

# OUTDOOR LIGHTING



 Zambelis  
LIGHTS

# INDEX



01. PORTABLE | p.008-019

02. FLOOR & WALL | p.020-077

03. WALL | p.078-129

04. SPIKES | p.130-163

05. STEP | p.164-185

06. CEILING | p.186-199

07. INGROUND | p.200-213

08. WALL WASHER | p.214-221



## OUTDOOR LIGHTING

OUTDOOR LIGHTING




OUTDOOR LIGHTING





OUTDOOR LIGHTING




PORTABLE | p.008-019

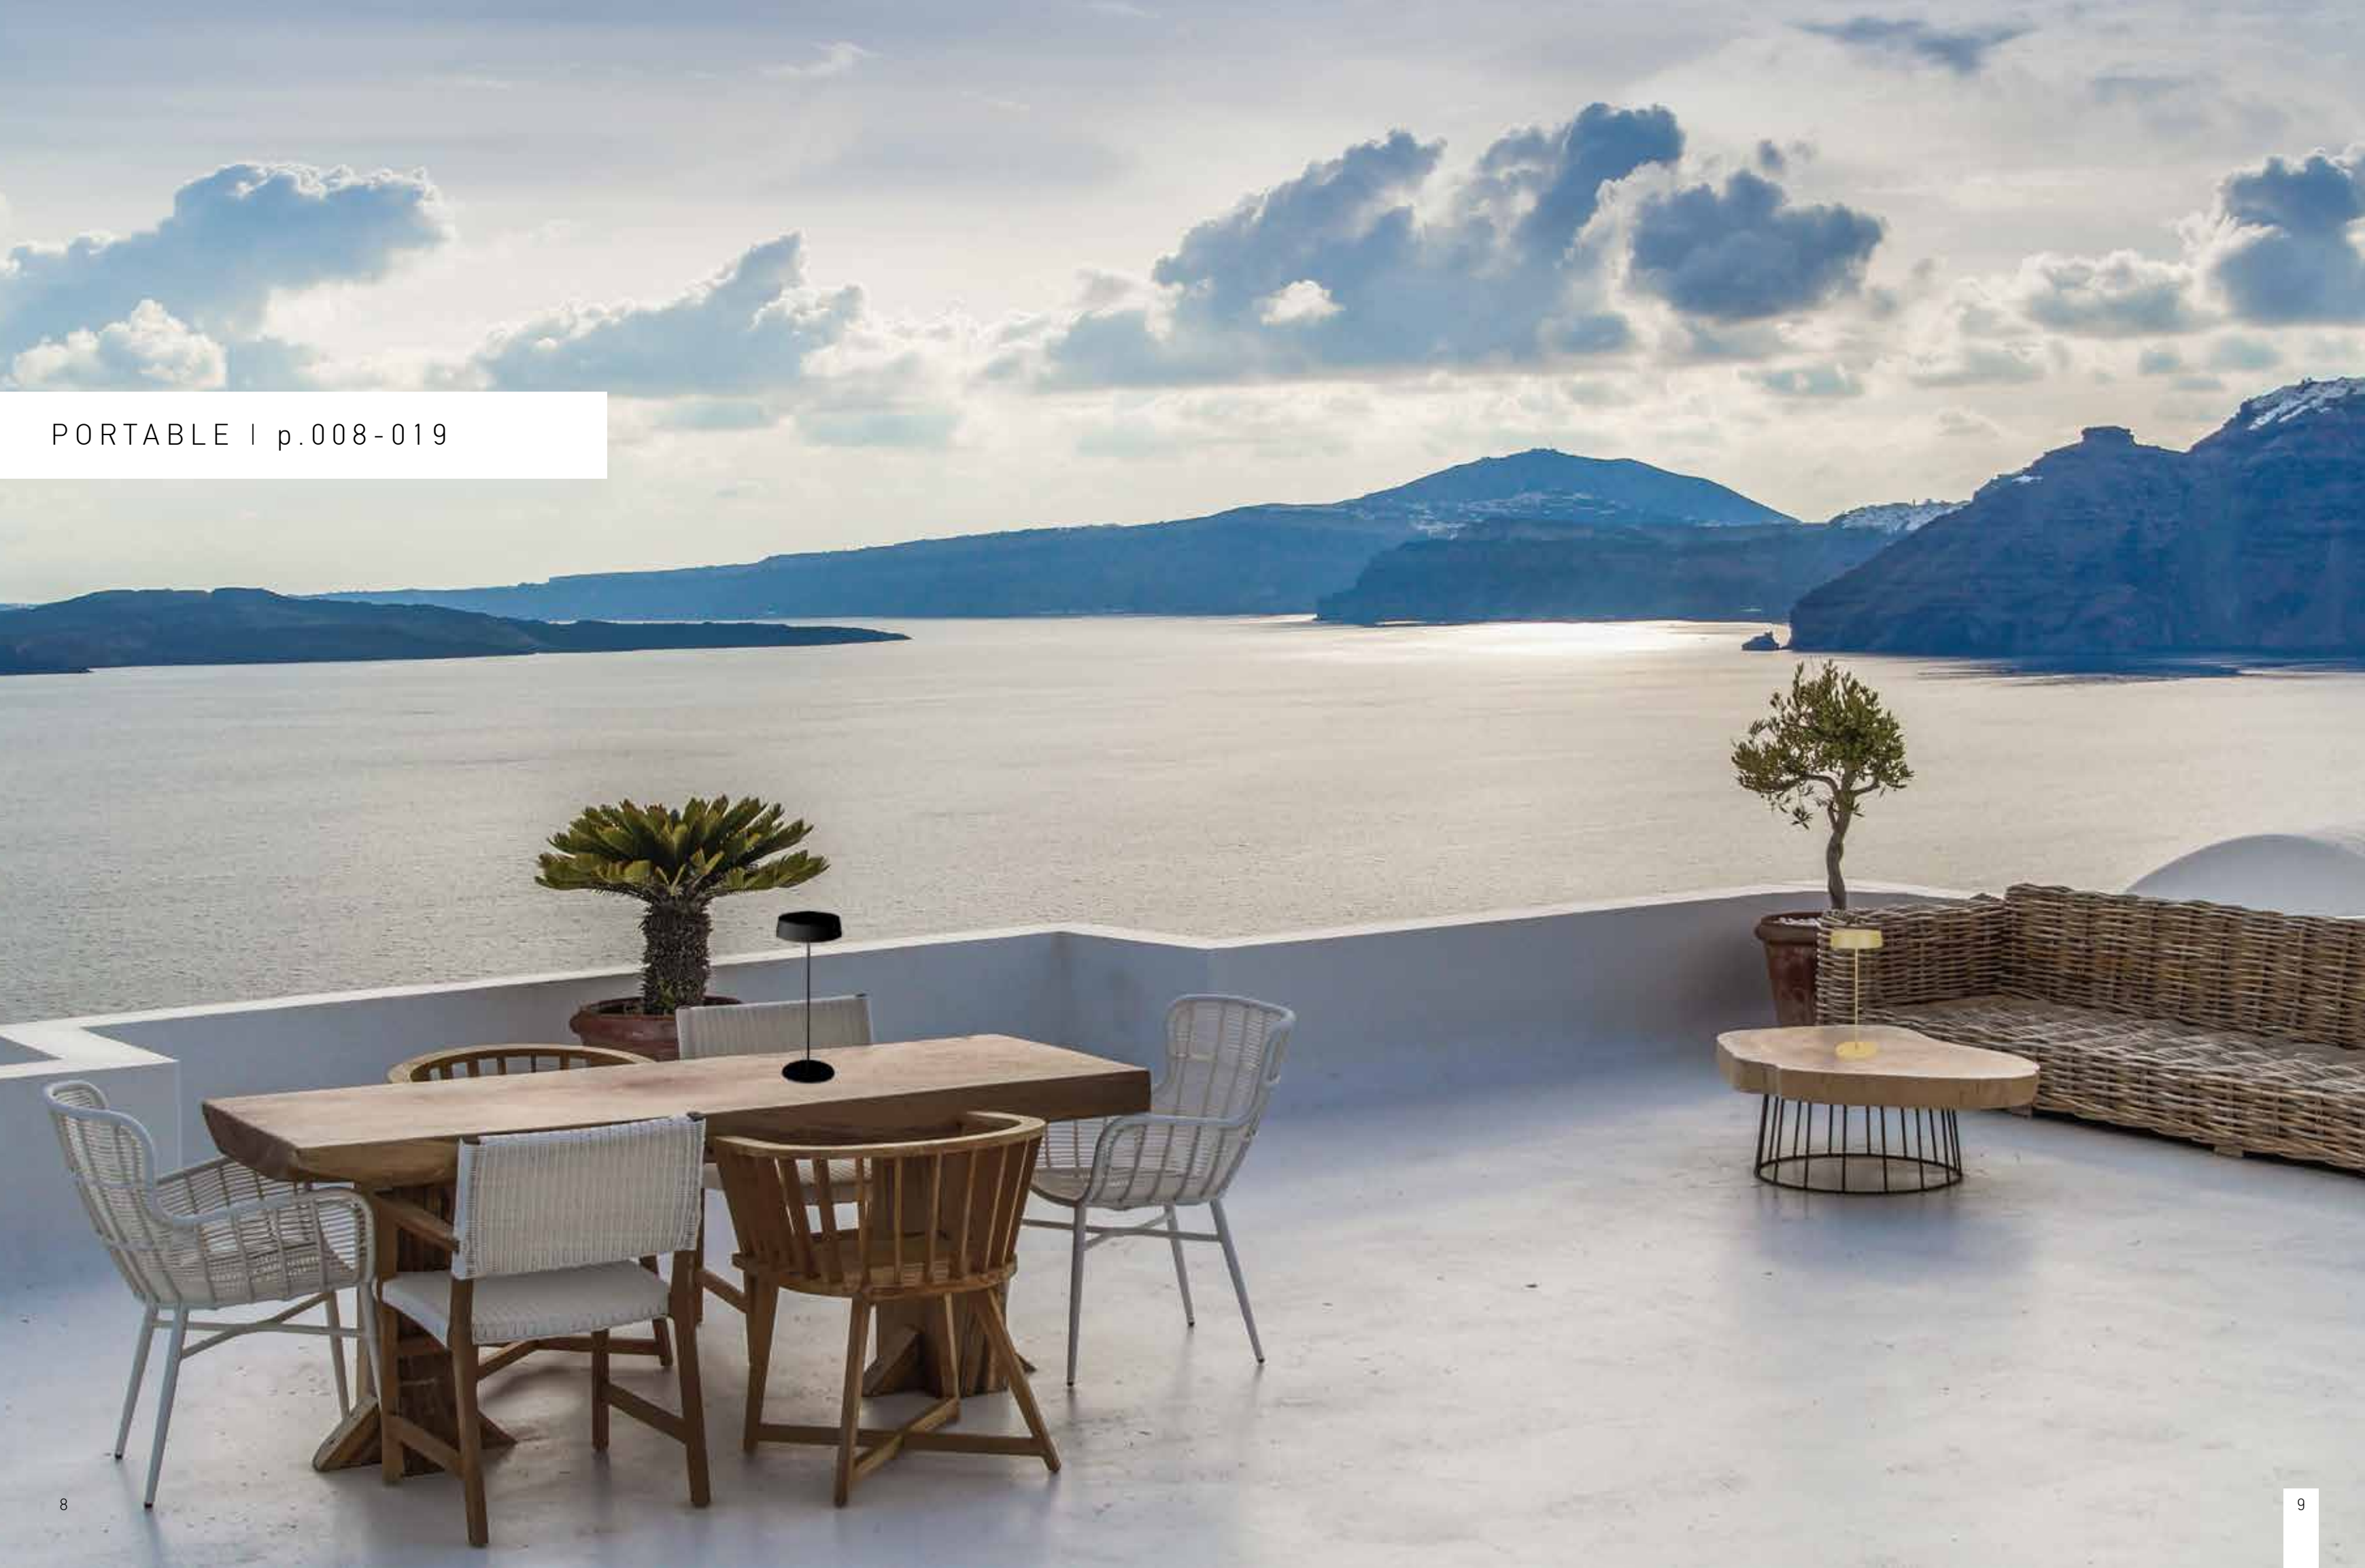

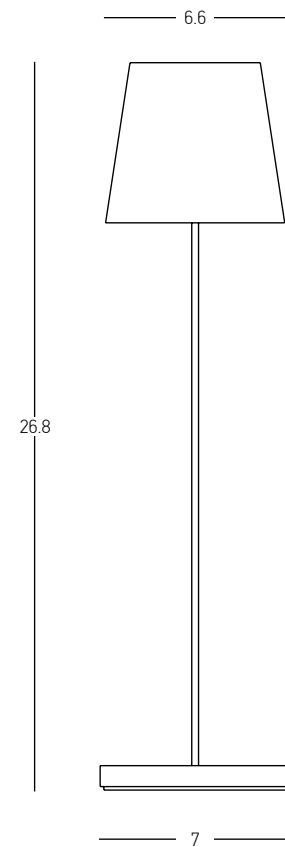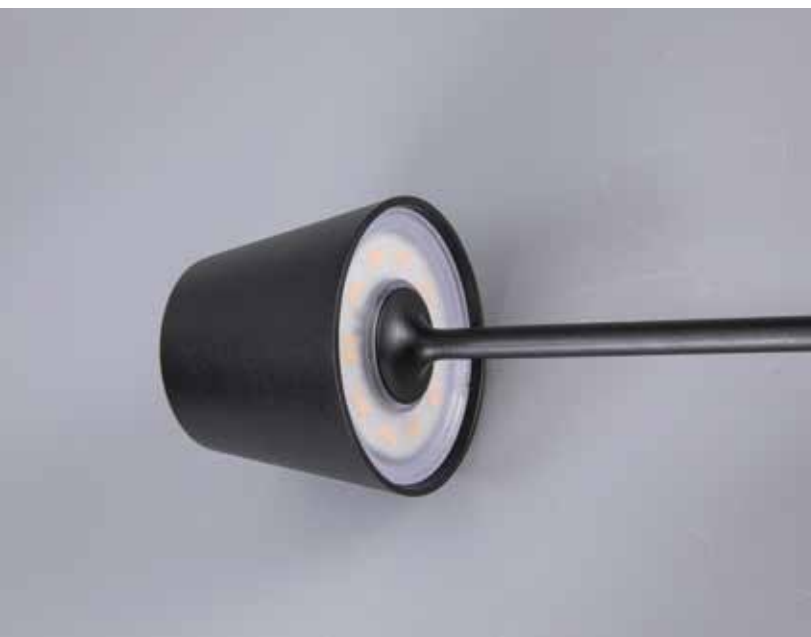

Power 1.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 125Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 6.6cm H: 26.8cm  
 3 Steps Dimming 10%, 50%, 100%  
 Material Aluminium - PC Diffuser  
 Special Feature Shade Ø: 6.6cm H: 5.9cm  
 Portable Table Lamp  
 Charging Base with USB Cable Included


Color Black / **Code E369**  
 Color Brick / **Code E370**  
 Color Sand / **Code E371**

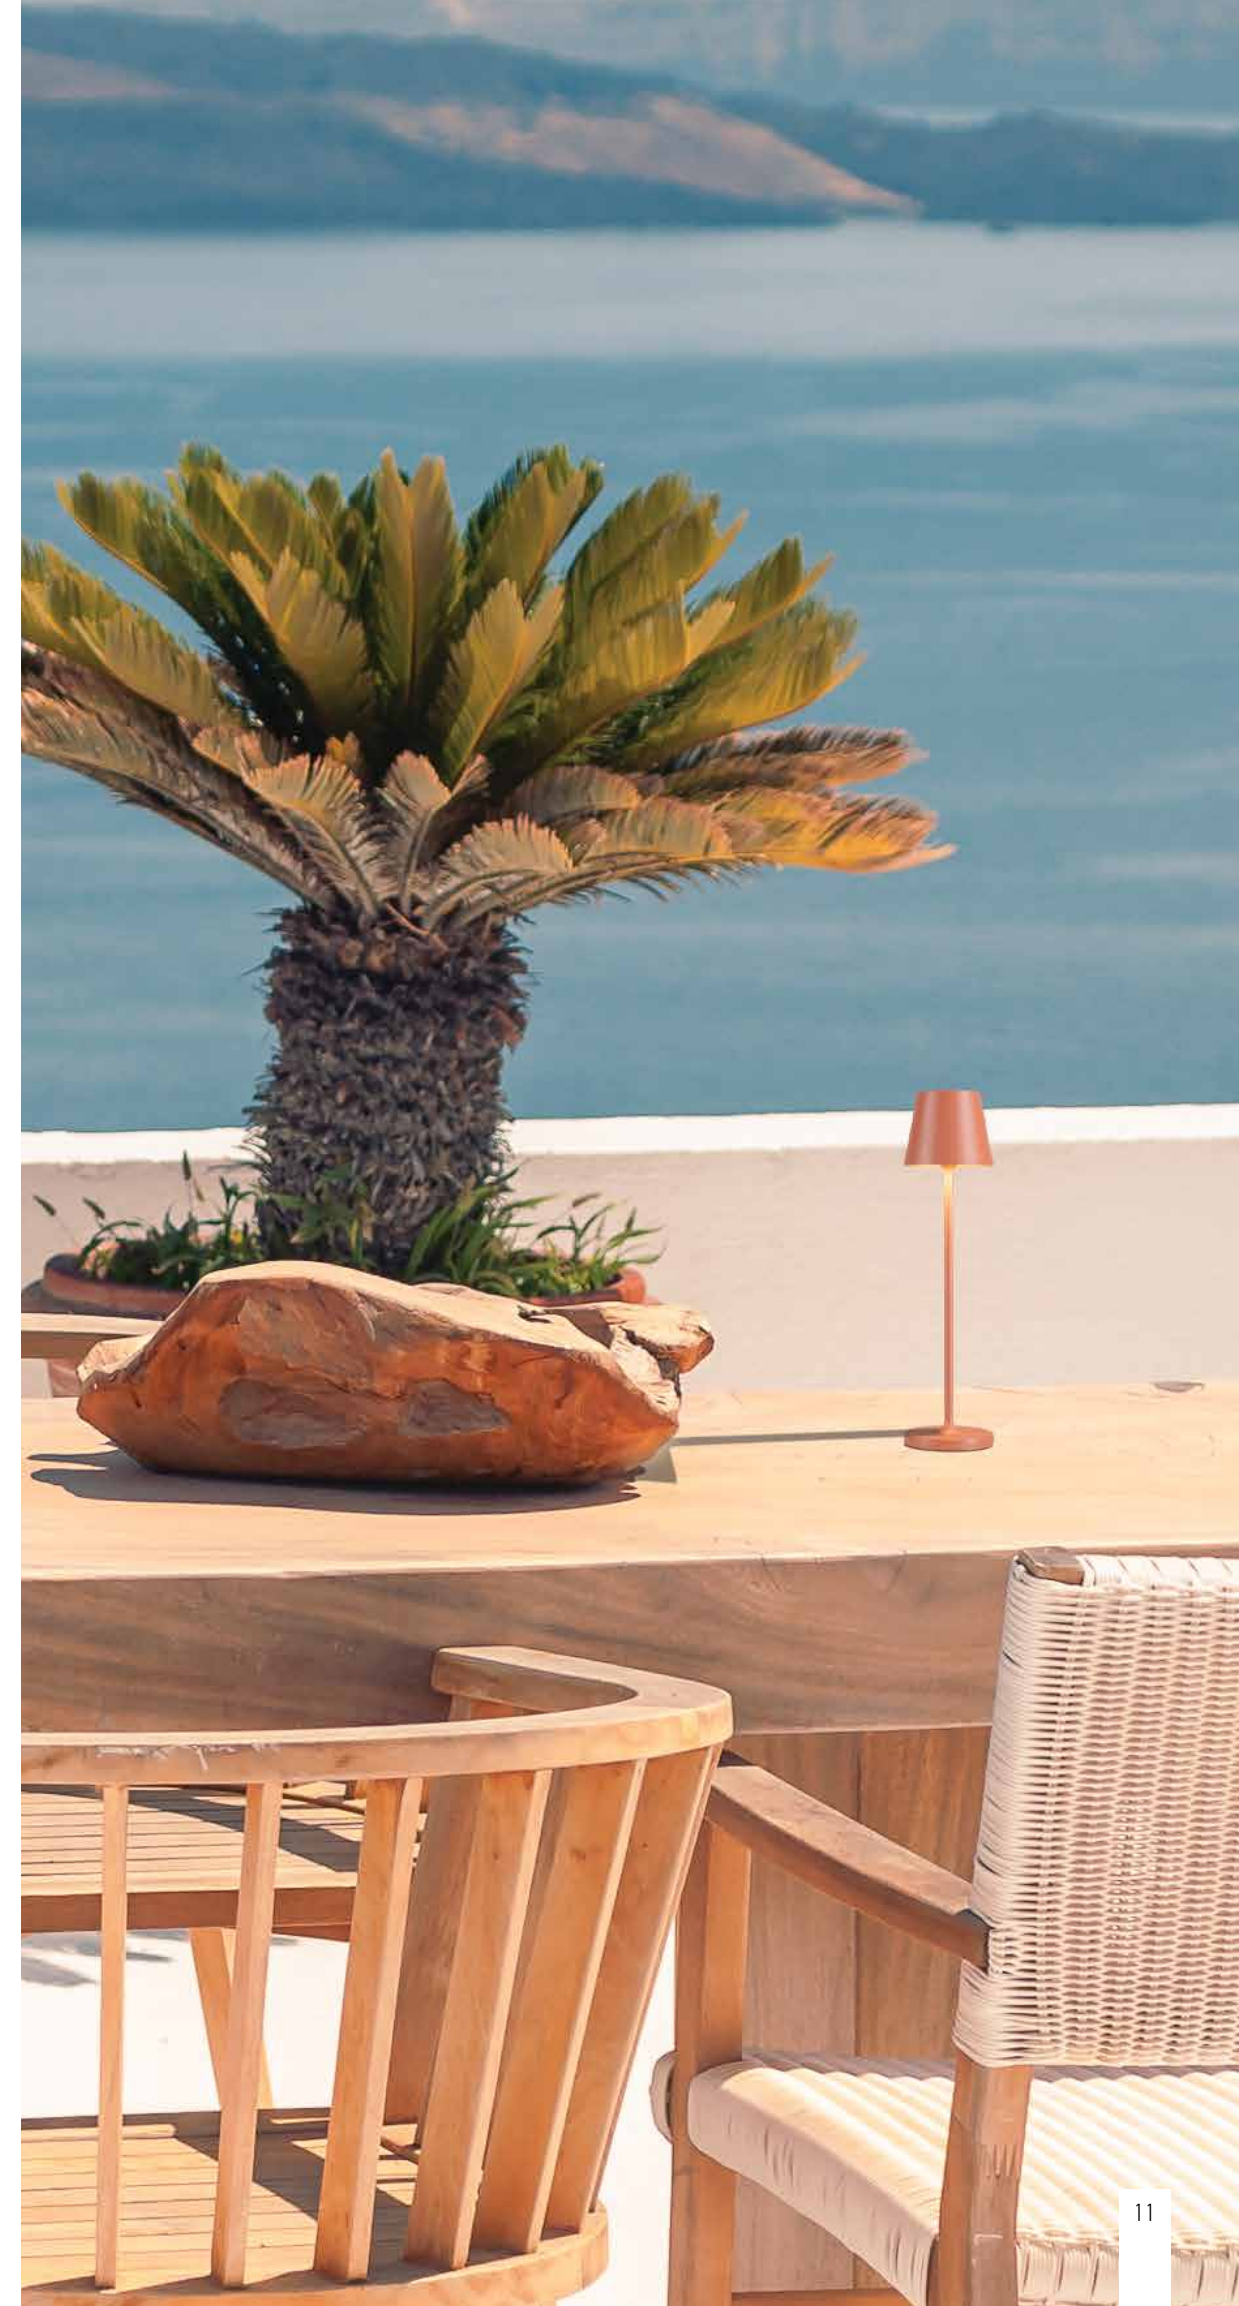

OUTDOOR LIGHTING | PORTABLE




Power 2W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 99Lm  
Cri 80  
IP 54  
Dimensions Ø: 12cm H: 32cm  
3 Steps Dimming 10%, 50%, 100%  
Material Aluminium - PC Diffuser  
Special Feature Portable Table Lamp  
USB Cable & Adaptor Included  
Color Sandy Black / **Code E314**  
Color Sandy White / **Code E313**

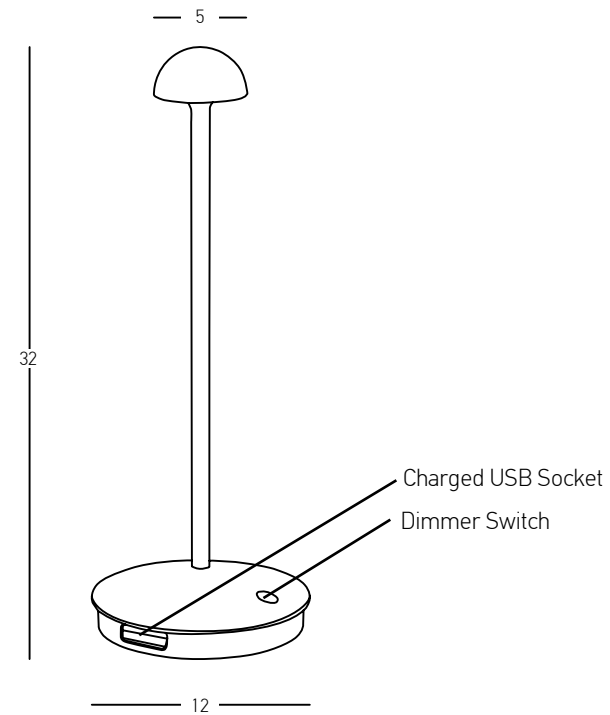



Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 168Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 5.5cm H: 26.5cm  
 3 Steps Dimming 10%, 50%, 100%  
 Material Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 Charging Base with USB Cable Included

Color White / **Code E398**  
 Color Black / **Code E399**  
 Color Green / **Code E400**

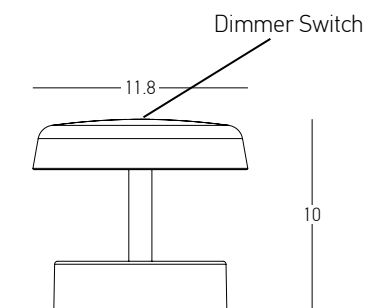


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 142Lm  
 Cri 80  
 IP 44  
 Dimensions Ø: 11.8cm H: 10cm  
 Shade Ø: 11.8cm H: 2cm  
 3 Steps Dimming 10%, 50%, 100%  
 Material Plastic  
 Special Feature Portable Table Lamp  
 USB Cable Included

Color White / **Code E401**  
 Color Black / **Code E402**






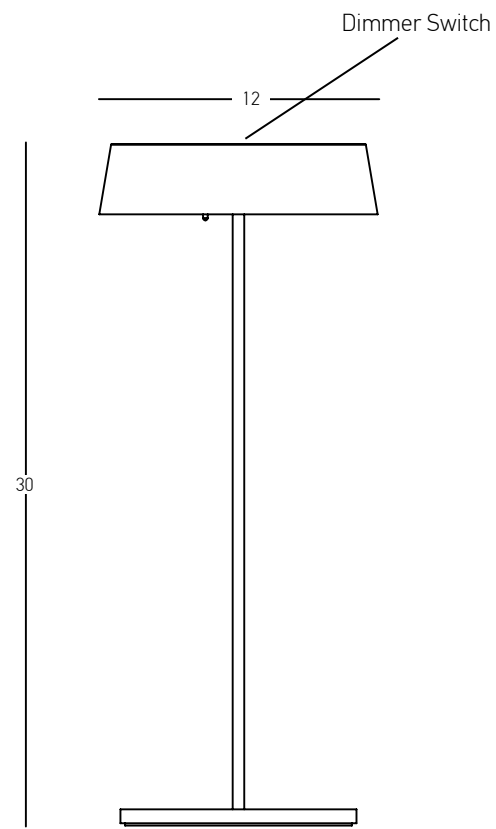



Power 2.2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 210Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 12cm H: 30cm  
 3 Steps Dimming 10%, 50%, 100%  
 Material Aluminium - PC Diffuser  
 Special Feature Shade Ø: 12cm H: 5cm  
 Portable Table Lamp  
 USB Cable & Adaptor Included

Color Sandy Black / **Code E289**  
 Color Sandy White / **Code E290**  
 Color Gold Matt / **Code E291**



☀ Touch Dimming ☀

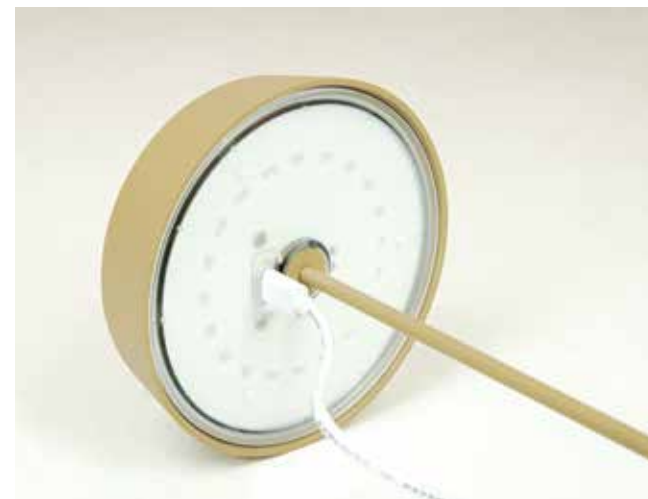

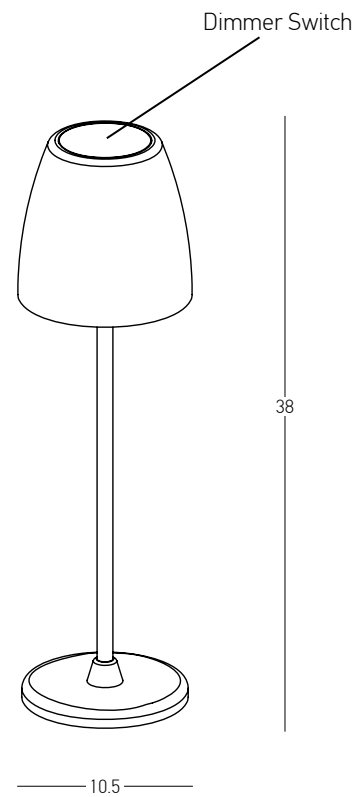


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 260Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 10.5cm H: 38cm  
 Shade Ø: 11cm H: 11cm  
 3 Steps Dimming 10%, 50%, 100%  
 Material Aluminium - PC Diffuser  
 Special Feature Portable Table Lamp  
 USB Cable & Adaptor Included

Color Sandy White / **Code E193**  
 Color Sandy Black / **Code E194**




FLOOR & WALL | p.020-077





Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 638Lm  
 Cri 80  
 IP 65  
 Dimensions L: 4.7cm W: 16.4cm H: 20cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E353**

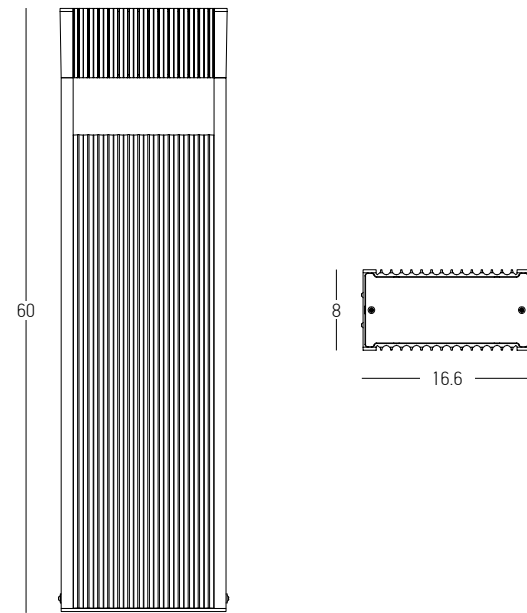


Power 30W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 986Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8m W: 16.6cm H: 60cm  
 Material Aluminium - Tempered Glass  
 Special Feature Double Sided Lighting  
 Color Graphite / **Code E368**






Power 9W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 710Lm  
Cri 80  
IP 54  
Dimensions L: 13.5cm W: 10cm H: 65cm  
Beam Angle 120°  
Material Aluminium - Tempered Glass  
Color Graphite / **Code E297**



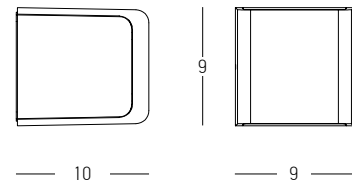


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 767Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10cm W: 9cm H: 9cm  
 Material Aluminium  
 Special Feature Up - Down Lighting  
 Color Graphite / Code E352

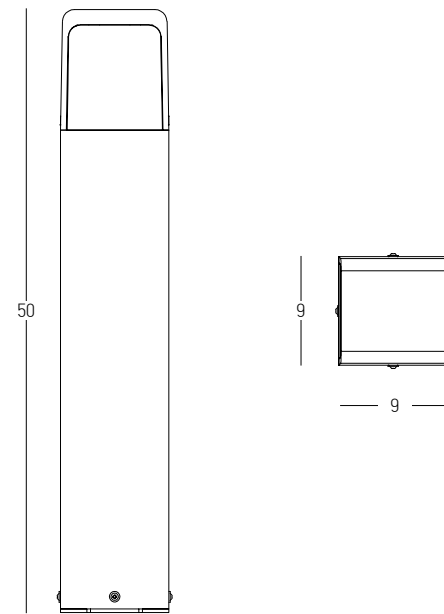


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 767Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 9cm H: 50cm  
 Material Aluminium  
 Special Feature Double Sided Lighting  
 Color Graphite / Code E351



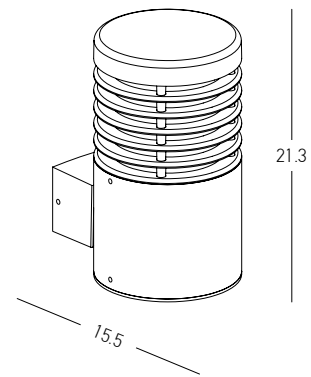


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 919Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 12cm L: 15.5cm H: 21.3cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E344**

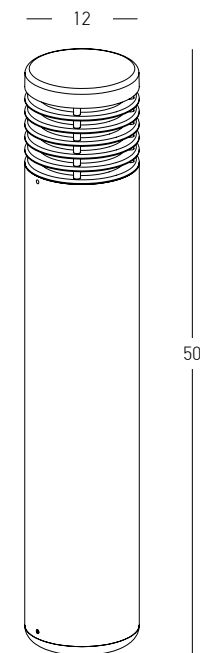

Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 923Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 12cm H: 50cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E345**




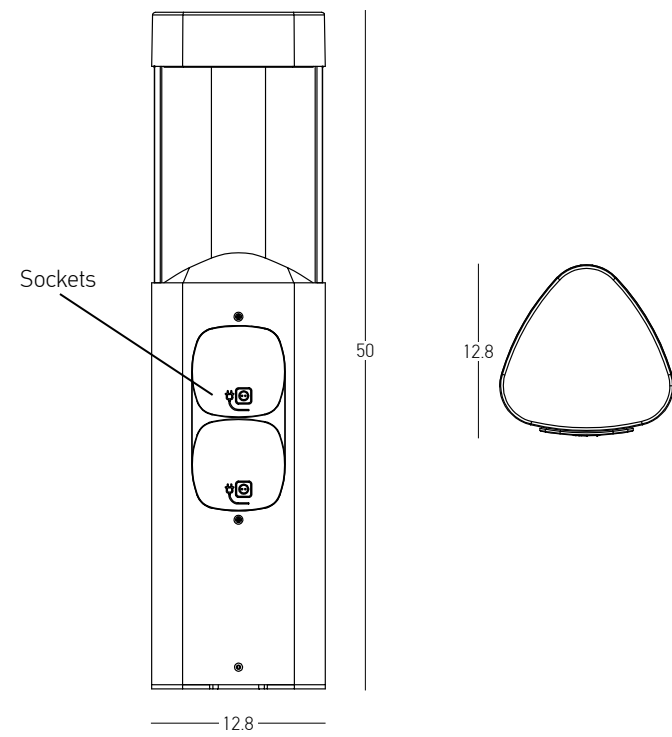

Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 639Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12.8cm W: 12.8cm H: 50cm  
 Material Aluminium - PC Diffuser  
 Special Feature 2 European Sockets 220-240V  
 Color Graphite / **Code E354**







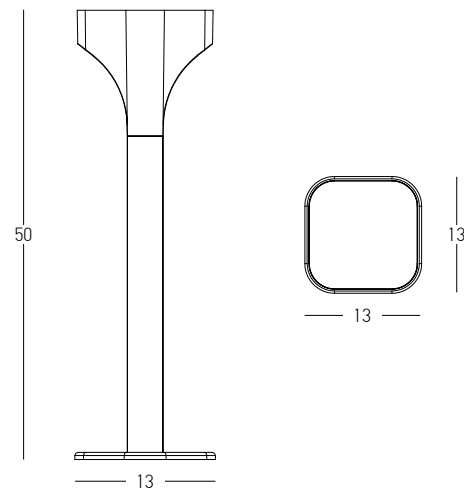


Power 11W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 993Lm  
Cri 80  
IP 65  
Dimensions L: 13cm W: 13cm H: 50cm  
Beam Angle 120°  
Material Aluminium - PC Diffuser  
Special Feature Double Sided Lighting  
Color Graphite / **Code E356**



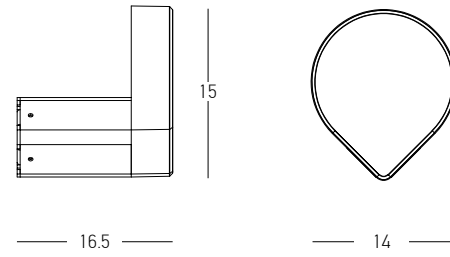


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1035Lm  
 Cri 80  
 IP 65  
 Dimensions L: 16.5cm W: 14cm H: 15cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E358**

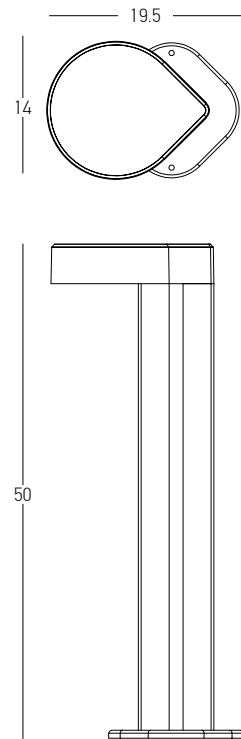


Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1035Lm  
 Cri 80  
 IP 65  
 Dimensions L: 19.5cm W: 14cm H: 50cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E357**




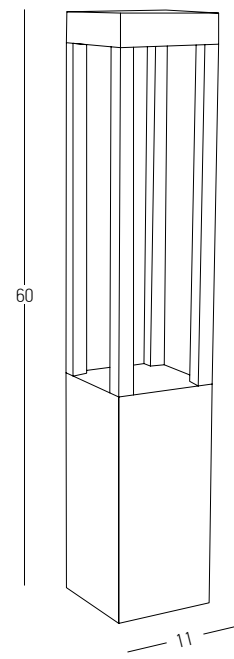


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 658Lm  
 Cri 80  
 IP 67  
 Dimensions L: 11cm W: 11cm H: 60cm  
 Beam Angle 120°  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E367**

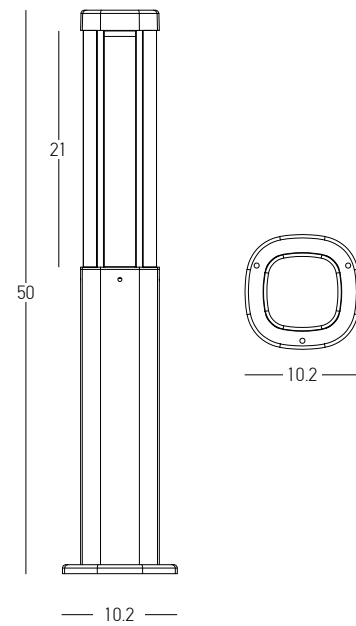


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 533Lm  
 Cri 80  
 IP 54  
 Dimensions L: 10.2cm W: 10.2cm H: 50cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E355**

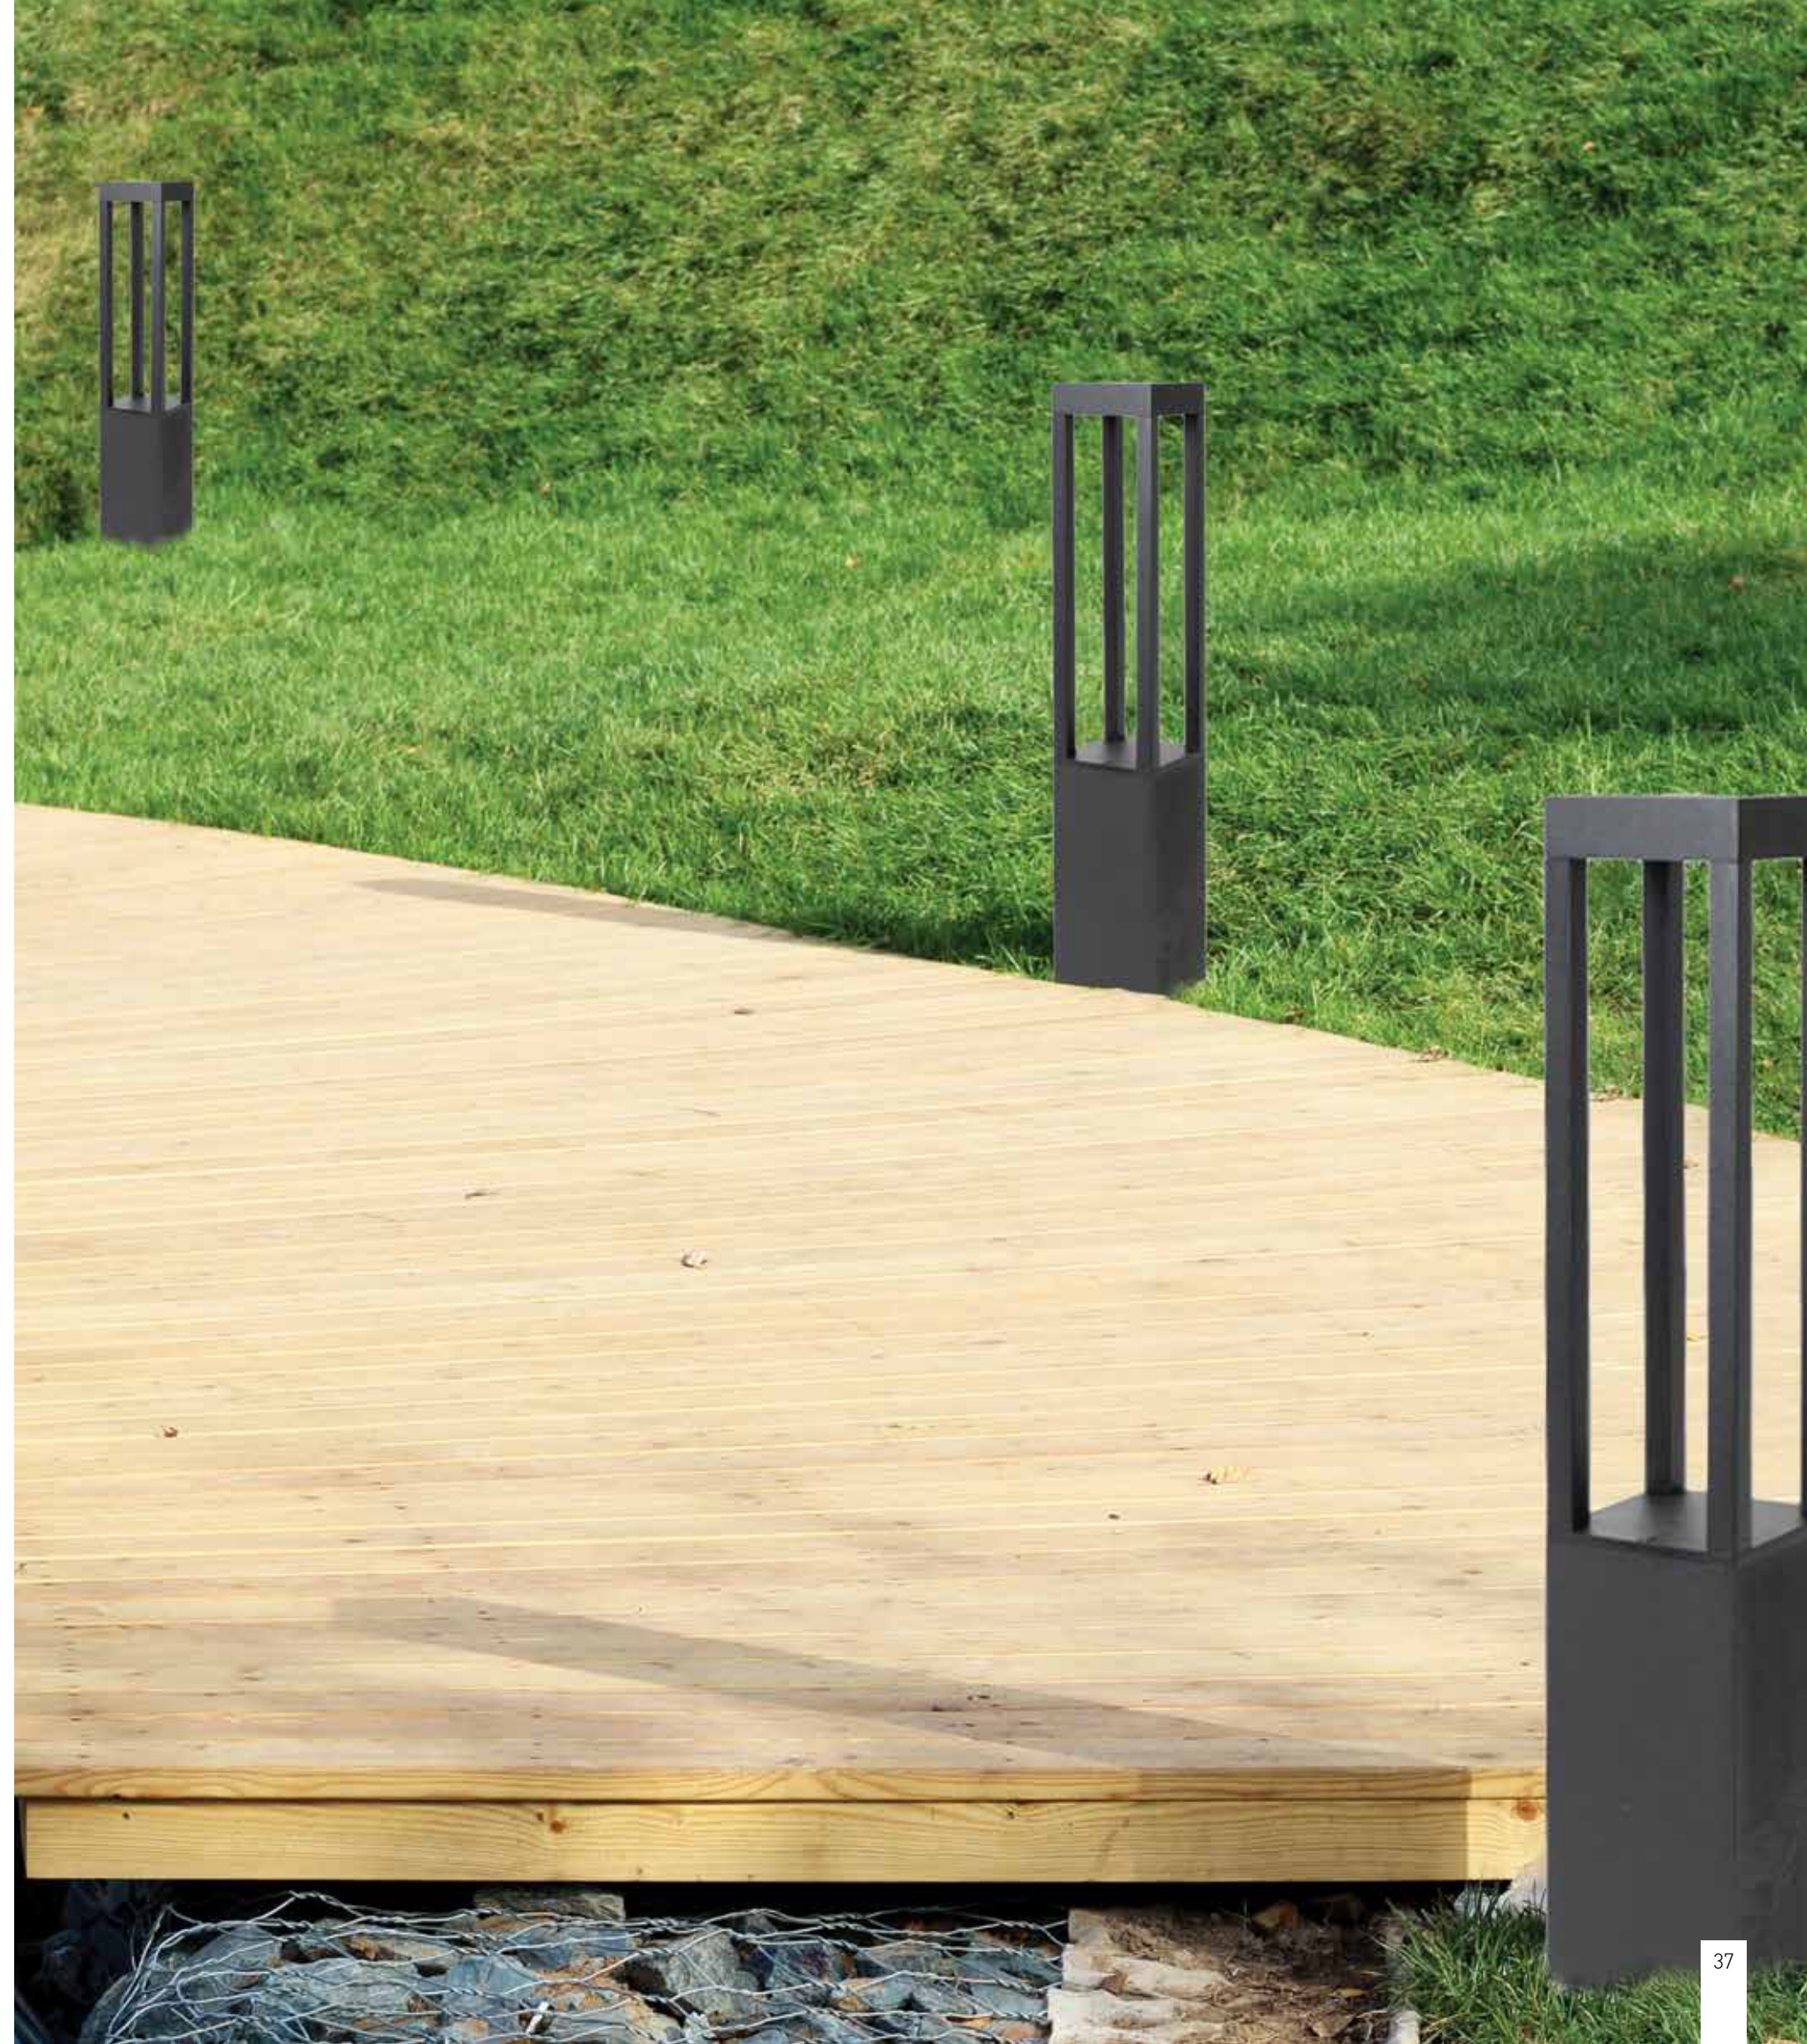

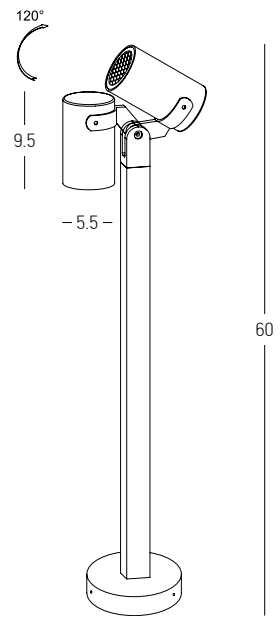


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 11.5cm W: 5.5cm H: 60cm  
 Base Ø: 11.5cm H: 3cm  
 Spot Dimensions Ø: 5.5cm L: 9.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Movable Spot  
 Honeycomb Included  
 Color Graphite / **Code E325**






Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 920Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 15cm L: 5.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E237**

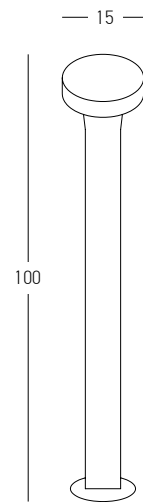


Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 792Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 15cm H: 100cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E249**




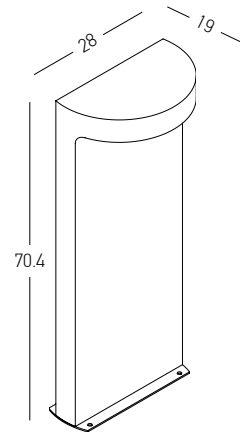


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 80  
 IP 65  
 Dimensions L: 19cm W: 28cm H: 70.4cm  
 Material Concrete  
 Color Natural Concrete / **Code E383**

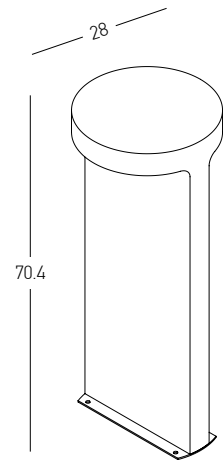


Power 2x 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 780Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 28cm H: 70.4cm  
 Material Concrete  
 Color Natural Concrete / **Code E384**

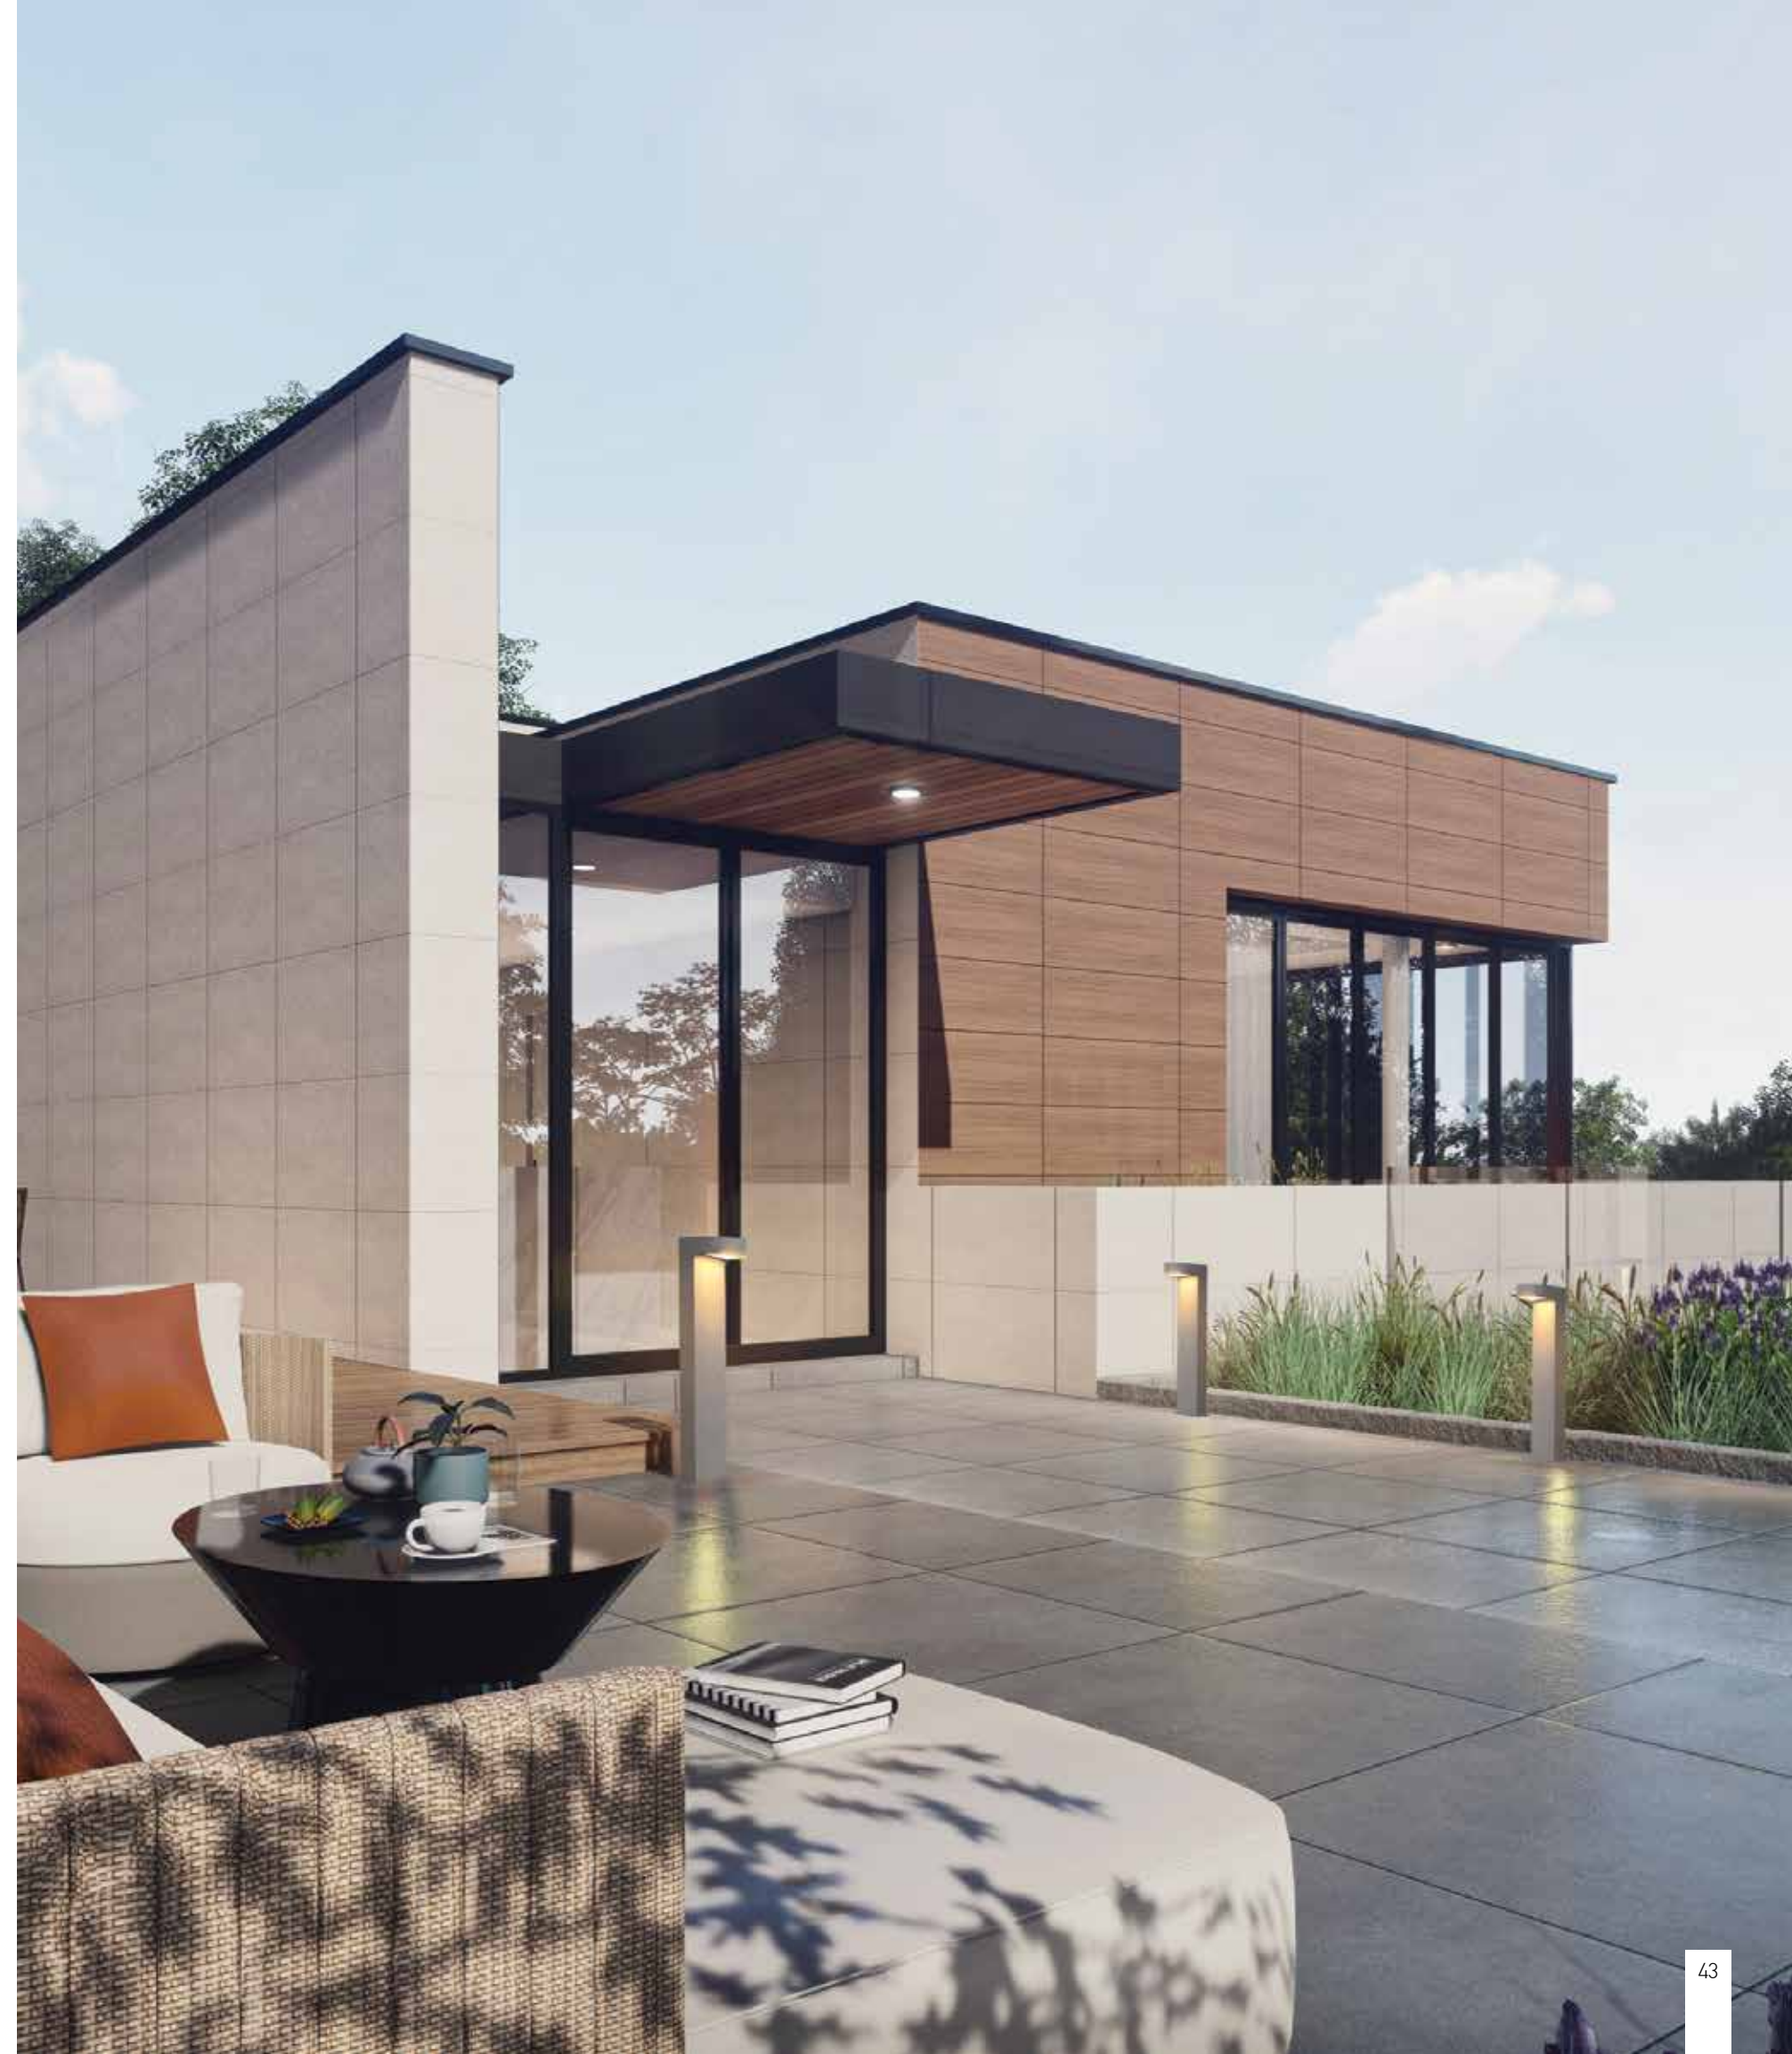





Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 15cm W: 16cm H: 30cm  
 Base L: 21cm W: 23cm  
 Material Concrete  
 Color Natural Concrete / **Code E191**

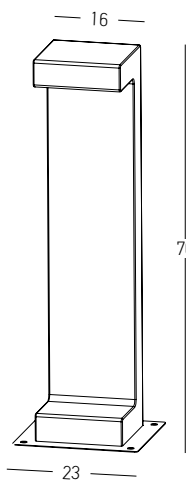


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 15cm W: 16cm H: 70cm  
 Base L: 21cm W: 23cm  
 Material Concrete  
 Color Natural Concrete / **Code E192**




Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 490Lm  
 Cri 90  
 IP 54  
 Dimensions L: 10cm W: 28cm H: 35cm  
 Base L: 19cm W: 37cm  
 Material Concrete  
 Color Natural Concrete / **Code E190**






Power 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 340Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.7cm W: 9.1cm H: 10.5cm  
 Beam Angle 36°  
 Dimmable Triac   
 Material Concrete - Aluminium  
 Color Natural Concrete / **Code E253**




Power 2x 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 600Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.7cm W: 9.1cm H: 20cm  
 Beam Angle 36°  
 Dimmable Triac   
 Material Concrete - Aluminium  
 Color Natural Concrete / **Code E254**






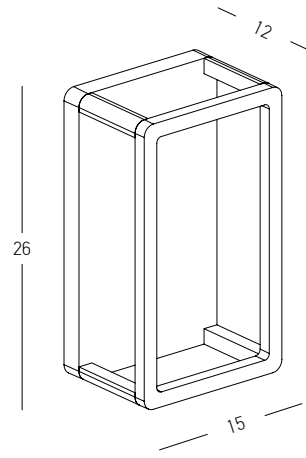


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 481Lm  
 Cri 80  
 IP 65  
 Dimensions L: 12cm W: 15cm H: 26cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E336**

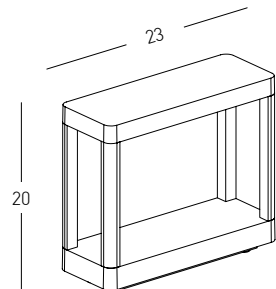


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 587Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8.5cm W: 23cm H: 20cm  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E334**

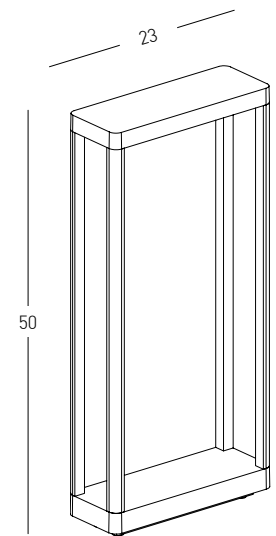

Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 587Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8.5cm W: 23cm H: 50cm  
 Material Aluminium - Clear Glass  
 Color Graphite / **Code E335**

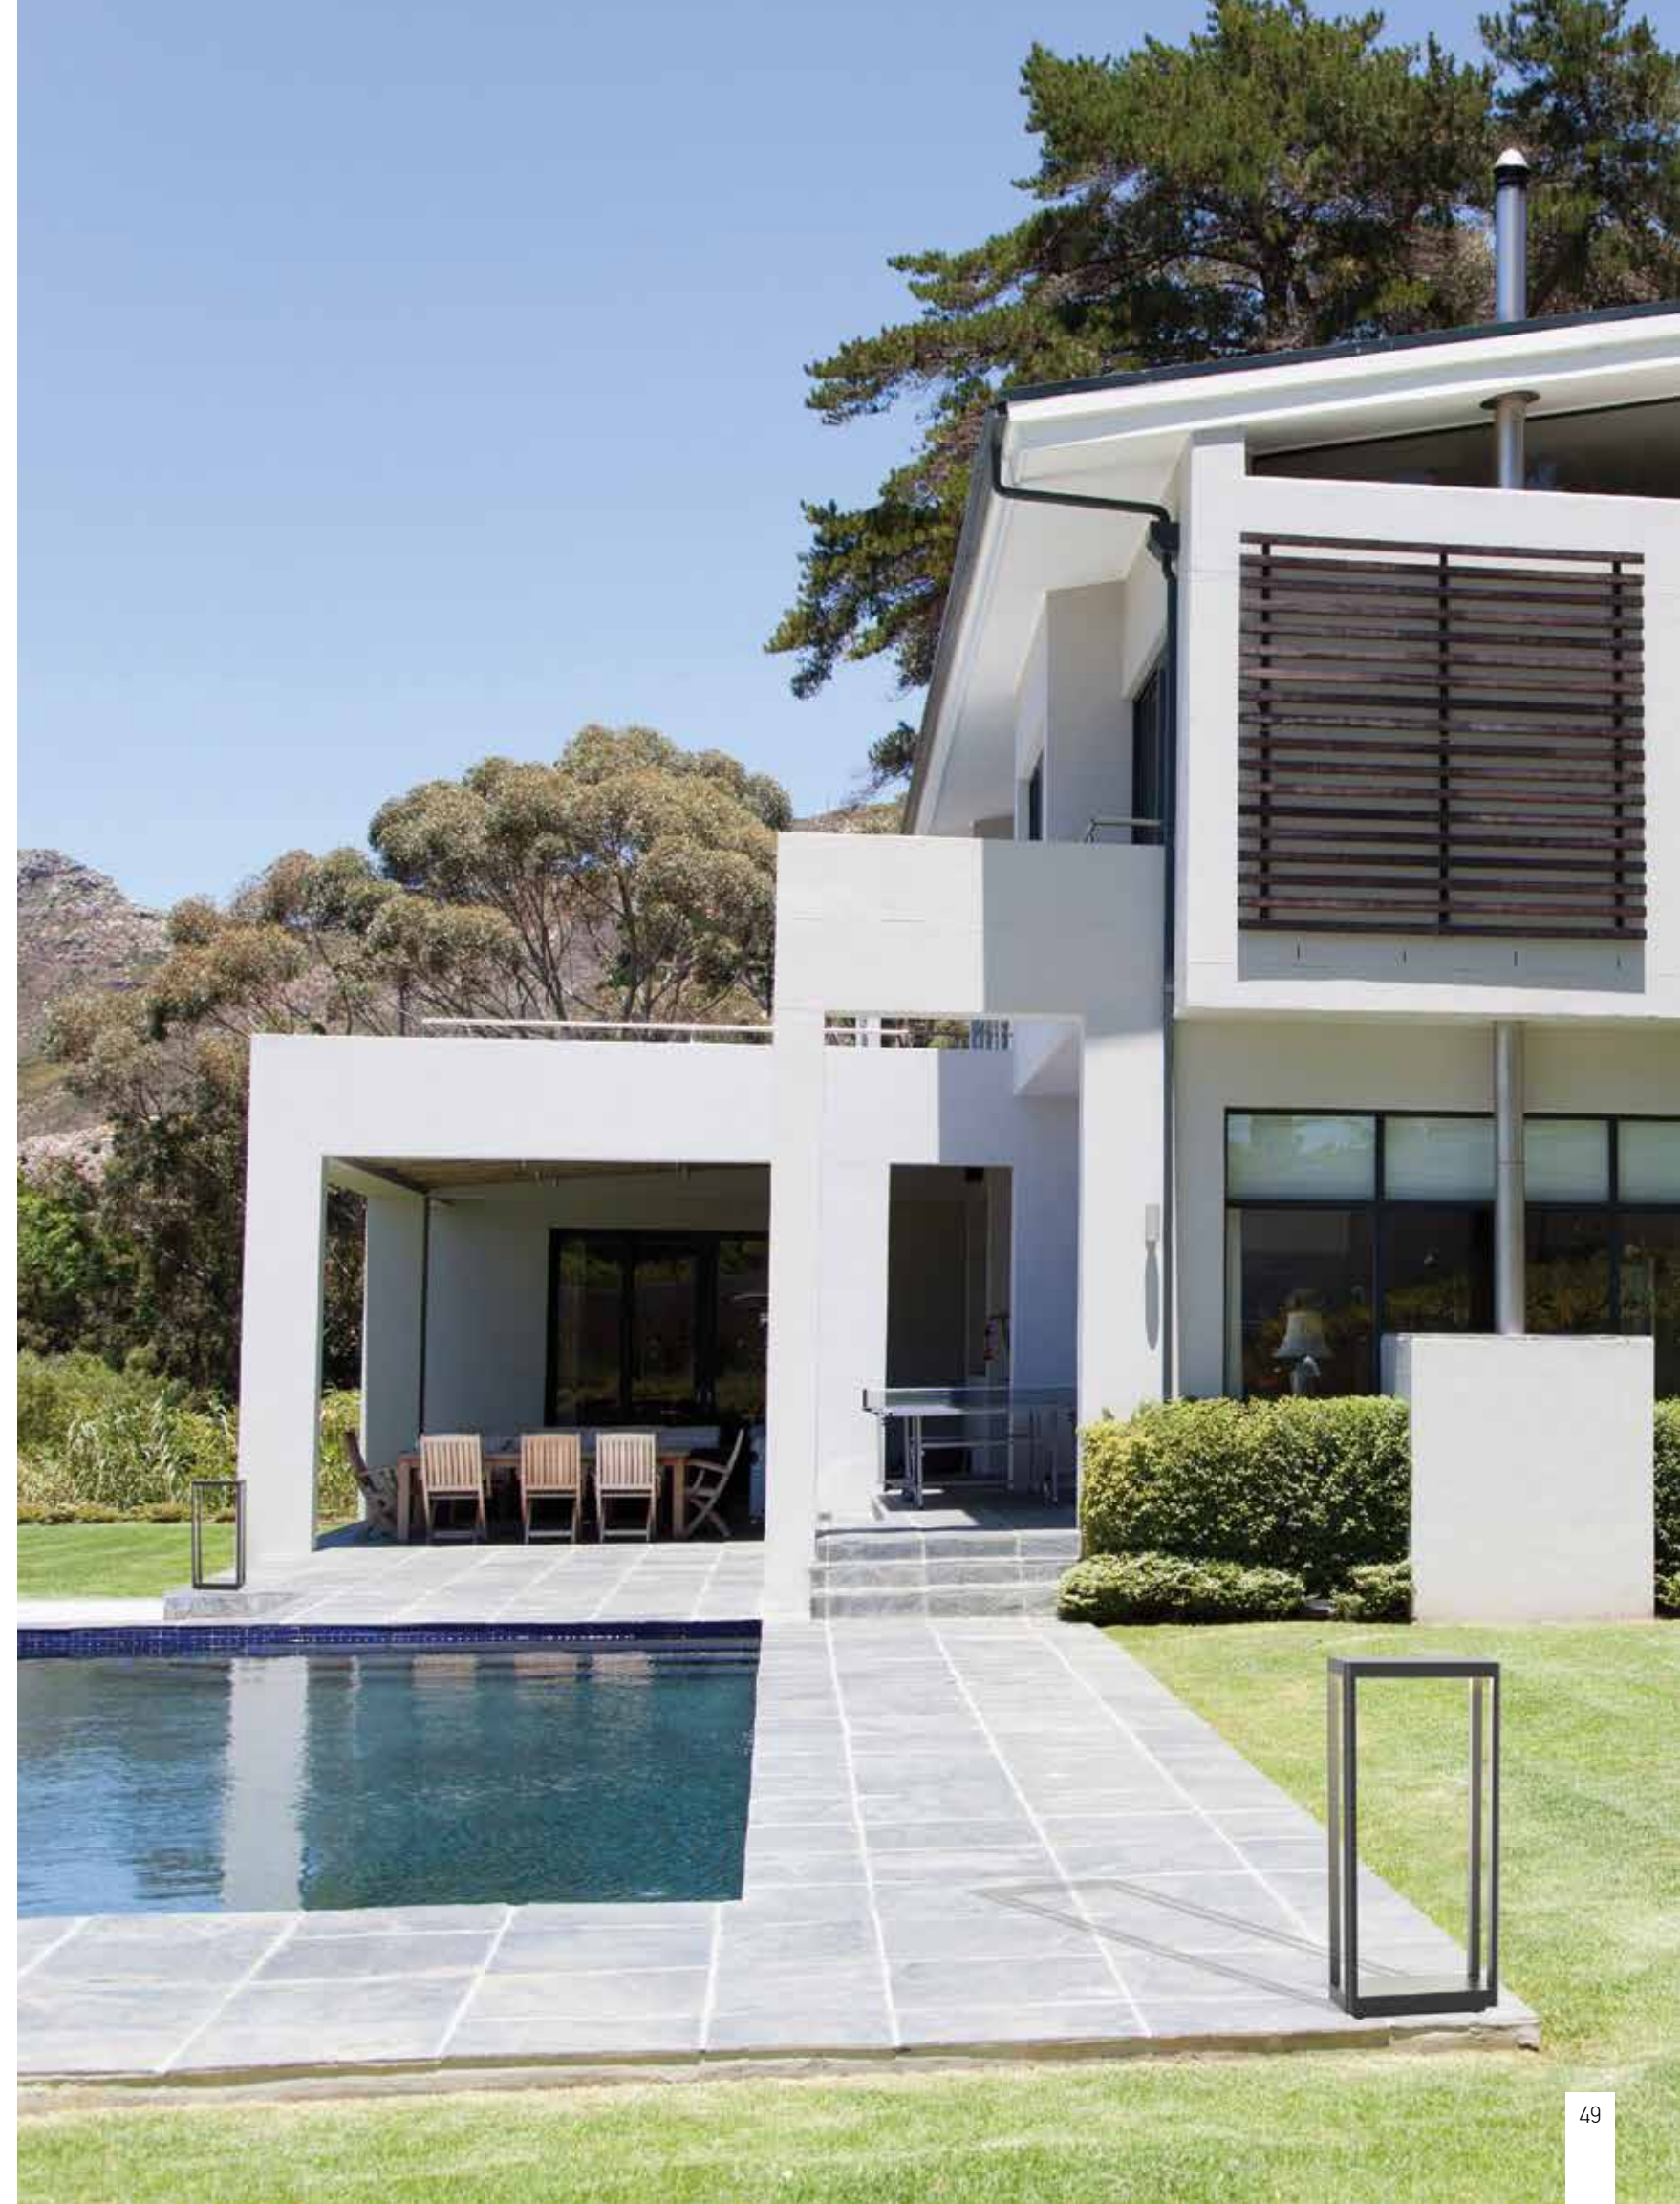




23

18


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 704Lm  
 Cri 80  
 IP 54  
 Dimensions L: 18cm W: 18cm H: 23cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E203**

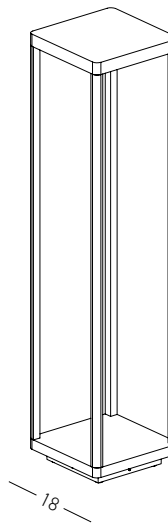


80


18


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 704Lm  
 Cri 80  
 IP 54  
 Dimensions L: 18cm W: 18cm H: 80cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E204**

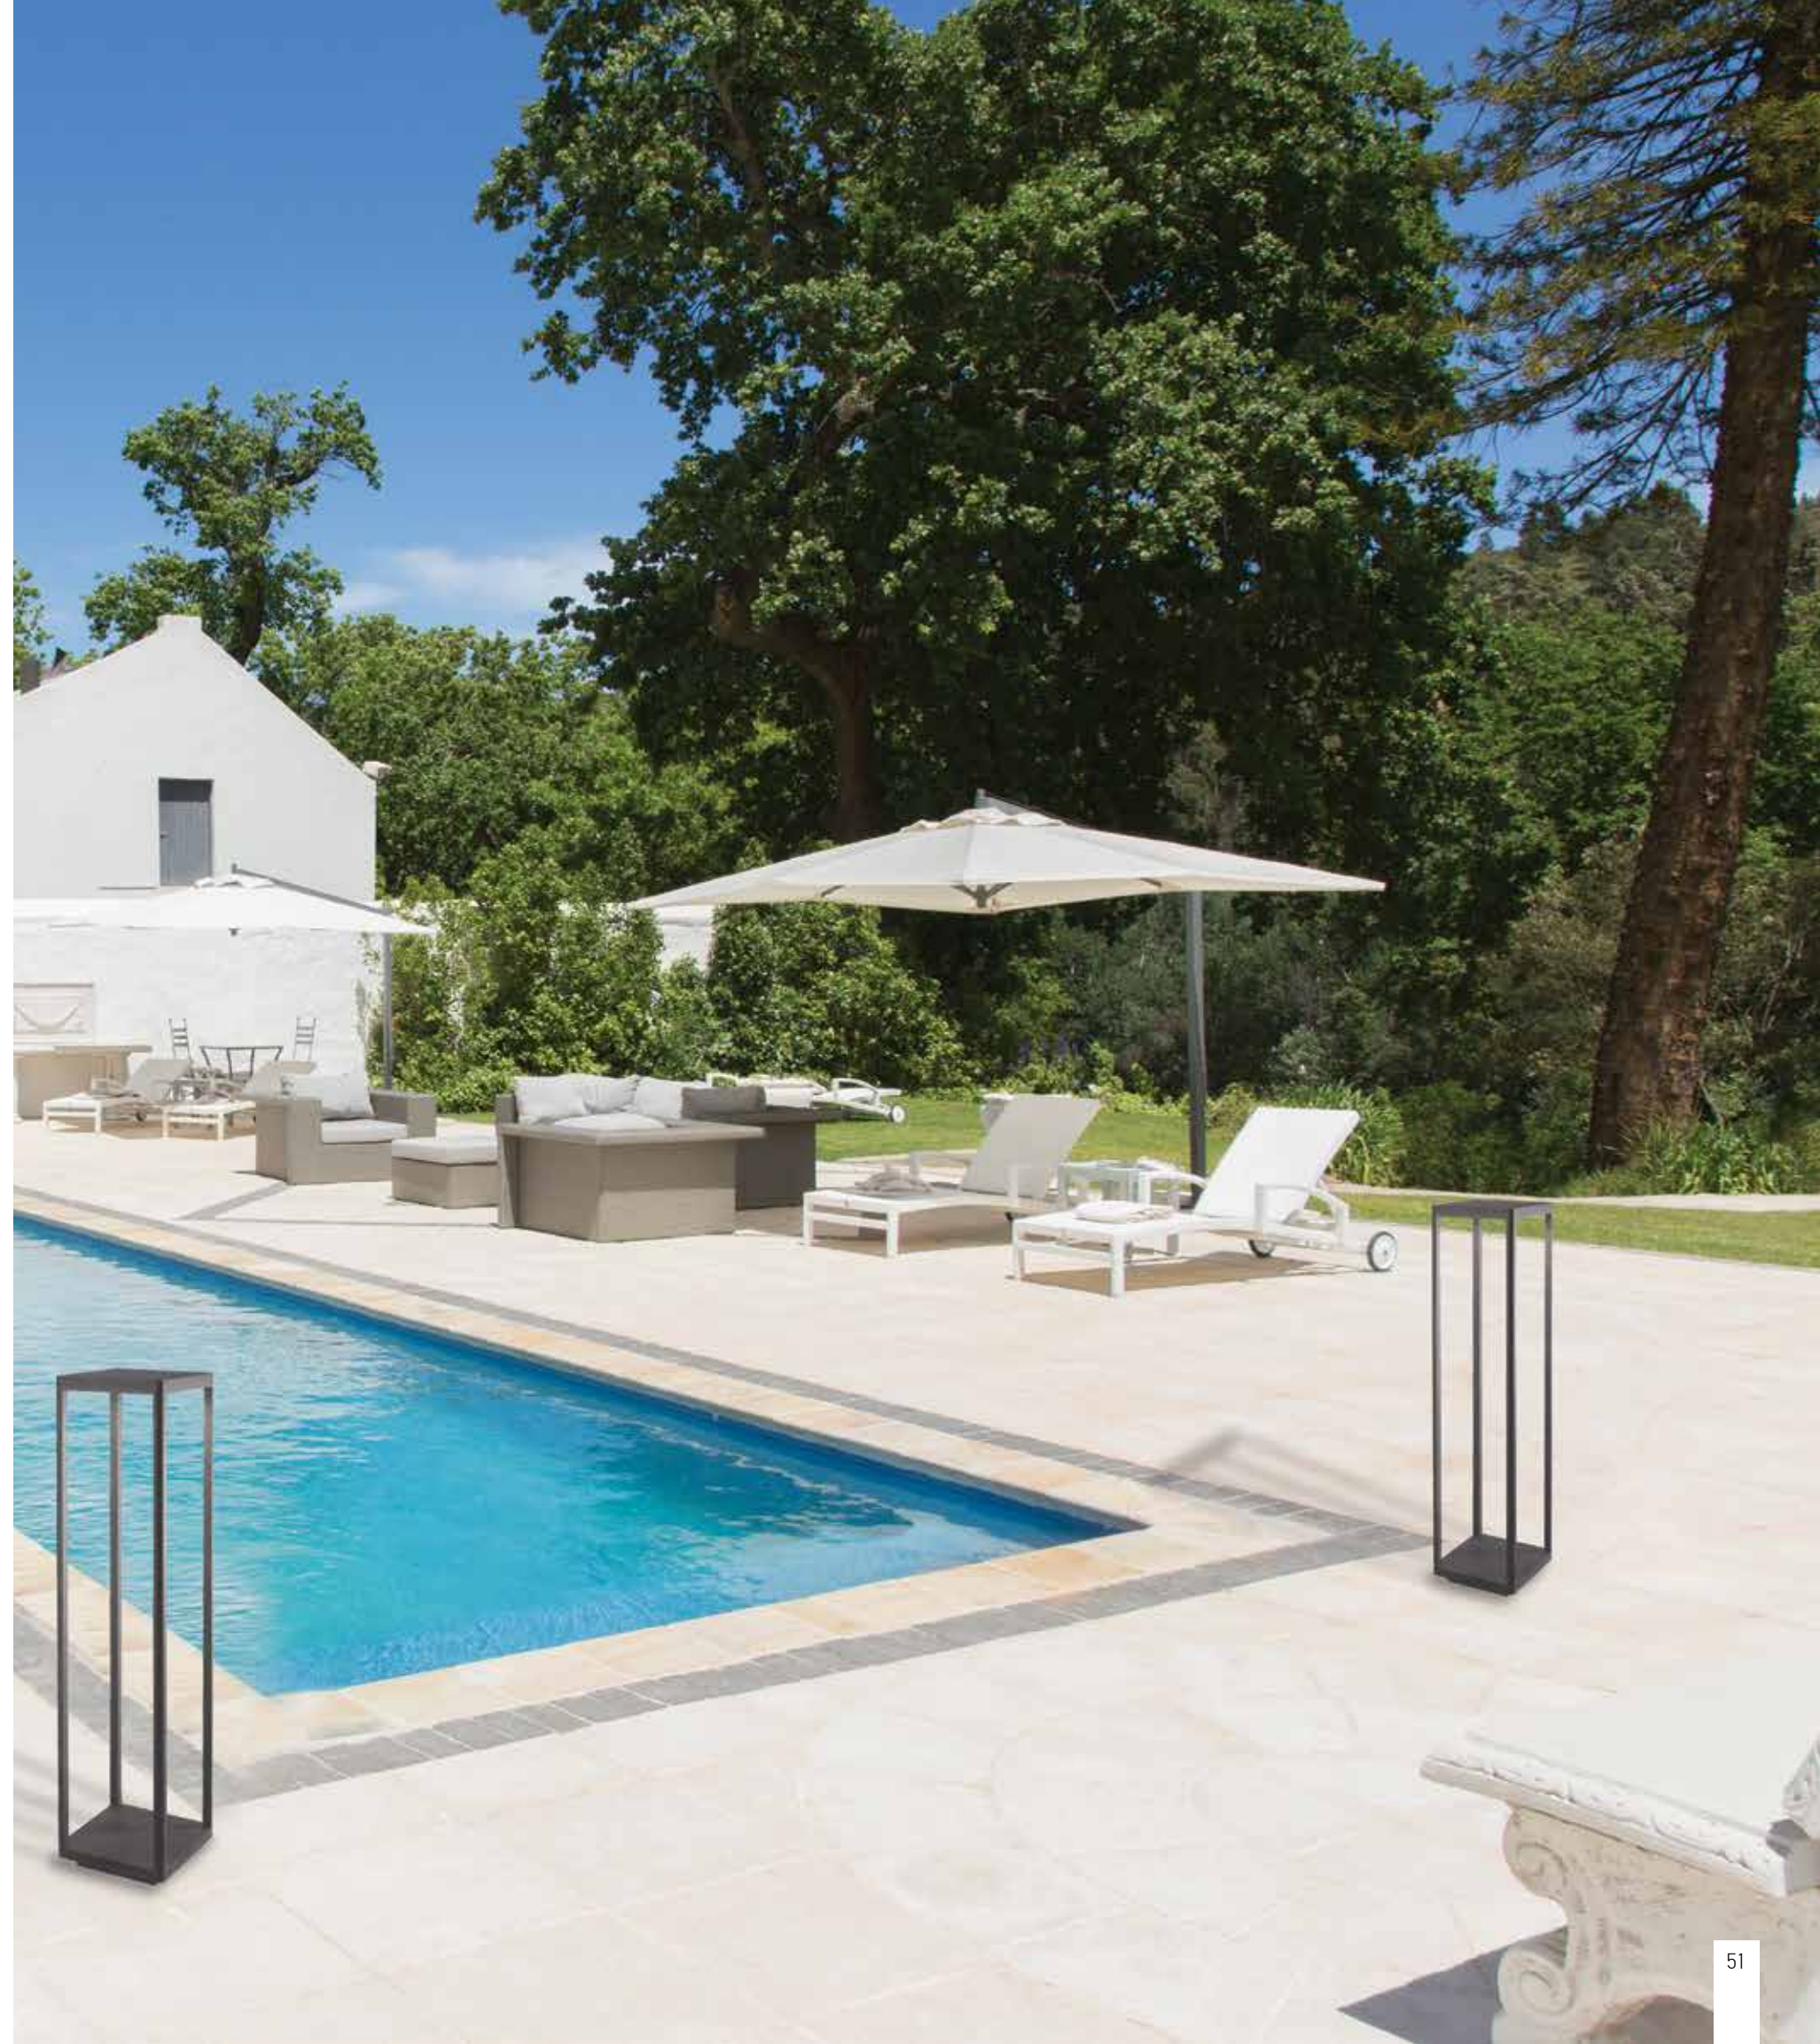

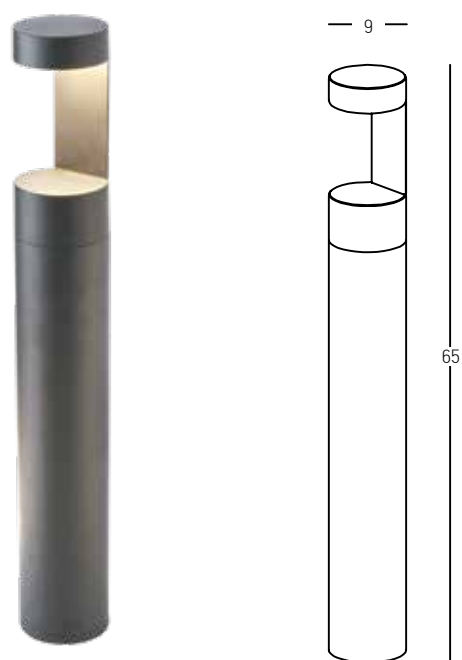


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1180Lm
Cri	90
IP	54
Dimensions	Ø: 9cm H: 65cm
Beam Angle	120°
Material	Aluminium - Tempered Glass
Color	Graphite / <b>Code E298</b>

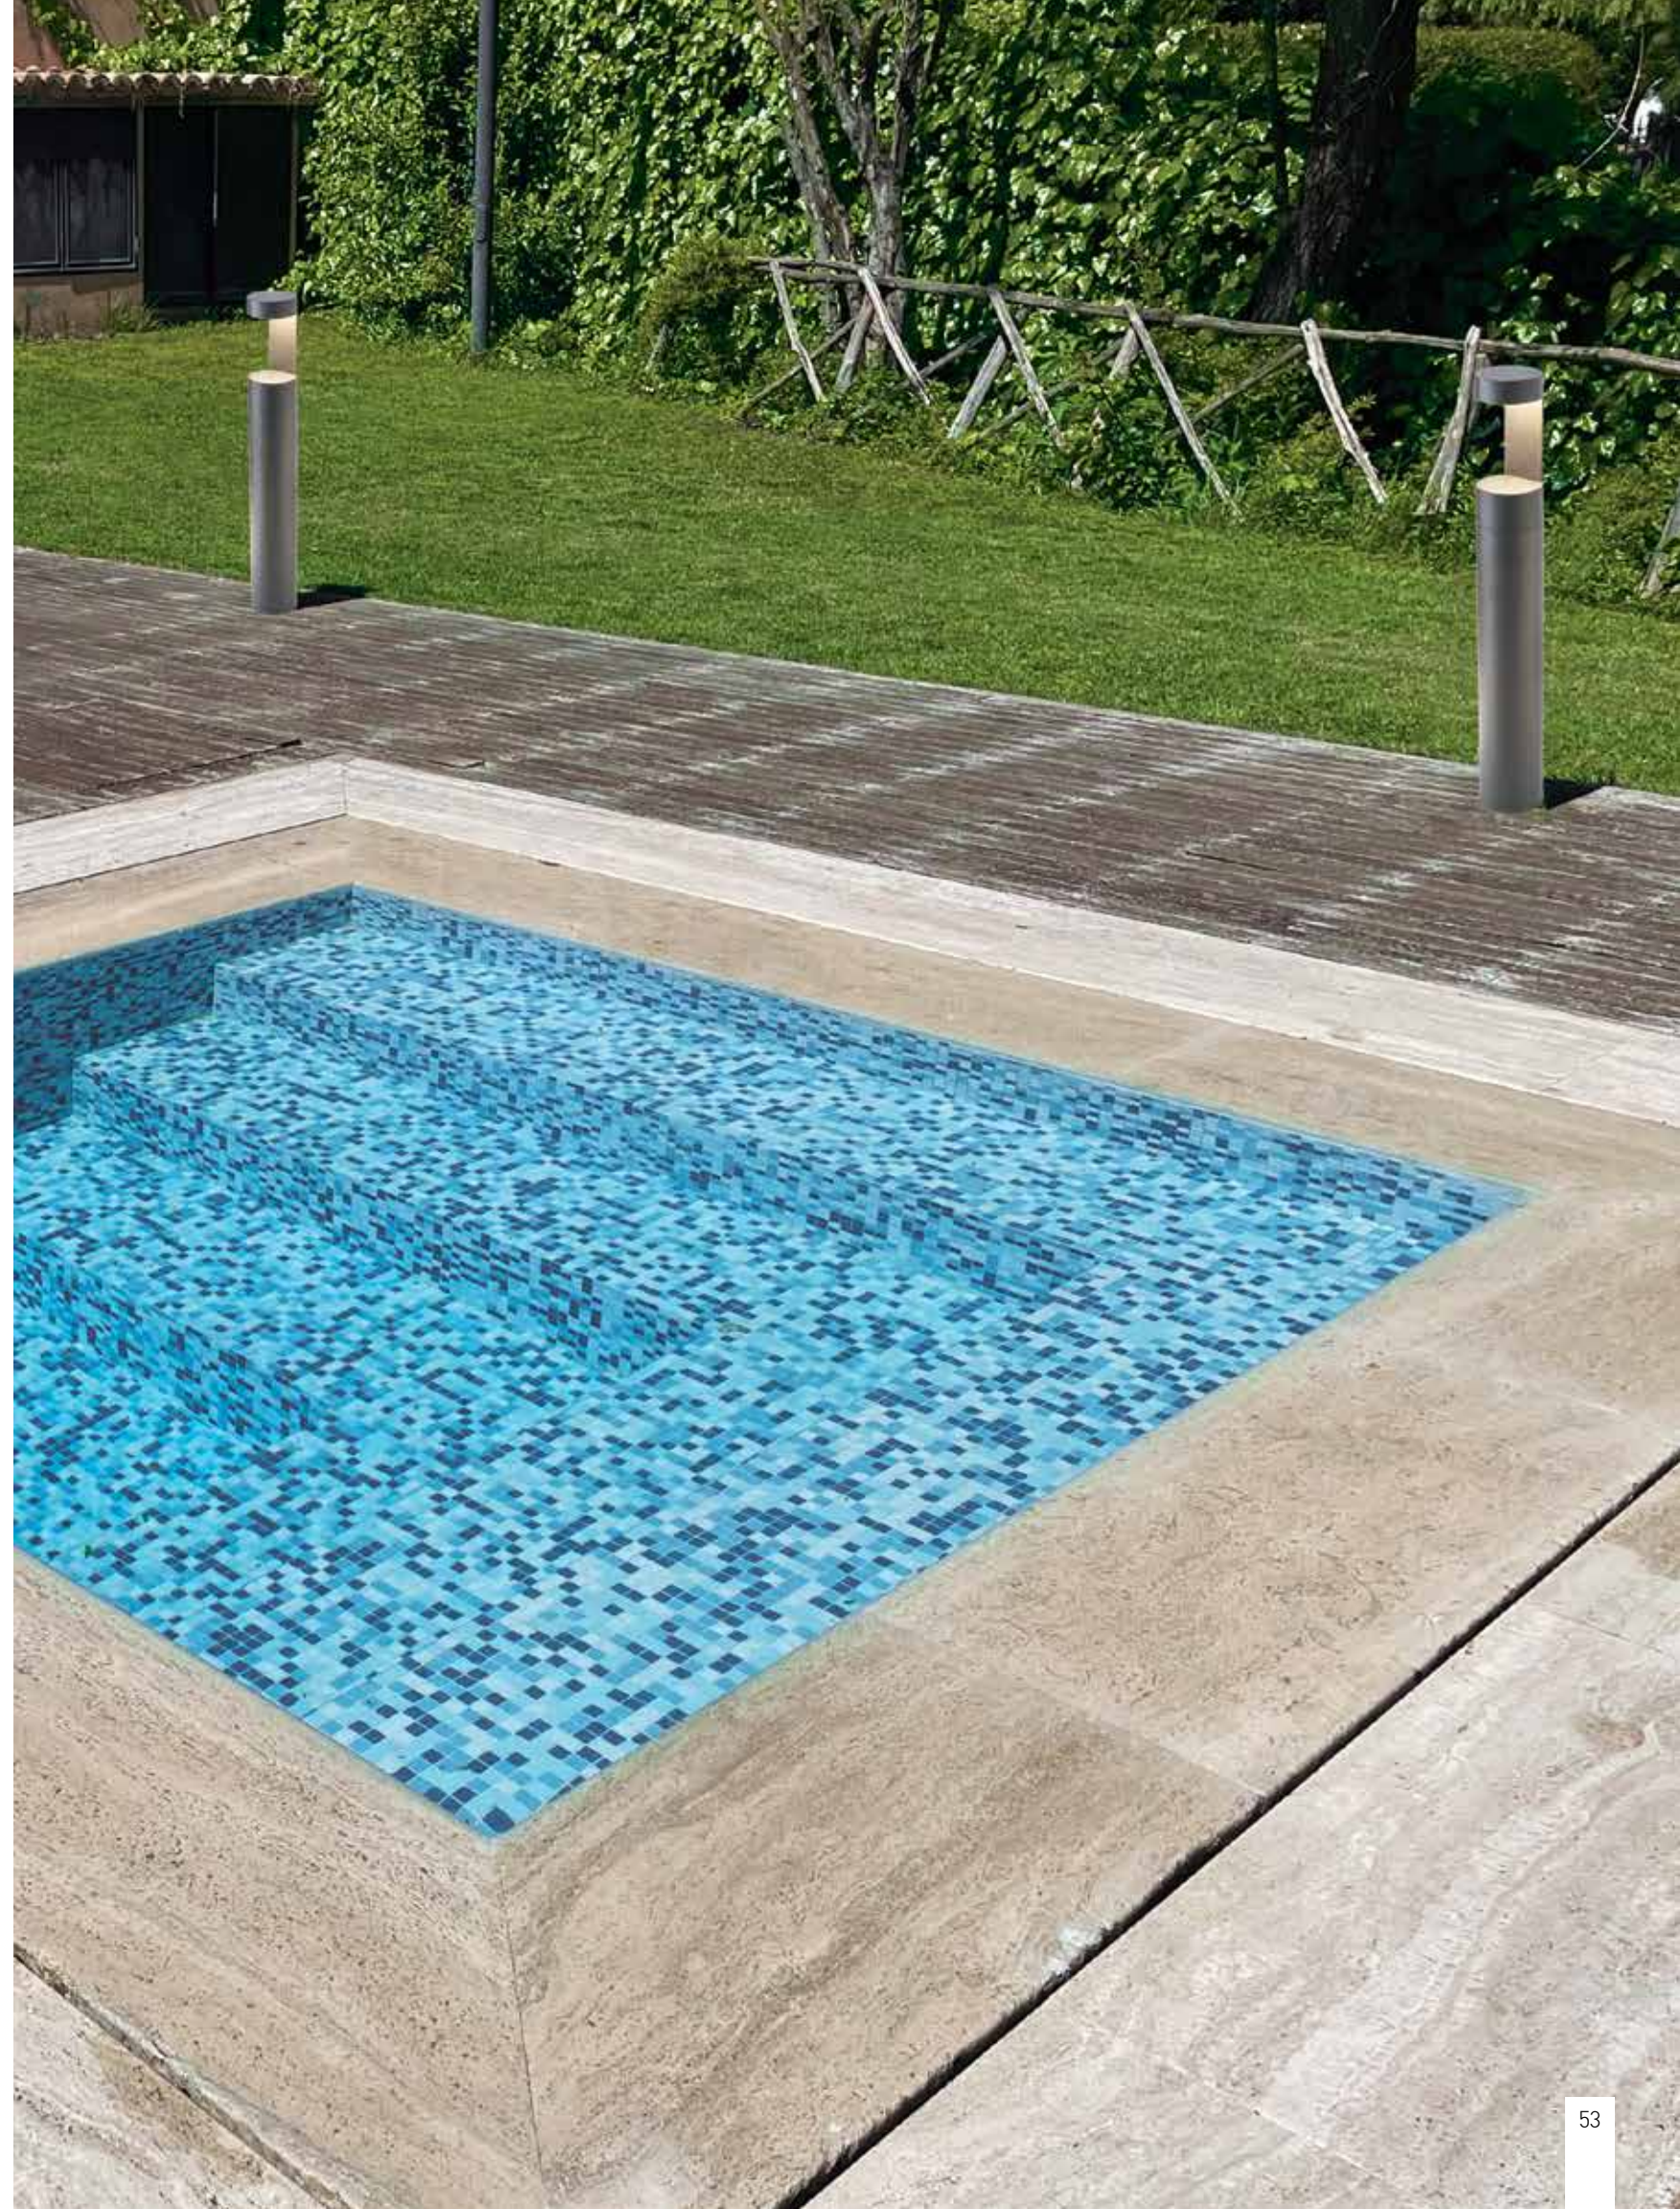

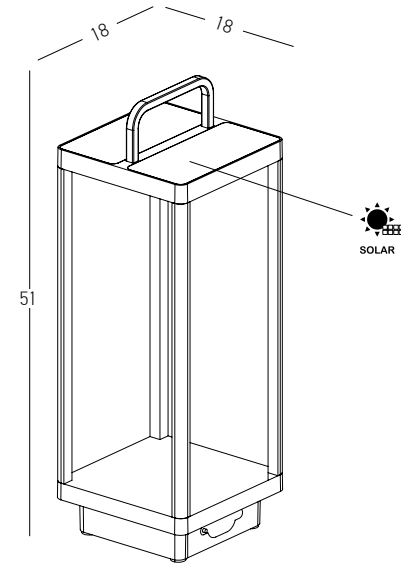


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 390Lm  
 Cri 80  
 IP 54  
 Dimensions L: 18cm W: 18cm H: 51  
 Switch 1 Switch On/Off  
 Material Aluminium - Tempered Glass  
 Special Feature Solar Panel  
 Portable Lamp  
 USB Cable Included  
 Color Graphite / **Code E302**



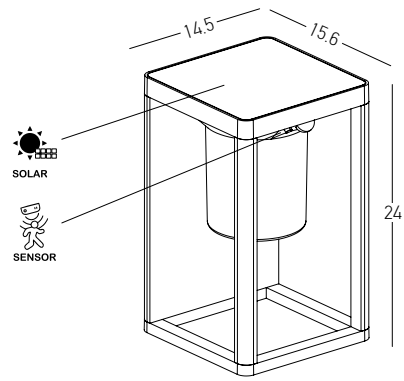


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 210Lm  
 Cri 80  
 IP 65  
 Dimensions L: 15.6cm W: 14.5cm H: 24cm  
 Material Aluminium - PC Diffuser  
 Special Feature Solar Panel  
 3 Different Ways of Lighting  
 Sense Distance 3 - 5m  
 Color Graphite / **Code E295**






Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 867Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 11cm H: 25cm  
 Material Aluminium  
 Color Graphite / **Code E133**




Power 3x 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1117Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 12cm H: 45cm  
 Material Aluminium  
 Color Graphite / **Code E132**



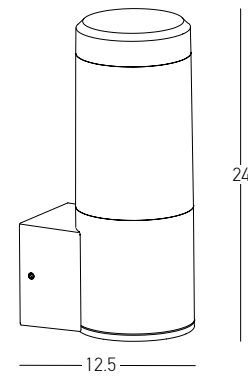


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 990Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12.5cm W: 9cm H: 24cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E276**

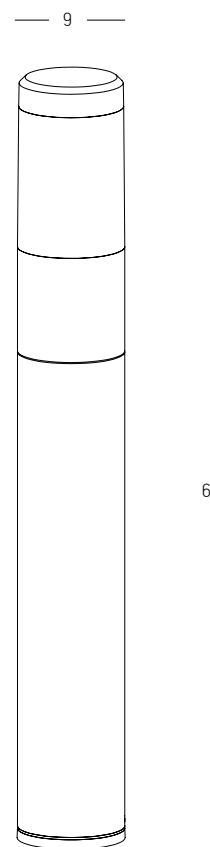

Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 993Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 9cm H: 65cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E277**




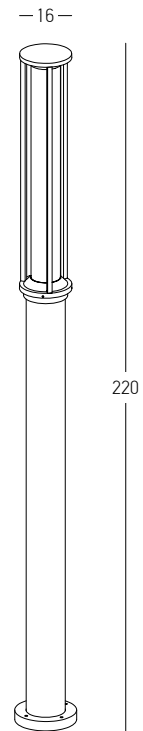


Power 17W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1488Lm  
Cri 80  
IP 65  
Dimensions Ø: 16cm H: 220cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E348**





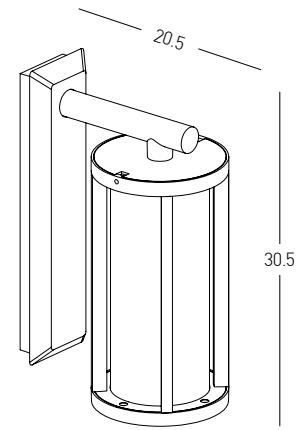


Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 20.5cm W: 12.5cm H: 30.5cm  
 Base L: 3cm W: 7.5cm H: 28.5cm  
 Shade Dimensions Ø: 12.5cm H: 24cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / Code E338

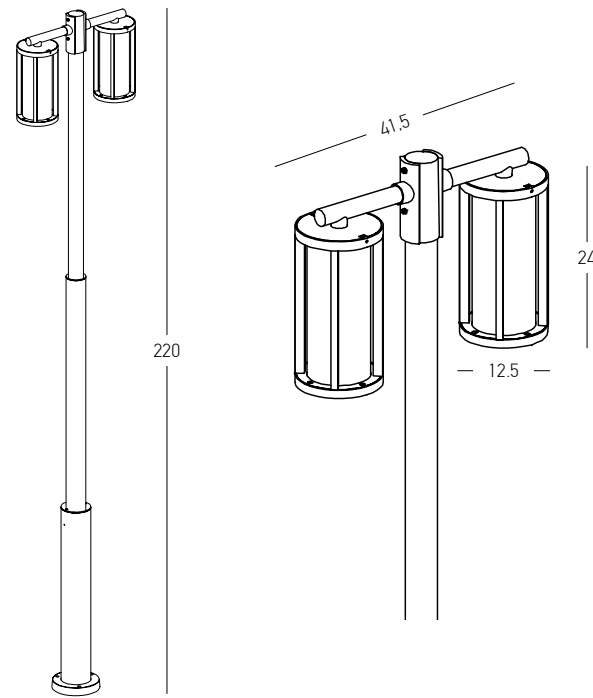


Bulb 2x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 12.5cm W: 41.5cm H: 220cm  
 Base Ø: 14.5cm H: 3cm  
 Shade Dimensions Ø: 12.5cm H: 24cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / Code E339



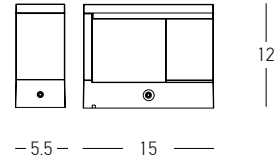


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 700Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12cm W: 15cm H: 5.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E207**

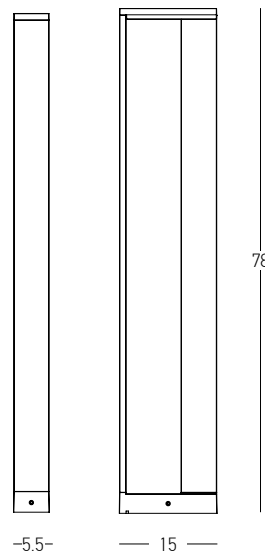


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 653Lm  
 Cri 80  
 IP 54  
 Dimensions L: 15cm W: 5.5cm H: 78cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E208**






Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 785Lm  
 Cri 80  
 IP 54  
 Dimensions L: 19.5cm W: 6cm H: 20.7cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E205**

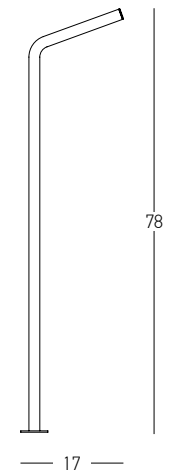


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 785Lm  
 Cri 80  
 IP 54  
 Dimensions L: 17cm W: 6cm H: 78cm  
 Base W: 10cm L: 10cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E206**




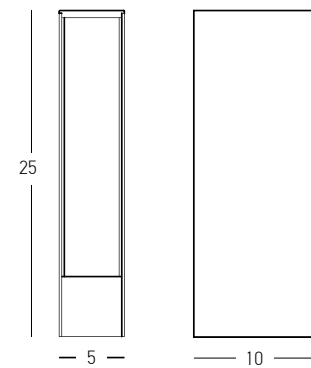


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions L: 5cm W: 10cm H: 25  
 Material Aluminium - PC Diffuser  
 Color Rusty Brown / **Code E256**

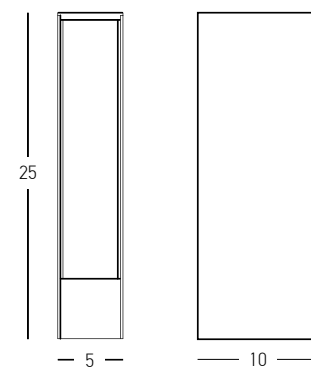


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 720Lm  
 Cri 80  
 IP 65  
 Dimensions L: 5cm W: 10cm H: 25  
 Material Aluminium - PC Diffuser  
 Special Feature Double Side Lighting  
 Color Graphite / **Code E257**

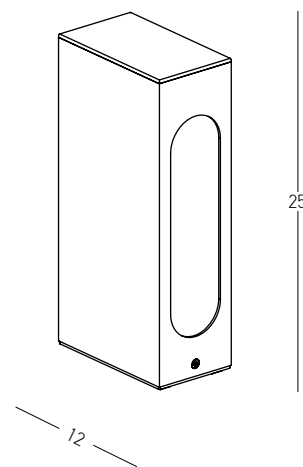


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12cm W: 7cm H: 25cm  
 Material Aluminium  
 Color Graphite / **Code E211**

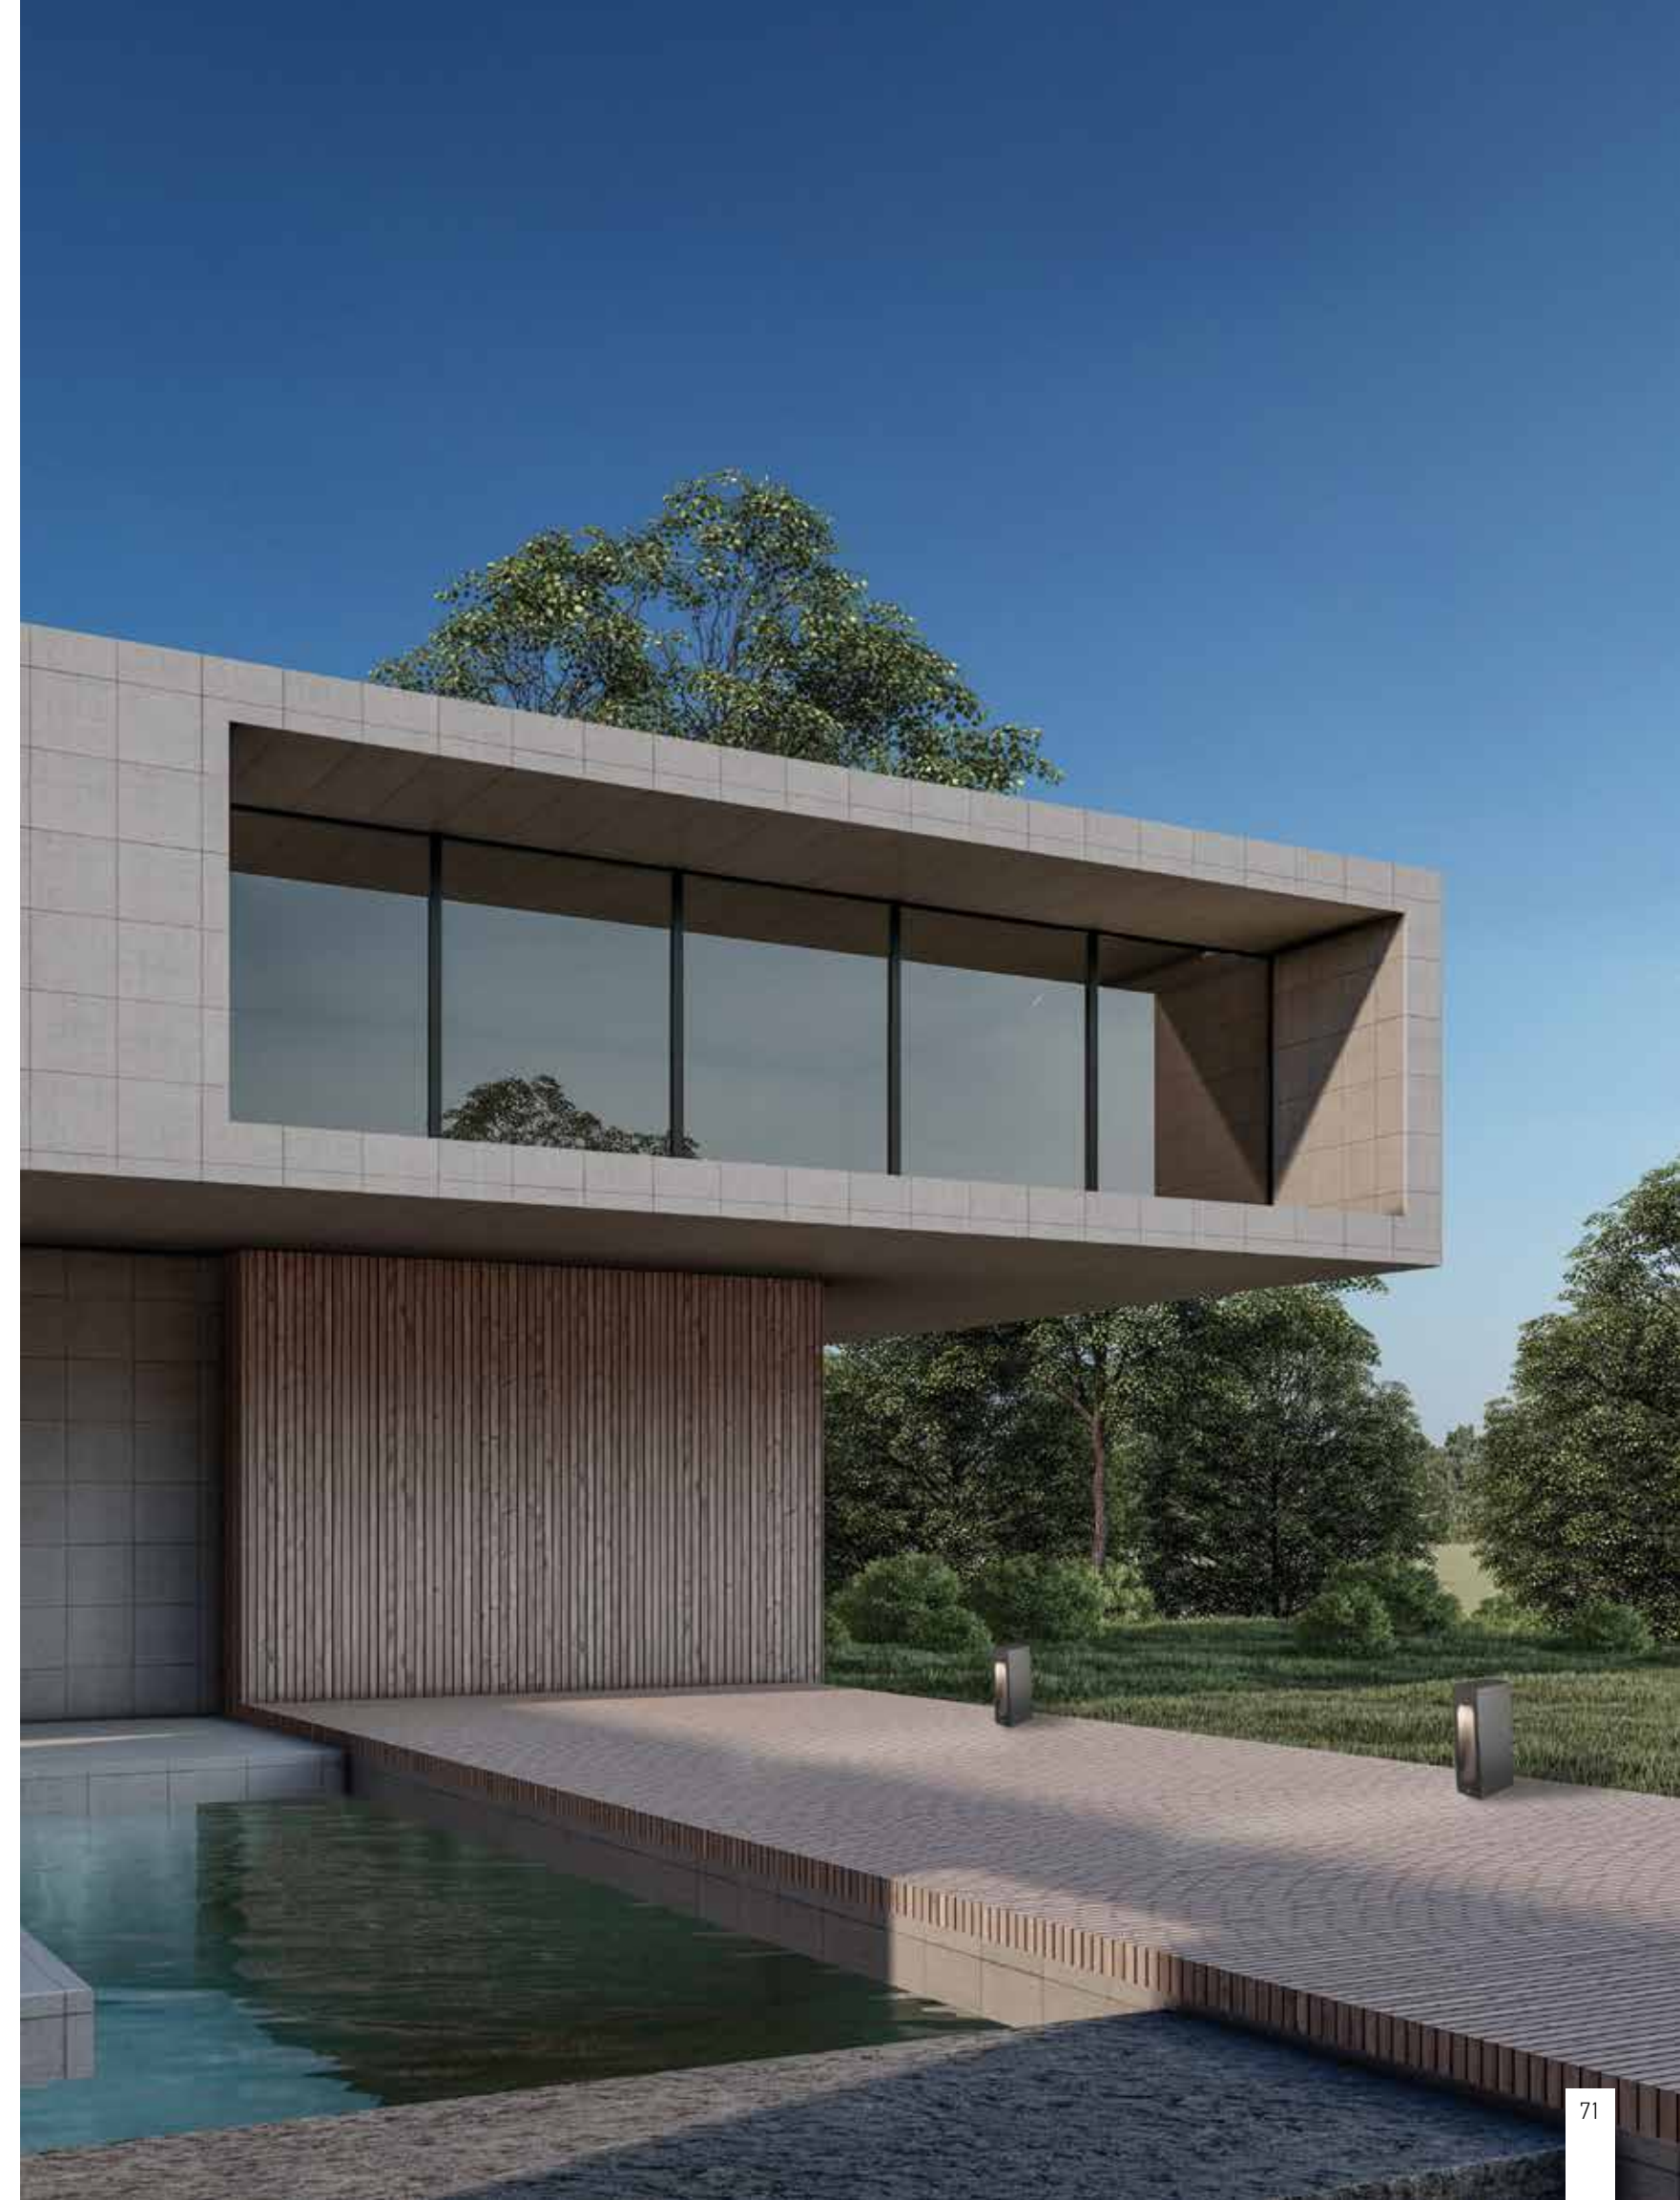

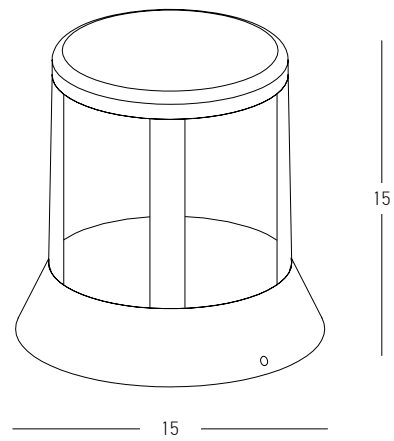

Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 557Lm  
Cri 80  
IP 65  
Dimensions Ø: 15cm H: 15cm  
Material Aluminium - Clear Diffuser  
Color Graphite / **Code E337**




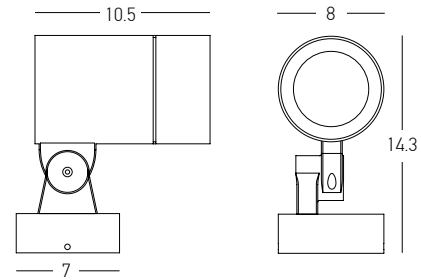


Bulb 1x GU10  
 Power 11W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 8cm L: 14.3cm  
 Base Ø: 7cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E236**




Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1243Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 8cm L: 16.2cm  
 Base Ø: 7cm  
 Optic 32°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E235**

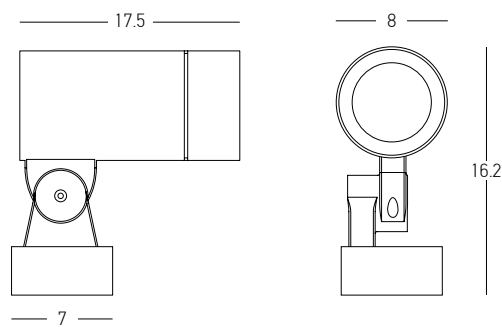

Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1243Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 8cm L: 16.2cm  
 Base Ø: 7cm  
 Optic 12°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E235-12D**

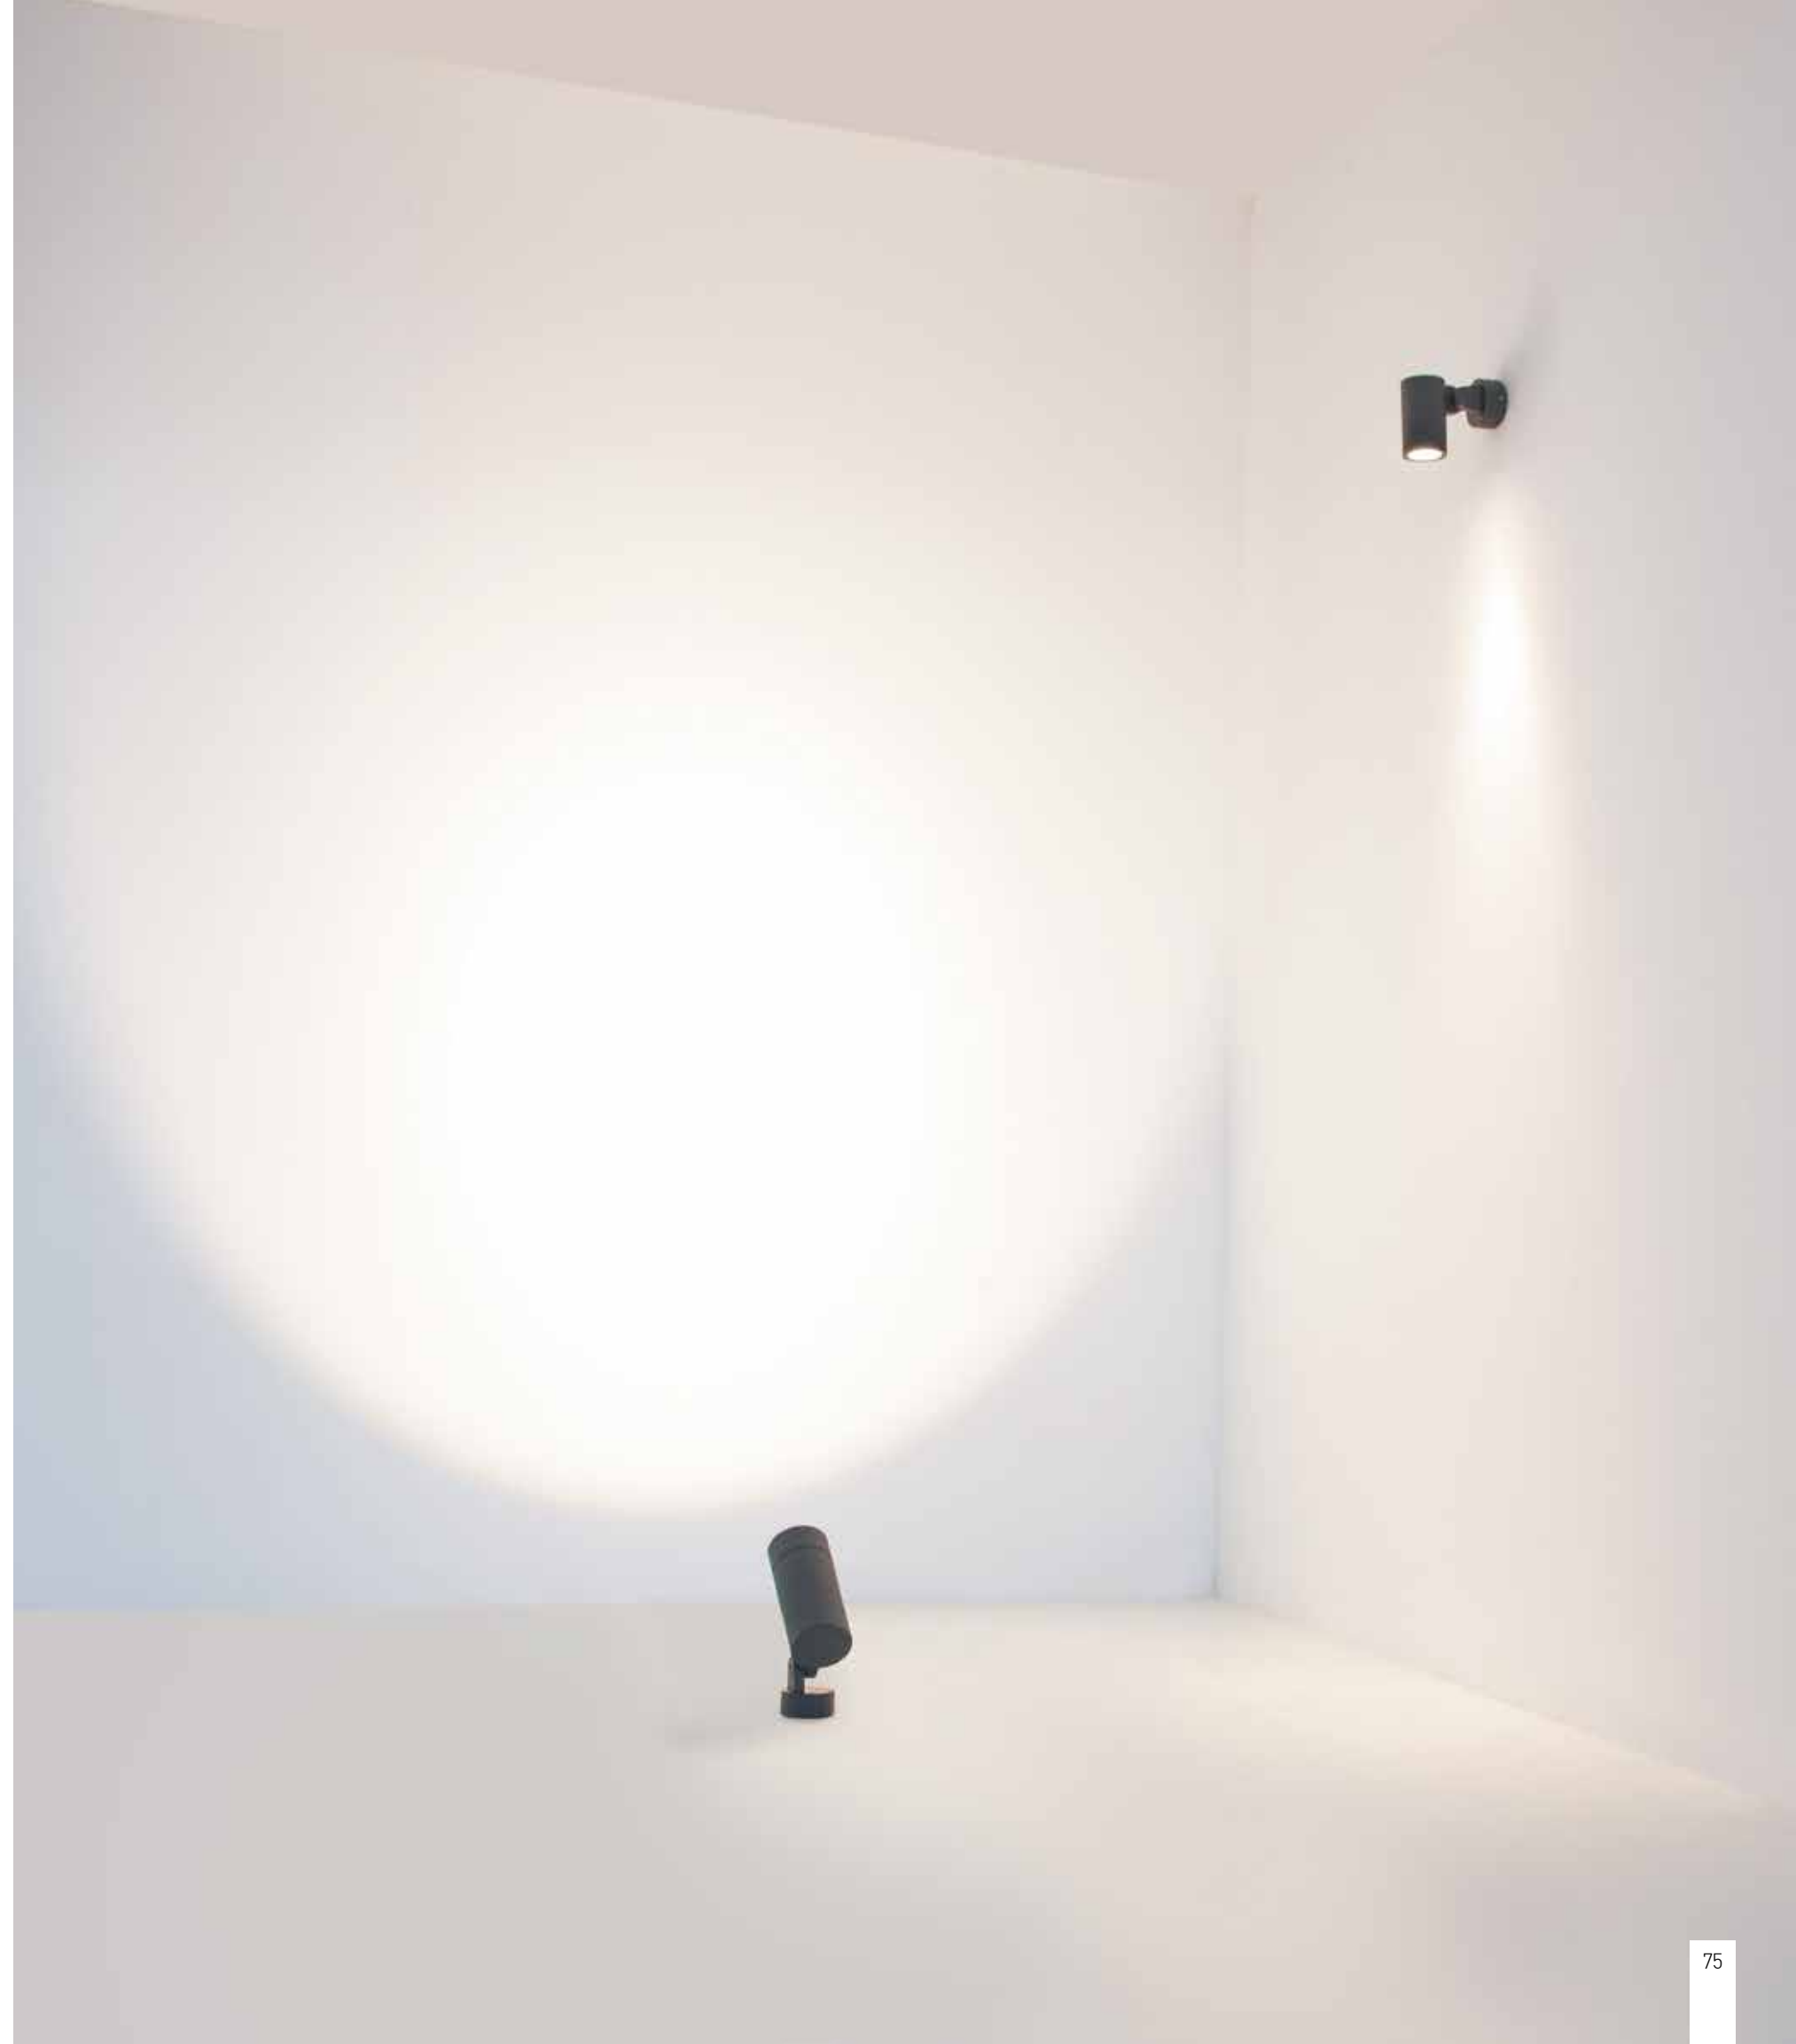



Power 4x 2.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 720Lm  
 Cri 80  
 IP 54  
 Dimensions L: 17cm W: 5.5cm H: 9cm  
 Optic 38°  
 Material Aluminium - Tempered Glass  
 Color Dark Grey / **Code E250**




Power 4x 2.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 720Lm  
 Cri 80  
 IP 54  
 Dimensions L: 17cm W: 5.5cm H: 9cm  
 Optic 12°  
 Material Aluminium - Tempered Glass  
 Color Dark Grey / **Code E250-12D**




**Wall / Ground Base**  
 Material Aluminium  
 Color Dark Grey / **Code E251**




WALL | p.078-129

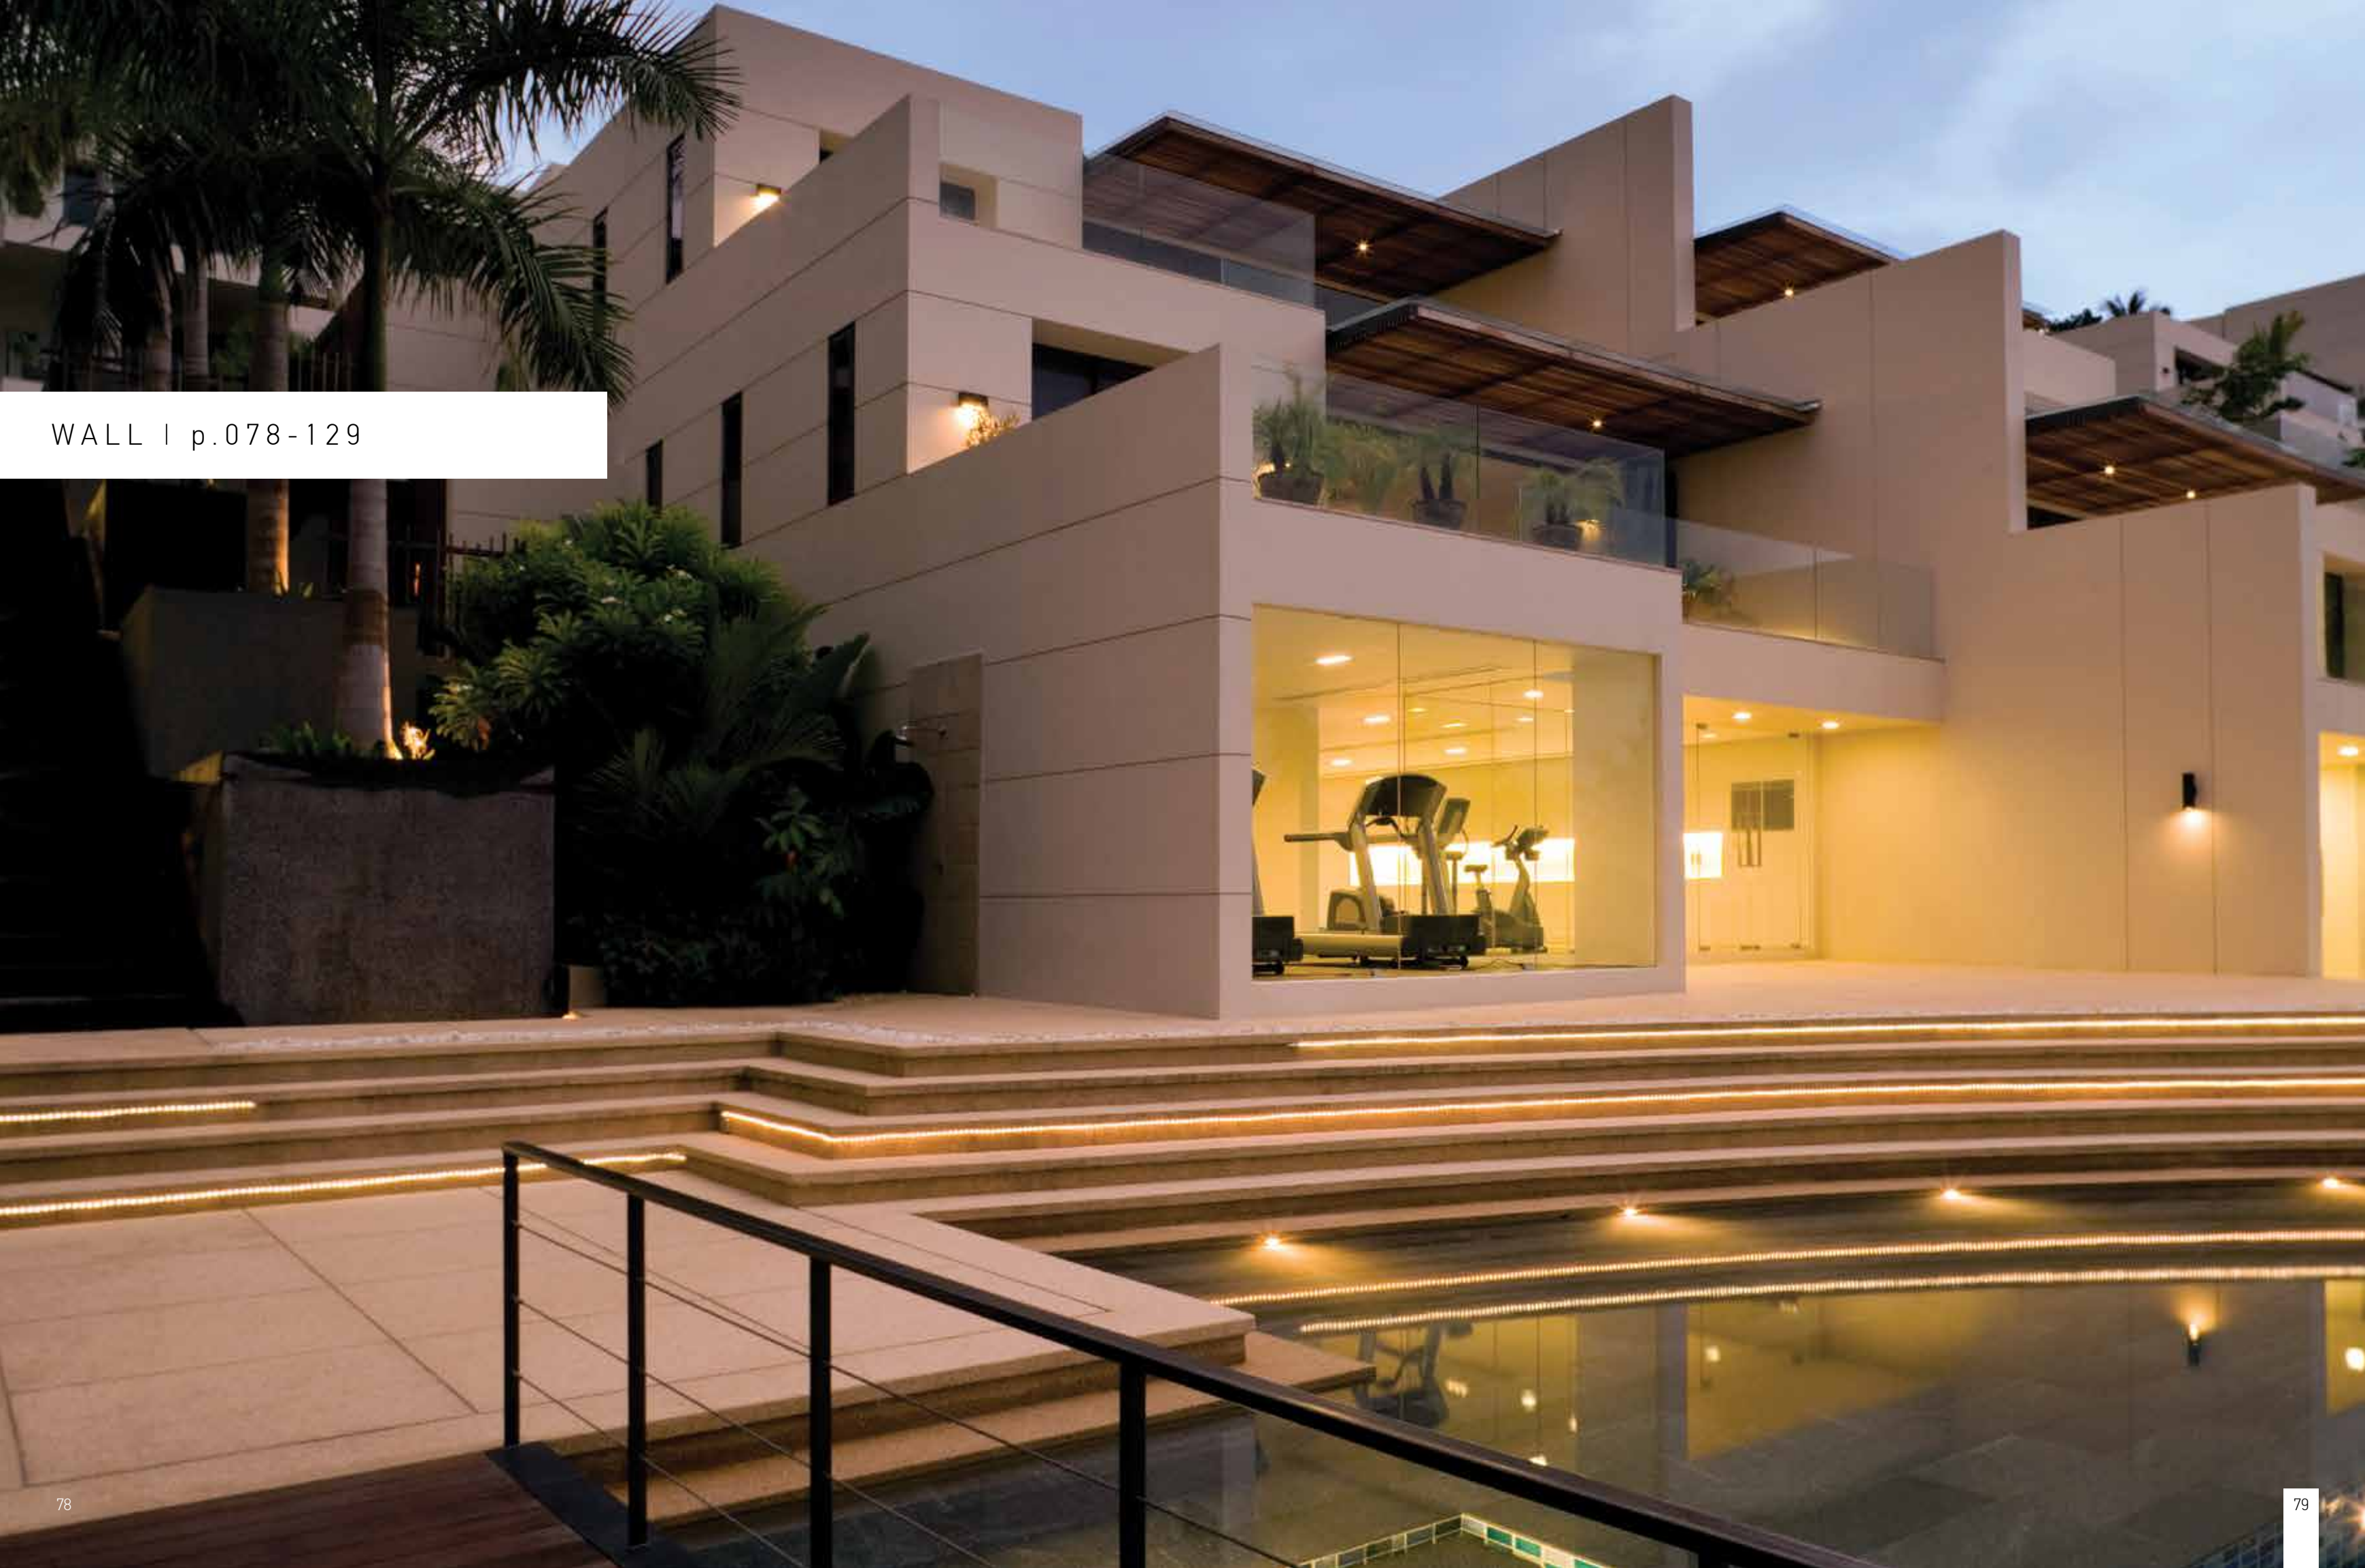





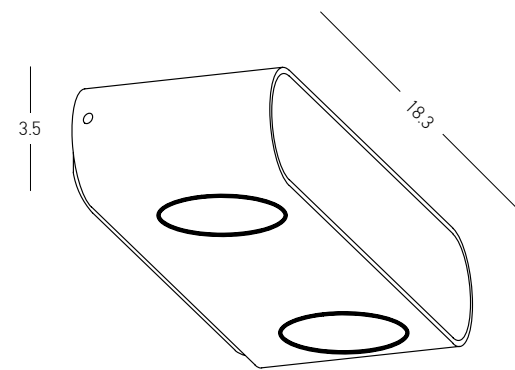

Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 775Lm  
 Cri 90  
 IP 54  
 Dimensions L: 6.5cm W: 18.3cm H: 3.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E315**

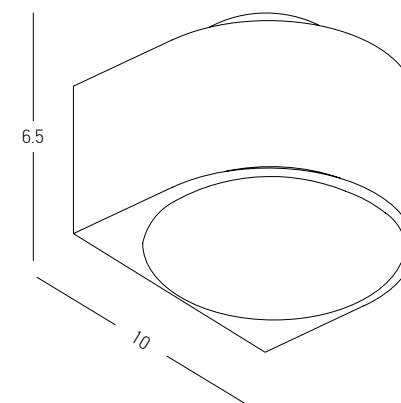


Power 2x 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 929Lm  
 Cri 90  
 IP 54  
 Dimensions L: 11cm W: 10cm H: 6.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E317**

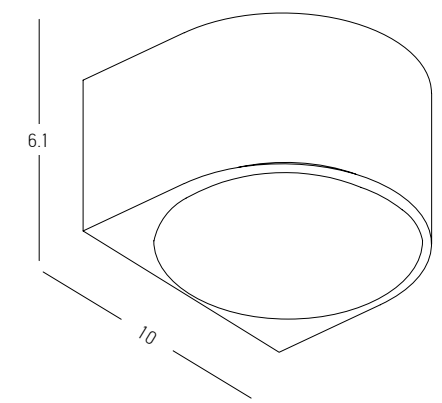


Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 544Lm  
 Cri 90  
 IP 54  
 Dimensions L: 11cm W: 10cm H: 6.1cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E316**



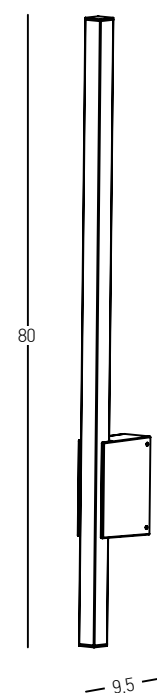


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1187Lm  
Cri 80  
IP 65  
Dimensions L: 9.5cm W: 4.5cm H: 80cm  
Base L: 9cm W: 4.5cm H: 12.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E287**



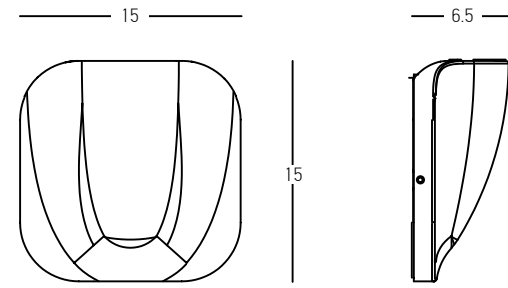


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 572Lm  
 Cri 80  
 IP 54  
 Dimensions L: 6.5cm W: 15cm H: 15cm  
 Beam Angle 45°  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E273**

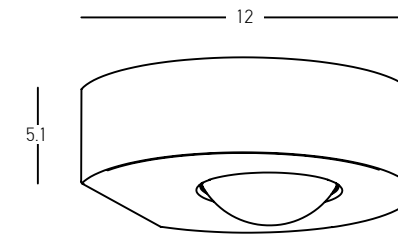


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 752Lm  
 Cri 80  
 IP 54  
 Dimensions L: 12cm W: 13cm H: 5.1cm  
 Beam Angle 120°  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E278**







Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 11cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E238**




Power 2x 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 960Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 17.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E239**

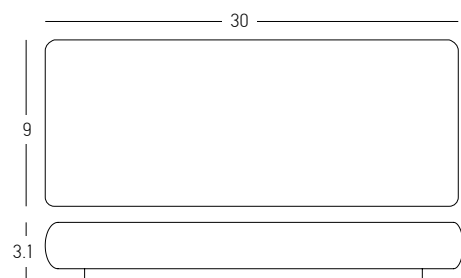


Power 2x 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1600Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.1cm W: 30cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E240**

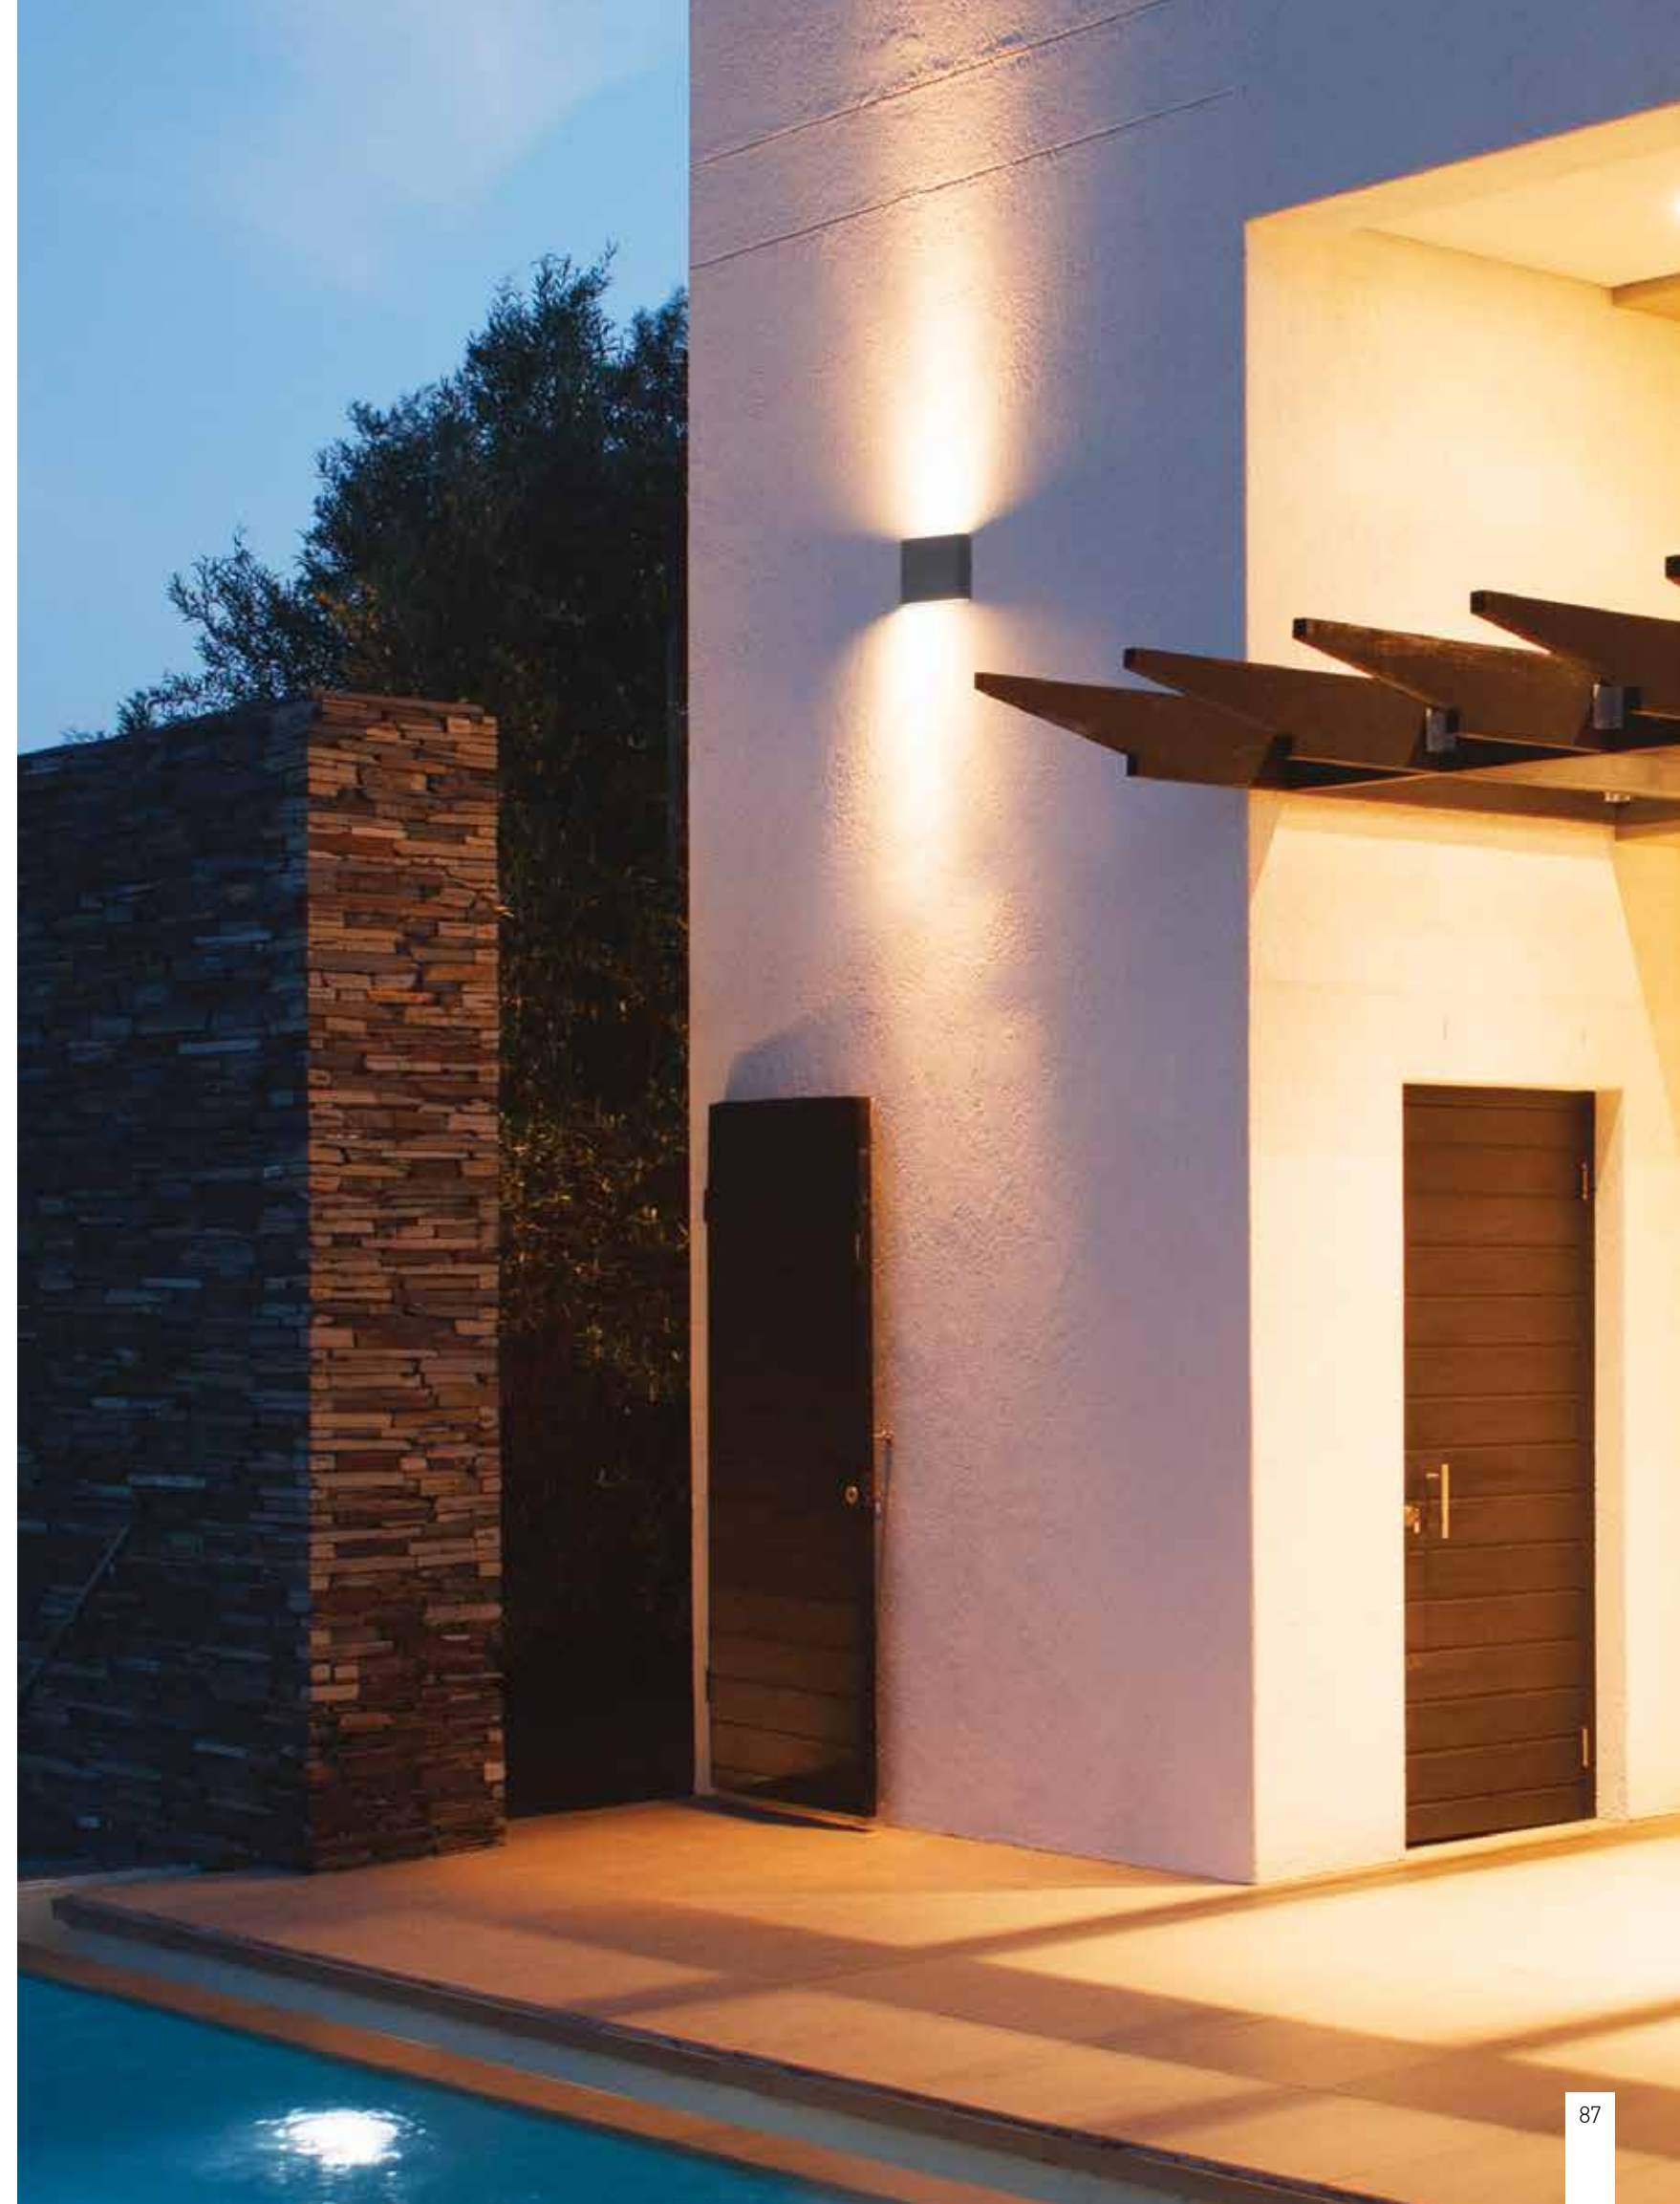




Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 900Lm  
 Cri 80  
 IP 54  
 Dimensions L: 10cm W: 16cm H: 7.7cm  
 Material Aluminium - PC Diffuser  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E274**



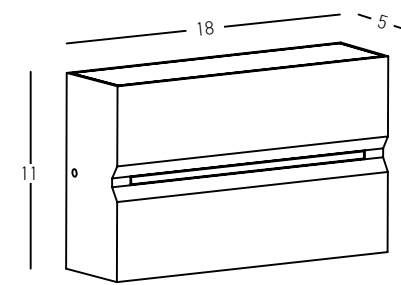


Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 796Lm  
 Cri 80  
 IP 54  
 Dimensions L: 5cm W: 18cm H: 11cm  
 Beam Angle 30°  
 Material Aluminium - Tempered Glass - PC Diffuser  
 Special Feature Up - Down Lighting  
 12x SMD LED  
 Color Graphite / **Code E272**



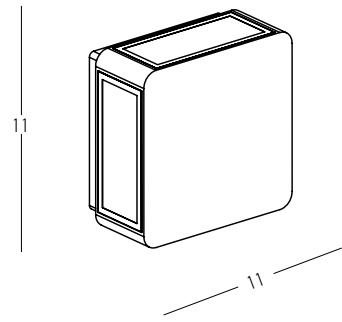


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 336Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 11cm H: 11cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E197**

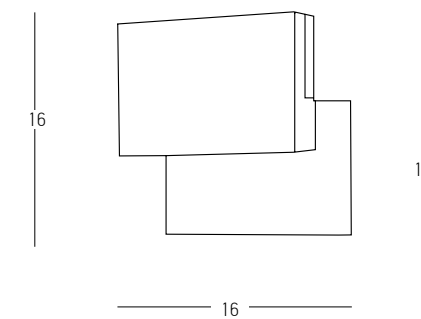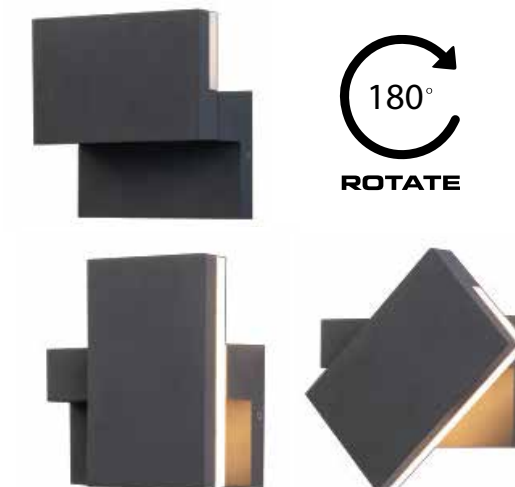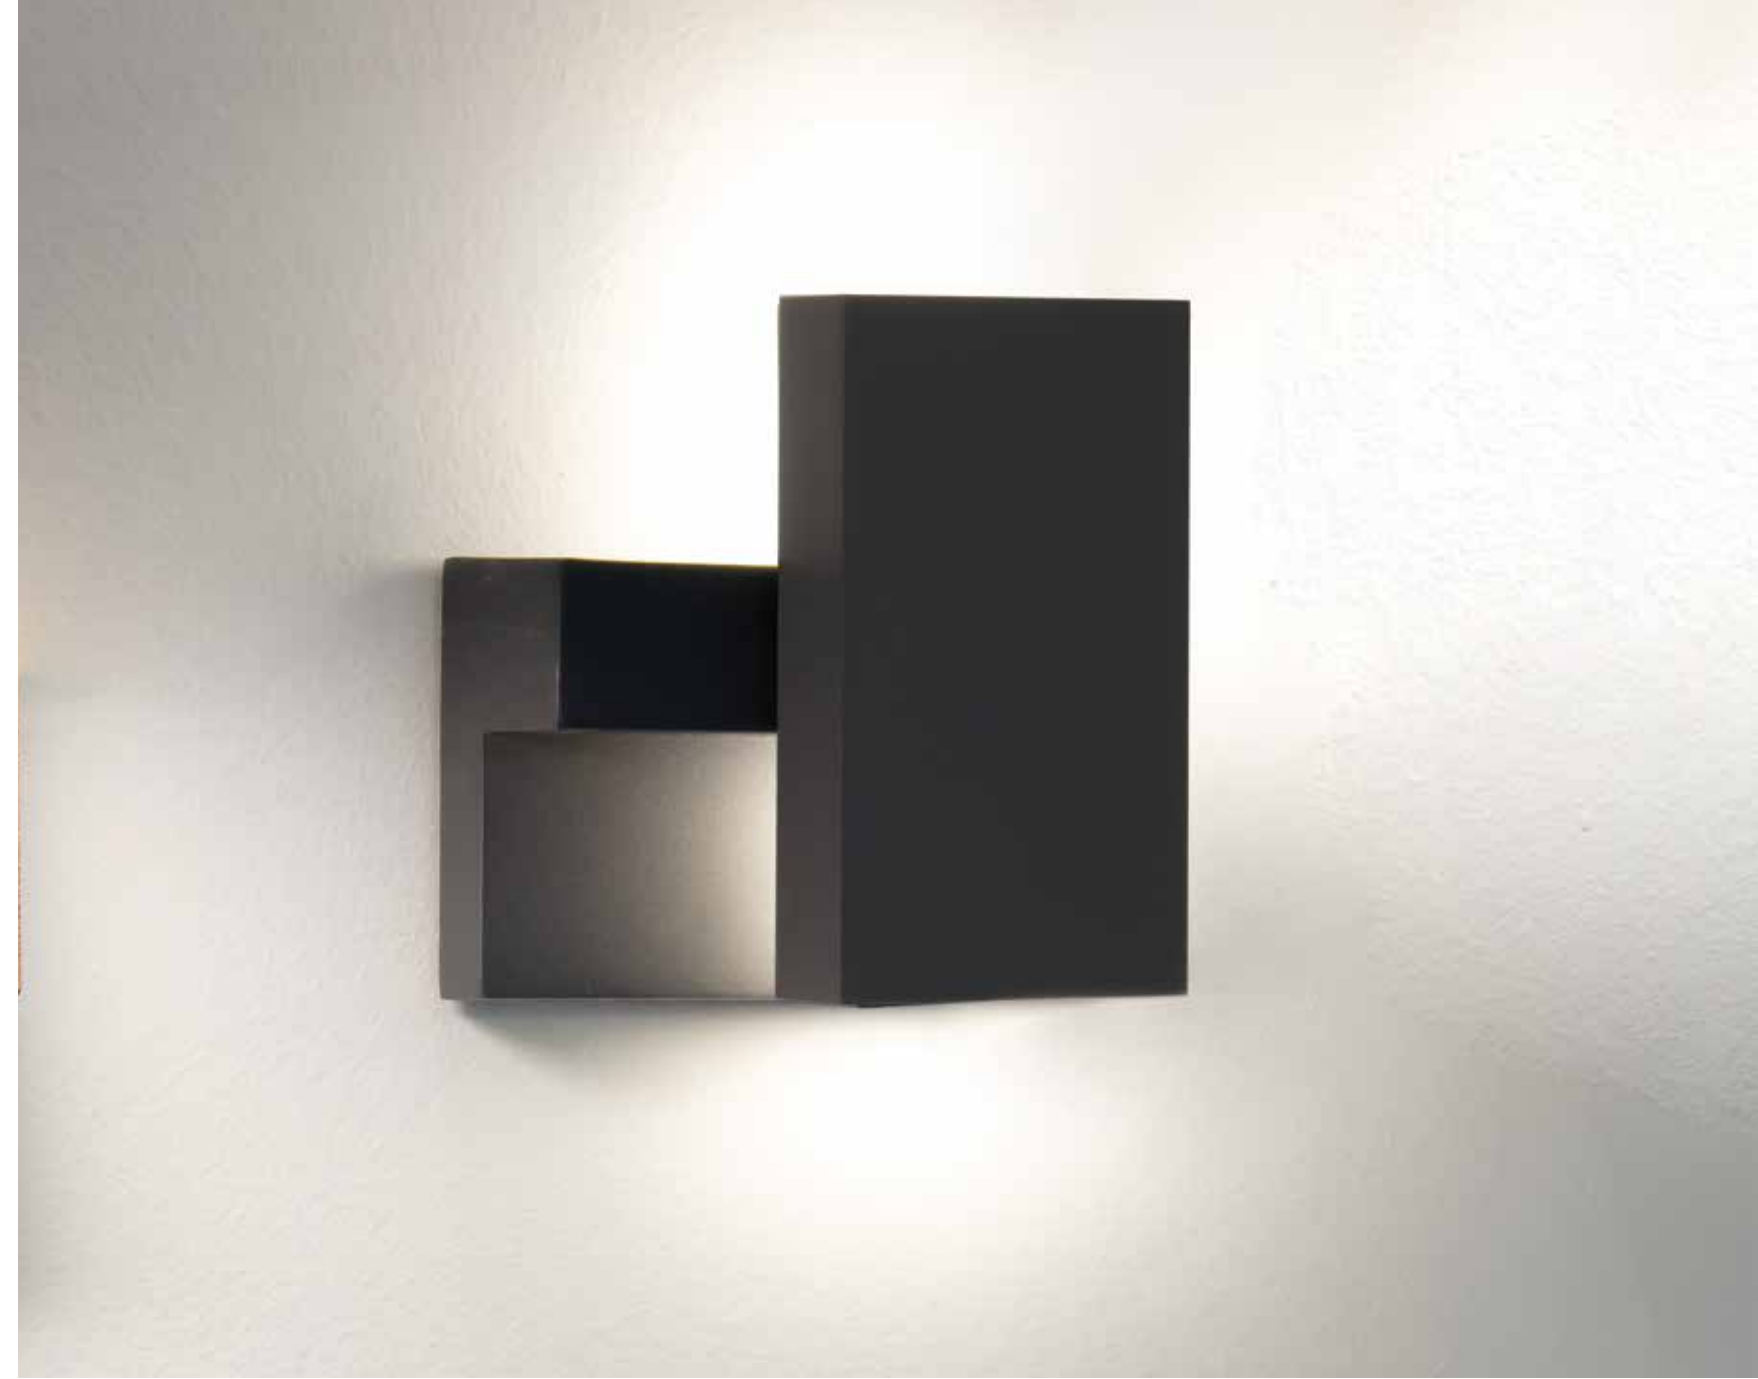


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 810Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7.8cm W: 16cm H: 10-16cm  
 Material Aluminium - PC Diffuser  
 Special Feature Movable  
 Color Graphite / **Code E199**




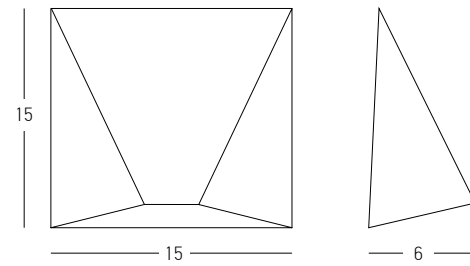


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 6cm W: 15cm H: 15cm  
 Material Aluminium - Glass  
 Color Graphite / **Code E243**

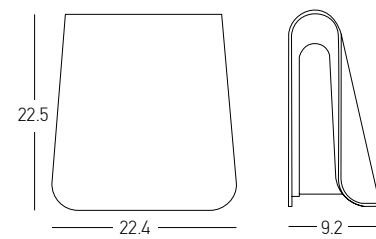


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 9.2cm W: 22.4cm H: 22.5cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E245**

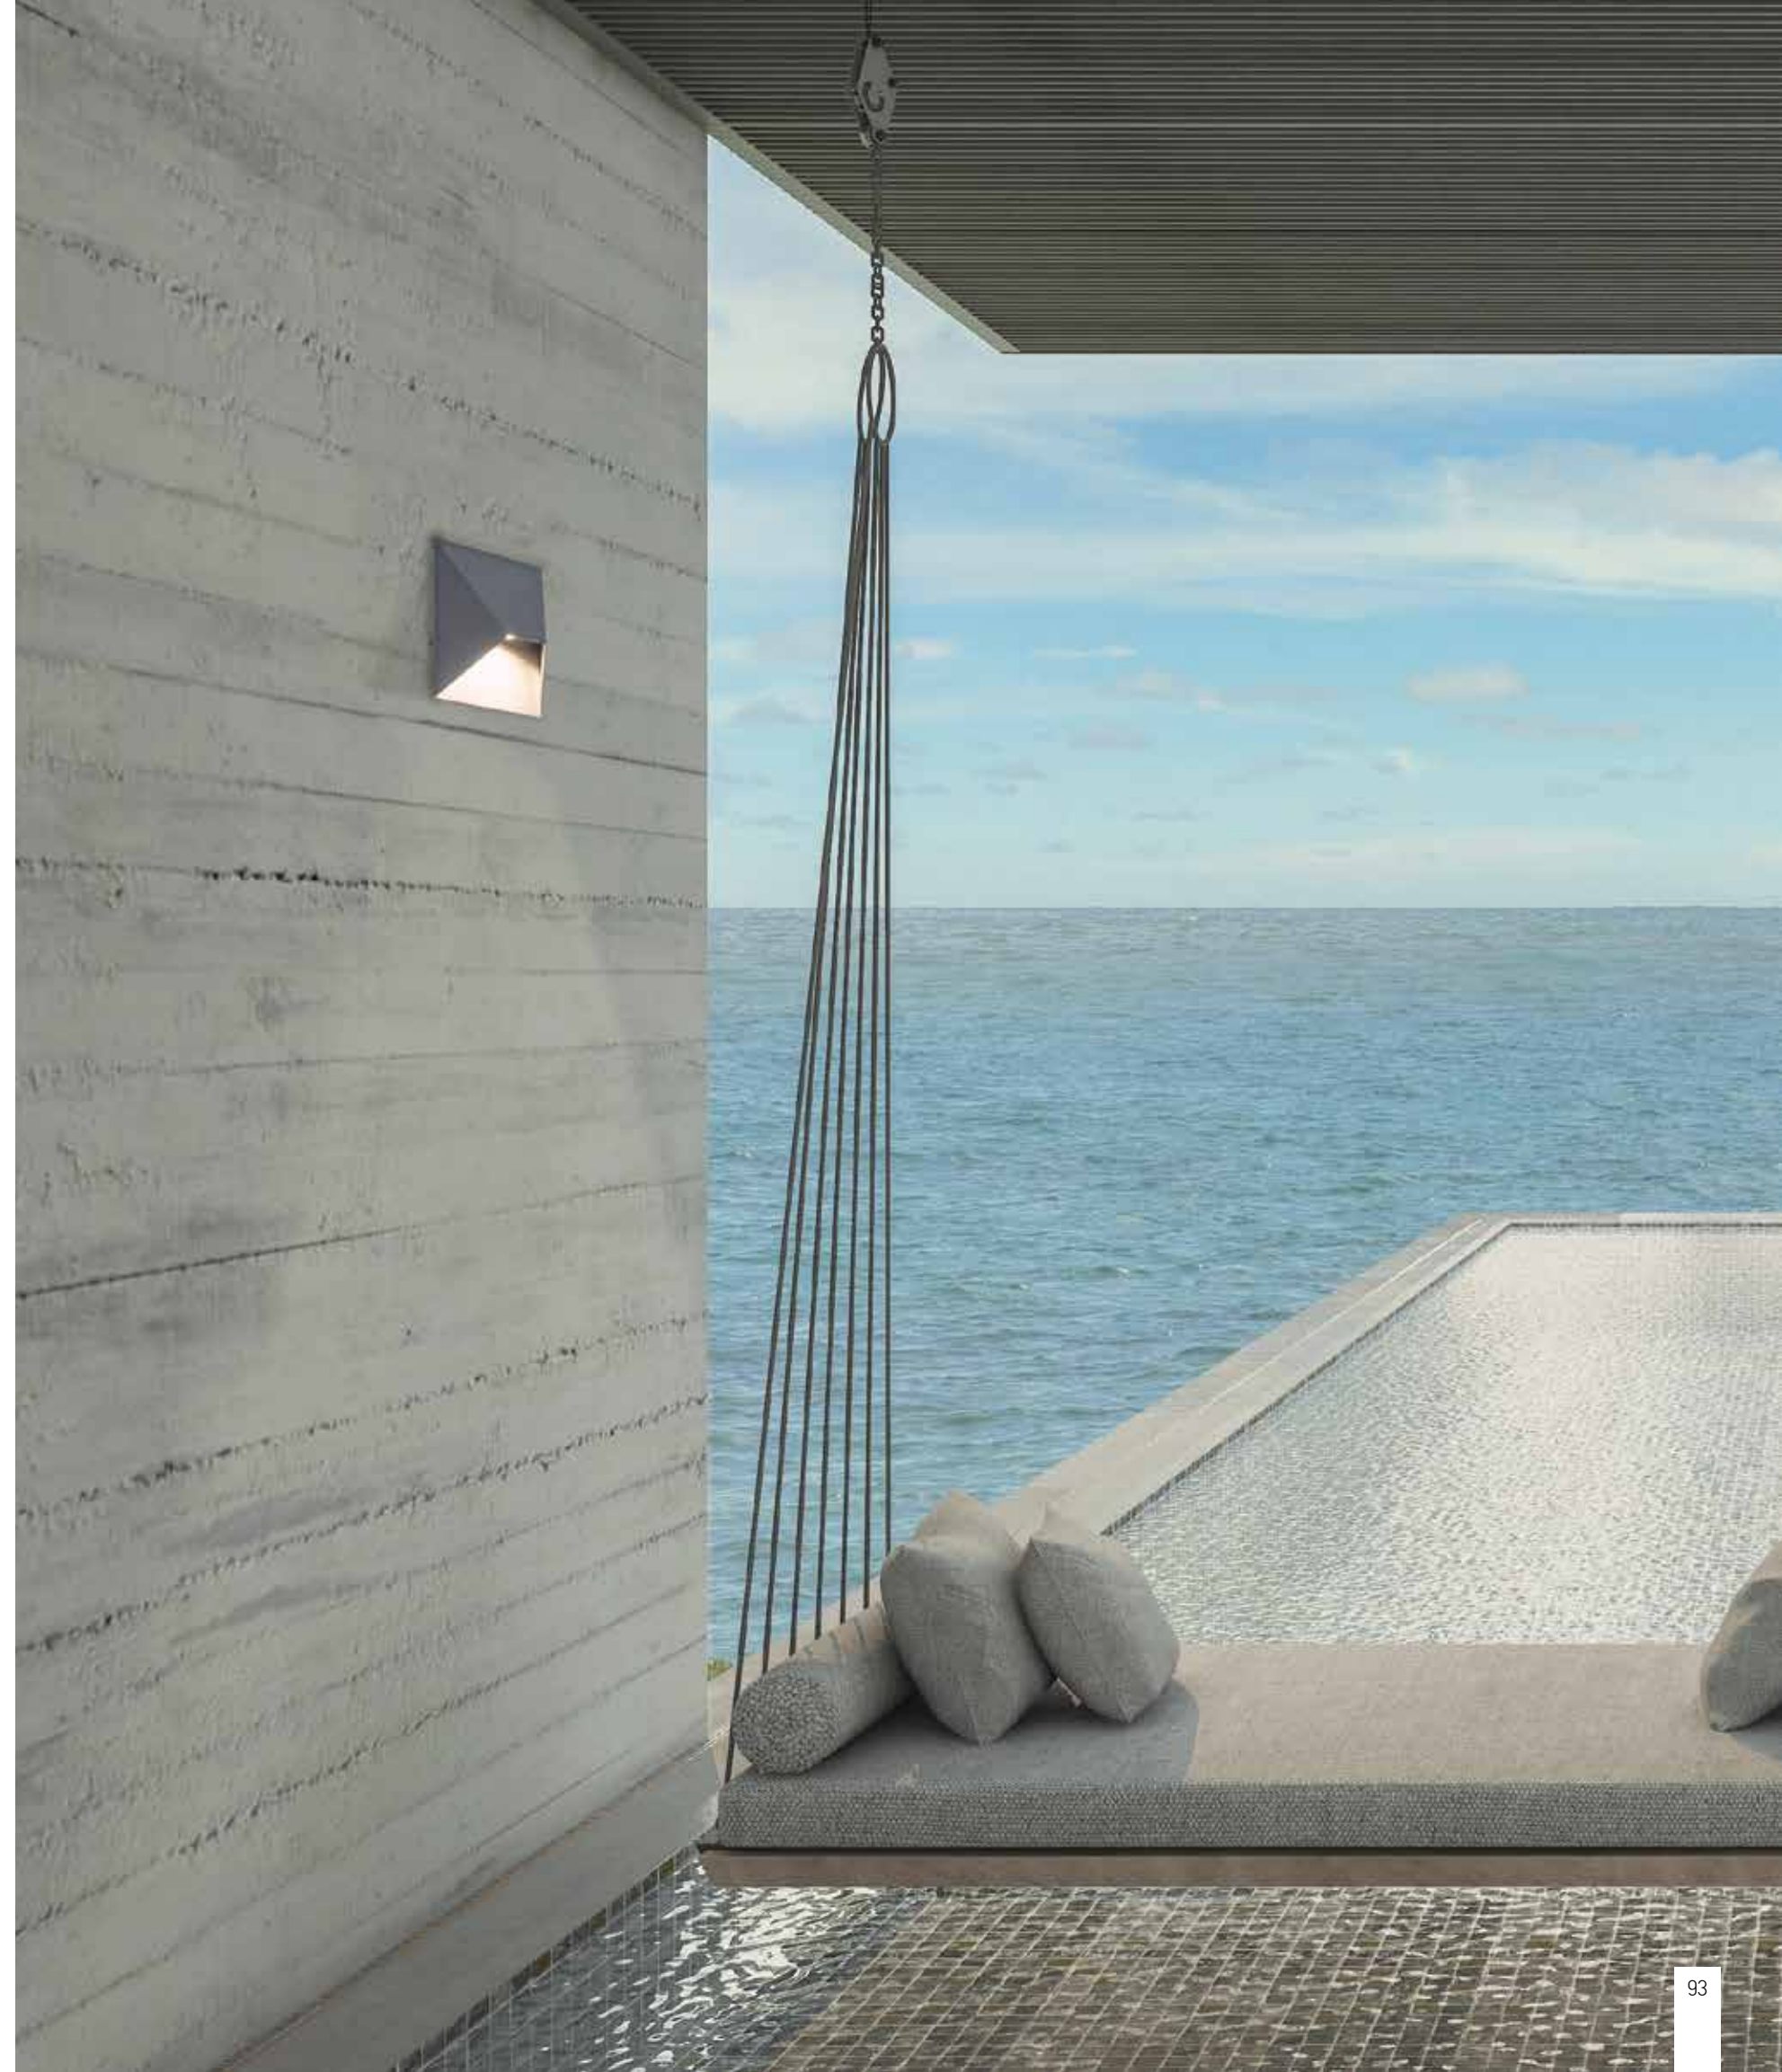

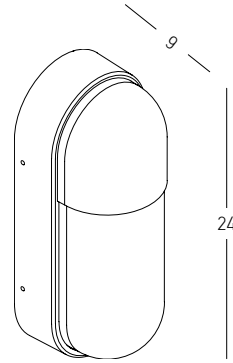


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 498Lm  
 Cri 80  
 IP 54  
 Dimensions L: 9cm W: 9.5cm H: 24cm  
 Material Aluminium - PC Diffuser  
 Color Black / **Code E318**



Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 540Lm  
 Cri 80  
 IP 54  
 Dimensions L: 11cm W: 13cm H: 14.8cm  
 Material Aluminium - PC Diffuser  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E114**










Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 810Lm  
Cri 80  
IP 65  
Dimensions L: 7.2cm W: 16cm H: 15.5cm  
Material Aluminium - PC Diffuser  
Color Graphite / **Code E195**




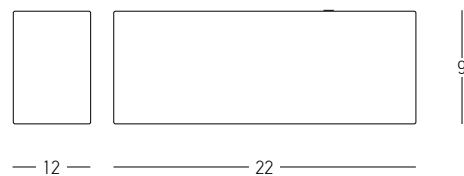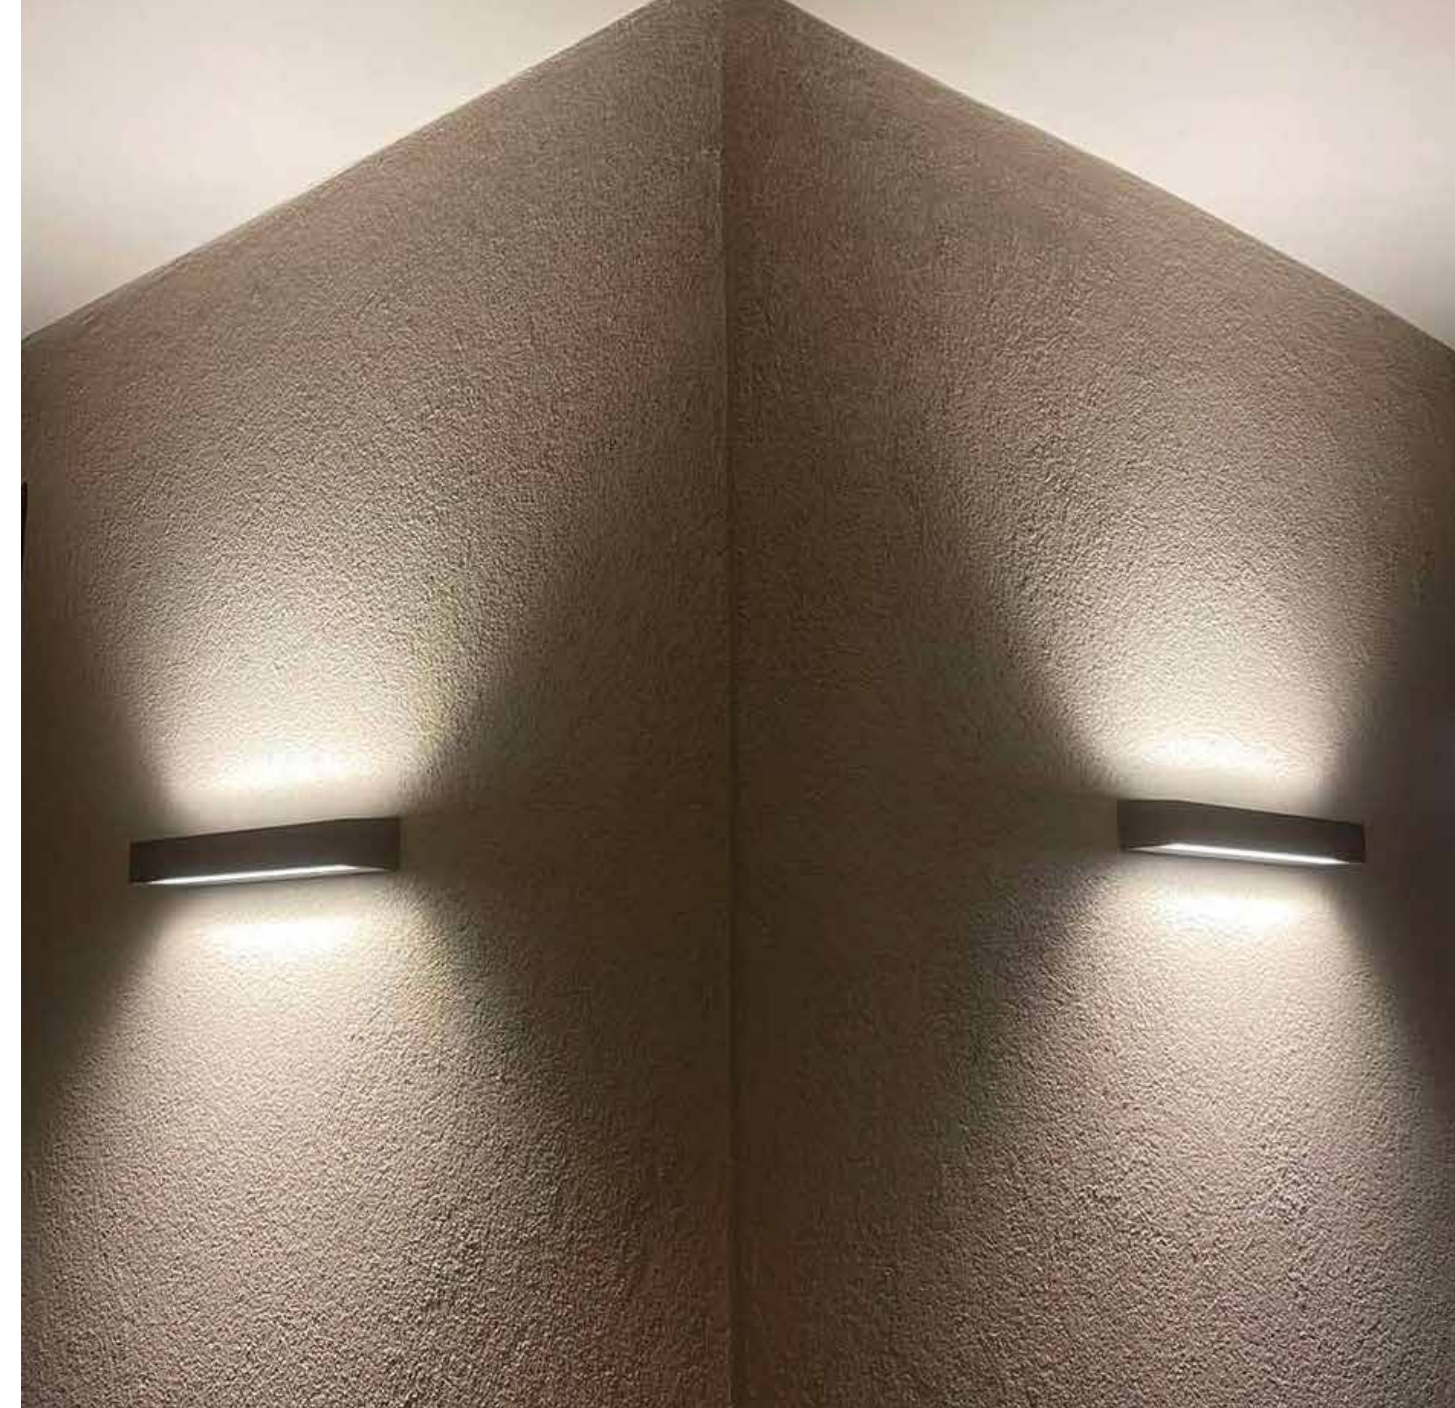

Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 44  
 Dimensions L: 12cm W: 22cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E146**

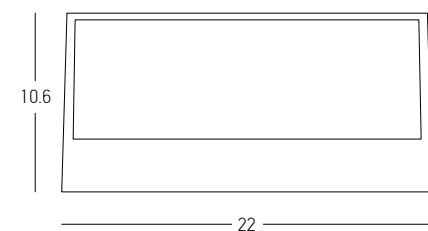



Power 2x 13.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1359Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10.6cm W: 22cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Dark Grey / **Code E261**  
 Color Dark Brown / **Code E262**



Power 30W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 2263Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7.5cm W: 50cm H: 6.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E227**



OUTDOOR LIGHTING | WALL



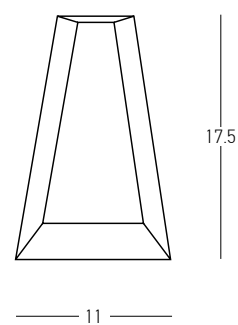
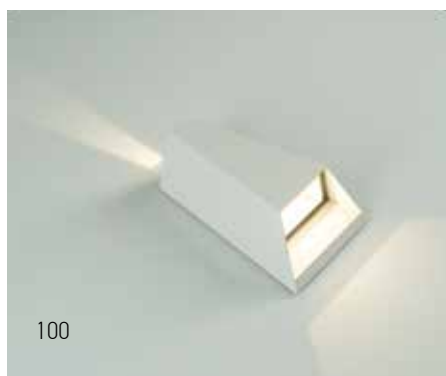



Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 6.5cm W: 11cm H: 17.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E135**  
 Color Sandy White / **Code E156**




Power 2x 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8.2cm W: 8cm H: 8cm  
 Material Aluminium - Tempered Glass  
 Special Feature Movable  
 Up - Down Lighting

Color Graphite / **Code E109**  
 Color Sandy White / **Code E159**

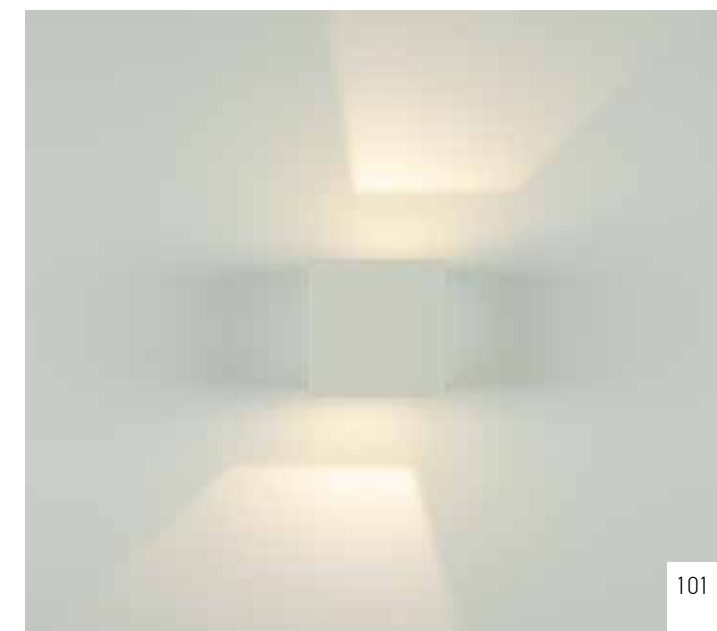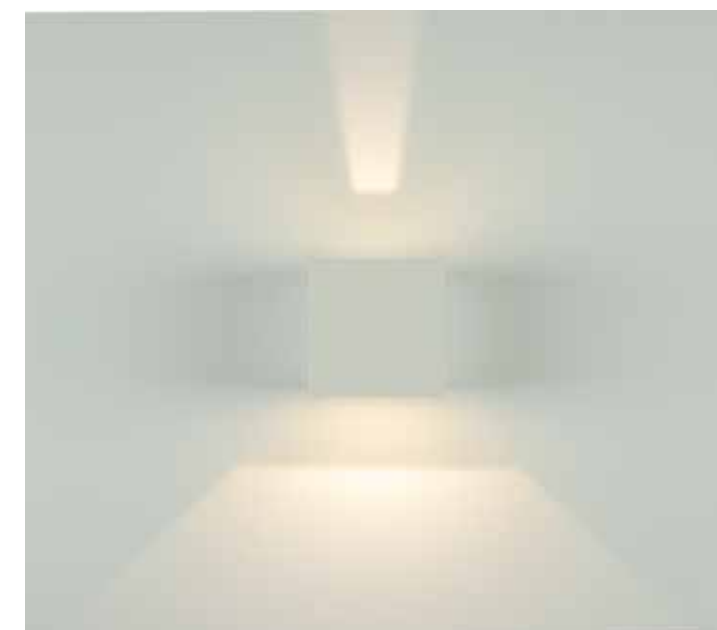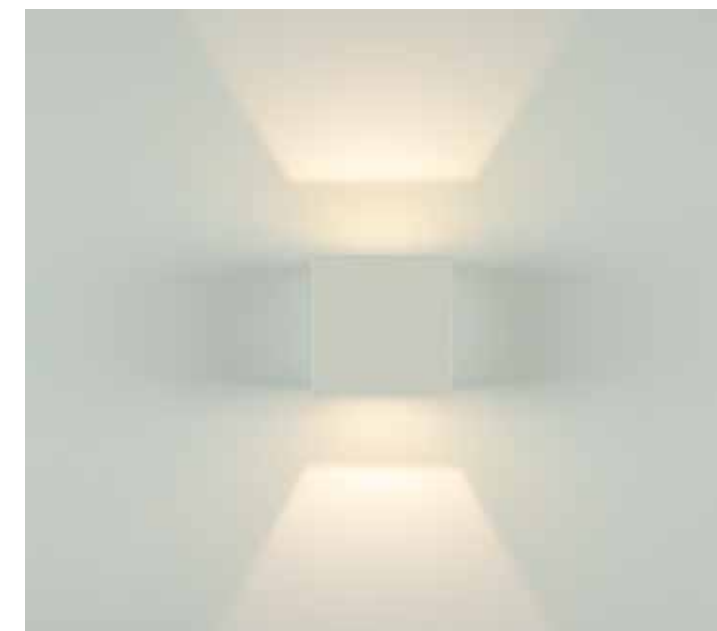


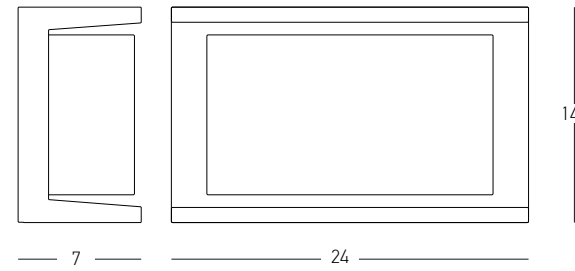


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 7cm W: 24cm H: 14cm  
 Material Alumunium - PC Diffuser  
 Color Graphite / **Code E149**

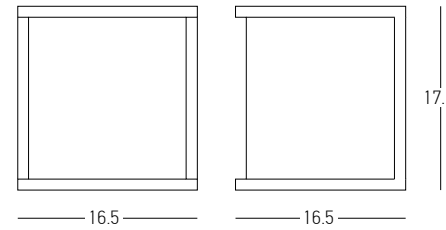


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 16.5cm W: 16.5cm H: 17.1cm  
 Material Alumunium - PC Diffuser  
 Color Graphite / **Code E127**

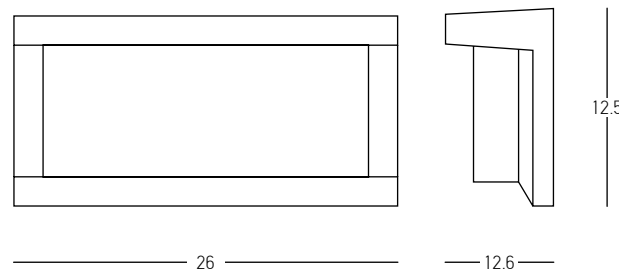


Bulb 1x E27  
 Power 18W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 12.6cm W: 26cm H: 12.5cm  
 Material Alumunium - PC Diffuser  
 Color Graphite / **Code E128**

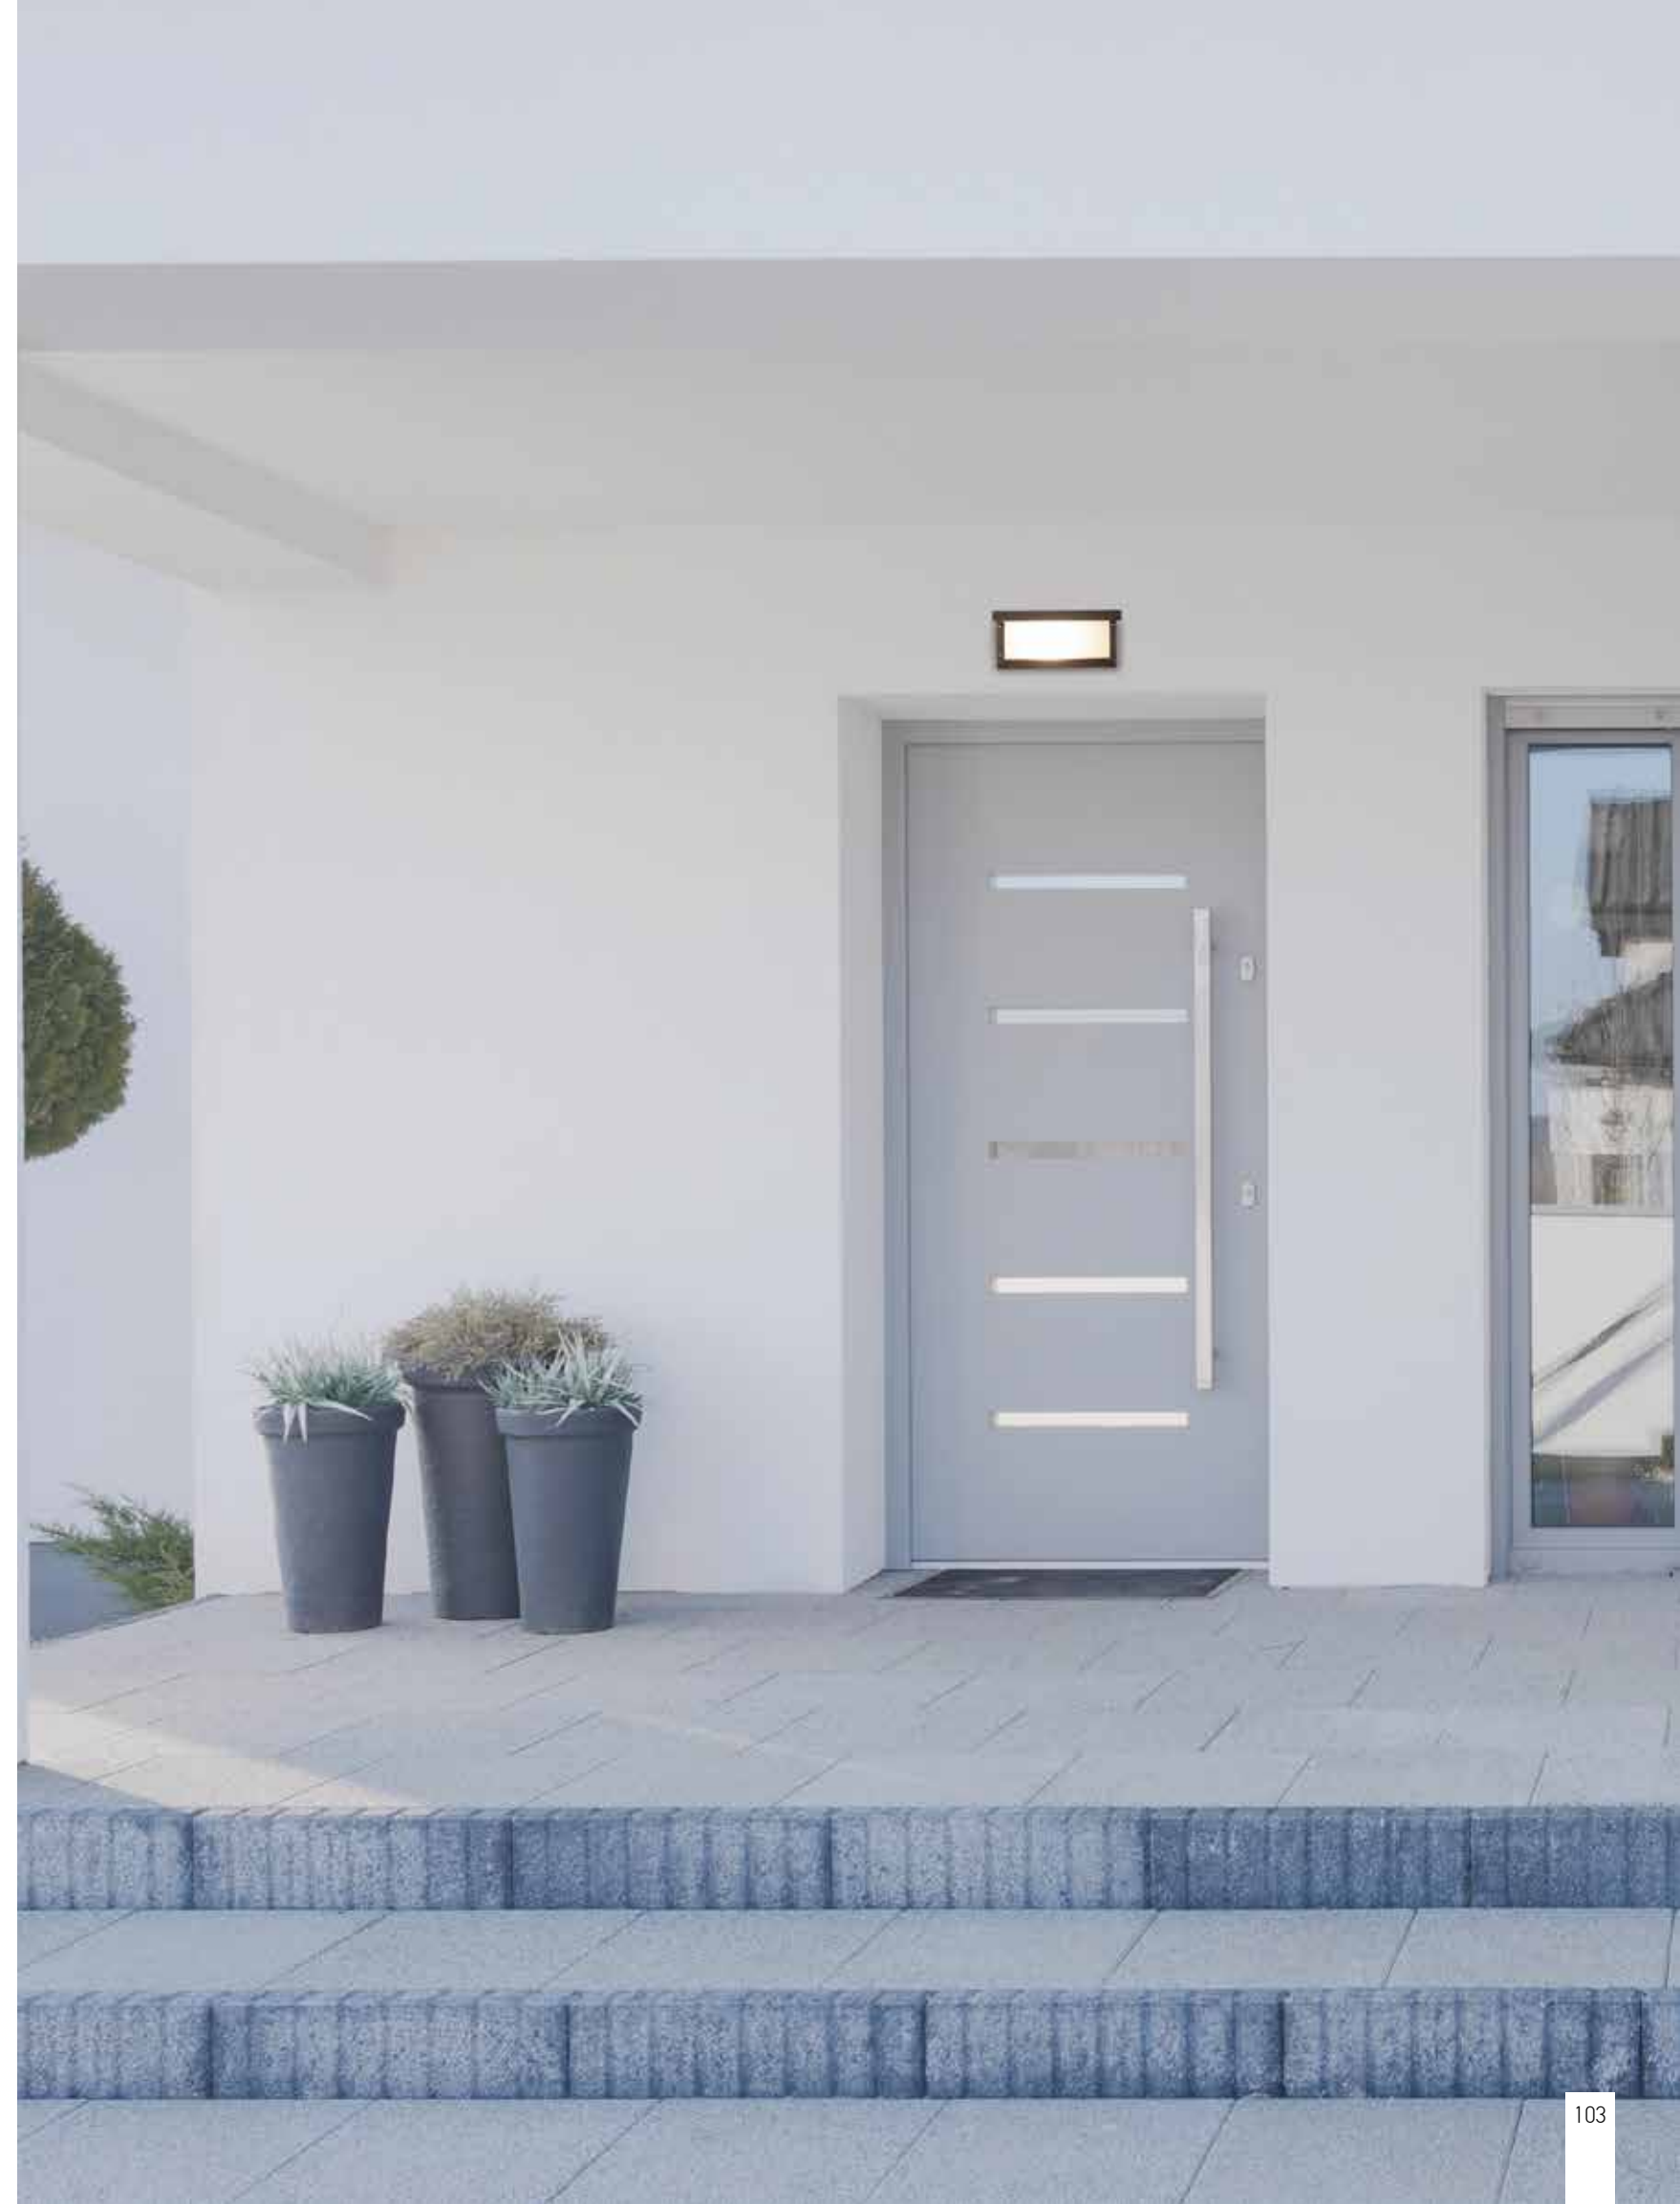





Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E124**



Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E123**

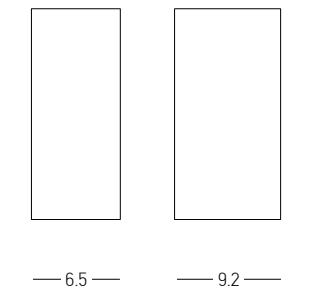


Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Graphite / **Code E122**




Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E121**







Bulb 2x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.5cm W: 6.8cm H: 15cm  
 Material ABS - Acrylic  
 Special Feature Up - Down Lighting  
 Color Sandy Black / **Code E307**

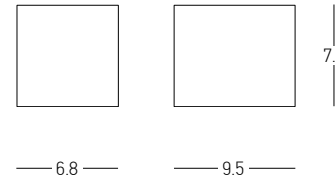


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.5cm W: 6.8cm H: 7.5cm  
 Material ABS - Acrylic  
 Color Sandy Black / **Code E306**




Bulb 2x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 15cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Sandy White / **Code E151**

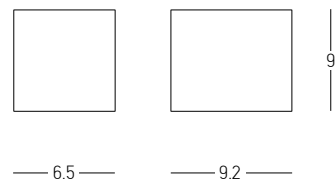


Bulb 1x GU10  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9.2cm W: 6.5cm H: 9cm  
 Material Aluminium - Tempered Glass  
 Color Sandy White / **Code E150**

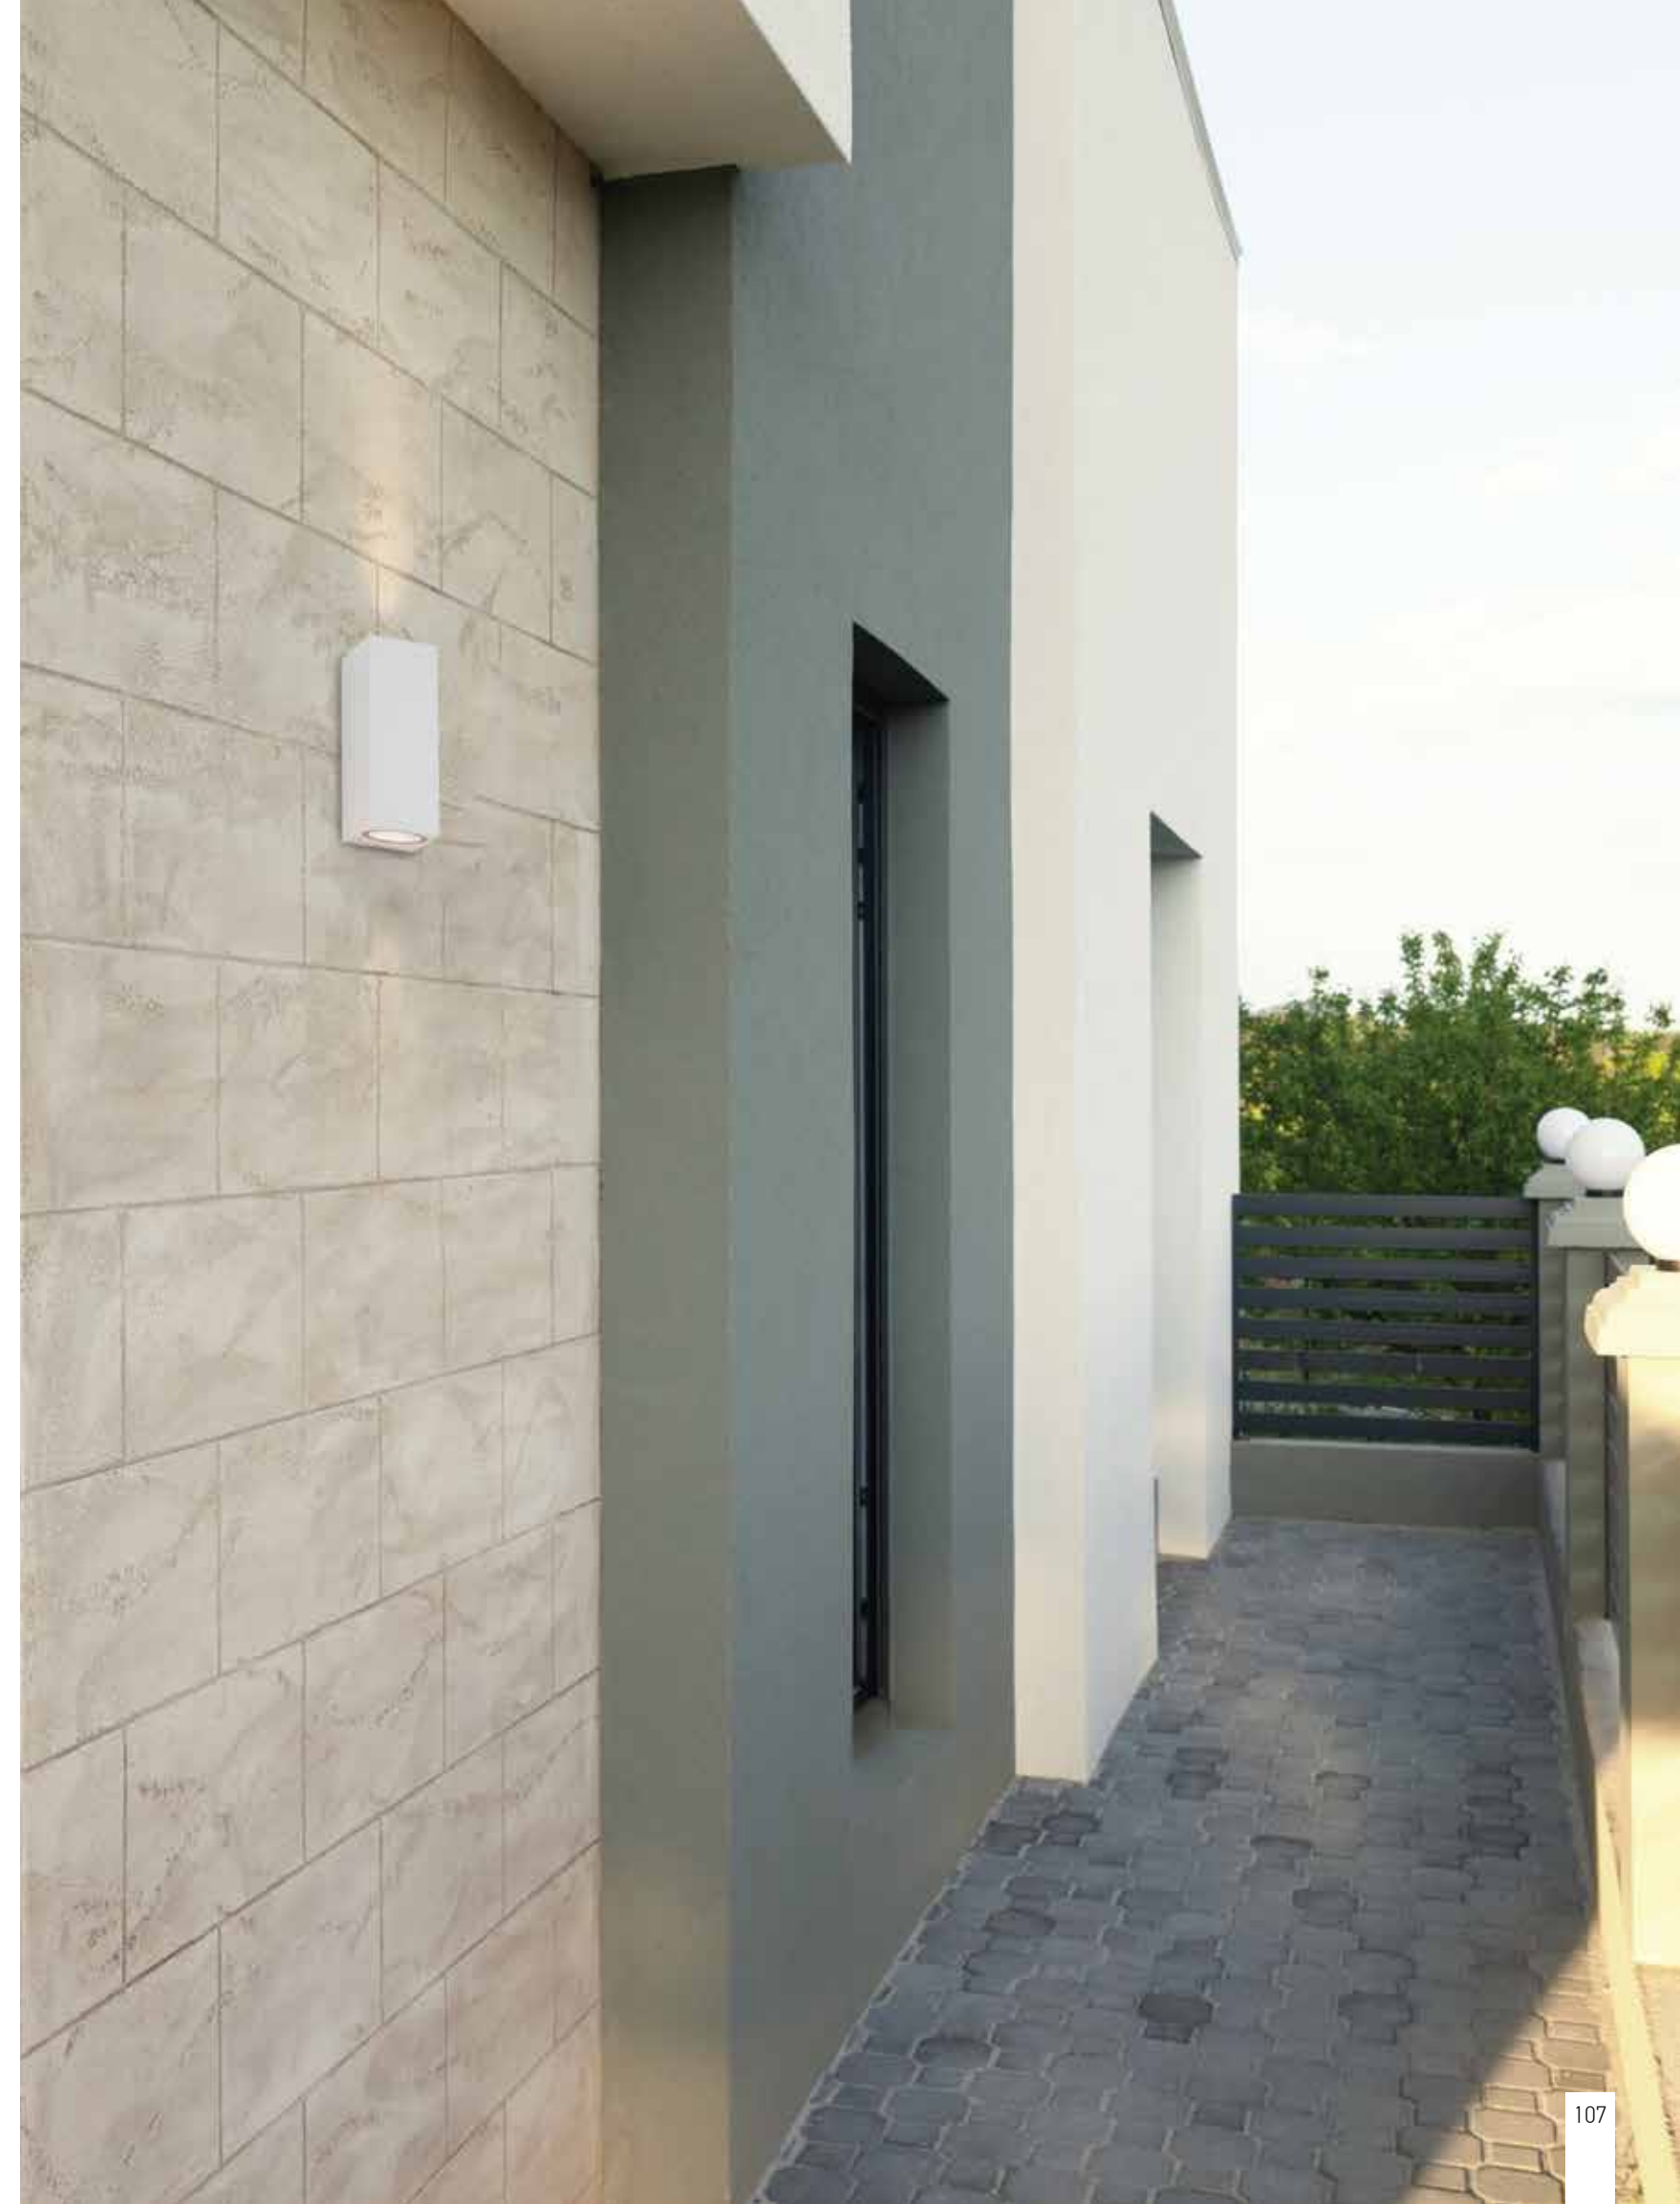




Bulb 1x GU10  
 Power 9W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.6cm L: 9.9cm H: 14.8cm  
 Material ABS - PC Diffuser  
 Color White / **Code E185**

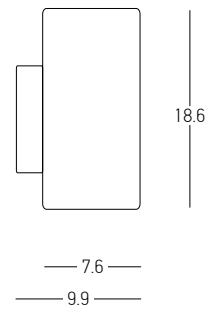

Bulb 2x GU10  
 Power 9W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm  
 Material ABS - PC Diffuser  
 Special Feature Up - Down Lighting  
 Color White / **Code E186**




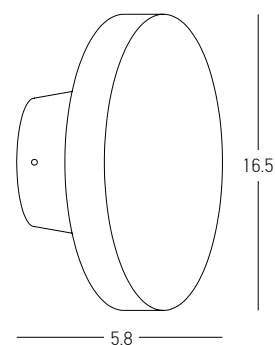


Power 8W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 720Lm  
Cri 80  
IP 65  
Dimensions Ø: 16.5cm L: 5.8cm  
Material ABS - PC Diffuser  
Color Sandy Black / Code E305  
Sandy White / Code E304








Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 653Lm  
 Cri 80  
 IP 54  
 Dimensions L: 7.5cm W: 22cm H: 3.2cm  
 Material Aluminium - Tempered Glass  
 Color Sandy White / **Code E168**




Power 2x 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 320Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3cm W: 8.3cm H: 12.3cm  
 Material ABS - PC Diffuser  
 Special Feature Up - Down Lighting  
 Color White / **Code E216**



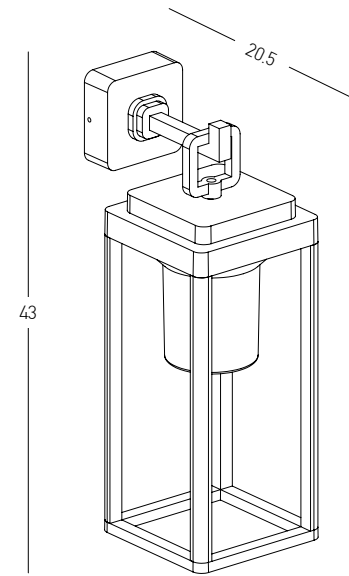


Bulb 1x E27  
Power 15W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 20.5cm W: 14.5cm H: 43cm  
Base L: 3.3cm W: 9cm H: 9cm  
Material Aluminium - Clear Diffuser  
Color Dark Brown / **Code E343**



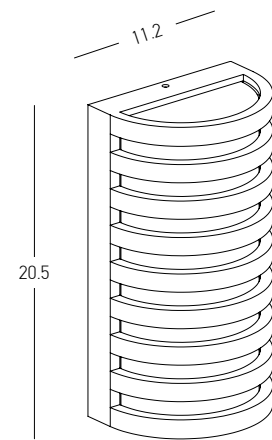


Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 929Lm  
 Cri 80  
 IP 65  
 Dimensions L: 8cm W: 11.2cm H: 20.5cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E341**

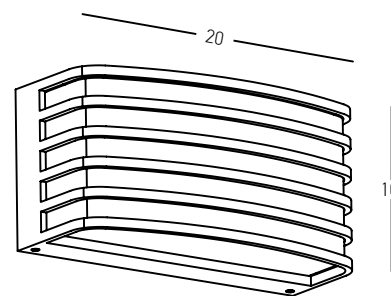


Bulb 1x E27  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9cm W: 20cm H: 10cm  
 Material Aluminium - PC Diffuser  
 Color Dark Brown / **Code E275**



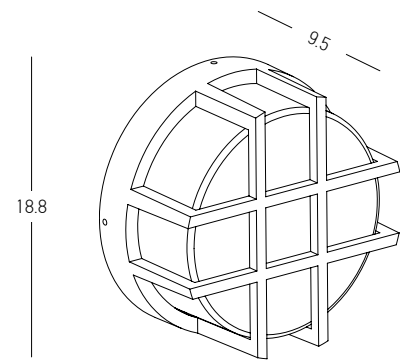


Power 10W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 880Lm  
Cri 80  
IP 65  
Dimensions Ø: 18.8cm L: 9.5cm  
Material Aluminium - PC Diffuser  
Color Dark Brown / Code E342



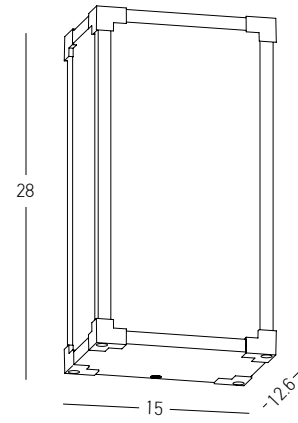


Power 12W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 816Lm  
Cri 80  
IP 65  
Dimensions L: 12.6cm W: 15cm H: 28cm  
Material Aluminium - Opal PC Diffuser  
Color Dark Brown / **Code E263**






Power 10W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 810Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9cm W: 9.5cm H: 26.5cm  
 Material Aluminium - PC Diffuser  
 Color Sandy Black / **Code E202**




Bulb 1x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 9cm W: 9.5cm H: 26.5cm  
 Material Aluminium - Clear Diffuser  
 Color Sandy Black / **Code E201**

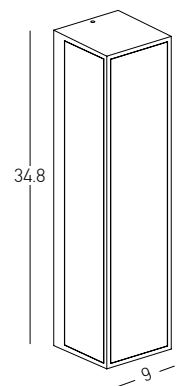


Bulb 2x E27  
 Power 15W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions L: 9cm W: 8.6cm H: 34.8cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E296**




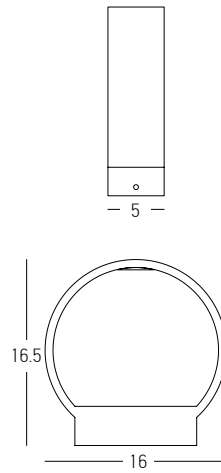


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 530Lm  
 Cri 80  
 IP 65  
 Dimensions L: 16.5cm W: 16cm H: 5cm  
 Material Aluminium - Tempered Glass  
 Special Feature Up - Down Lighting  
 Color Dark Brown / **Code E268**

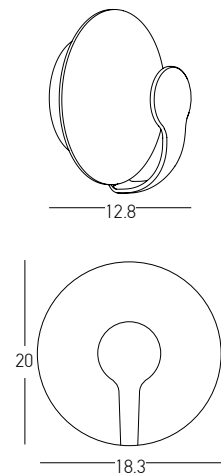


Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 880Lm  
 Cri 80  
 IP 65  
 Dimensions L: 12.8cm W: 18.3cm H: 20cm  
 Material Aluminium  
 Color Dark Brown - Sandy White / **Code E271**


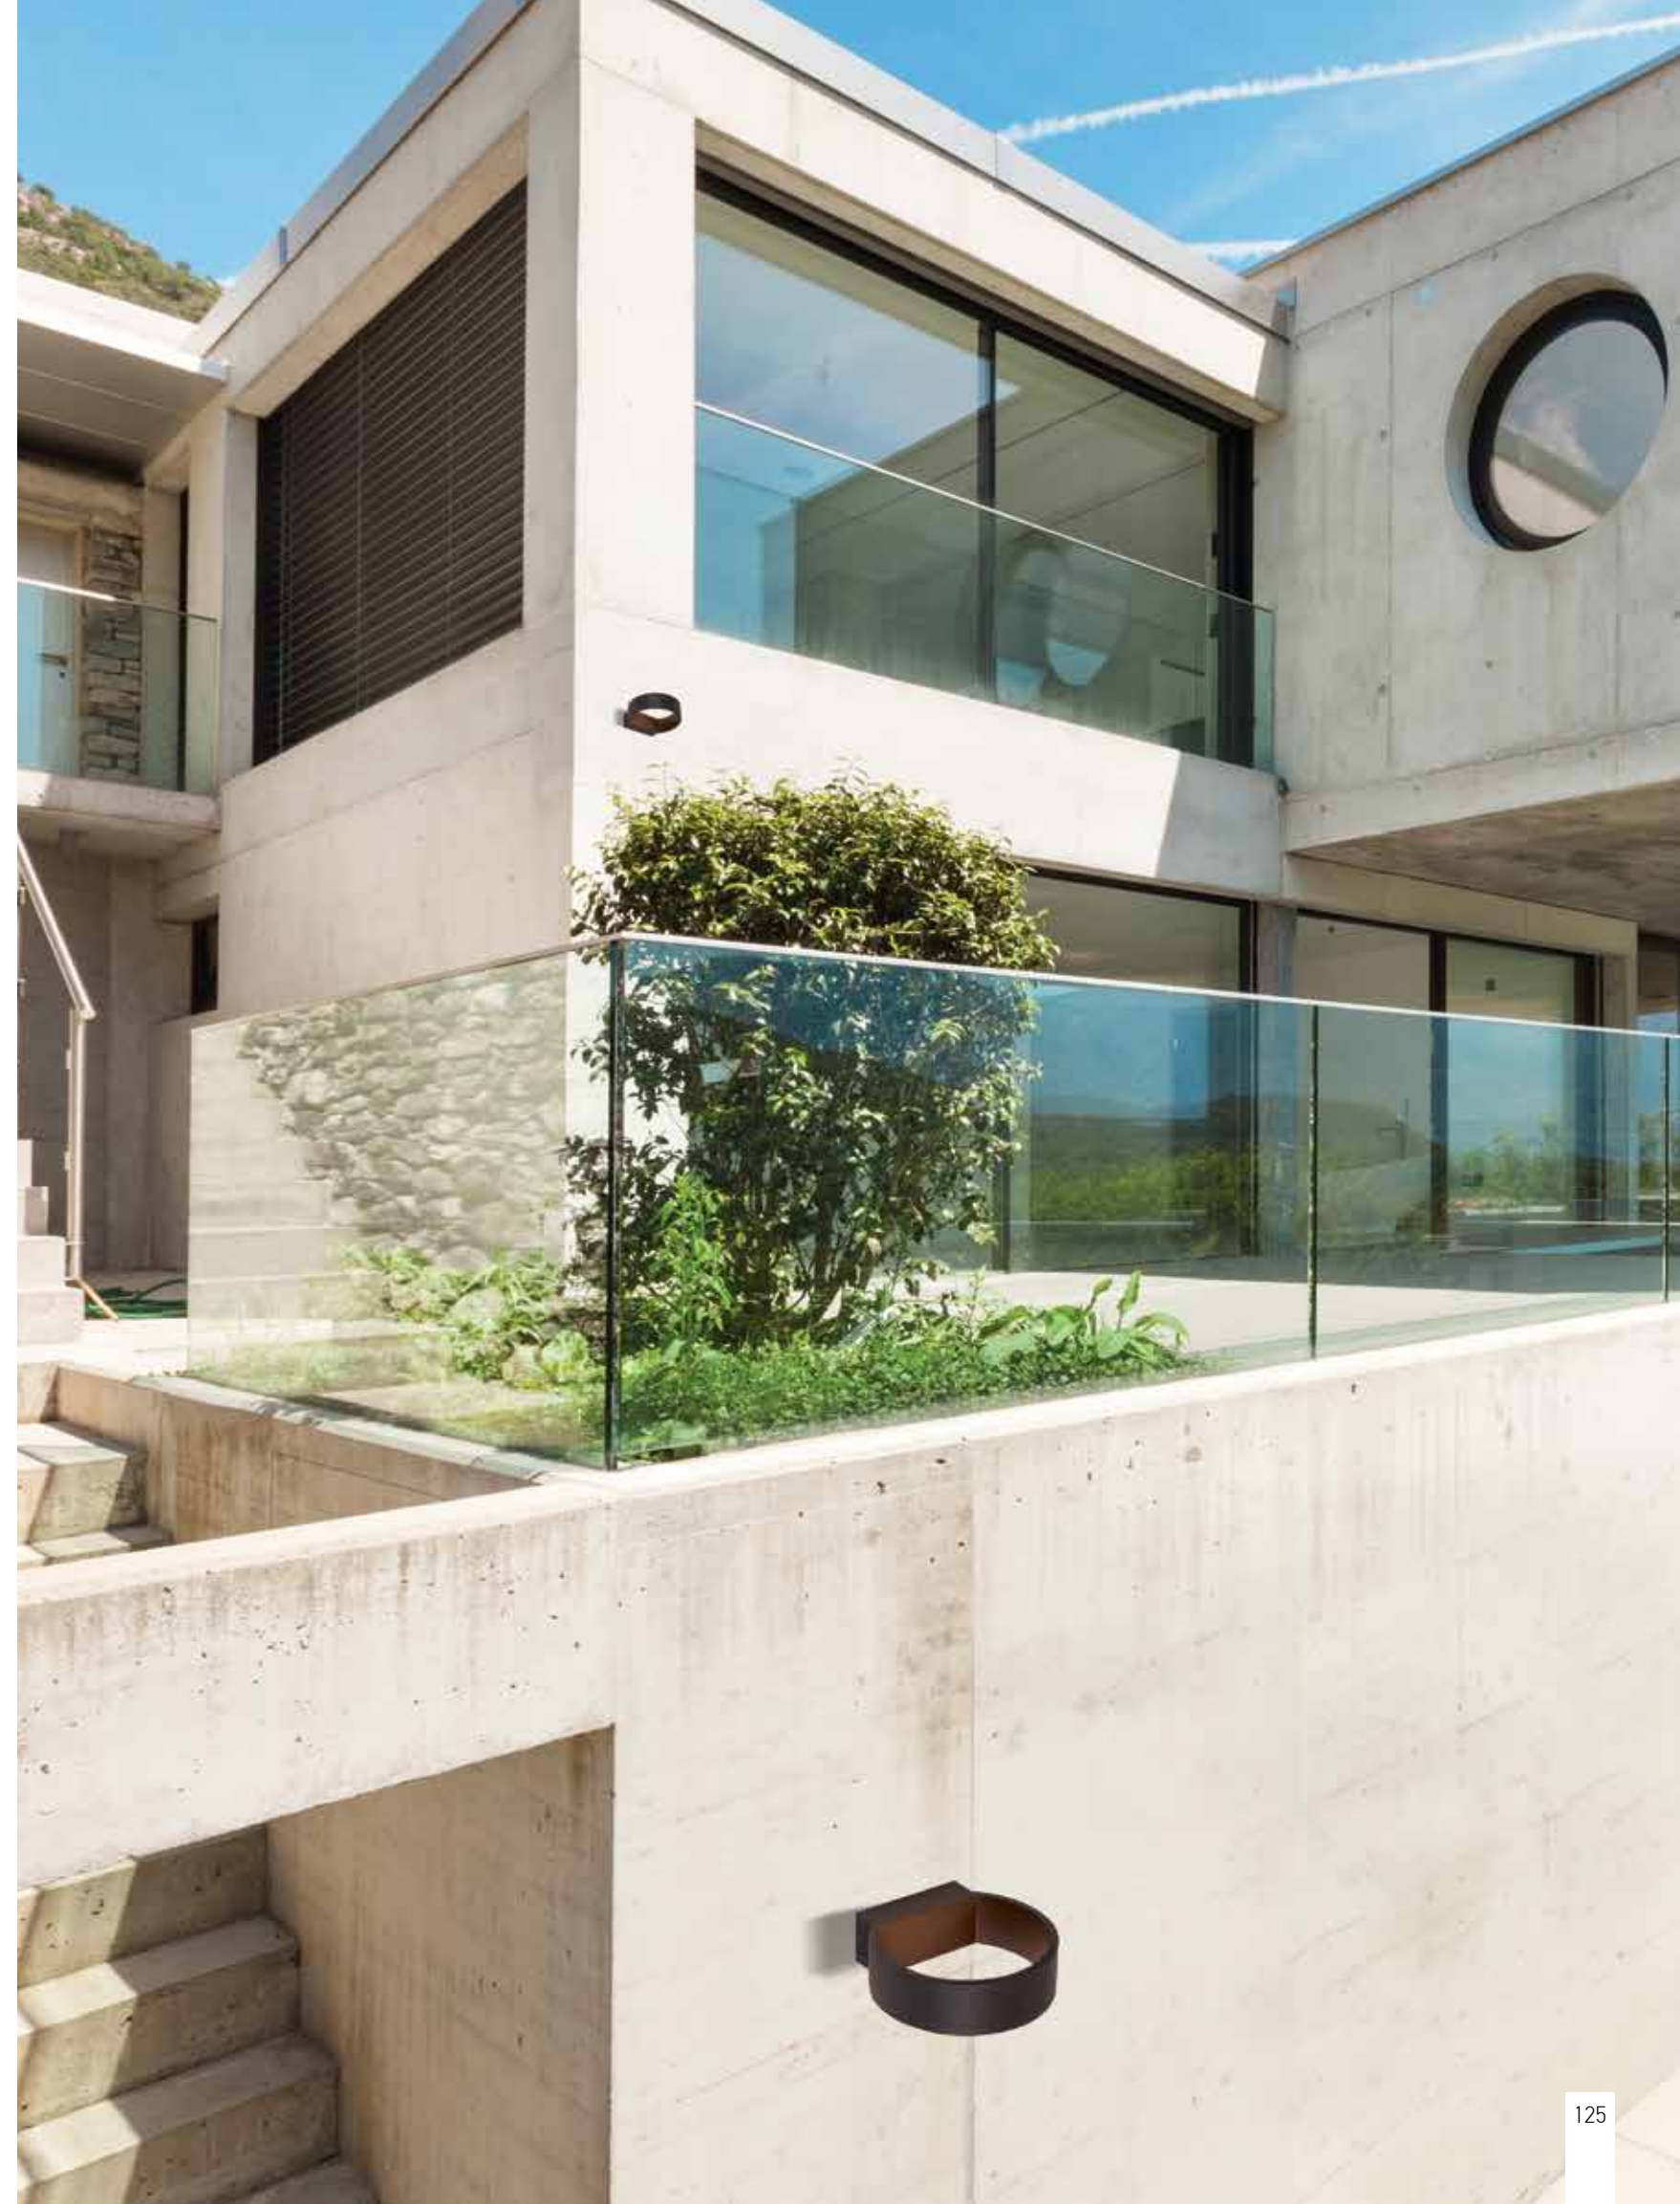


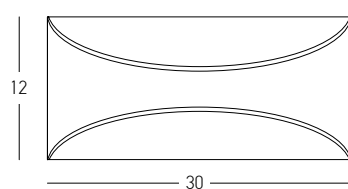

Power 11W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 640Lm  
 Cri 80  
 IP 65  
 Dimensions L: 9.6cm W: 30cm H: 12cm  
 Material Aluminium - Opal PC Diffuser  
 Special Feature Up - Down Lighting  
 Color Dark Grey / **Code E265**  
 Color Dark Brown / **Code E266**

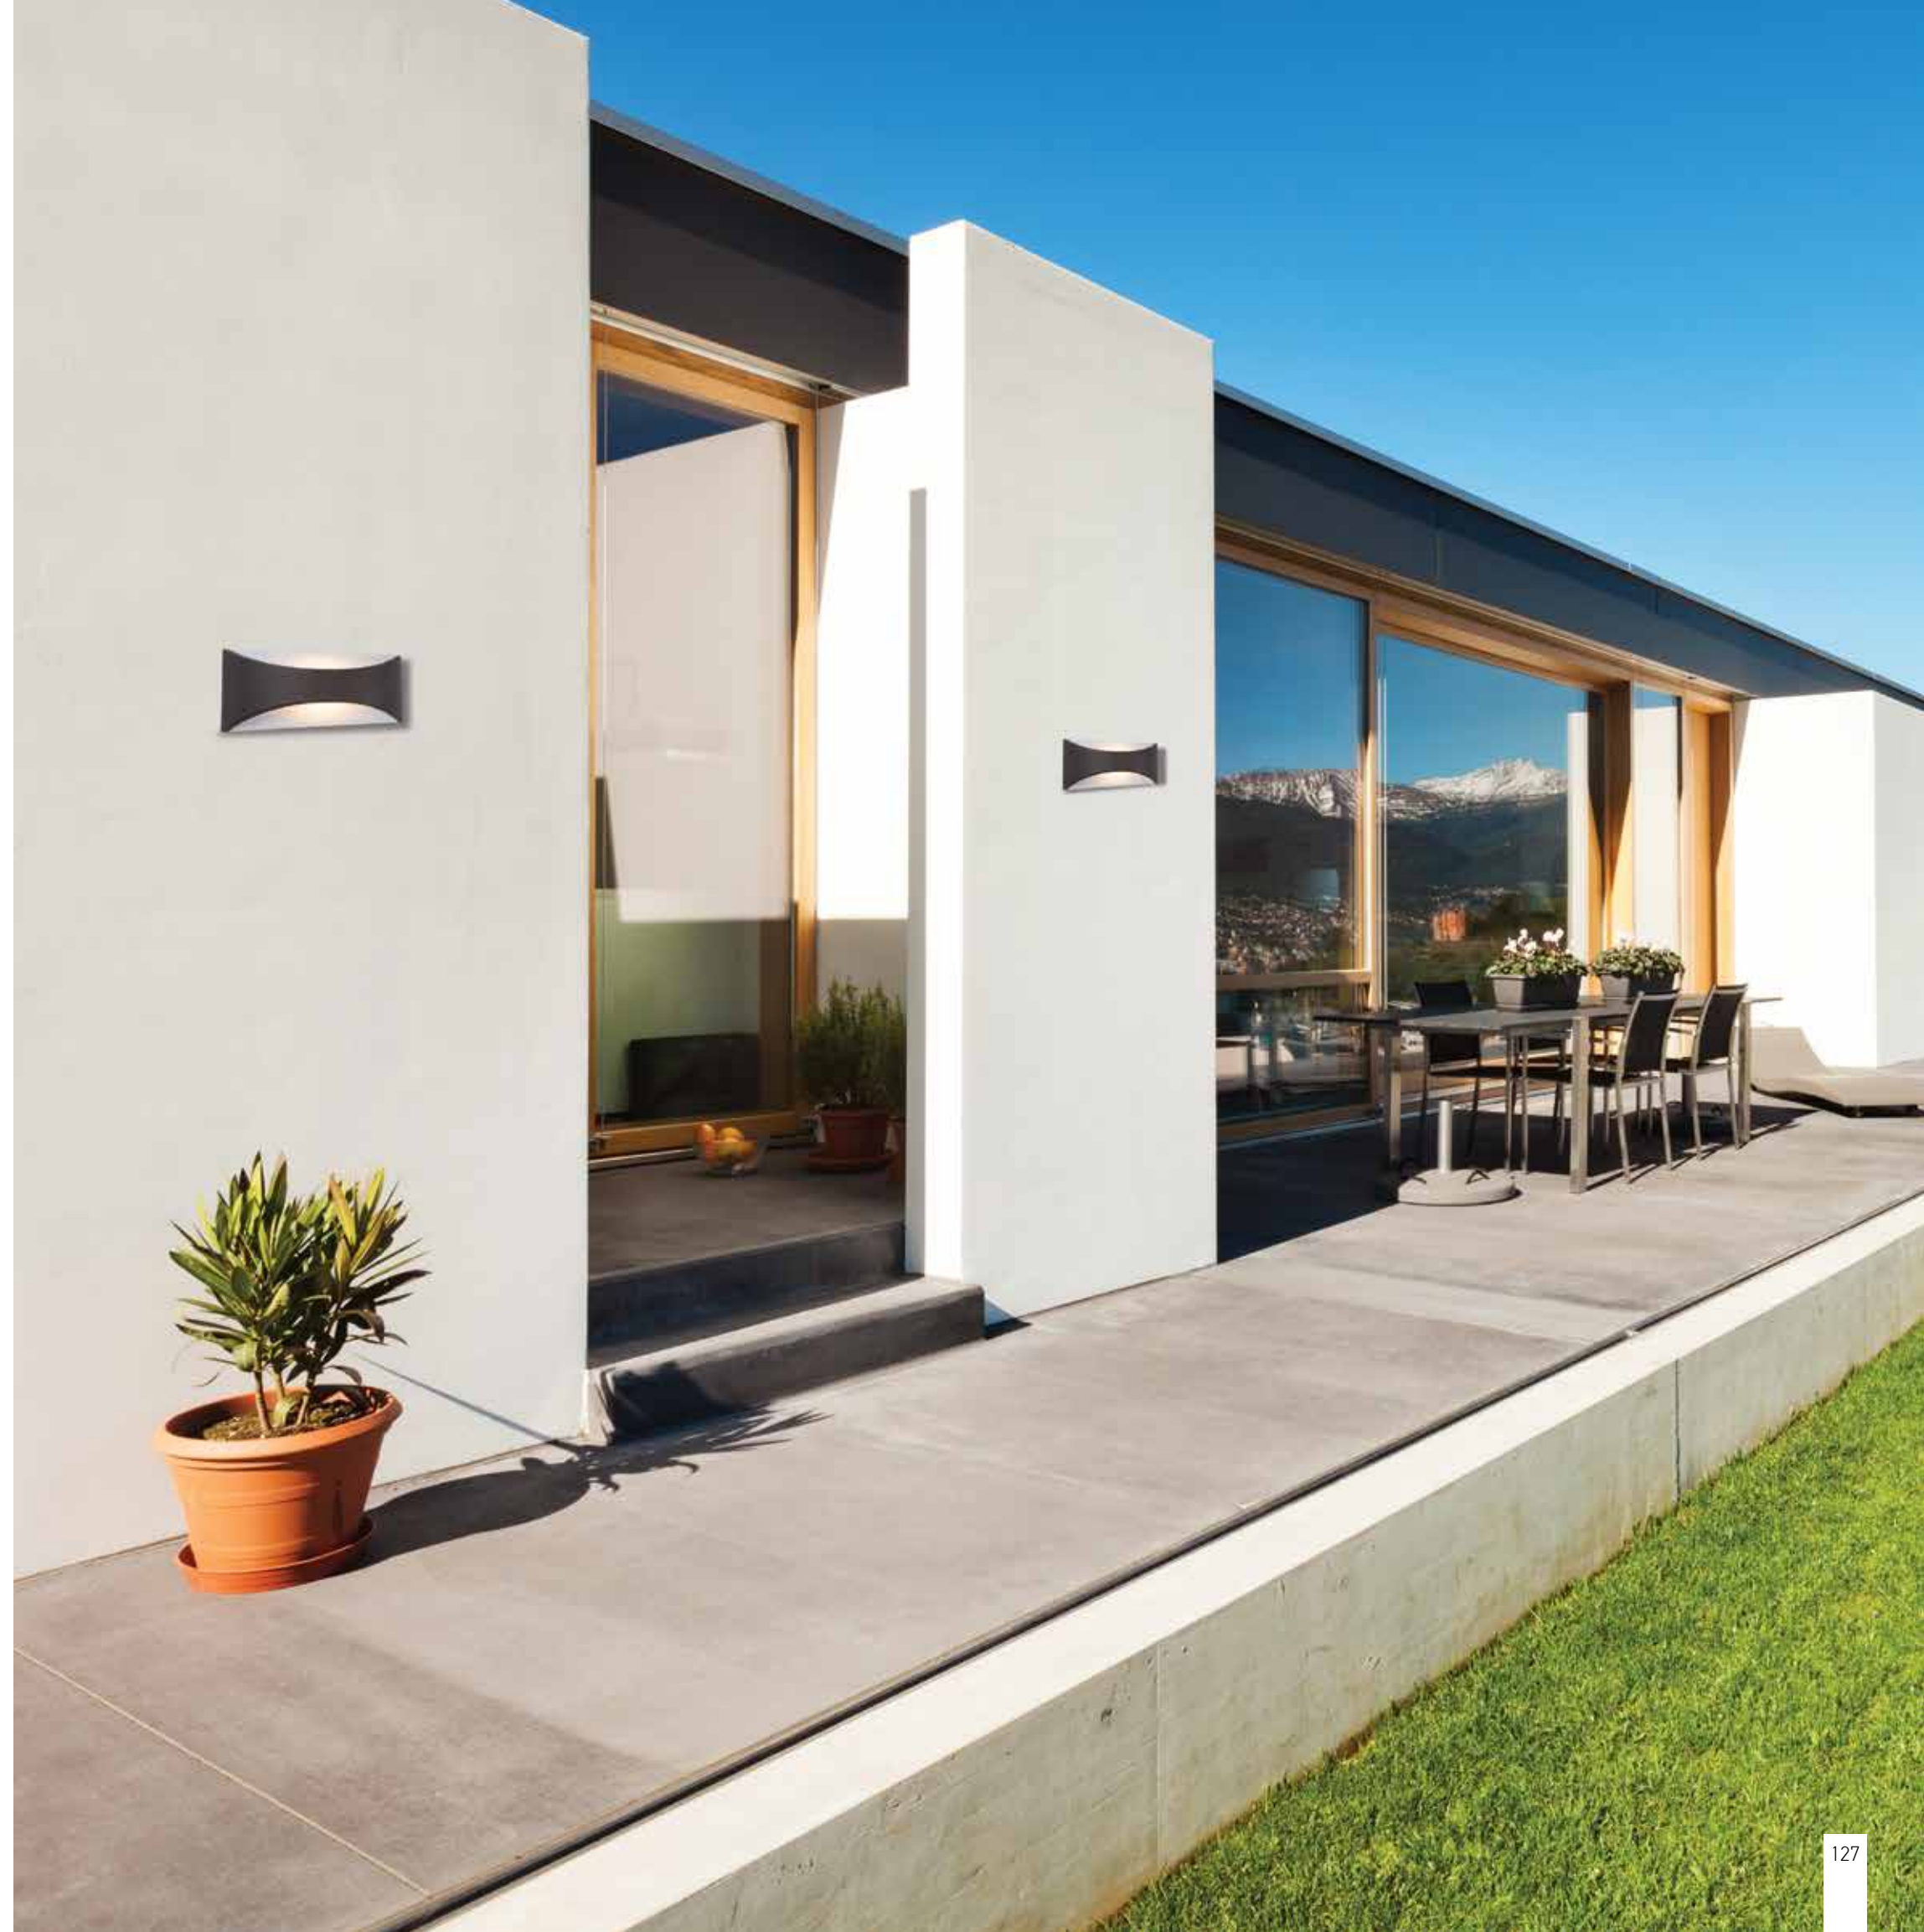




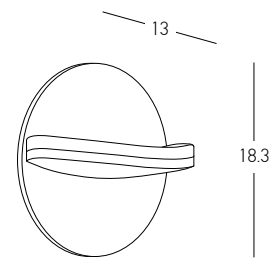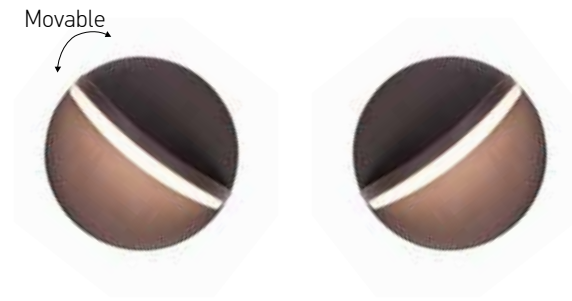


Power 16W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1106Lm  
Cri 80  
IP 65  
Dimensions Ø: 18.3cm L: 13cm  
Material Aluminium - Opal PC Diffuser  
Special Feature Movable Light  
Color Dark Brown / **Code E267**




SPIKES | p.130-163

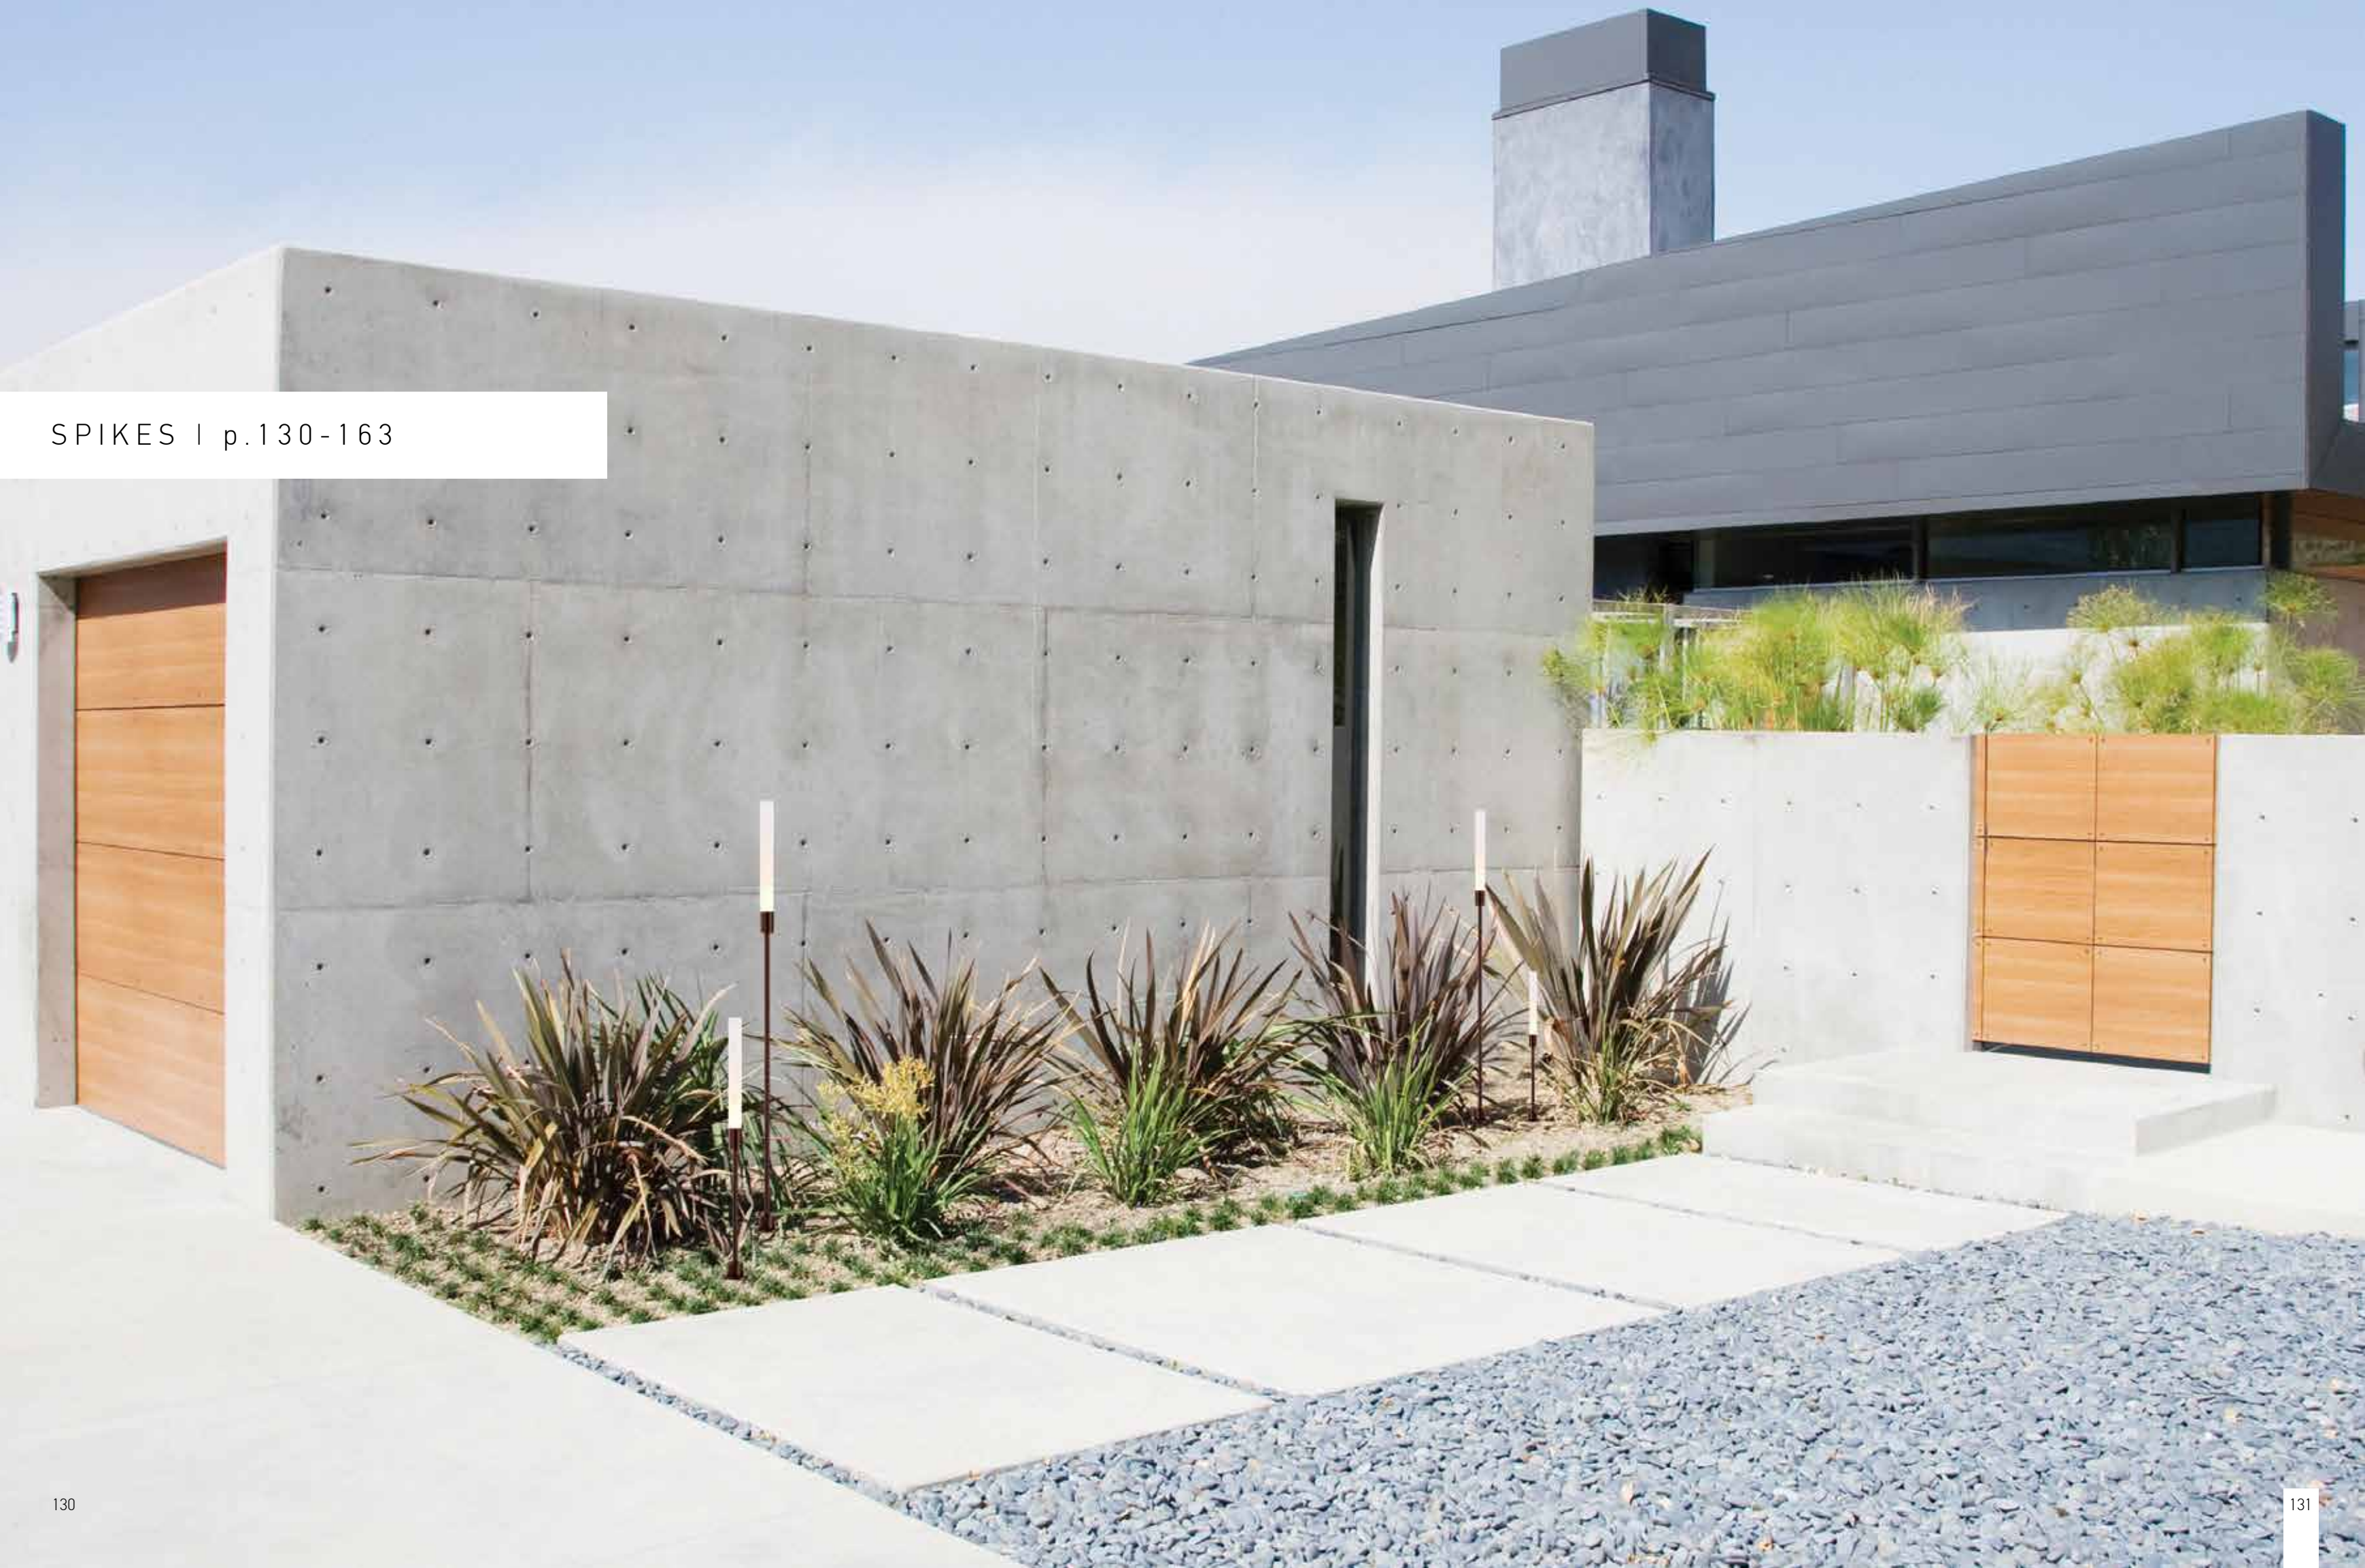

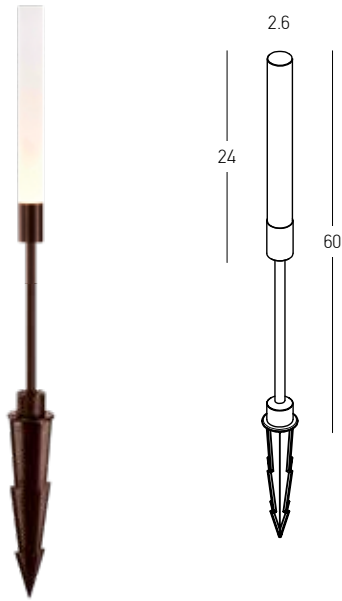

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 180Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 2.6cm H: 60cm  
 Base Ø: 10cm H: 2cm  
 Material Aluminium - Acrylic  
 Special Feature 30cm Cable Available  
 Spike & Base Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-6 pcs

Color Dark Brown / **Code E372**

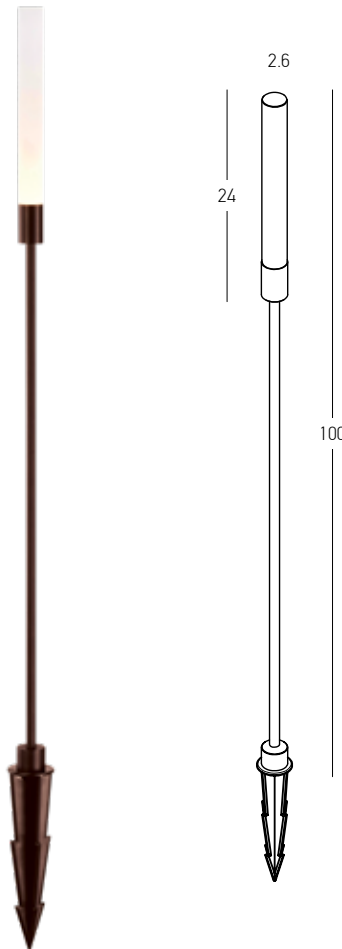

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 180Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 2.6cm H: 100cm  
 Base Ø: 10cm H: 2cm  
 Material Aluminium - Acrylic  
 Special Feature 30cm Cable Available  
 Spike & Base Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-6 pcs

Color Dark Brown / **Code E373**




**Driver** **D-20-24**  
 Power 20W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 12cm W: 4cm H: 2.5cm  
 IP 20



**Waterproof Connection Box 1in / 1out , 16A , 450V**  
 IP 67  
 Color Black / **Code Z0800-BA**



OUTDOOR LIGHTING | SPIKES

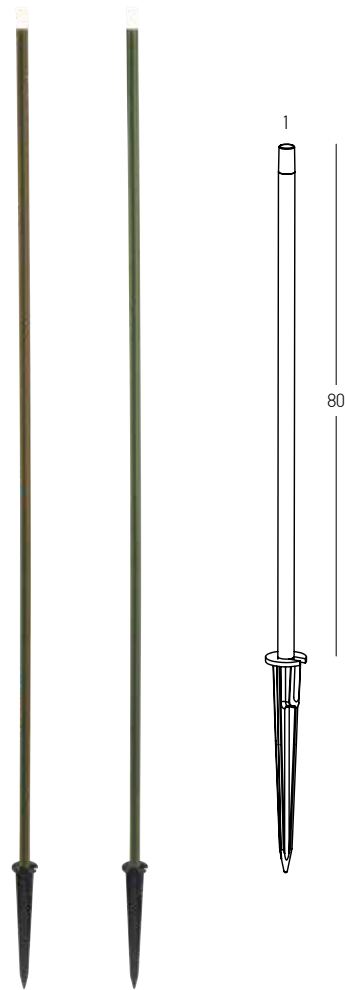

Power 1W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 58Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1cm H: 80cm  
 Material Stainless Steel - PC Diffuser  
 Special Feature 100cm Cable Available  
 Spike Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-19 pcs  
 Color Dark Brown / **Code E330**  
 Dark Green / **Code E331**



Power 1W  
 Input 24V  
 Color Temperature 2700K  
 Lumen 58Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 1cm H: 30cm  
 Material Stainless Steel - PC Diffuser  
 Special Feature 100cm Cable Available  
 Spike Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-19 pcs  
 Color Dark Brown / **Code E328**  
 Dark Green / **Code E329**




**Driver**  
 Power 20W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 12cm W: 4cm H: 2.5cm  
 IP 20

**D-20-24**  
 Power 20W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 12cm W: 4cm H: 2.5cm  
 IP 20




**Waterproof Connection Box 1in / 1out . 16A . 450V**  
 IP 67  
 Color Black / **Code Z0800-BA**



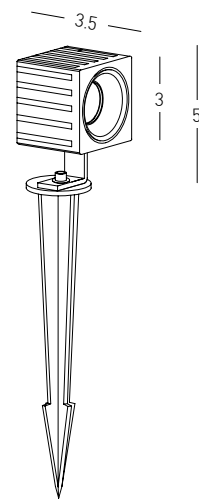

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 228Lm  
 Cri 90  
 IP 65  
 Dimensions L: 3cm W: 3.5cm H: 5cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature Movable Spot  
 Spike Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-6 pcs  
 Color Graphite / **Code E350**

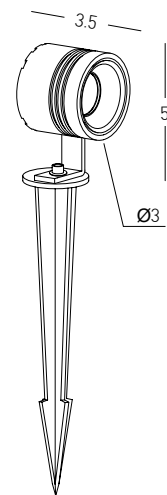

Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 228Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 3cm L: 3.5cm H: 5cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature Movable Spot  
 Spike Included  
 Recommended Driver D-20-24 (Not Included)  
 In Parallel Connection 1-6 pcs  
 Color Graphite / **Code E349**




**Driver**  
 Power 20W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions L: 12cm W: 4cm H: 2.5cm  
 IP 20

**D-20-24**



**Waterproof Connection Box 1in / 1out . 16A . 450V**  
 IP 67  
 Color Black / **Code Z0800-BA**



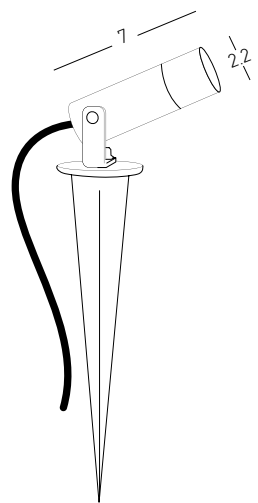

Power 2.3W  
 Input 3.2V , 700mA  
 Color Temperature 2700K  
 Lumen 130Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
 Beam Angle 40°  
 Material Brush  
 Special Feature 60cm Cable Available  
 Movable Spot  
 Spike Included  
 Optional In Special RAL

Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-9 pcs


Color Natural Brush / **Code E403**




Power 2.3W  
 Input 3.2V , 700mA  
 Color Temperature 3000K  
 Lumen 130Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm  
 Beam Angle 40°  
 Material Brush  
 Special Feature 60cm Cable Available  
 Movable Spot  
 Spike Included  
 Optional In Special RAL


Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-9 pcs

Color Natural Brush / **Code E404**




**Driver** **V350-1050**  
 Power 34W  
 Input 220-240V, 50/60Hz  
 Output 2 - 32V  
 Dimensions L: 15cm W: 4cm H: 3cm  
 IP 20

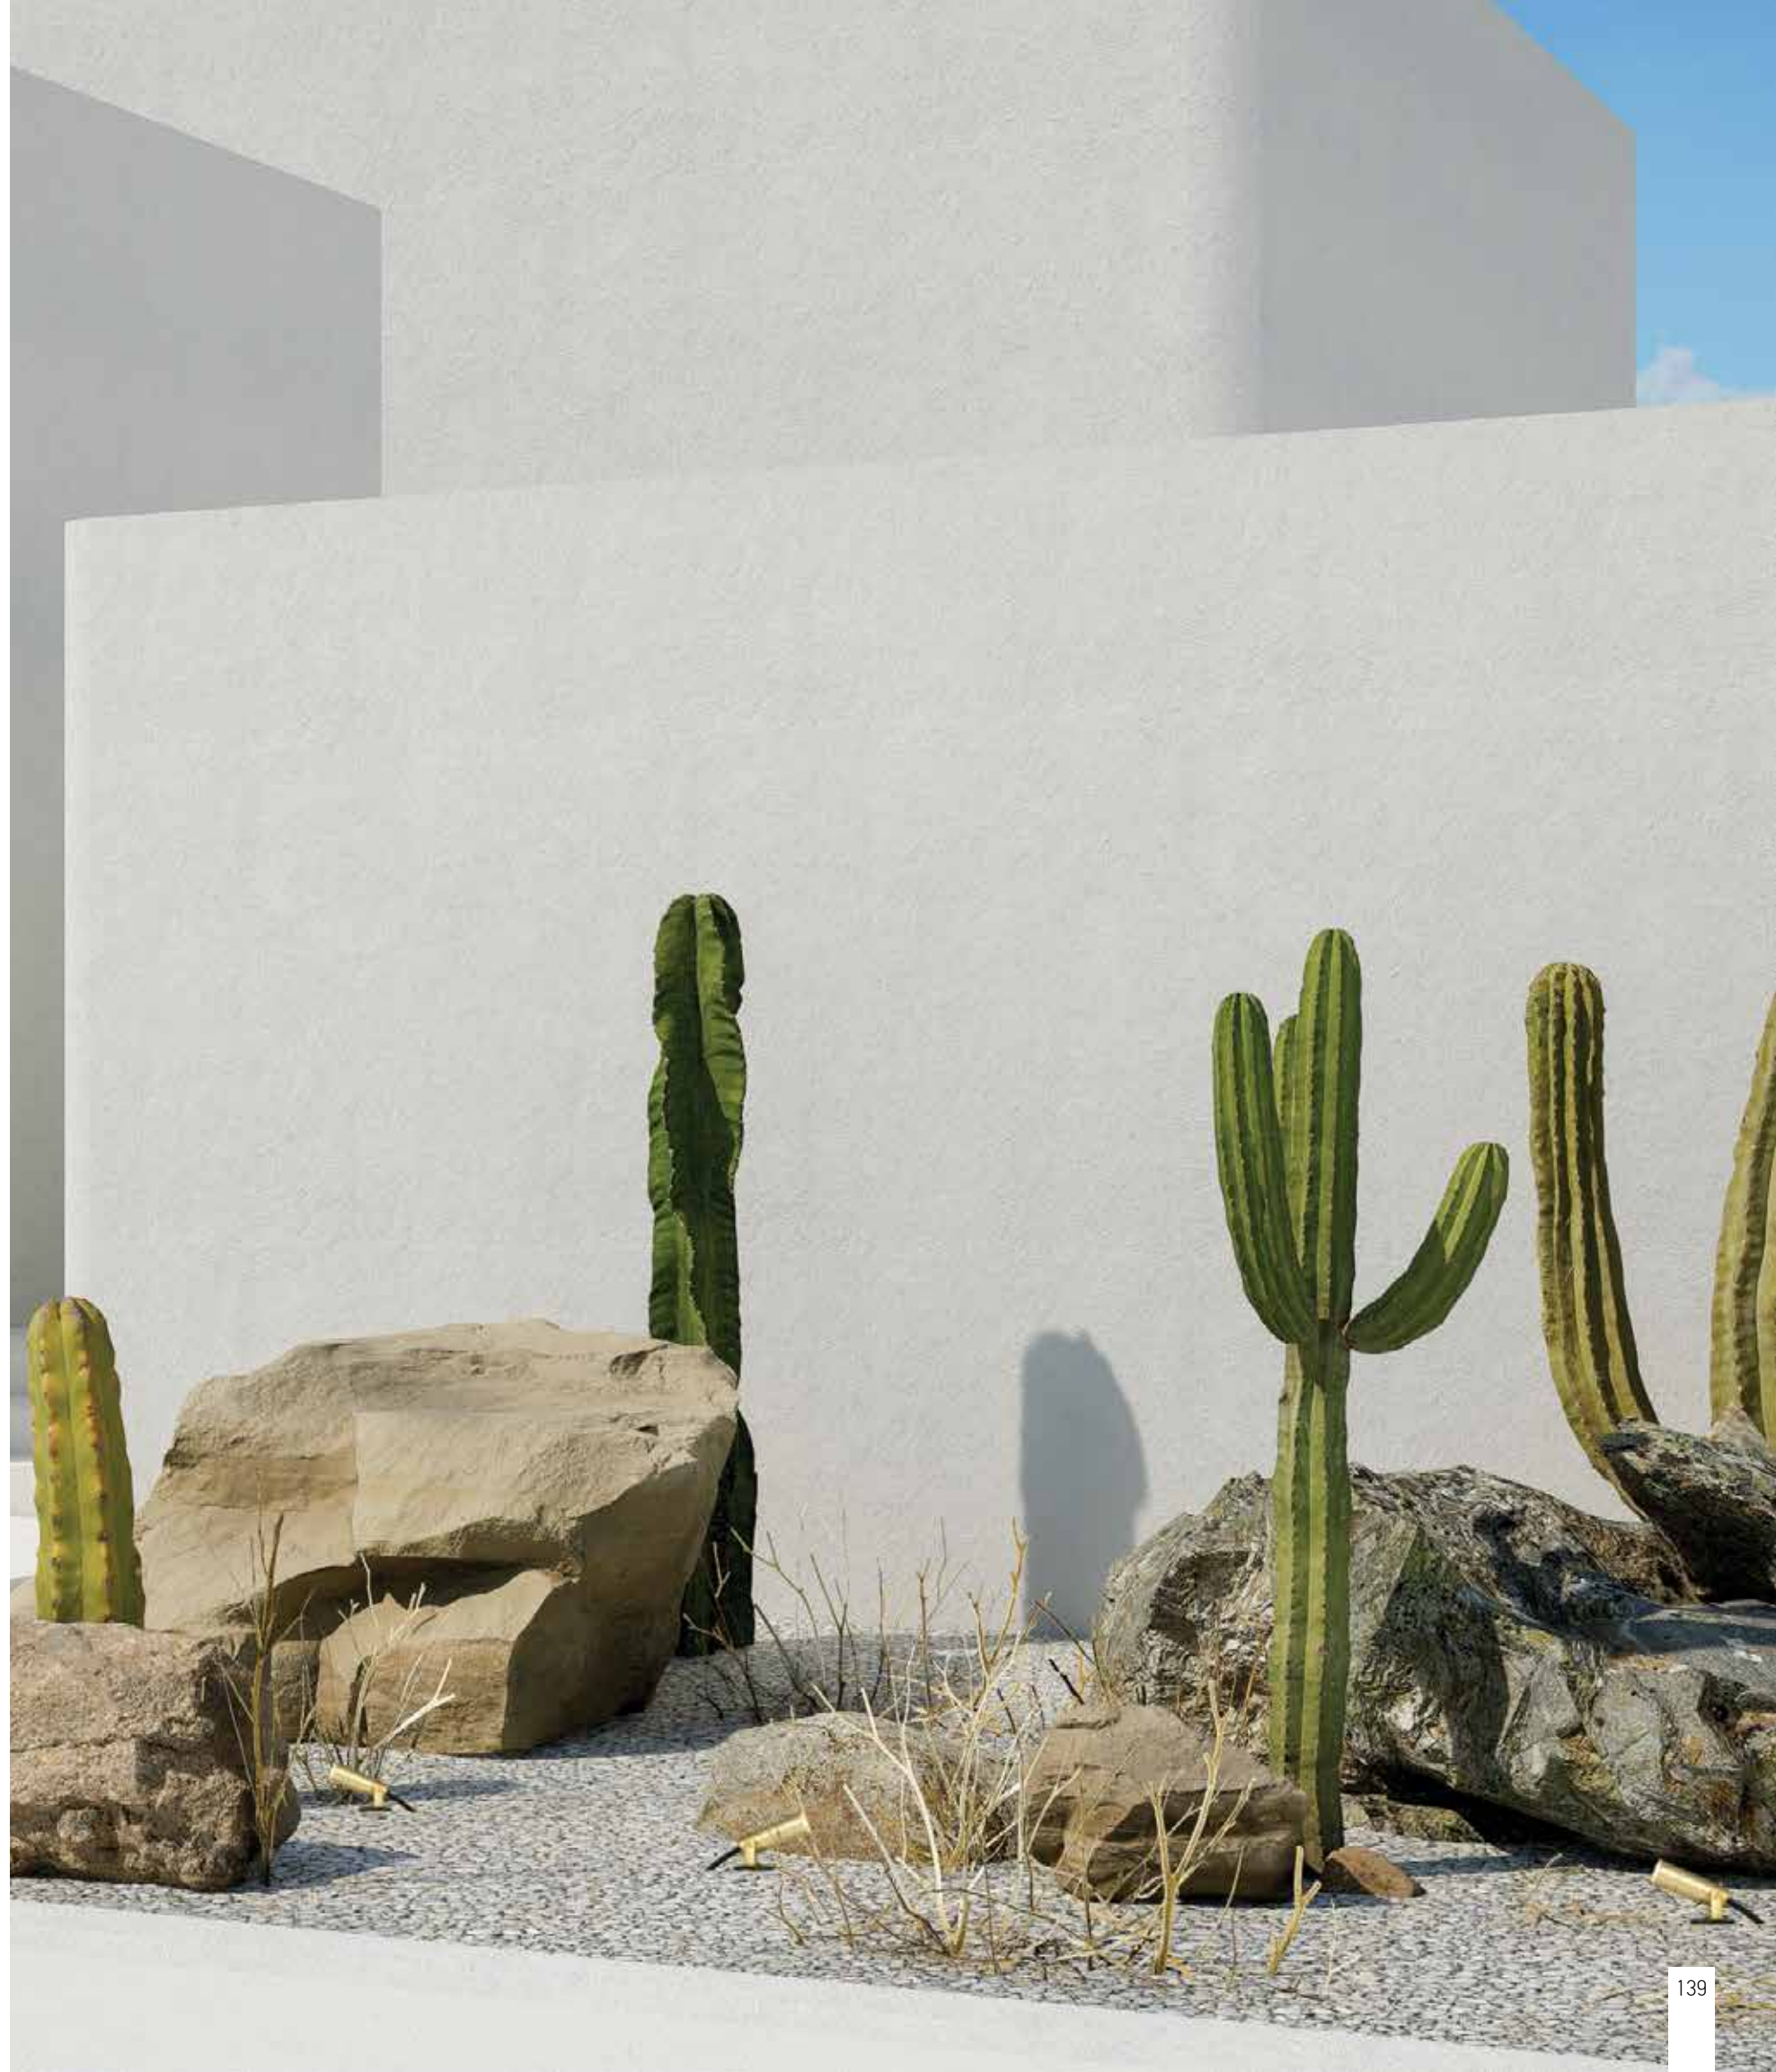

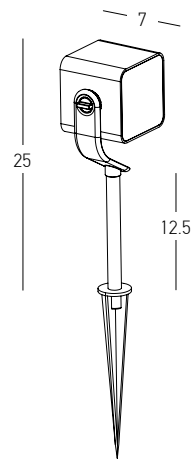

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 740Lm  
 Cri 80  
 IP 65  
 Dimensions L: 7cm W: 7cm H: 25cm  
 Base Ø: 6cm H: 0.5cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable Spot  
 Spike & Base Included  
 Waterproof Connector Included


Color Graphite / **Code E286**

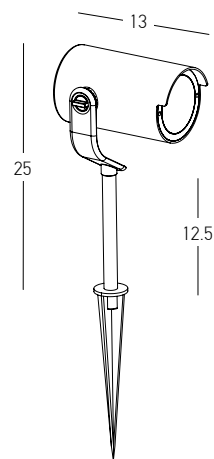

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 740Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 7.5cm L: 13cm H: 25cm  
 Base Ø: 6cm H: 0.5cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable Spot  
 Spike & Base Included  
 Waterproof Connector Included

Color Graphite / **Code E285**




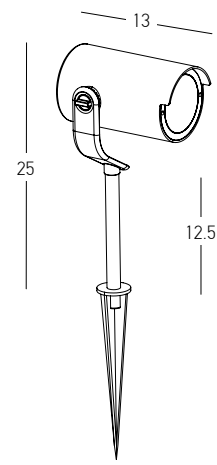


Bulb 1x GU10  
Power 20W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions Ø: 7.5cm L: 13cm H: 25cm  
Base Ø: 6cm H: 0.5cm  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Movable Spot  
Spike & Base Included  
Waterproof Connector Included  
Color Dark Brown / Code E284





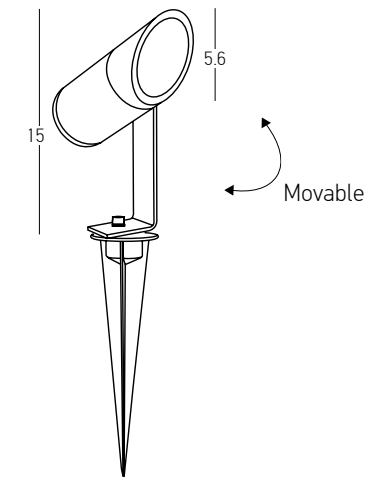


Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 516Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 5.6cm H: 15cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 20cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Graphite / **Code E152**

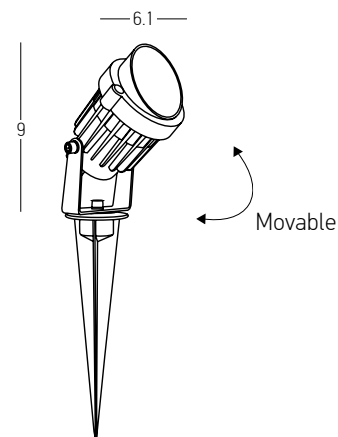


Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 380Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 6.1cm H: 9cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 20cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Graphite / **Code E153**



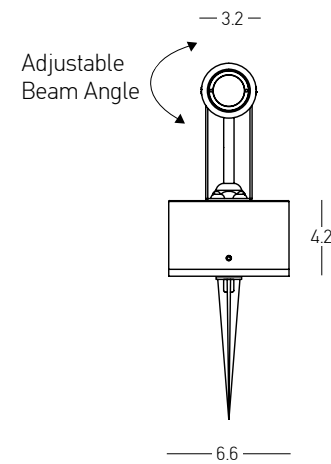

Power 2.1W  
 Input 220-240V, 50/60Hz  
 Color Temperature 2700K  
 Lumen 168Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8cm H: 8.5cm  
 Base Ø: 6.6cm H: 4.2cm  
 Beam Angle 10°-60°  
 Material Aluminium - Stainless Steel  
 Special Feature 60cm Cable Available  
 Stick Ø: 3.2cm H: 8cm  
 Spike Included  
 Color Sandy Black / **Code E177-B**





Power 2.1W  
 Input 3V , 700mA  
 Color Temperature 2700K  
 Lumen 168Lm  
 Cri 80  
 IP 54  
 Dimensions L: 8cm H: 8.5cm  
 Beam Angle 10-60°  
 Material Aluminium - Stainless Steel  
 Special Feature 60cm Cable Available  
 Stick Ø: 3.2cm H: 8cm  
 Spike Included  
 Recommended Driver V350-1050 (Not Included)  
 In Series Connection 1-10 pcs  
 Color Sandy Black / **Code E177-A**



**Driver**  
 Power 34W  
 Input 220-240V, 50/60Hz  
 Output 2 - 32V  
 Dimensions L: 15cm W: 4cm H: 3cm  
 IP 20


**V350-1050**

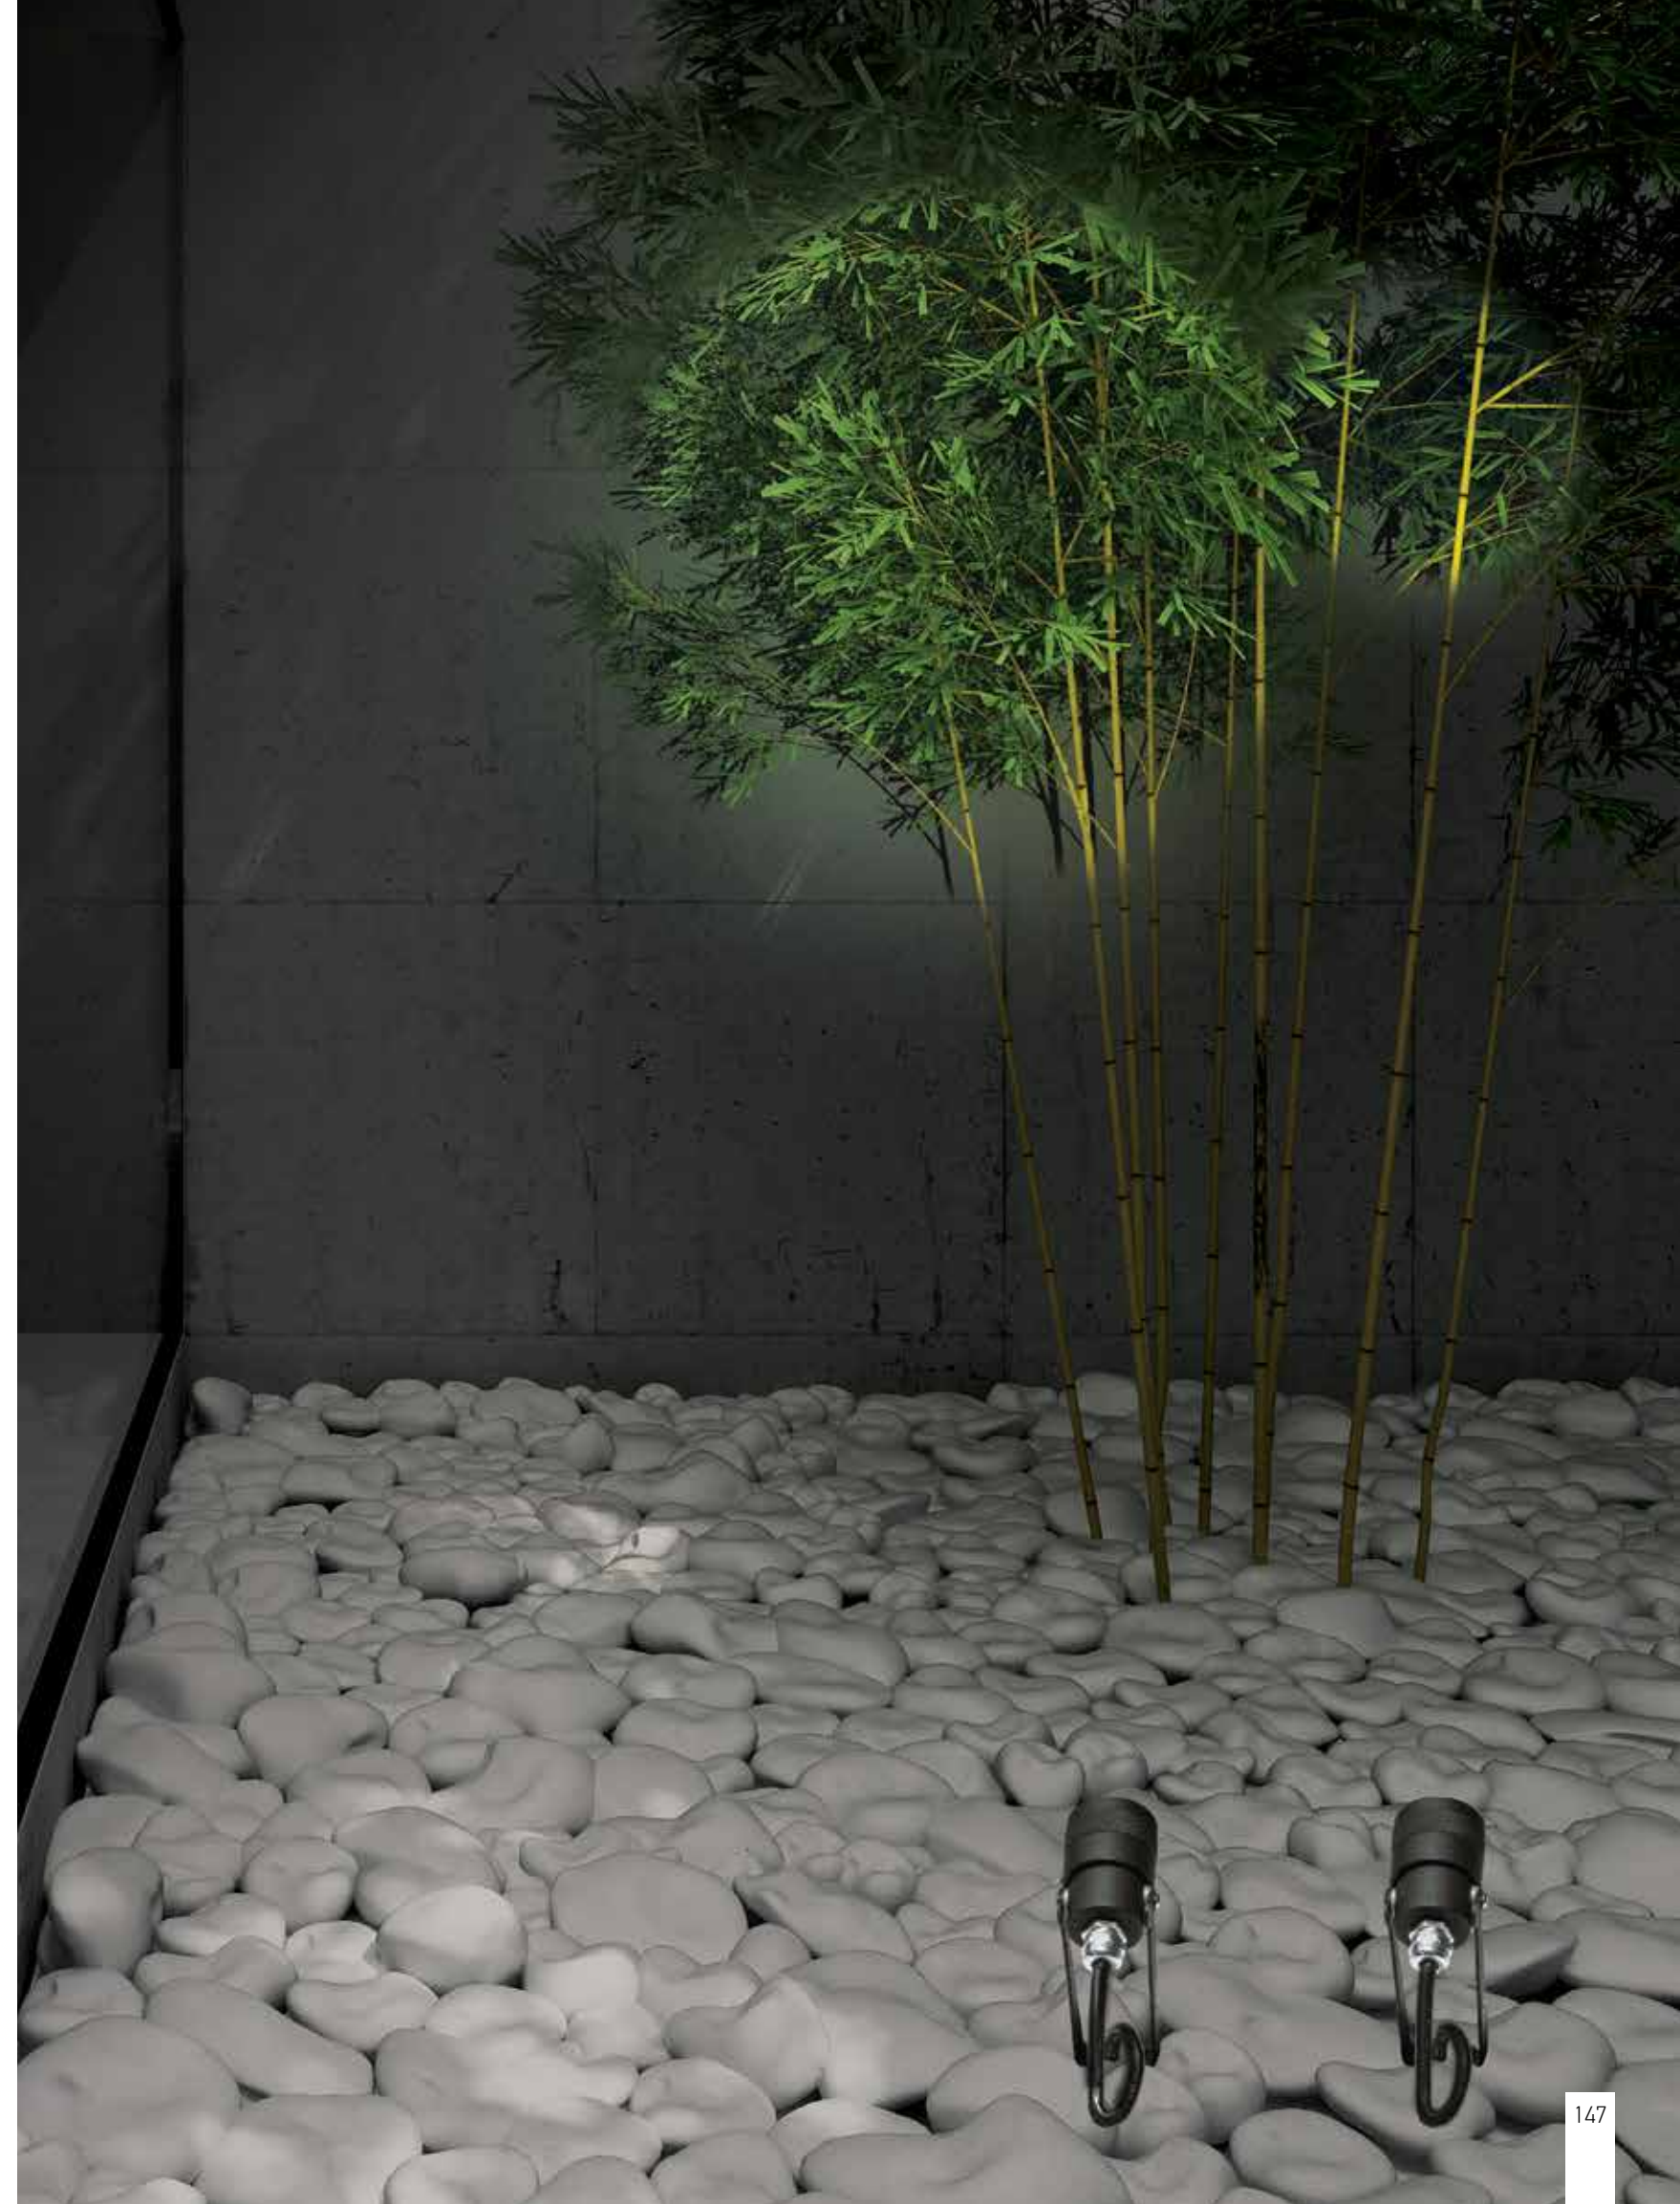

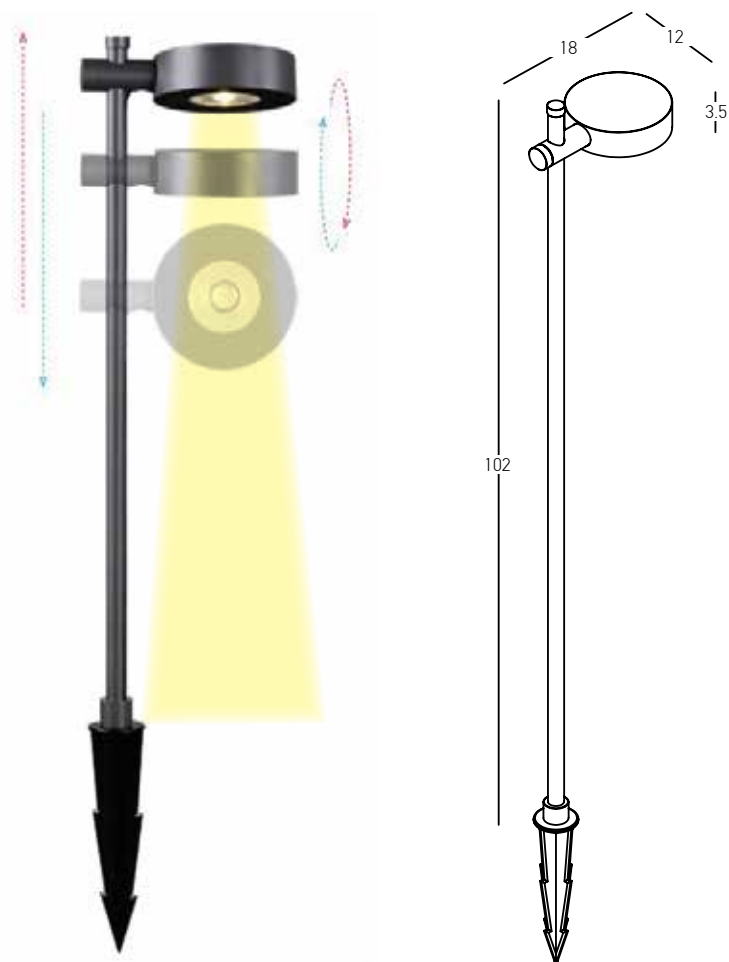

Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 522Lm  
 Cri 90  
 IP 65  
 Dimensions L: 18cm W: 12cm H: 102cm  
 Base Ø: 10.5cm H: 1cm  
 Shade Dimensions Ø: 12cm H: 3.5cm  
 Beam Angle 36°  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Movable - Rotational Spot  
 Spike & Base Included


Color Graphite / **Code E292**

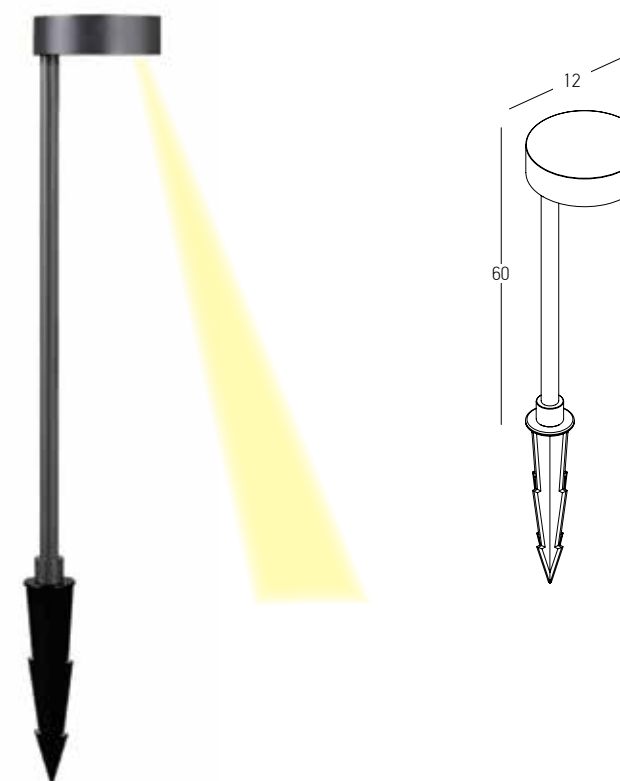

Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 629Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 12cm H: 63.5cm  
 Base Ø: 10.5cm H: 1cm  
 Shade Dimensions Ø: 12cm H: 3.5cm  
 Material Aluminium - Tempered Glass  
 Special Feature 50cm Cable Available  
 Asymmetric Beam Angle  
 Spike & Base Included


Color Graphite / **Code E293**



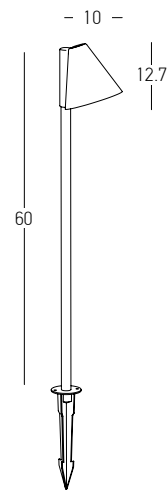

Bulb 1x GU10  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 60cm  
 Material Aluminium - Tempered Glass  
 Special Feature 50cm Cable Available  
 Spike Included  
 Recommended Base E282-SP / Not Included

Color Graphite / **Code E281**

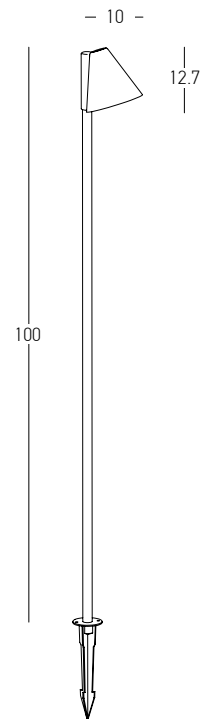

Bulb 1x GU10  
 Power 20W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 100cm  
 Material Aluminium - Tempered Glass  
 Special Feature 40cm Cable Available  
 Spike Included  
 Recommended Base E282-SP / Not Included


Color Graphite / **Code E282**



**Base for E281 - E282**  
 Dimensions Ø: 9.5cm H: 2cm  
 Material Aluminium


Color Graphite / **Code E282-SP**



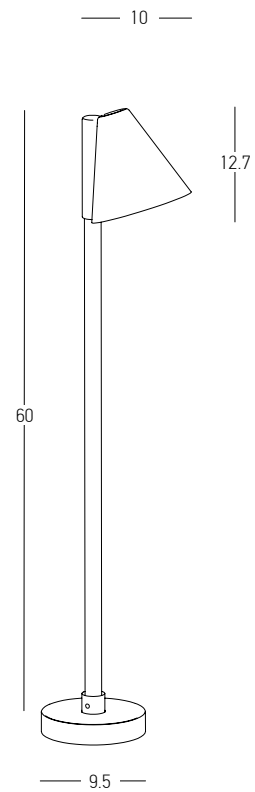


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 522Lm  
 Cri 80  
 IP 65  
 Dimensions L: 10cm W: 10cm H: 60cm  
 Base Ø: 9.5cm H: 2cm  
 Beam Angle 40°  
 Material Aluminium - Tempered Glass  
 Special Feature 50cm Cable Available  
 Spike & Base Included  
 Color Graphite / **Code E283**



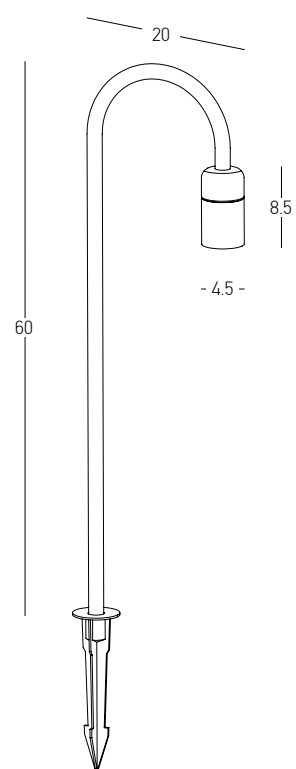


Power 6W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 500Lm  
Cri 80  
IP 65  
Dimensions L: 20cm W: 4.5cm H: 60cm  
Beam Angle 40°  
Material Aluminium - Tempered Glass  
Special Feature 40cm Cable Available  
Spike Included  
Color Dark Brown / **Code E279**




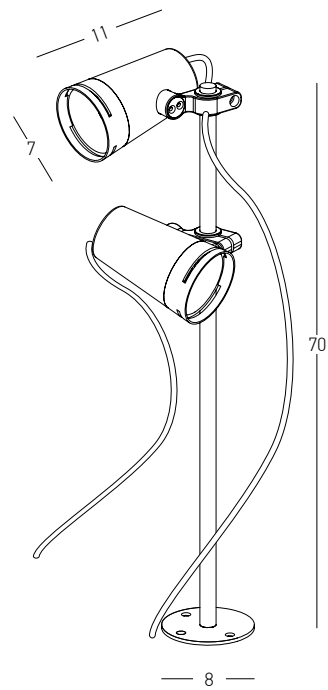

Power 13W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1162Lm  
 Cri 90  
 IP 54  
 Dimensions L: 11cm W: 11cm H: 70cm  
 Base Ø: 8cm H: 0.5cm  
 Beam Angle 40°  
 Spots Ø: 5-7cm L: 11cm  
 Material Aluminium - Tempered Glass  
 Special Feature 110cm Cable Available (2 pcs)  
 Movable - Rotational Spots  
 Base Included


Color Dark Brown / Code E299

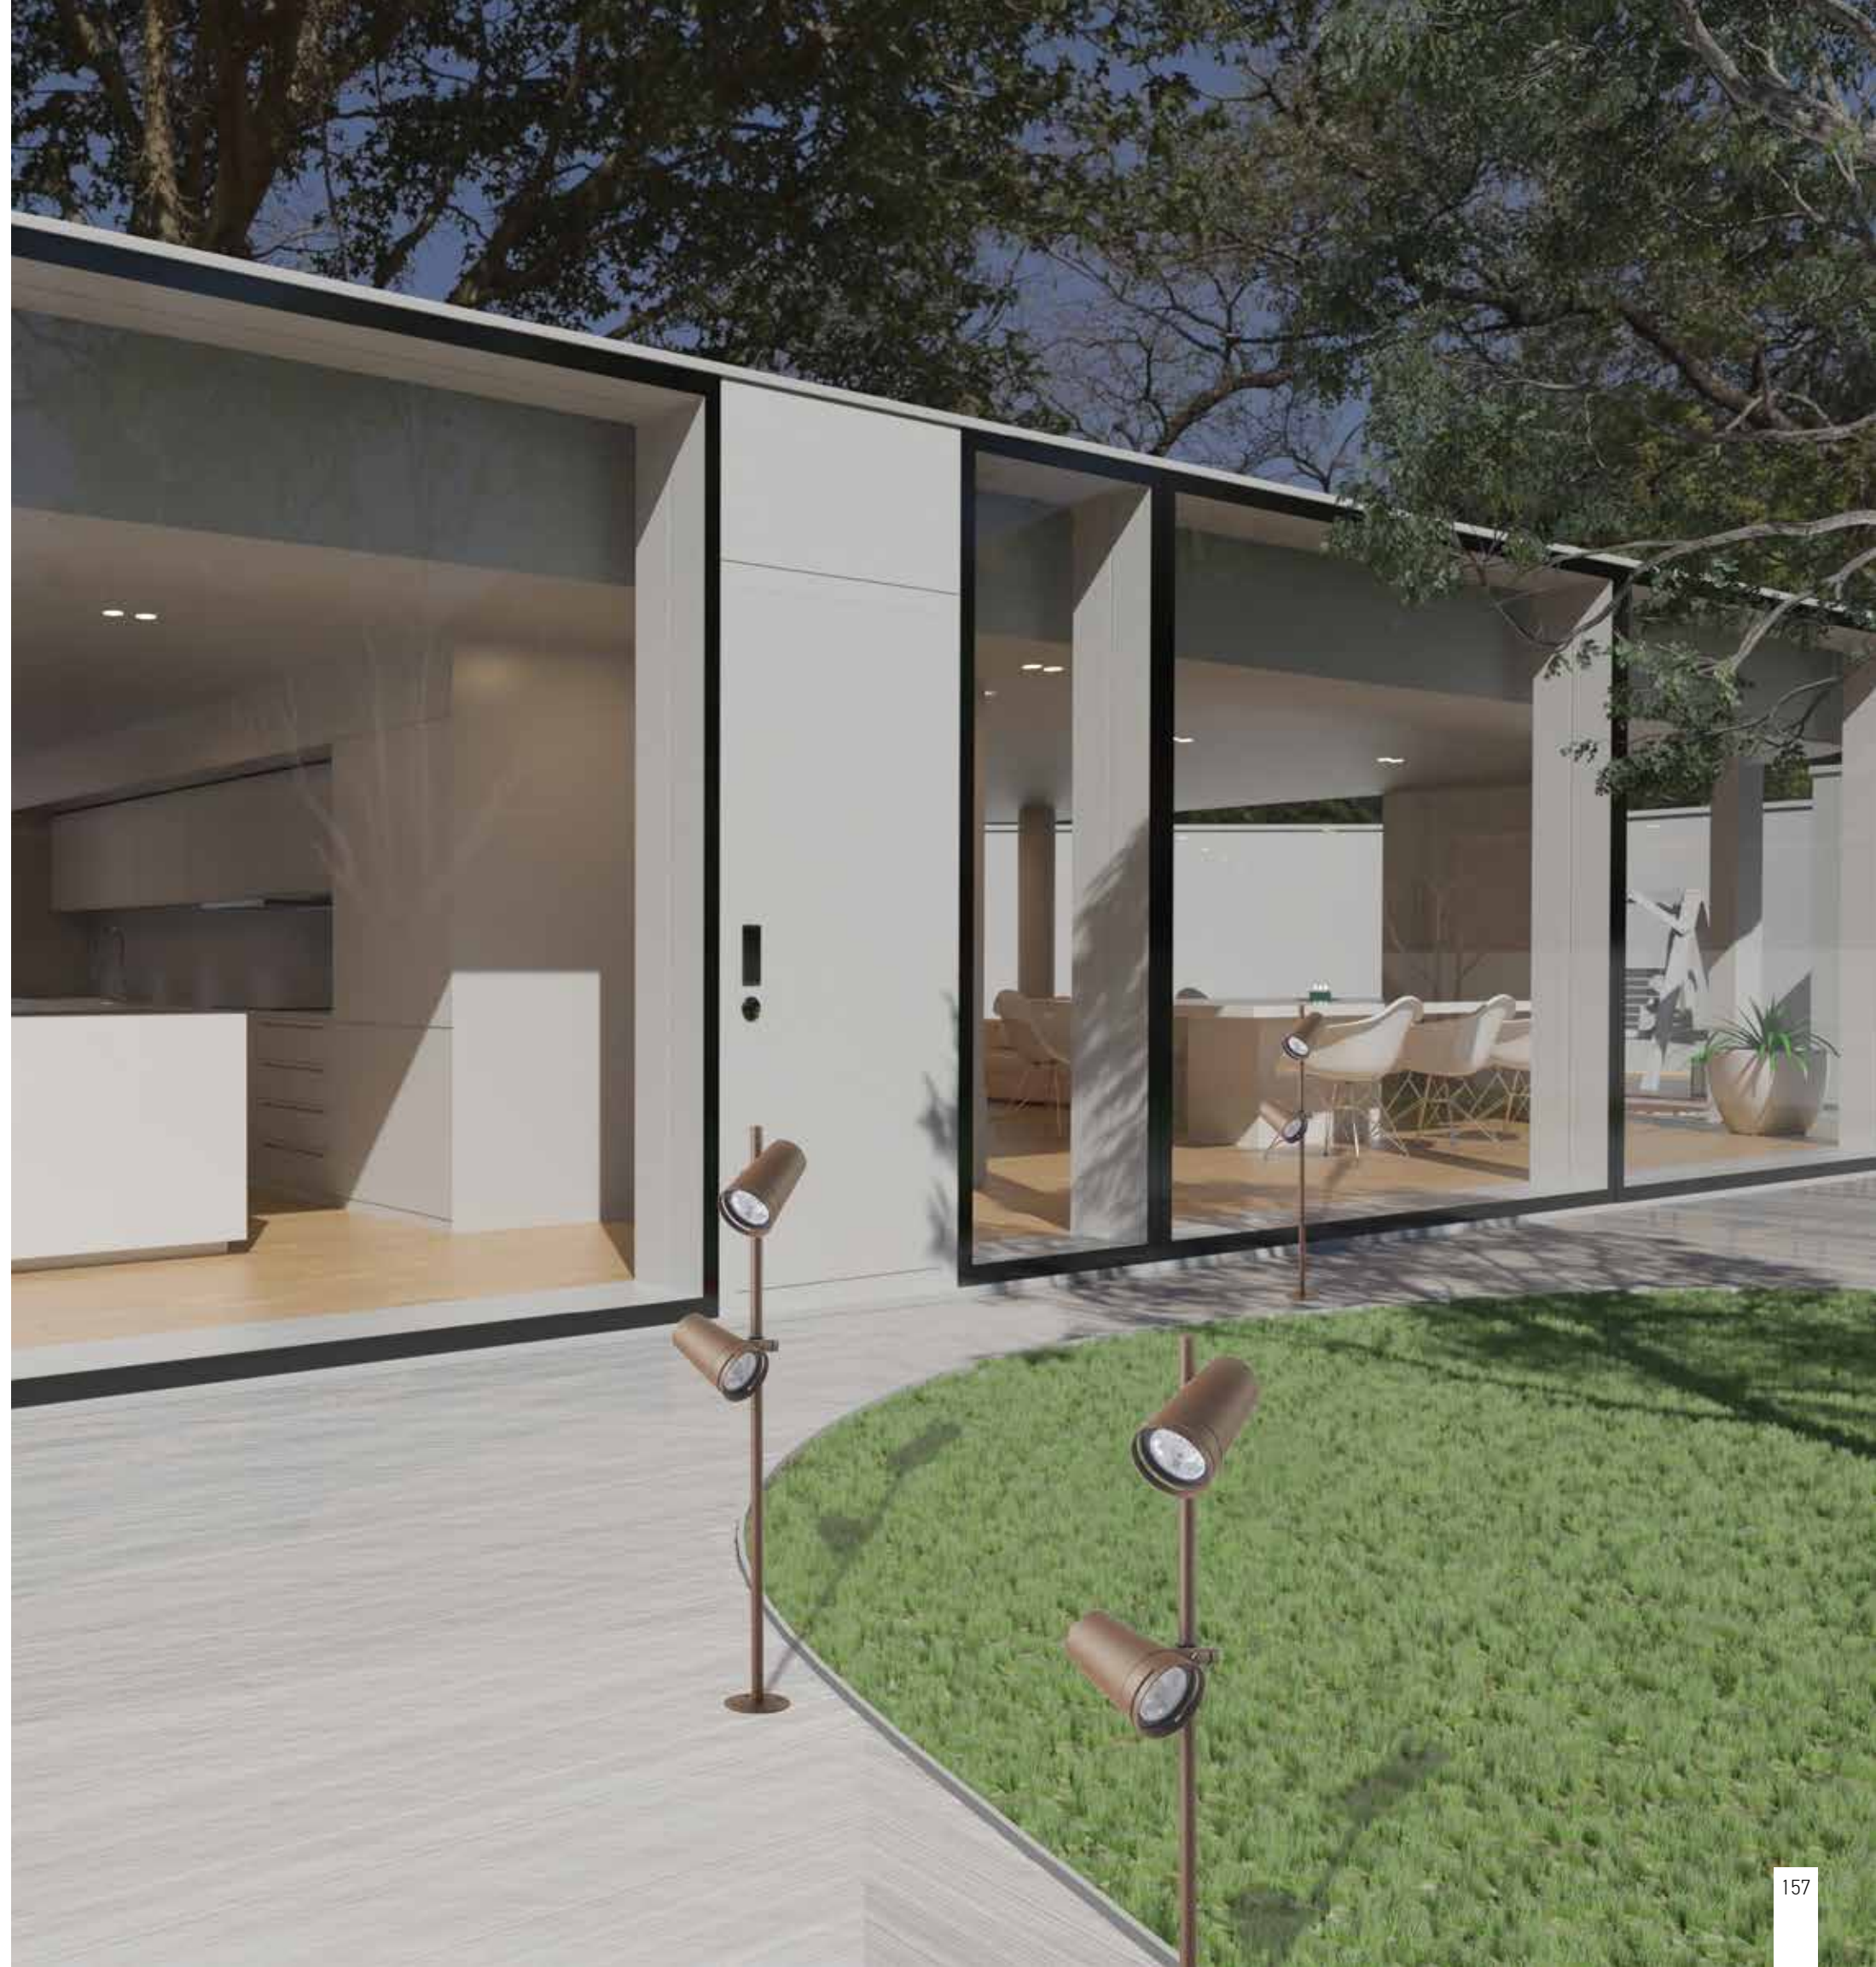

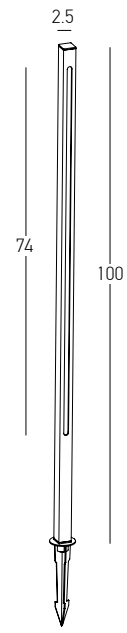


Power 15W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 1550Lm  
Cri 80  
IP 65  
Dimensions L: 2.5cm W: 2.5cm H: 100cm  
Base Ø: 9.5cm H: 2cm  
Material Aluminium - Opal PC Diffuser  
Special Feature 40cm Cable Available  
Spike & Base Included  
Profile 2.5 x 2.5cm


Color Dark Brown / **Code E280**

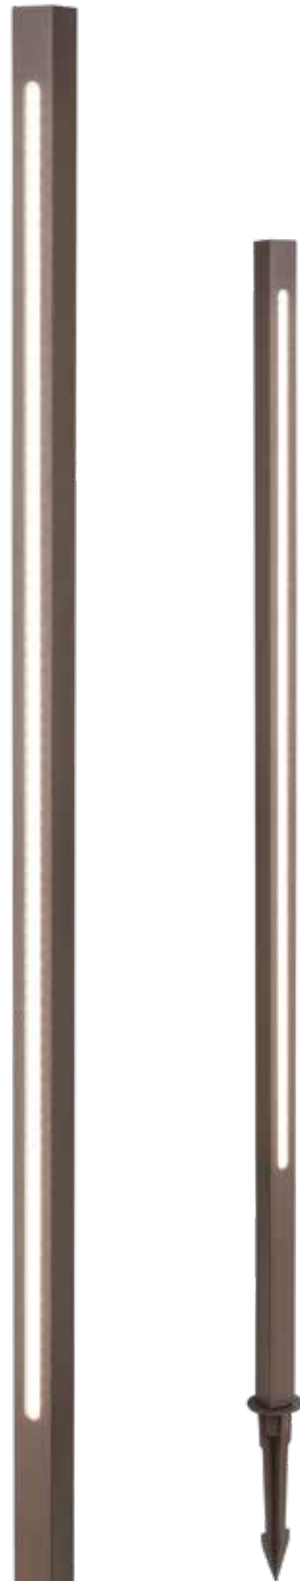






Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm L: 11cm H: 6.2cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Without Spike  
 Color Black / **Code E311**

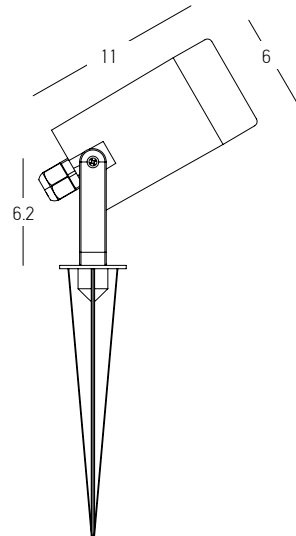


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm L: 11cm H: 6.2cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E312**



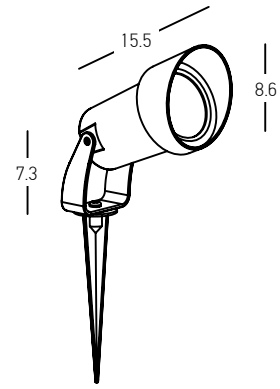


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm  
 Material ABS - Tempered Glass  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E310**




Bulb 1x GU10 LED  
 Power 5W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 Dimensions Ø: 6cm H: 16cm  
 Material ABS - PC Diffuser  
 Special Feature 30cm Cable Available  
 Movable Spot  
 Spike Included  
 Color Black / **Code E217**




STEP | p.164-185

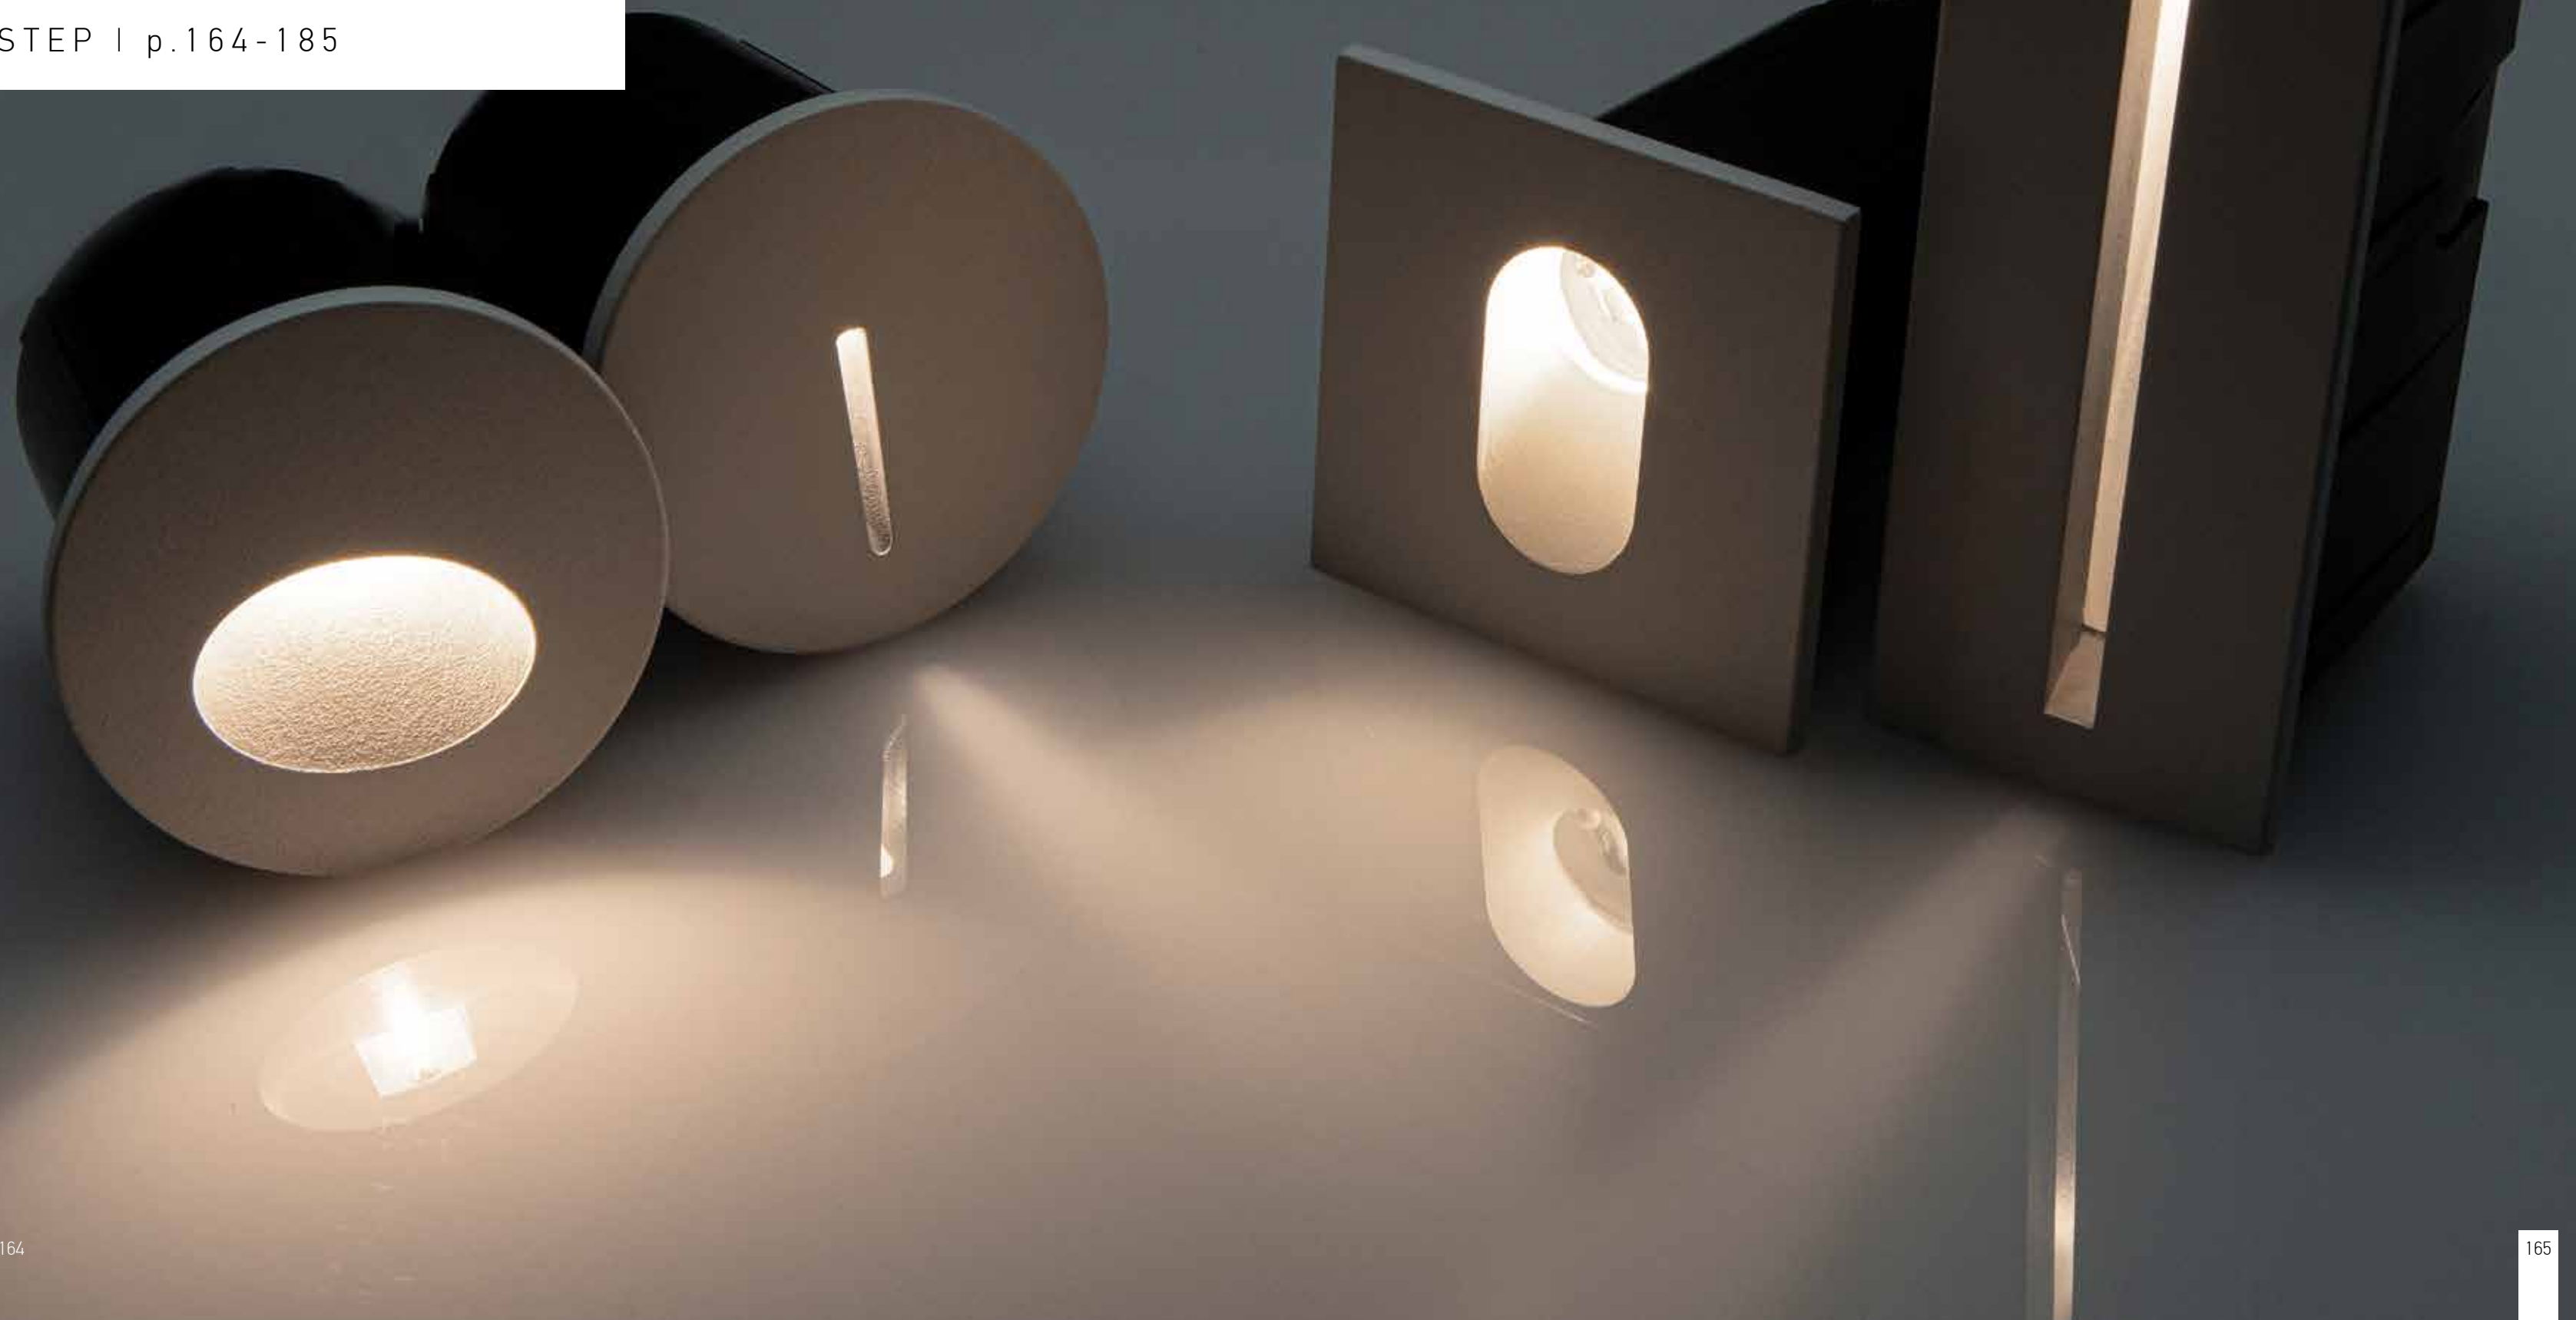


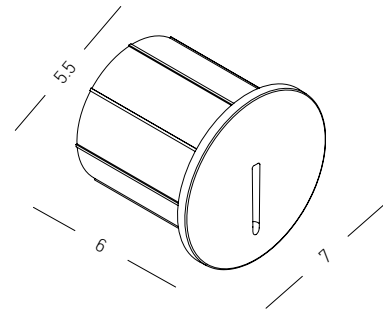


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7cm L: 6.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy White / **Code E321**

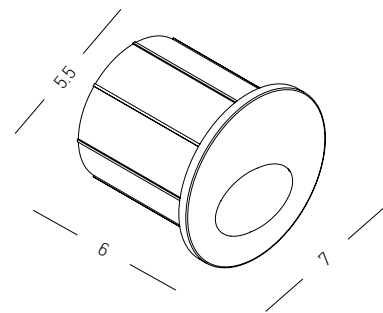


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 133Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 7cm L: 6.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy White / **Code E320**





Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 133Lm  
 Cri 90  
 IP 65  
 Dimensions L: 7.5cm W: 7cm H: 7cm  
 Material Aluminium - Tempered Glass  
 Depth Required 7cm  
 Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)  
 Color Sandy White / **Code E319**

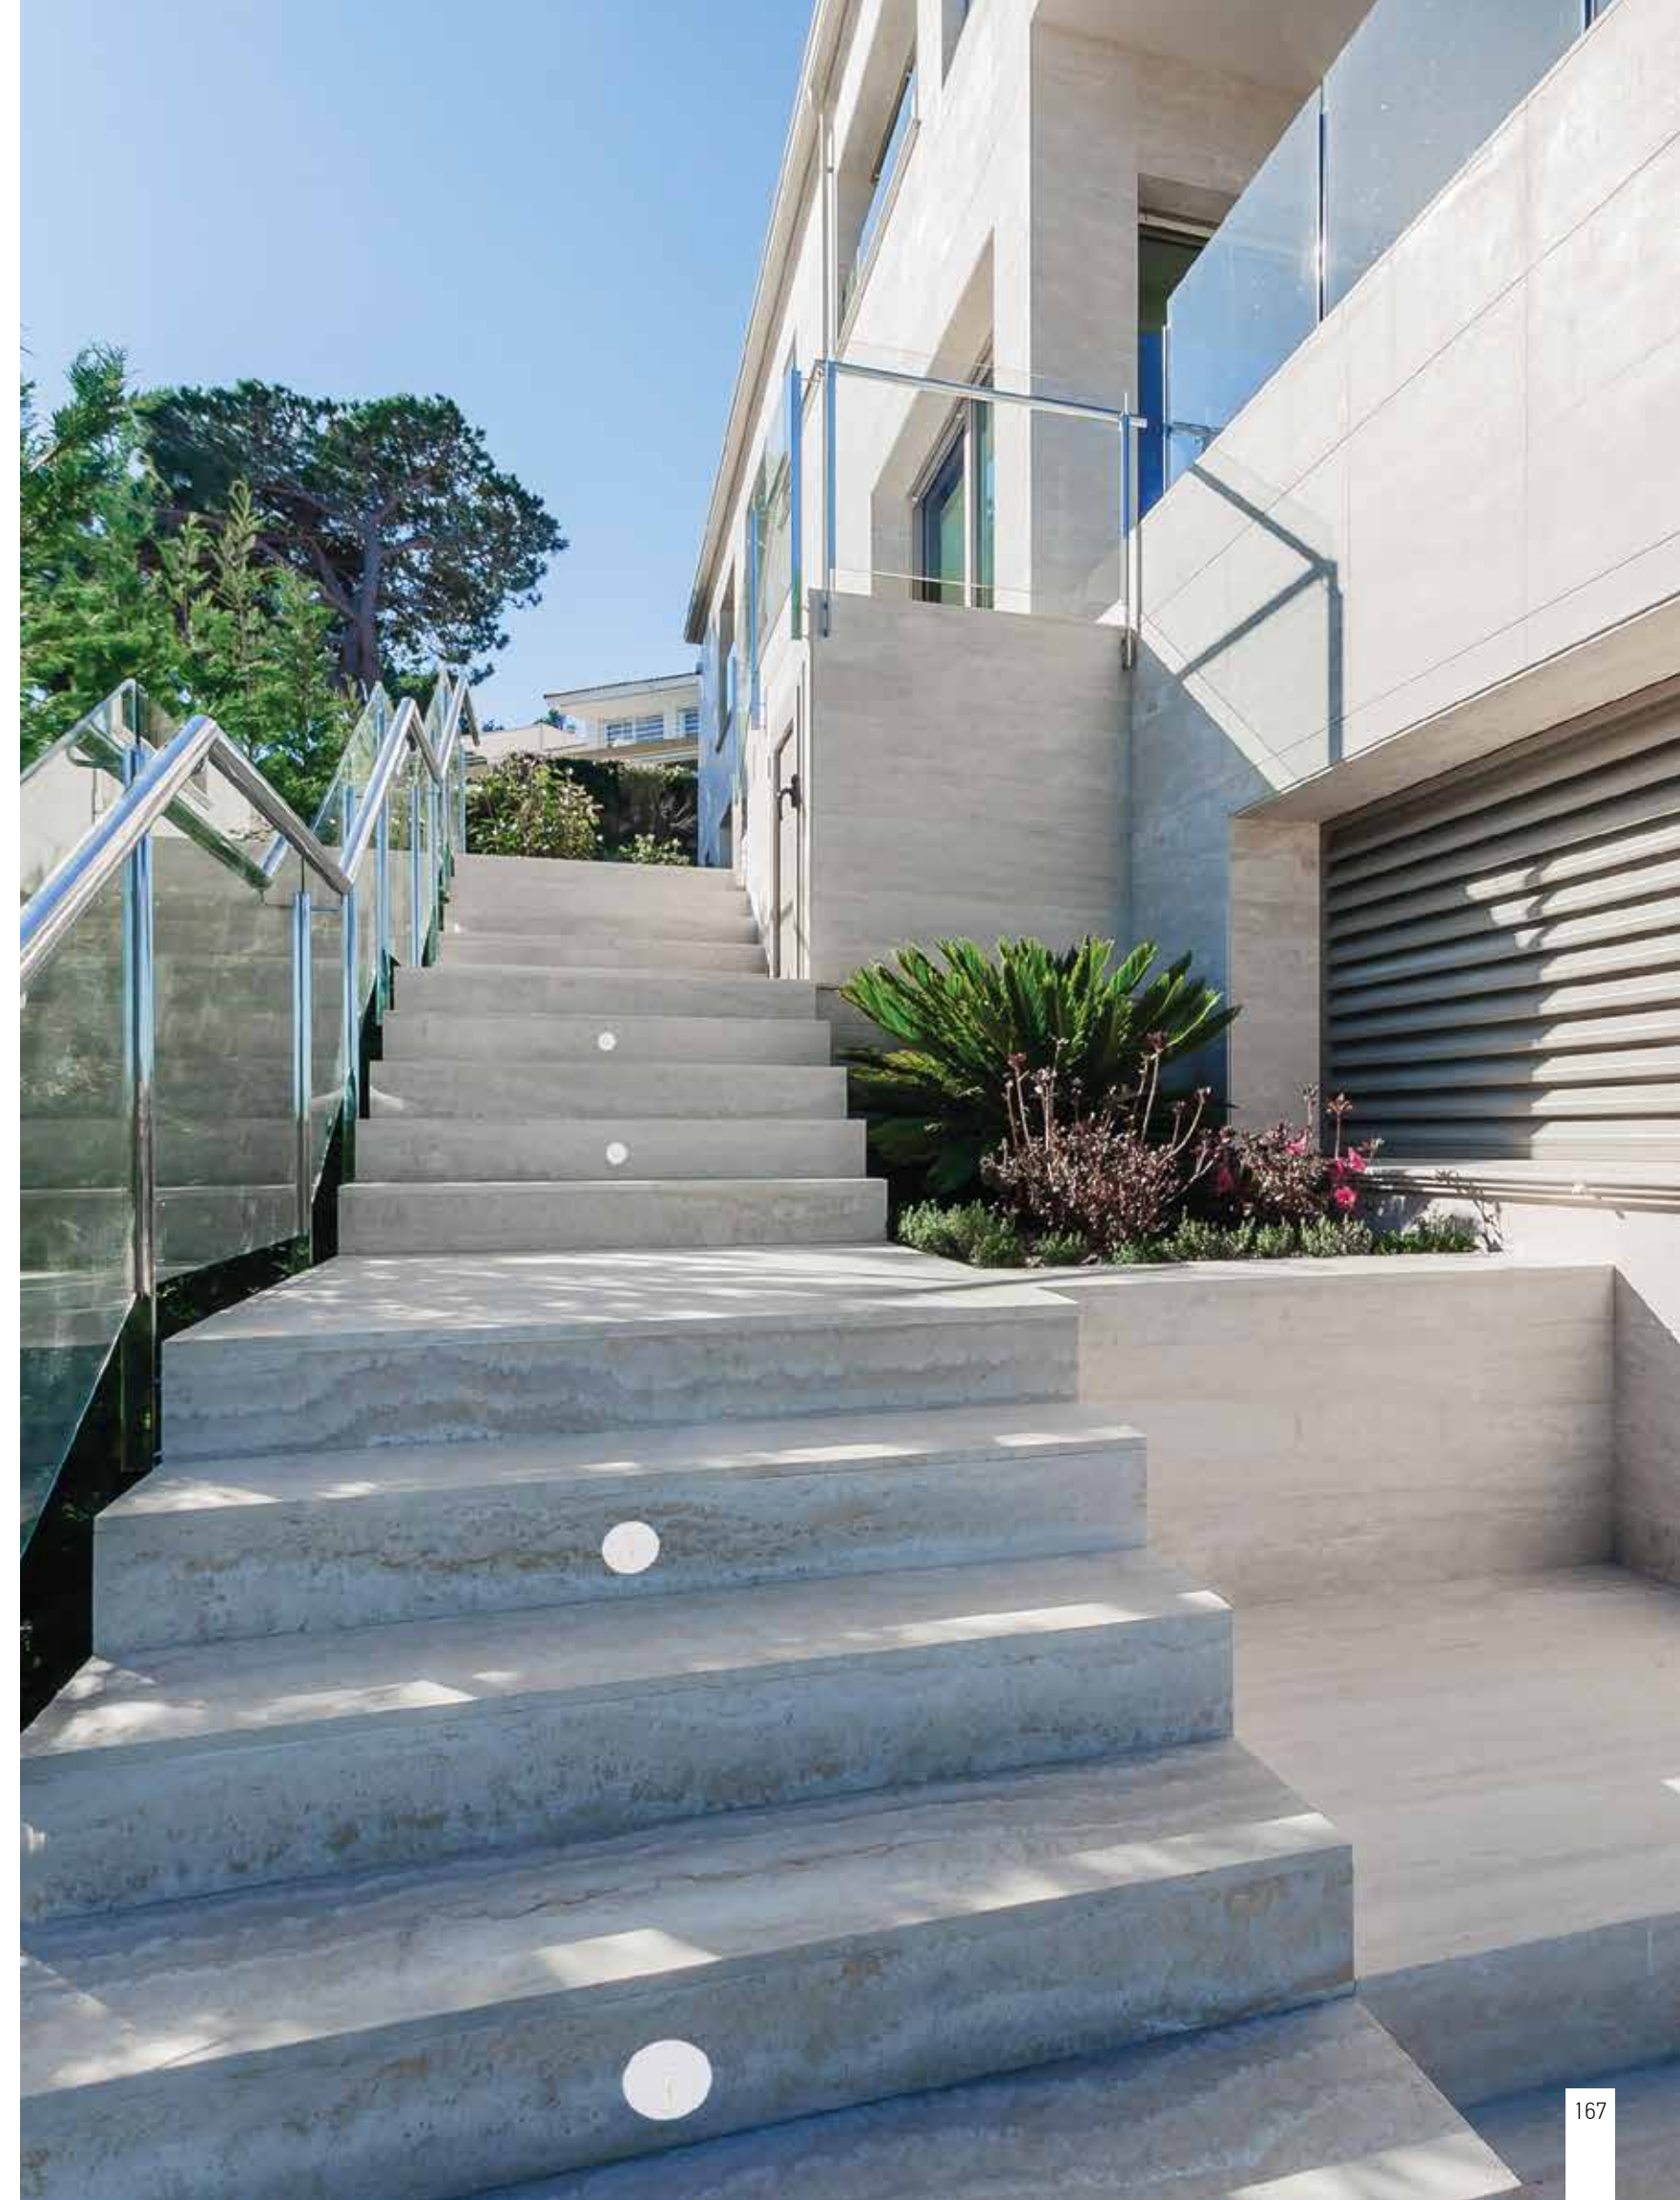

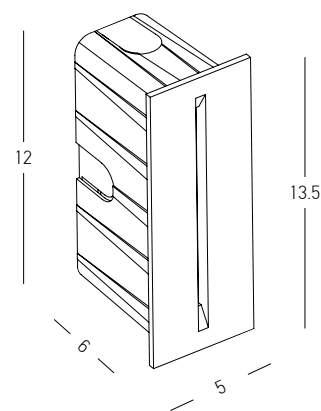


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 90  
 IP 65  
 Dimensions L: 6.5cm W: 5cm H: 13.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box L: 6cm W: 4.3cm H: 12.6cm (Included)  
 Color Sandy White / Code **E322**

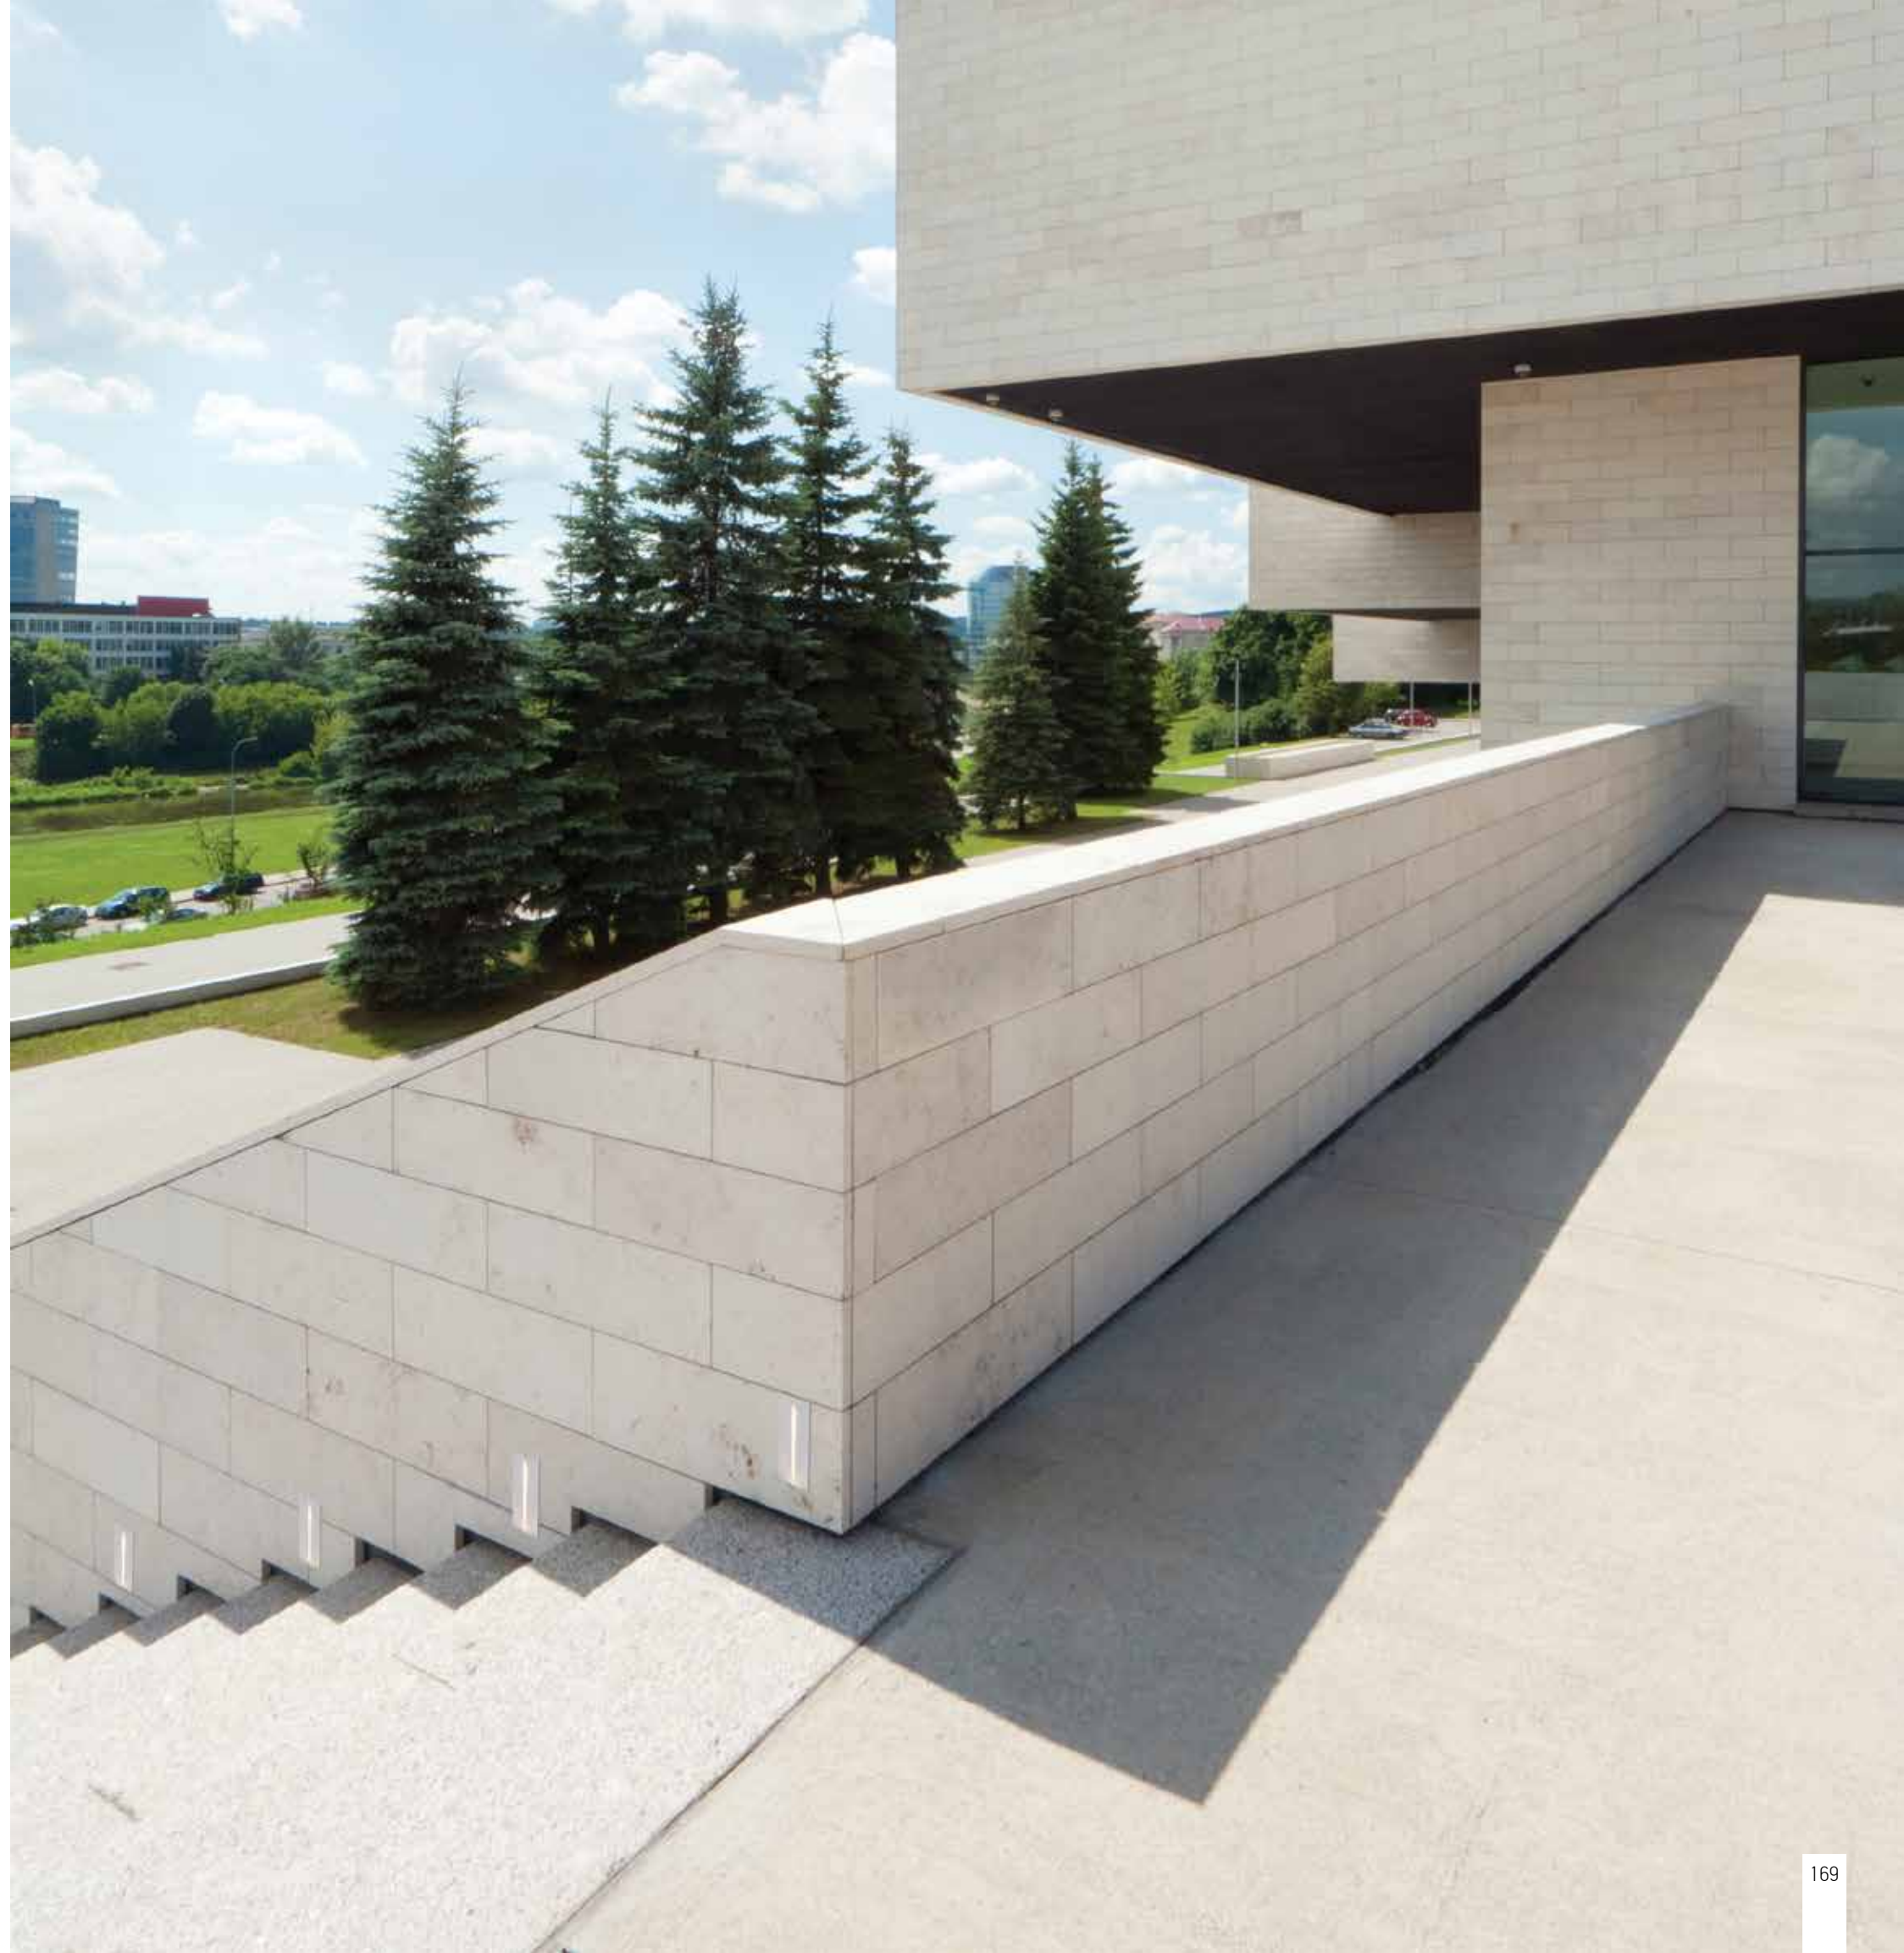


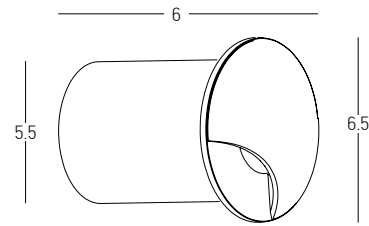


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 230Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 6.5cm L: 6cm  
 Material Aluminium - PC Diffuser  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy Black / **Code E300**

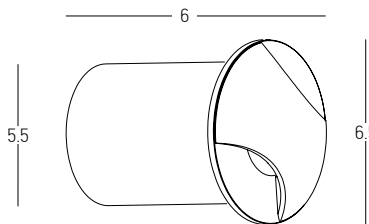


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 290Lm  
 Cri 90  
 IP 65  
 Dimensions Ø: 6.5cm L: 6cm  
 Material Aluminium - PC Diffuser  
 Depth Required 6cm  
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)  
 Color Sandy Black / **Code E301**

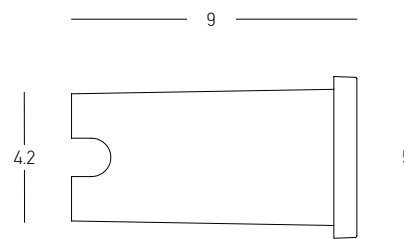


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 200Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 5cm L: 9cm  
 Material Stainless Steel- PC Diffuser  
 Depth Required 8cm  
 Recessed Mounting Box Ø: 4.2cm L: 8cm (Included)  
 Color Stainless Steel / **Code E288**

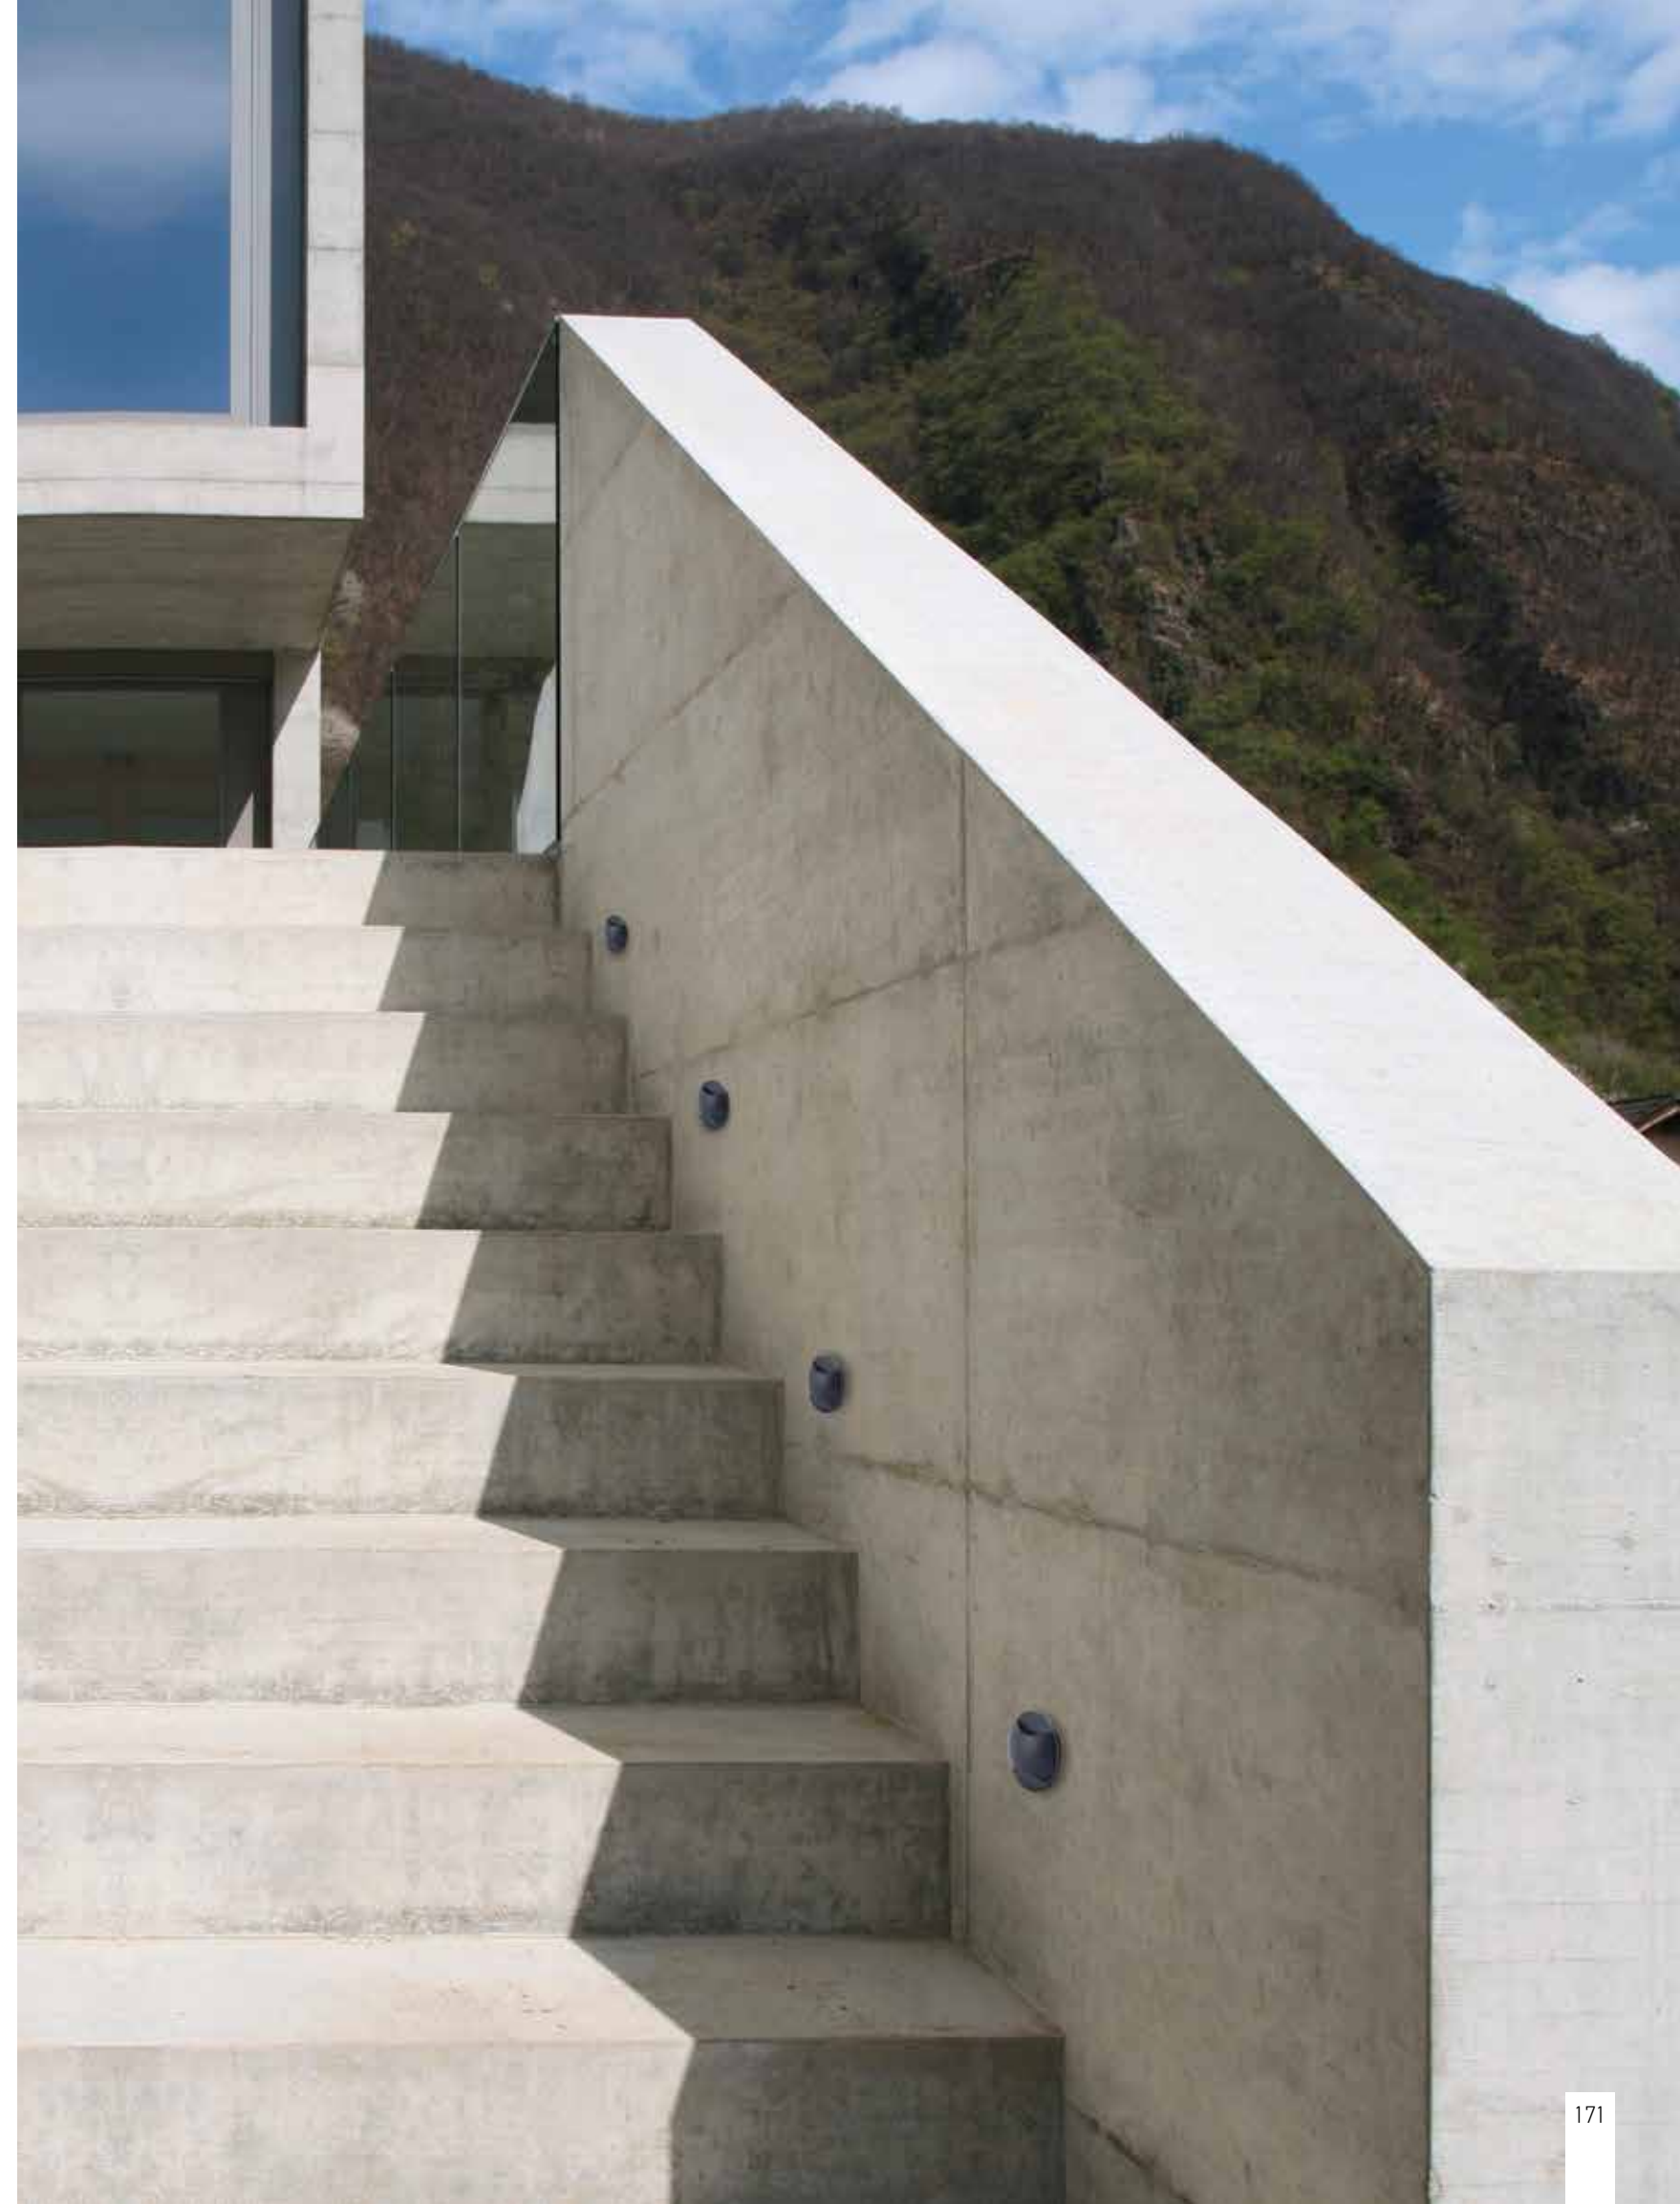

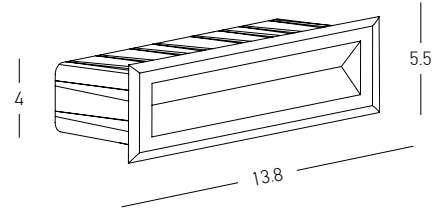



Power 5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 302Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6.5cm W: 13.8cm H: 5.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)  
 Color Graphite / **Code E324**

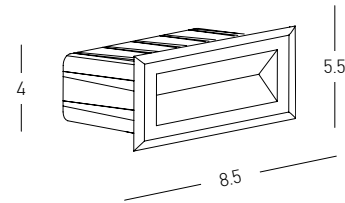


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 195Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6.5cm W: 8.5cm H: 5.5cm  
 Material Aluminium - Tempered Glass  
 Depth Required 6cm  
 Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)

Color Graphite / **Code E323**

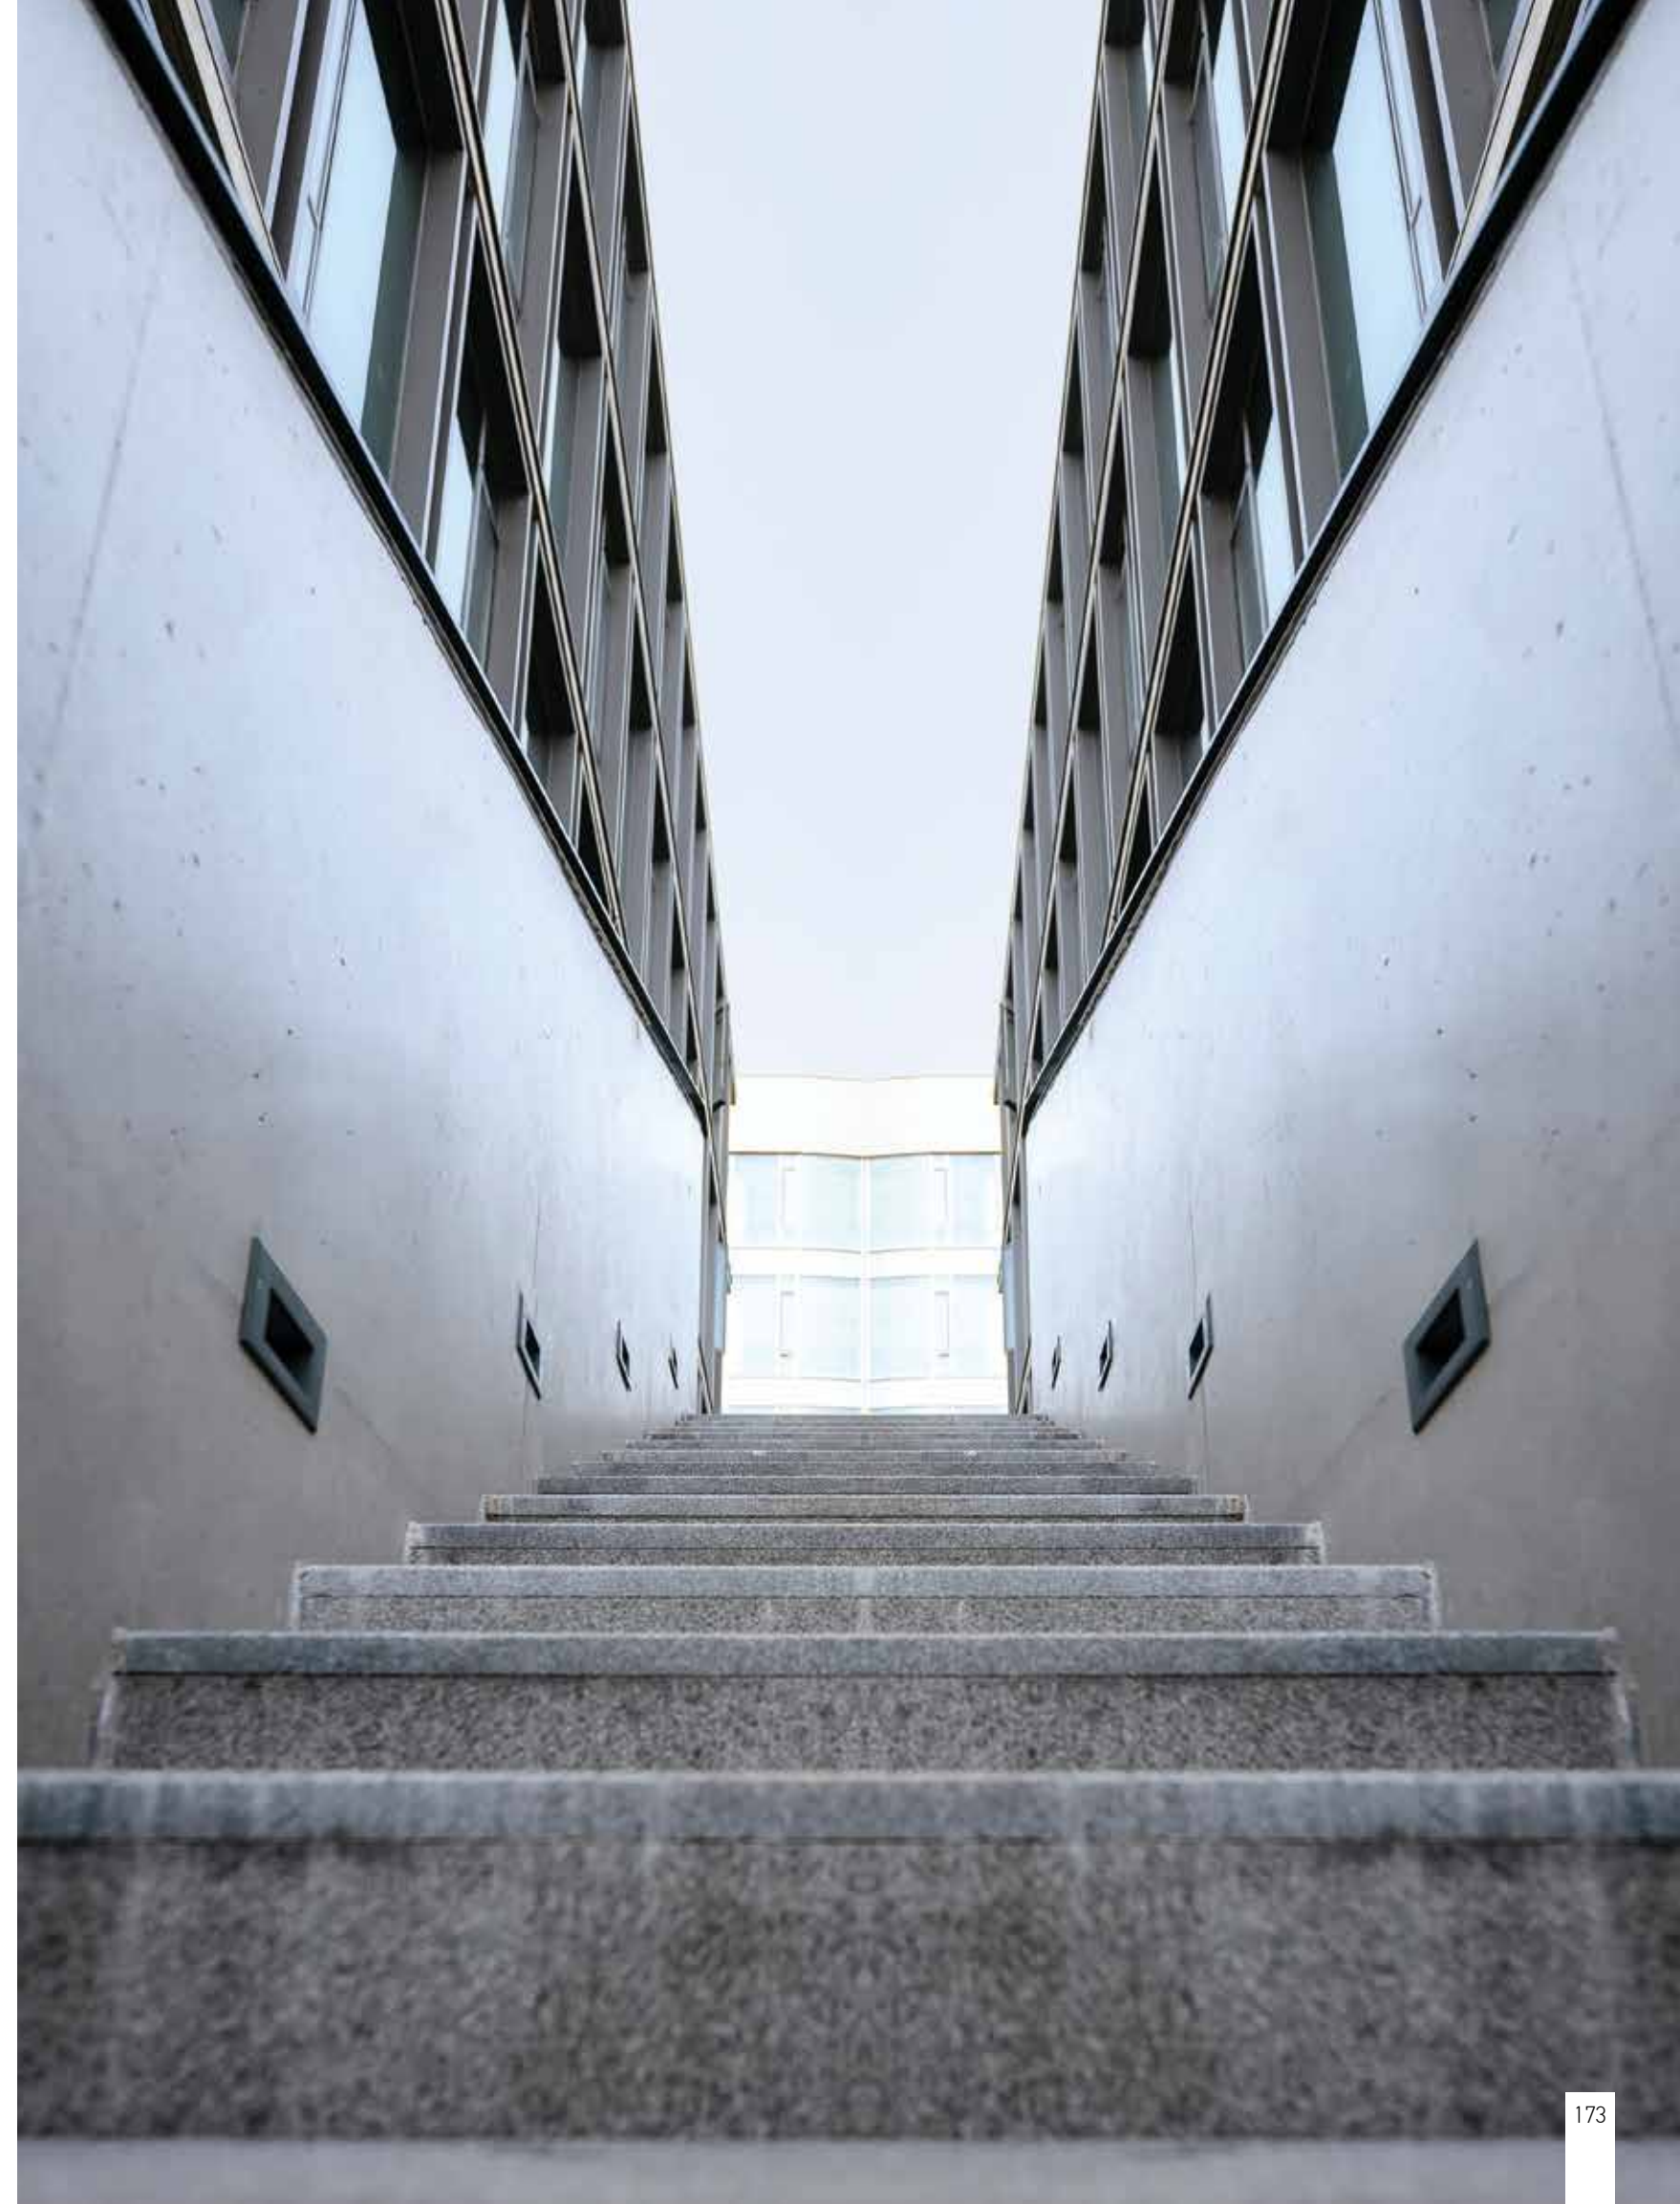


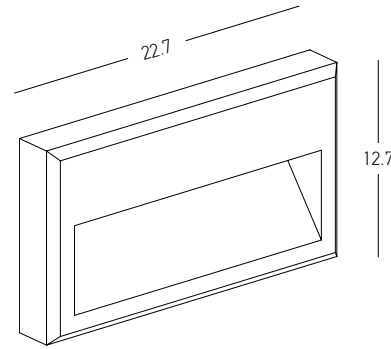


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 420Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.5cm W: 22.7cm H: 12.7cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E347**

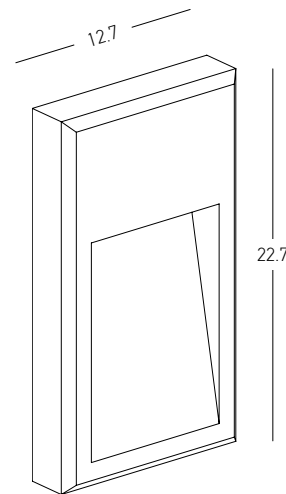


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 420Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.5cm W: 12.7cm H: 22.7cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E346**

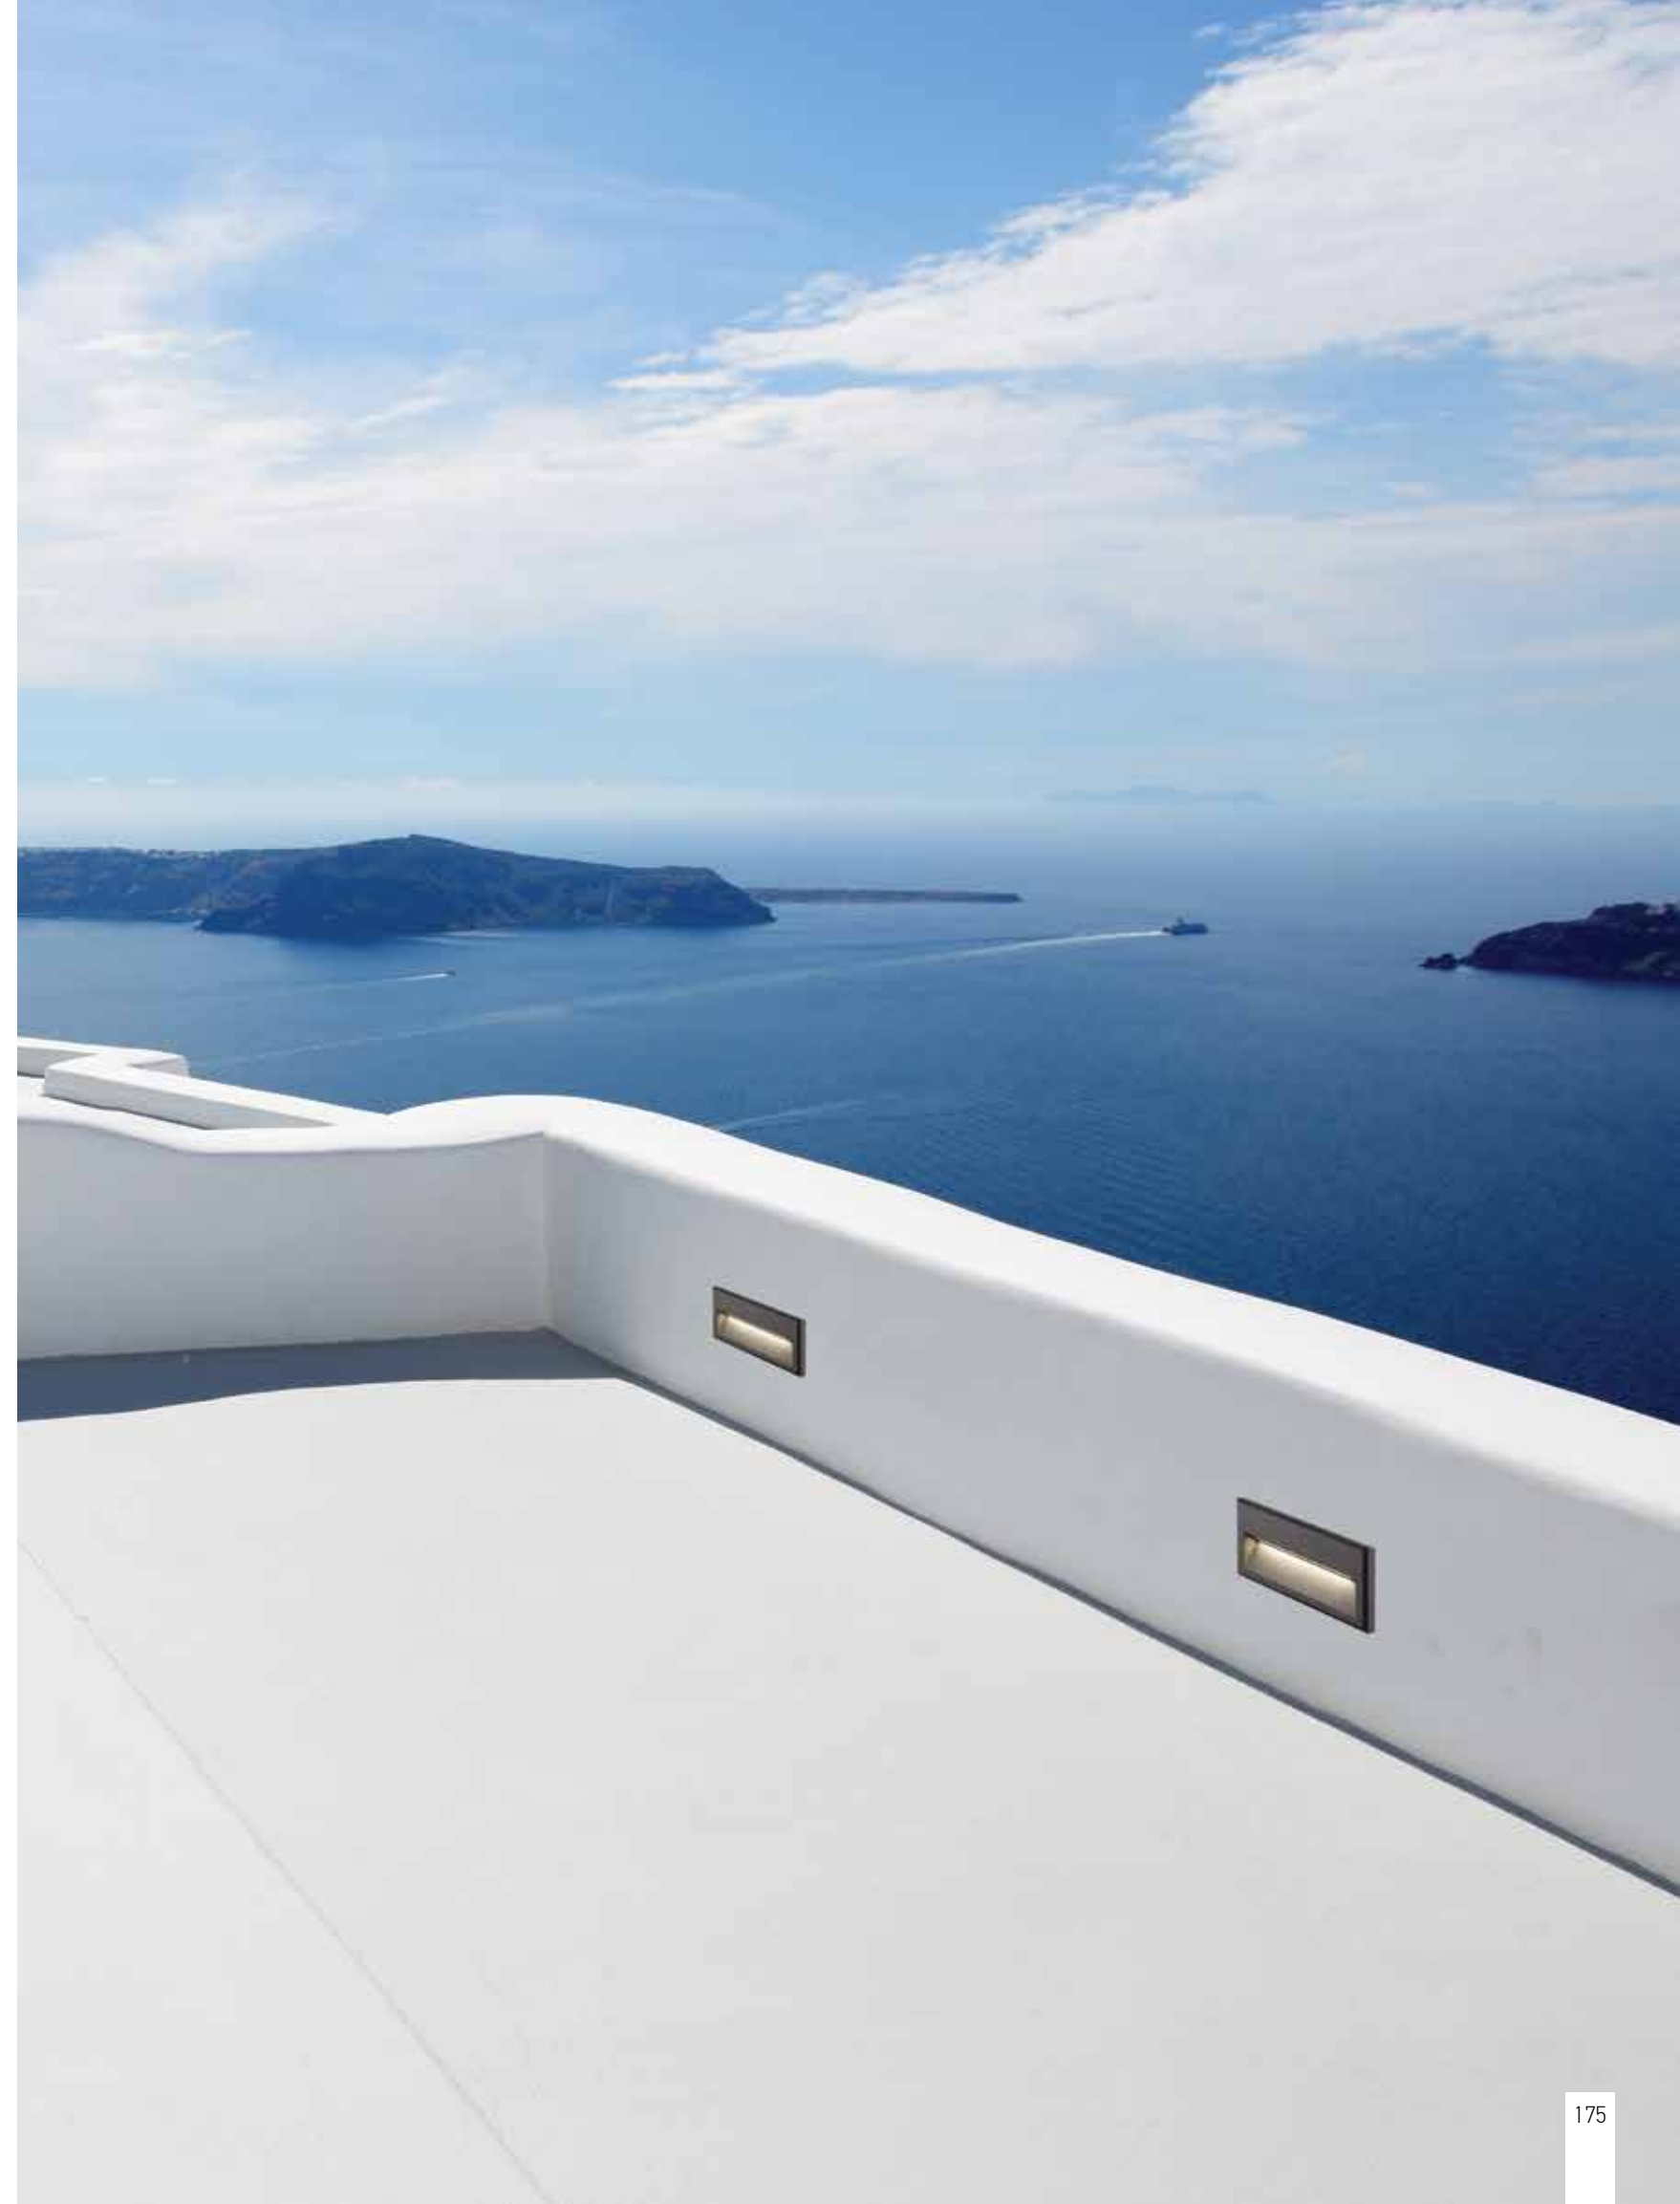




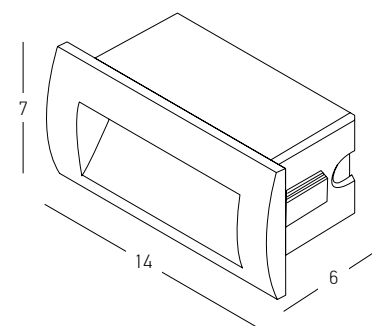


Power 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 188Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 14cm H: 7cm  
 Depth 6cm  
 Material Aluminium - PC Diffuser  
 Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)  
 Color Graphite / **Code E247-G**  
 Color Sandy White / **Code E247-W**

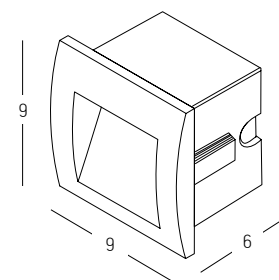


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 65Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 9cm H: 9cm  
 Depth 6cm  
 Material Aluminium - PC Diffuser  
 Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)  
 Color Graphite / **Code E246-G**  
 Color Sandy White / **Code E246-W**


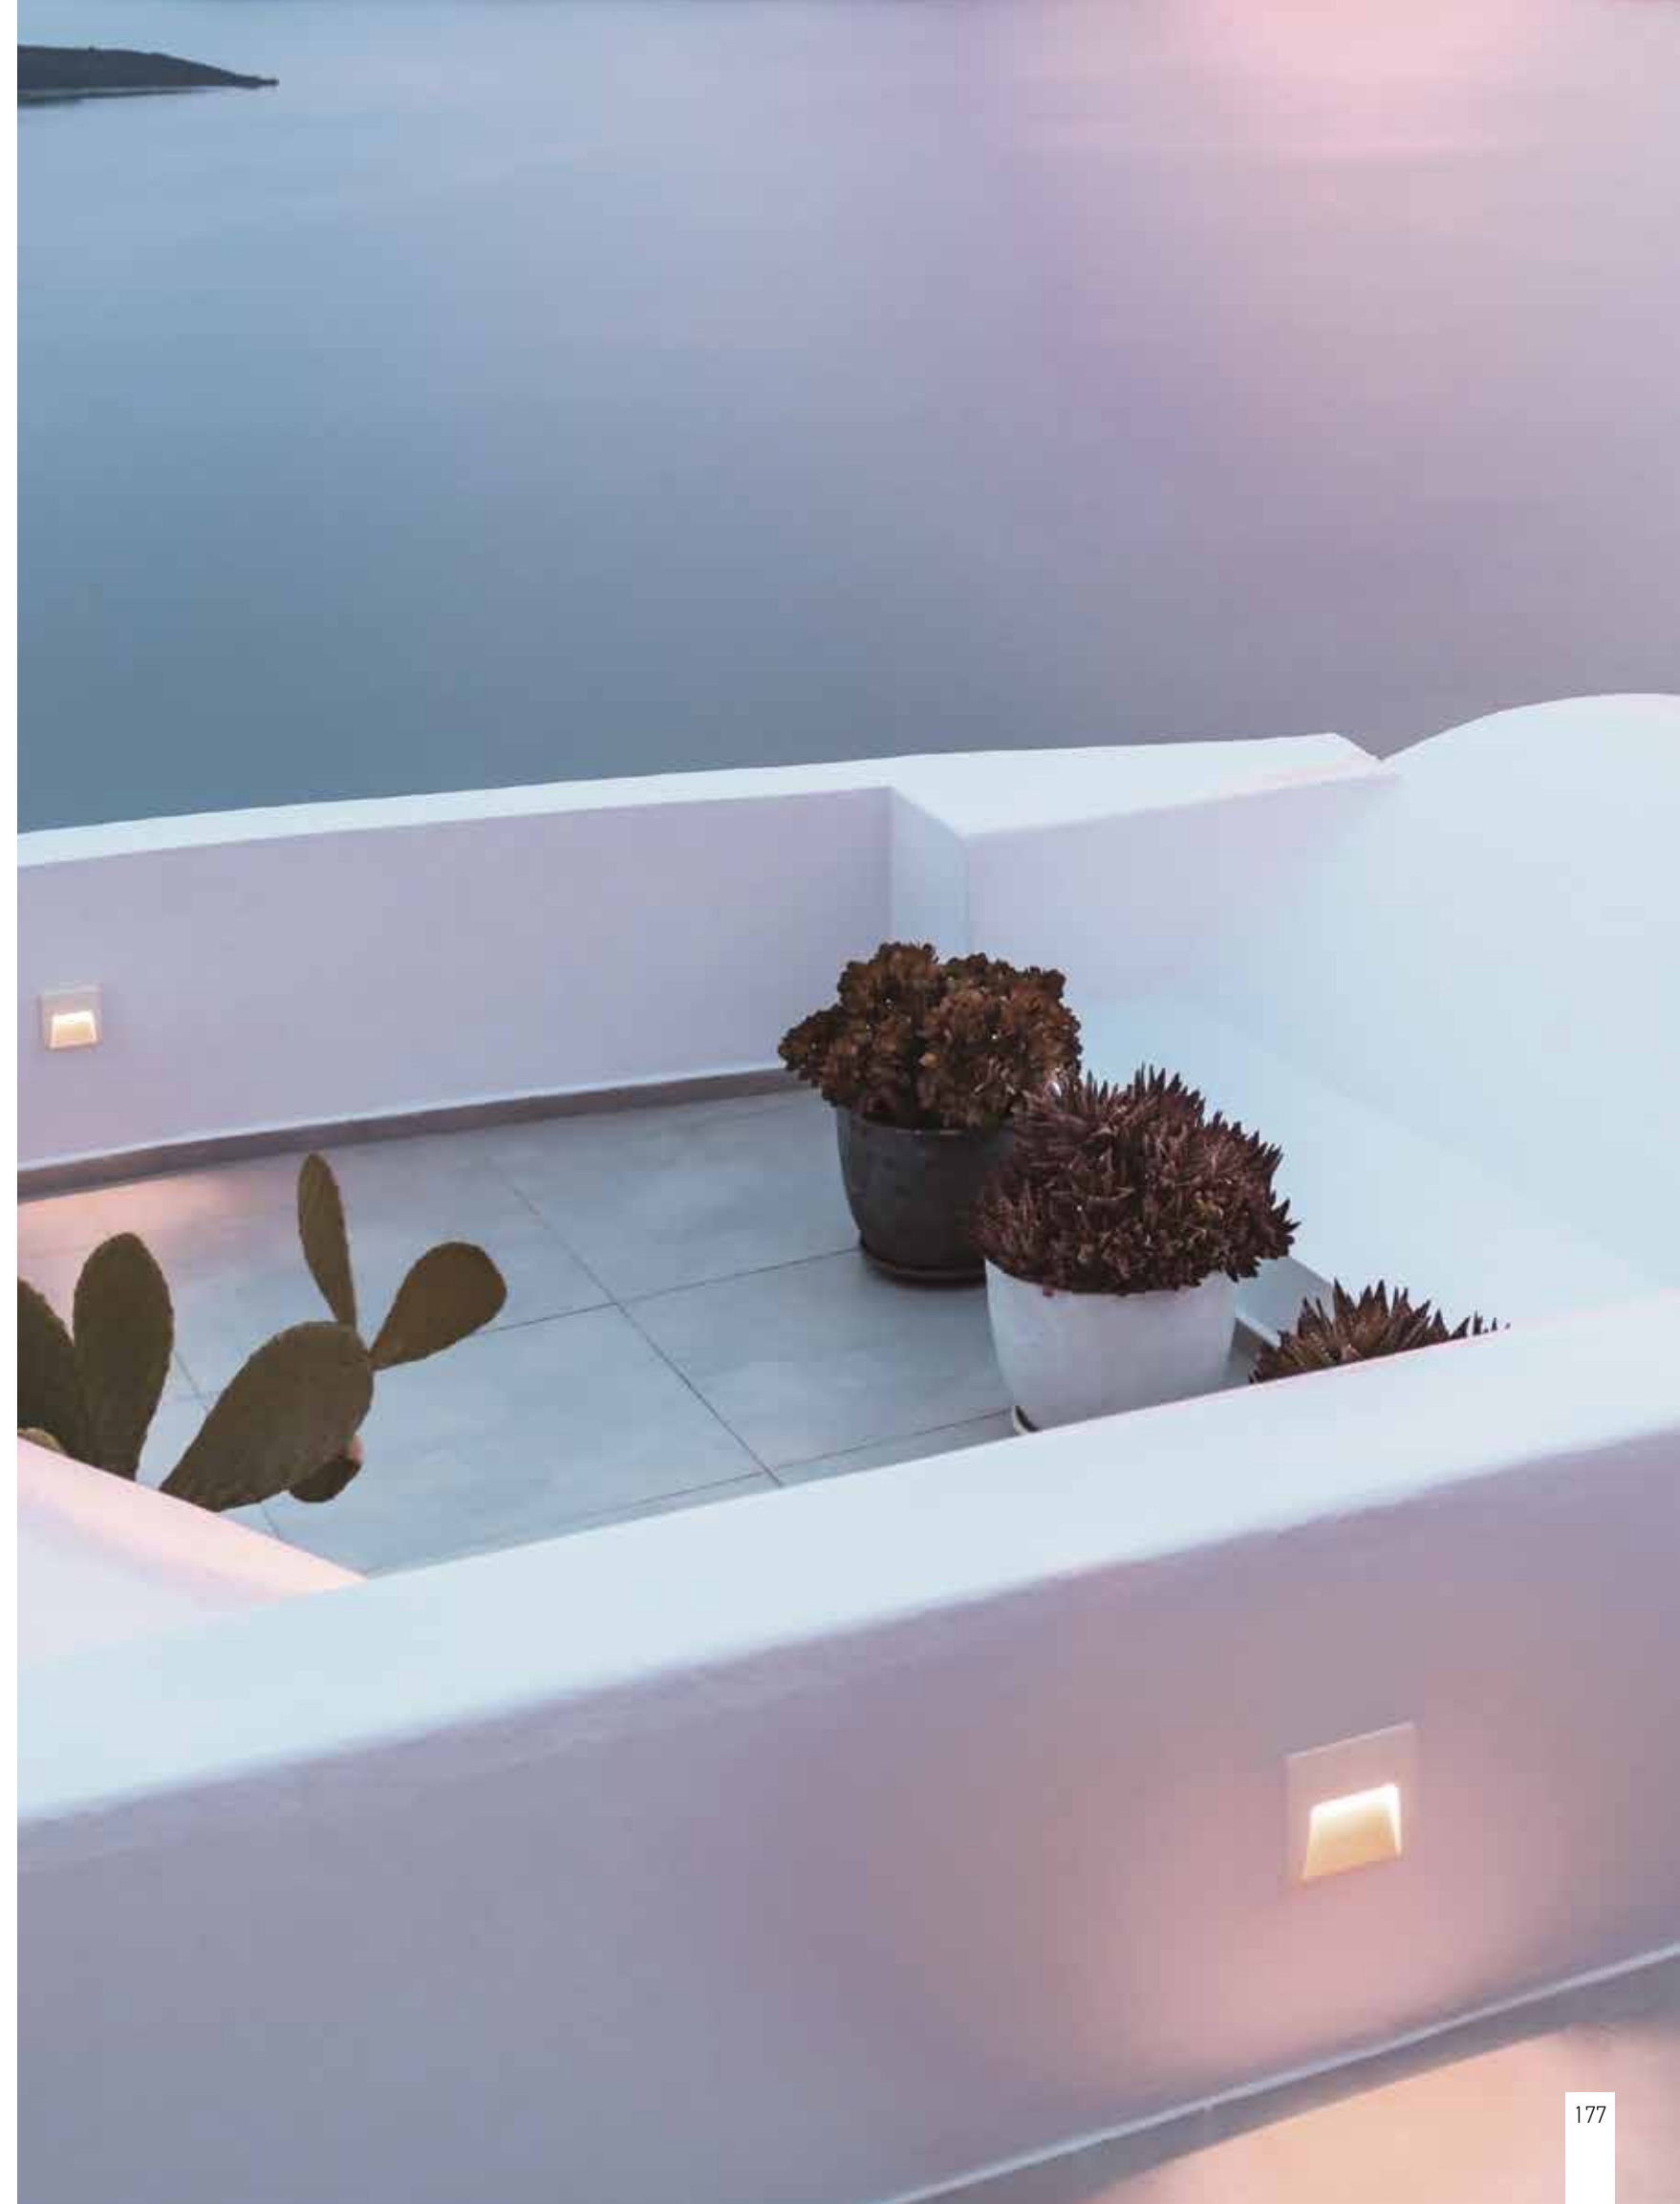




Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions L: 3.7cm W: 15cm H: 15cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E241-G**  
 Sandy White / **Code E241-W**




Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 480Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 15cm L: 3.7cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E242-G**  
 Sandy White / **Code E242-W**

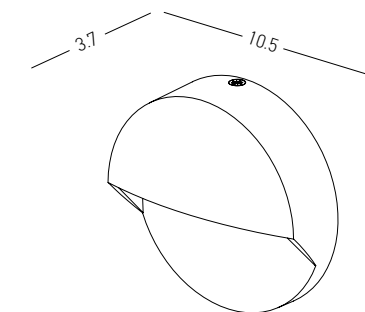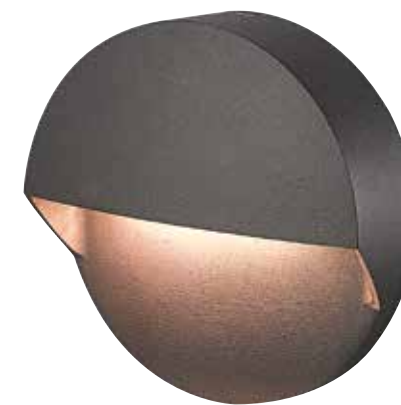


Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 190Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 10.5cm L: 3.7cm  
 Material Aluminium - PC Diffuser  
 Color Graphite / **Code E294**



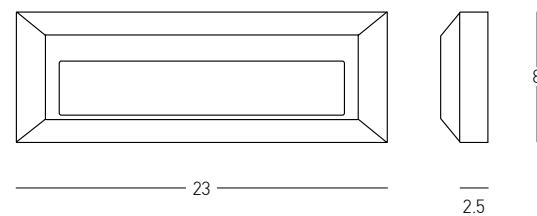


Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 132Lm  
 Cri 80  
 IP 65  
 Dimensions L: 2.5cm W: 23cm H: 8cm  
 Material ABS  
 Color Graphite / **Code E229**




Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 69Lm  
 Cri 80  
 IP 65  
 Dimensions L: 2.5cm W: 12.5cm H: 12.5cm  
 Material ABS  
 Color Graphite / **Code E230**






Power 3W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 92Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 13.5cm L: 3.2cm  
 Material ABS  
 Color Graphite / **Code E183**  
 White / **Code E184**





Power 2W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 88Lm  
 Cri 80  
 IP 54  
 Dimensions L: 3.3cm W: 10cm H: 6cm  
 Material ABS  
 Color Graphite / **Code E181**  
 White / **Code E182**



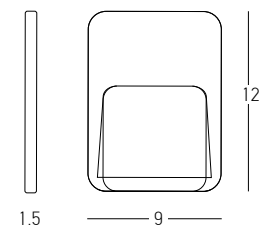

Power 1.5W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 90Lm  
 Cri 80  
 IP 65  
 Dimensions L: 1.5cm W: 9cm H: 12cm  
 Material ABS - PC Diffuser  
 Color White / **Code E187**

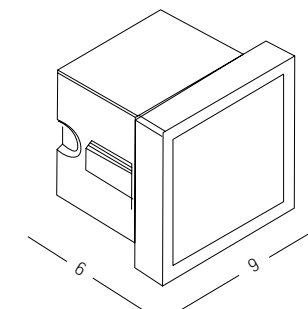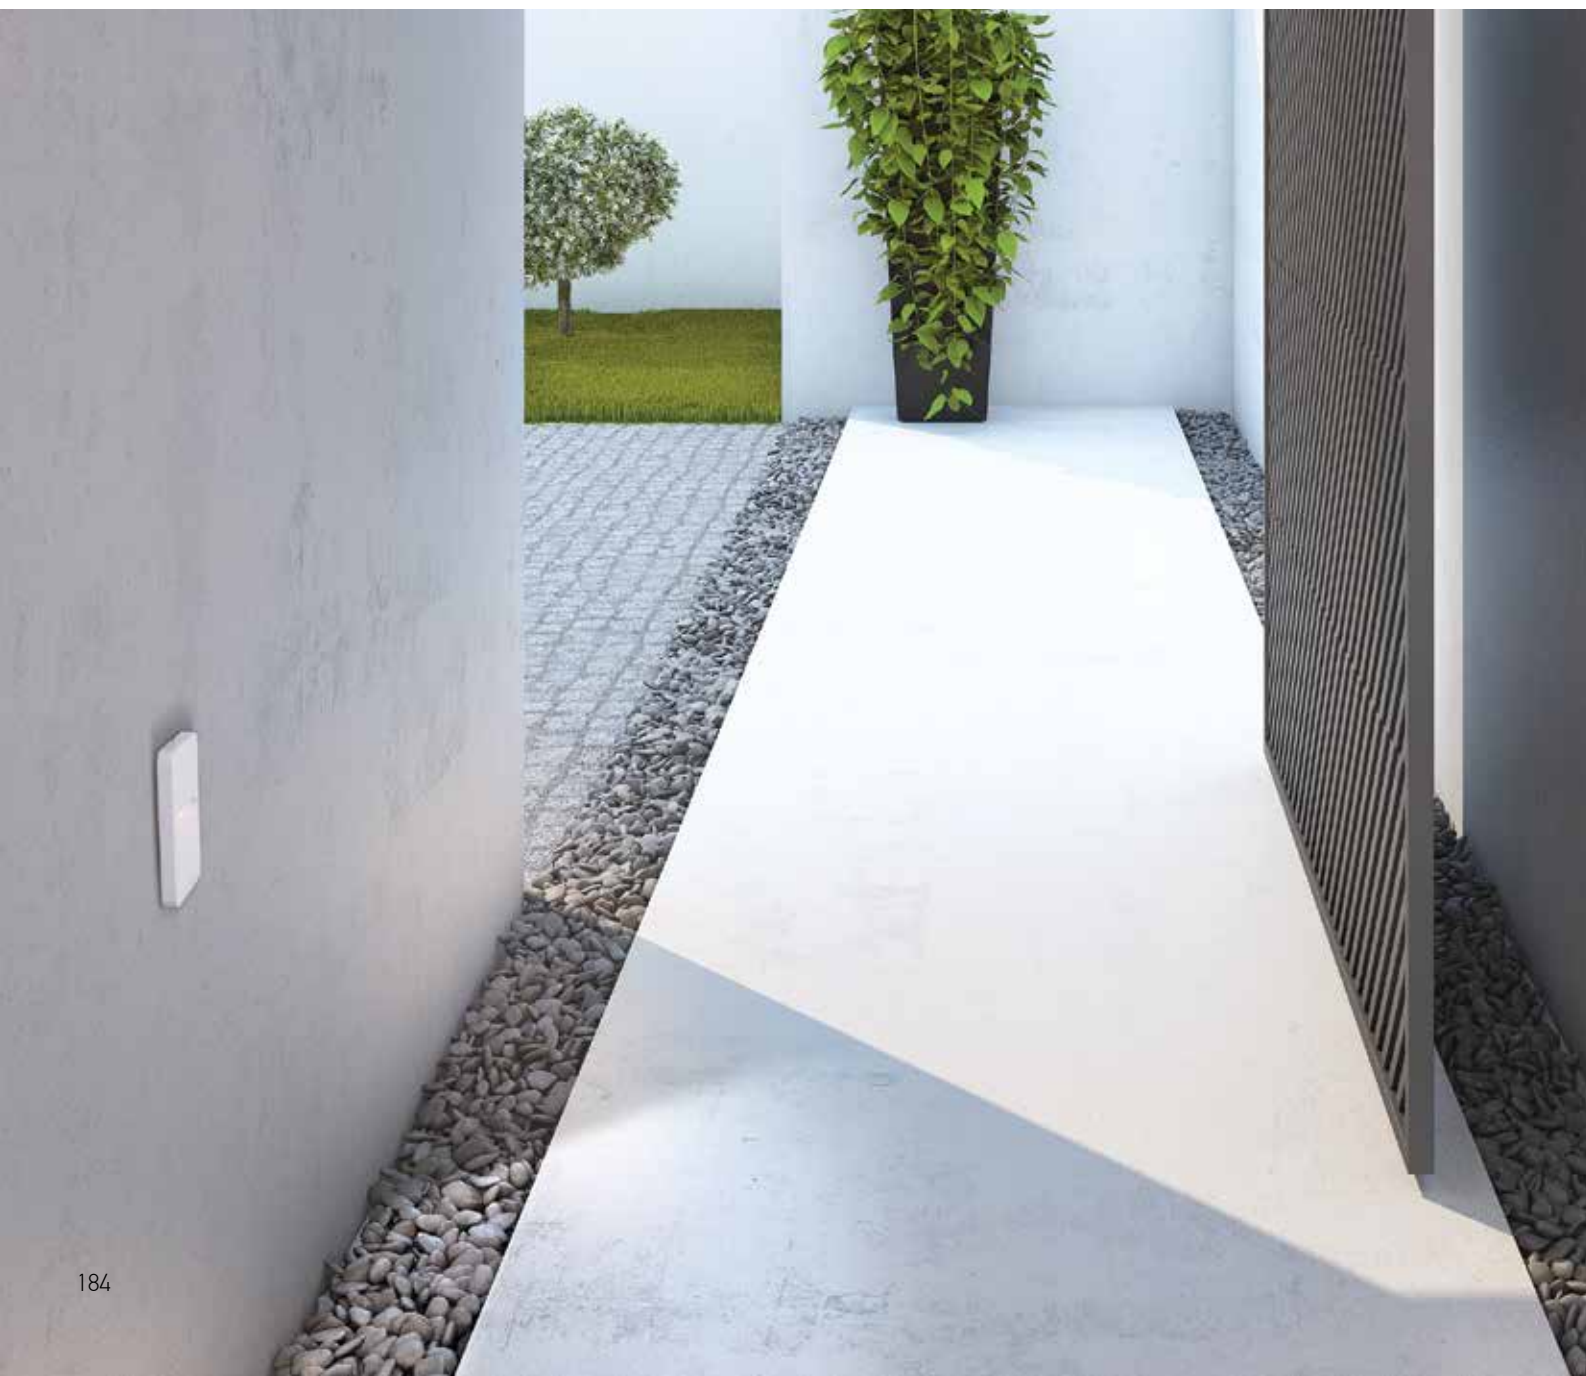


Power 4W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 185Lm  
 Cri 80  
 IP 65  
 Dimensions L: 6cm W: 9cm H: 9cm  
 Depth 6cm  
 Material Aluminium - Tempered Glass  
 Recessed Mounting Box L: 6cm W: 8cm H: 8cm (Included)  
 Color Black / **Code E248**






CEILING | p.186-199



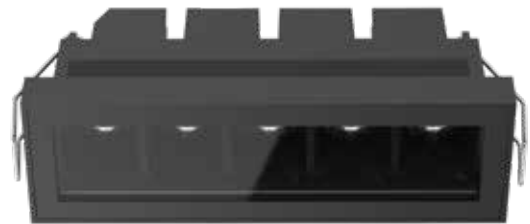

Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 757Lm  
 Cri 90  
 IP 65  
 Dimensions L: 15.7cm W: 5cm H: 6.8cm  
 Cutting Hole 14.2 x 3.5cm  
 Beam Angle 40°  
 Non Dimmable ☒  
 Material Stainless Steel - Aluminium - Tempered Glass  
 Depth Required JT: 6cm  
 Driver Included  
 Color Sandy Black / **Code E332**  
 Sandy White / **Code E333**

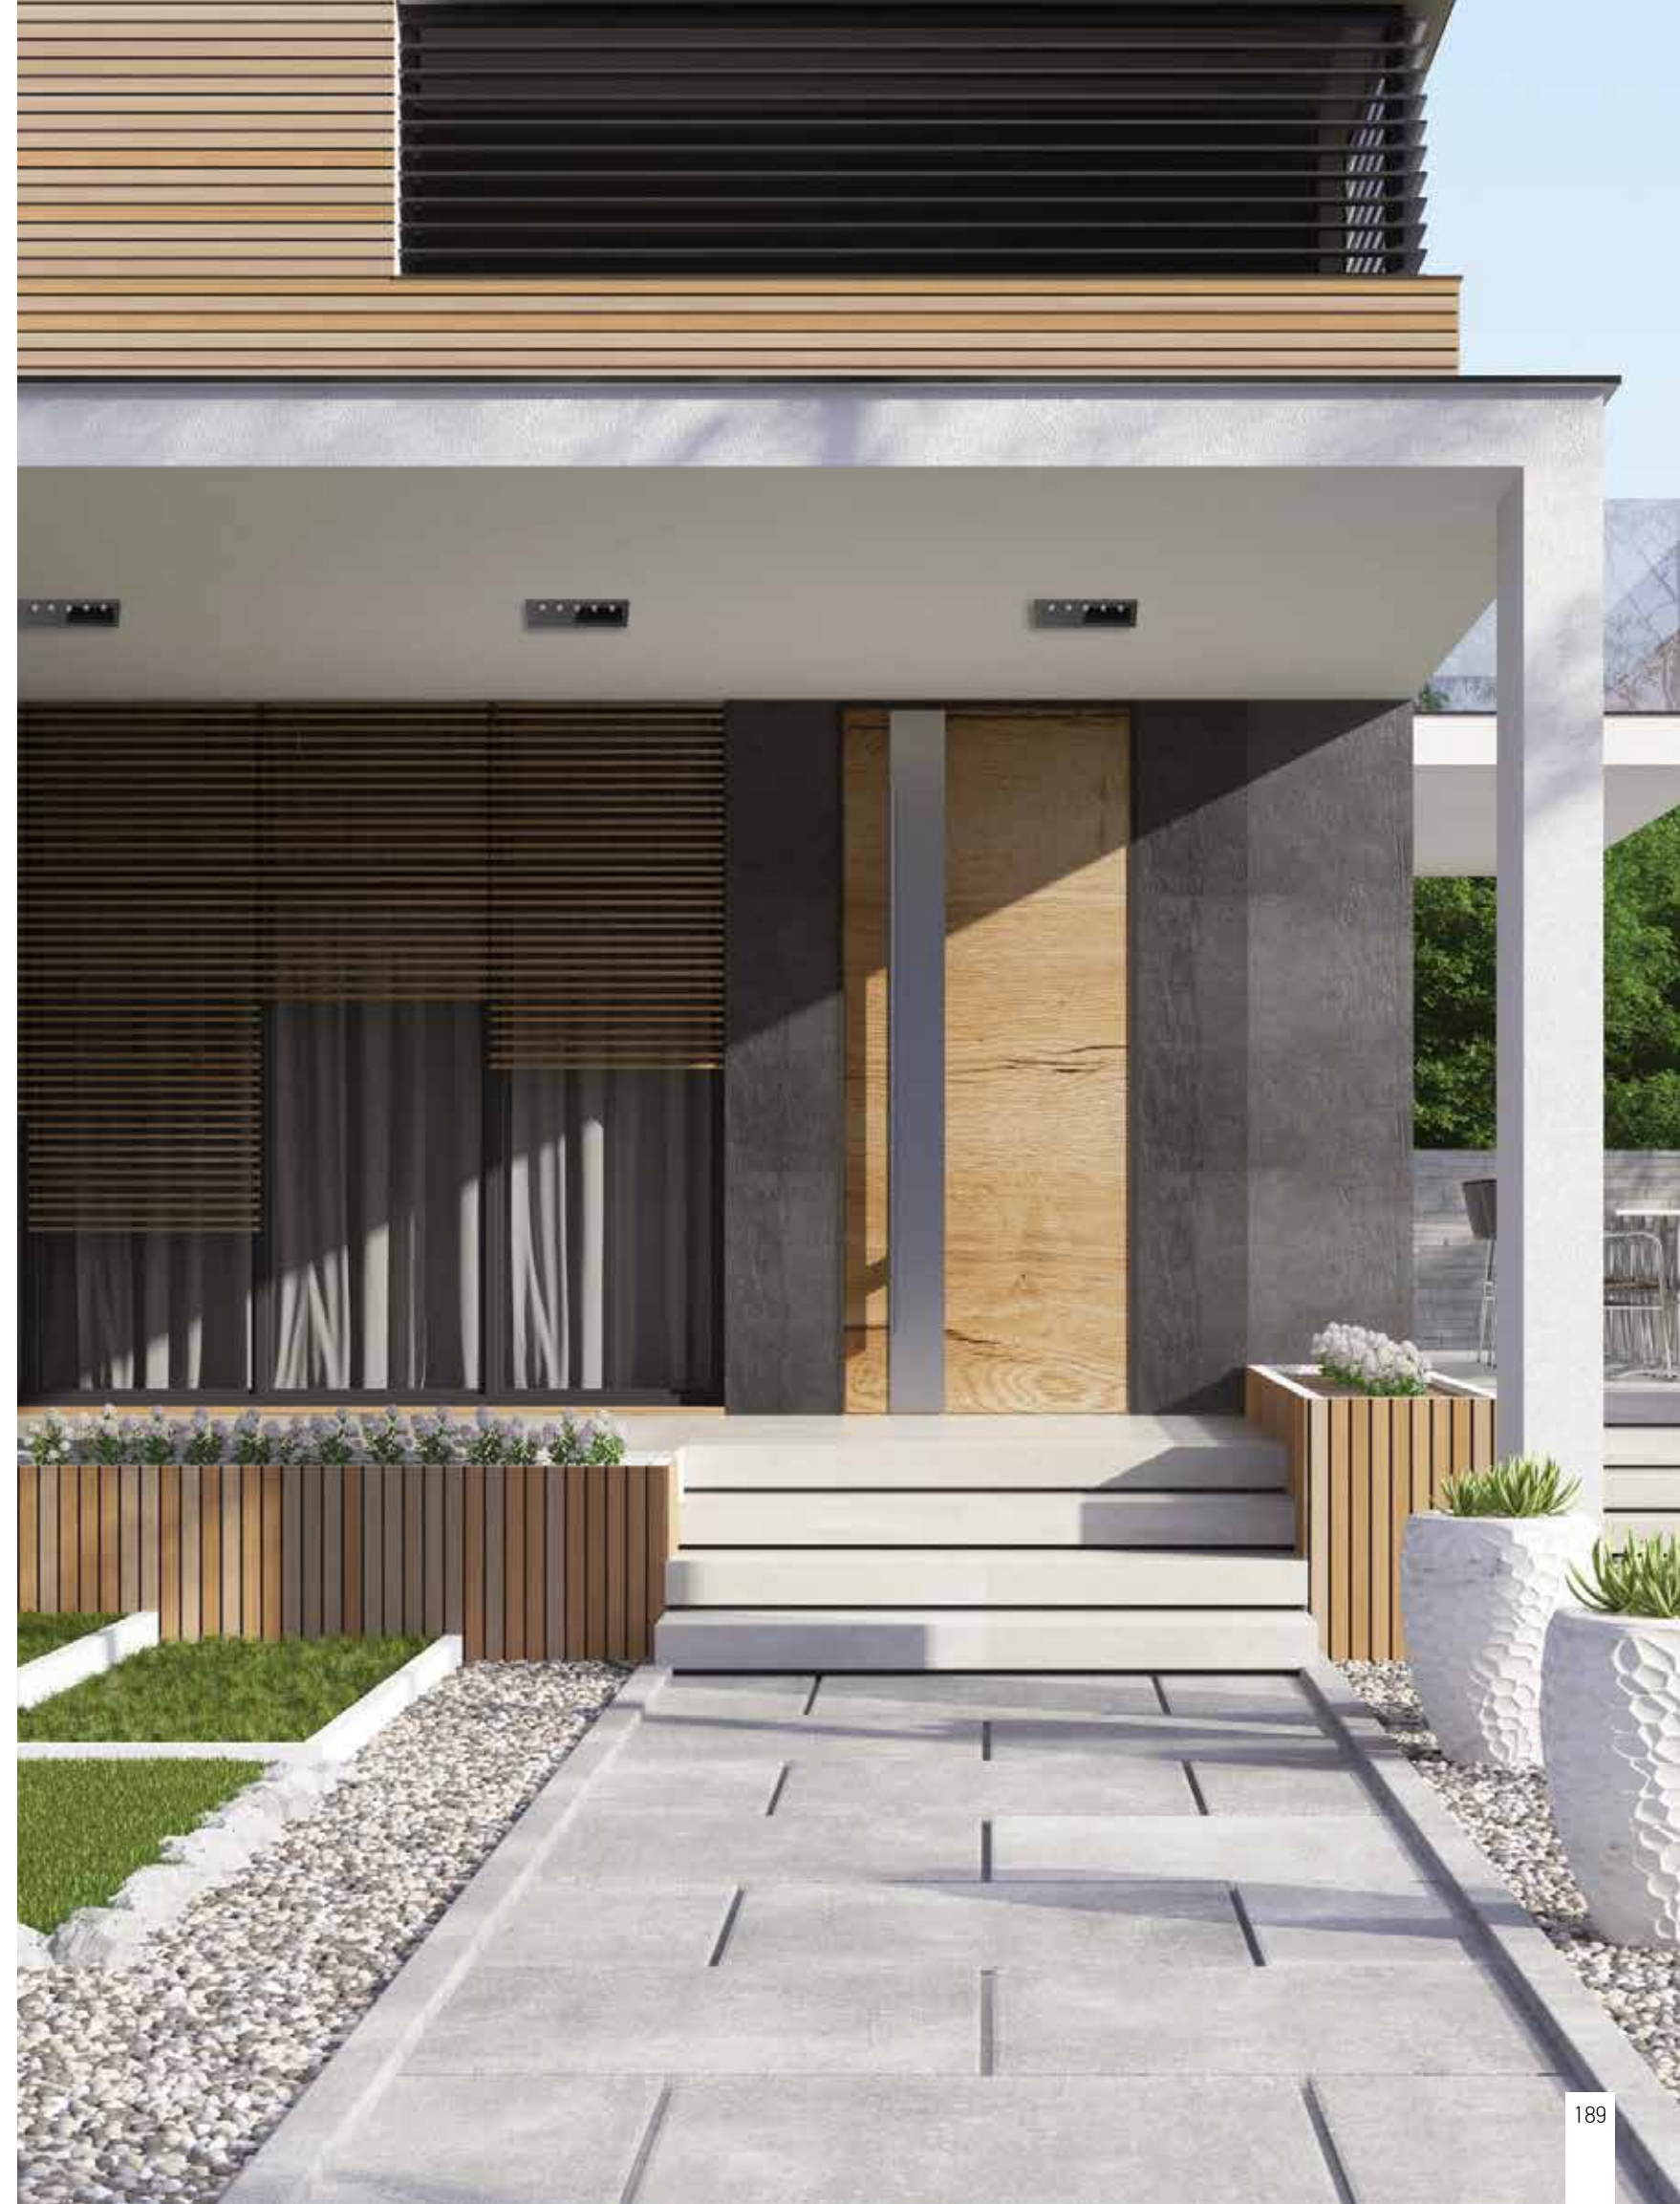

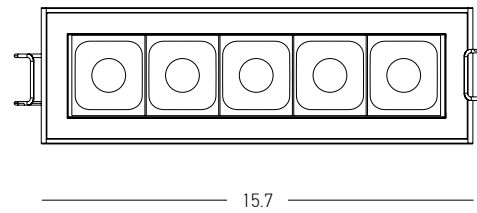





Power 12W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 561Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 8cm H: 5.5cm  
 Beam Angle 120°  
 Material Aluminium  
 Color Sandy Black / **Code S131**  
 Color Sandy White / **Code S132**




Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 454Lm  
 Cri 80  
 IP 54  
 Dimensions Ø: 6.5cm H: 4.5cm  
 Beam Angle 120°  
 Material Aluminium  
 Color Sandy Black / **Code S133**  
 Color Sandy White / **Code S134**

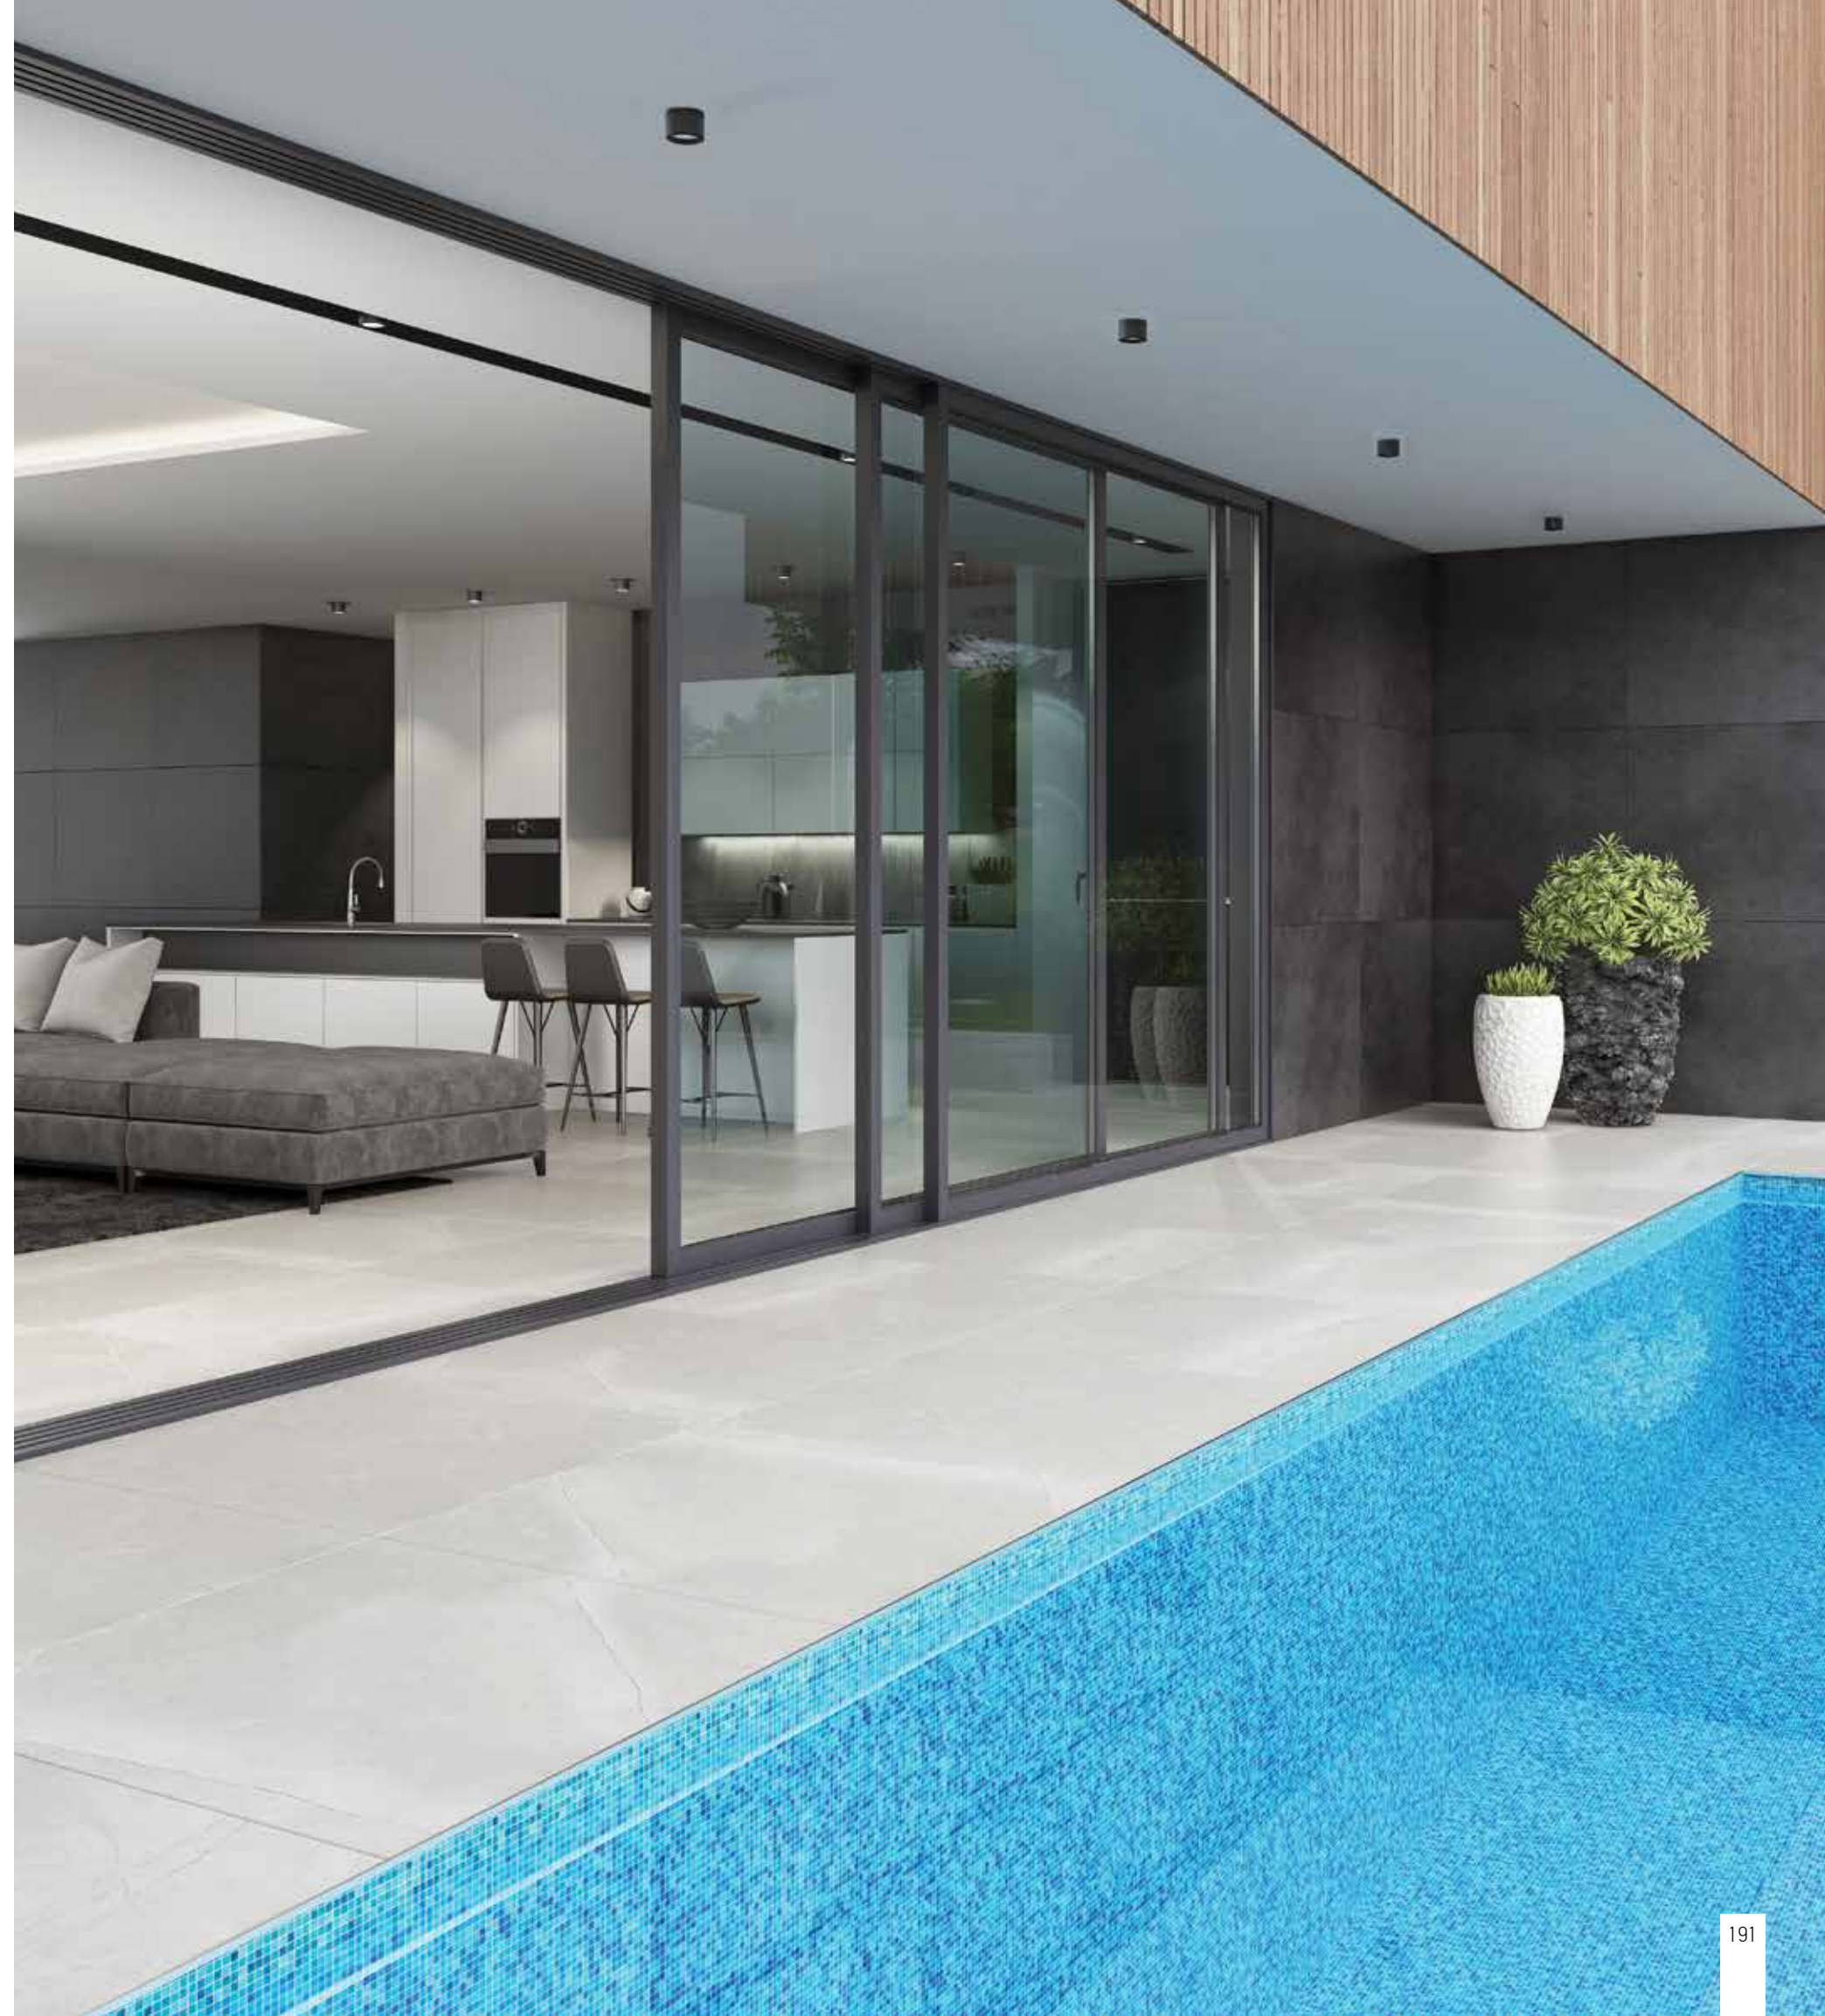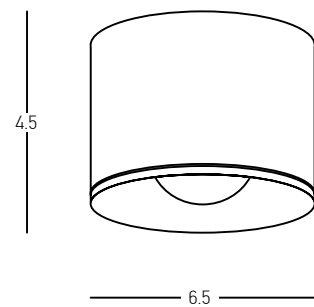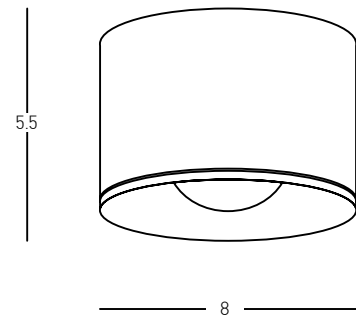






Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 500Lm  
 Cri 90  
 IP 54  
 Dimensions Ø: 6.3cm H: 7.5cm  
 Beam Angle 20°  
 Material Aluminium - Glass  
 Special Feature Driver Included  
 Color Sandy Black / **Code S112**  
 Color Sandy White / **Code S113**

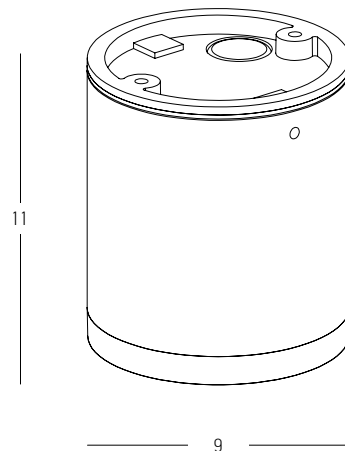


Power 8W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 597Lm  
 Cri 80  
 IP 65  
 Dimensions Ø: 9cm H: 11cm  
 Material Aluminium - Tempered Glass  
 Color Graphite / **Code E340**






Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 6cm H: 10.5cm  
 Material Aluminium - Glass Diffuser  
 Color Sandy Black / **Code E219**  
 Color Sandy White / **Code E220**

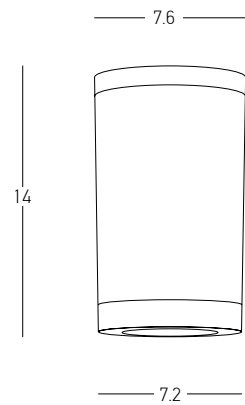


Bulb 1x GU10 LED  
 Power 7W MAX  
 Input 220-240V, 50/60Hz  
 IP 54  
 Dimensions Ø: 7.2-7.6cm H: 14cm  
 Material ABS - Acrylic  
 Color White Matt / **Code E308**  
 Color Black Matt / **Code E309**



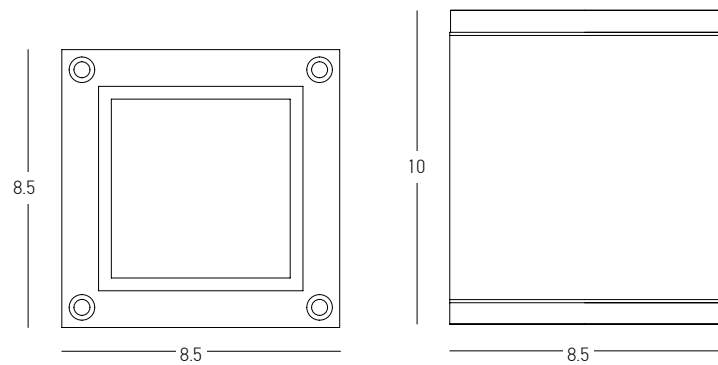


Bulb 1x GU10  
Power 35W MAX  
Input 220-240V, 50/60Hz  
IP 65  
Dimensions L: 8.5cm W: 8.5cm H: 10cm  
Material Aluminium - Glass  
Color Graphite / **Code E269**  
Color Sandy White / **Code E270**





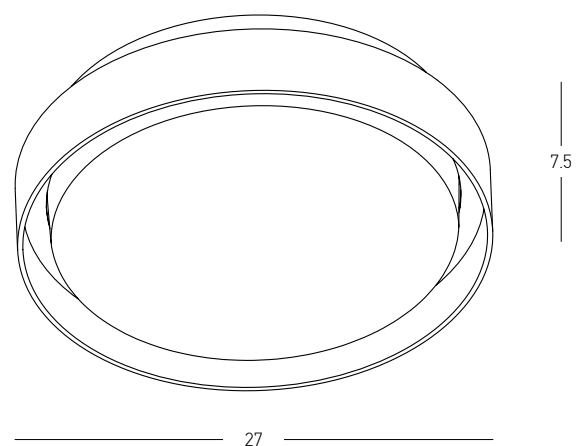


Power 20W  
Input 220-240V, 50/60Hz  
Color Temperature 3000K  
Lumen 2041Lm  
Cri 80  
IP 65  
Dimensions Ø: 27cm H: 7.5cm  
Material Aluminium - PC Diffuser  
Special Feature Driver Included  
Color Sandy White / **Code E326**  
Color Graphite / **Code E327**

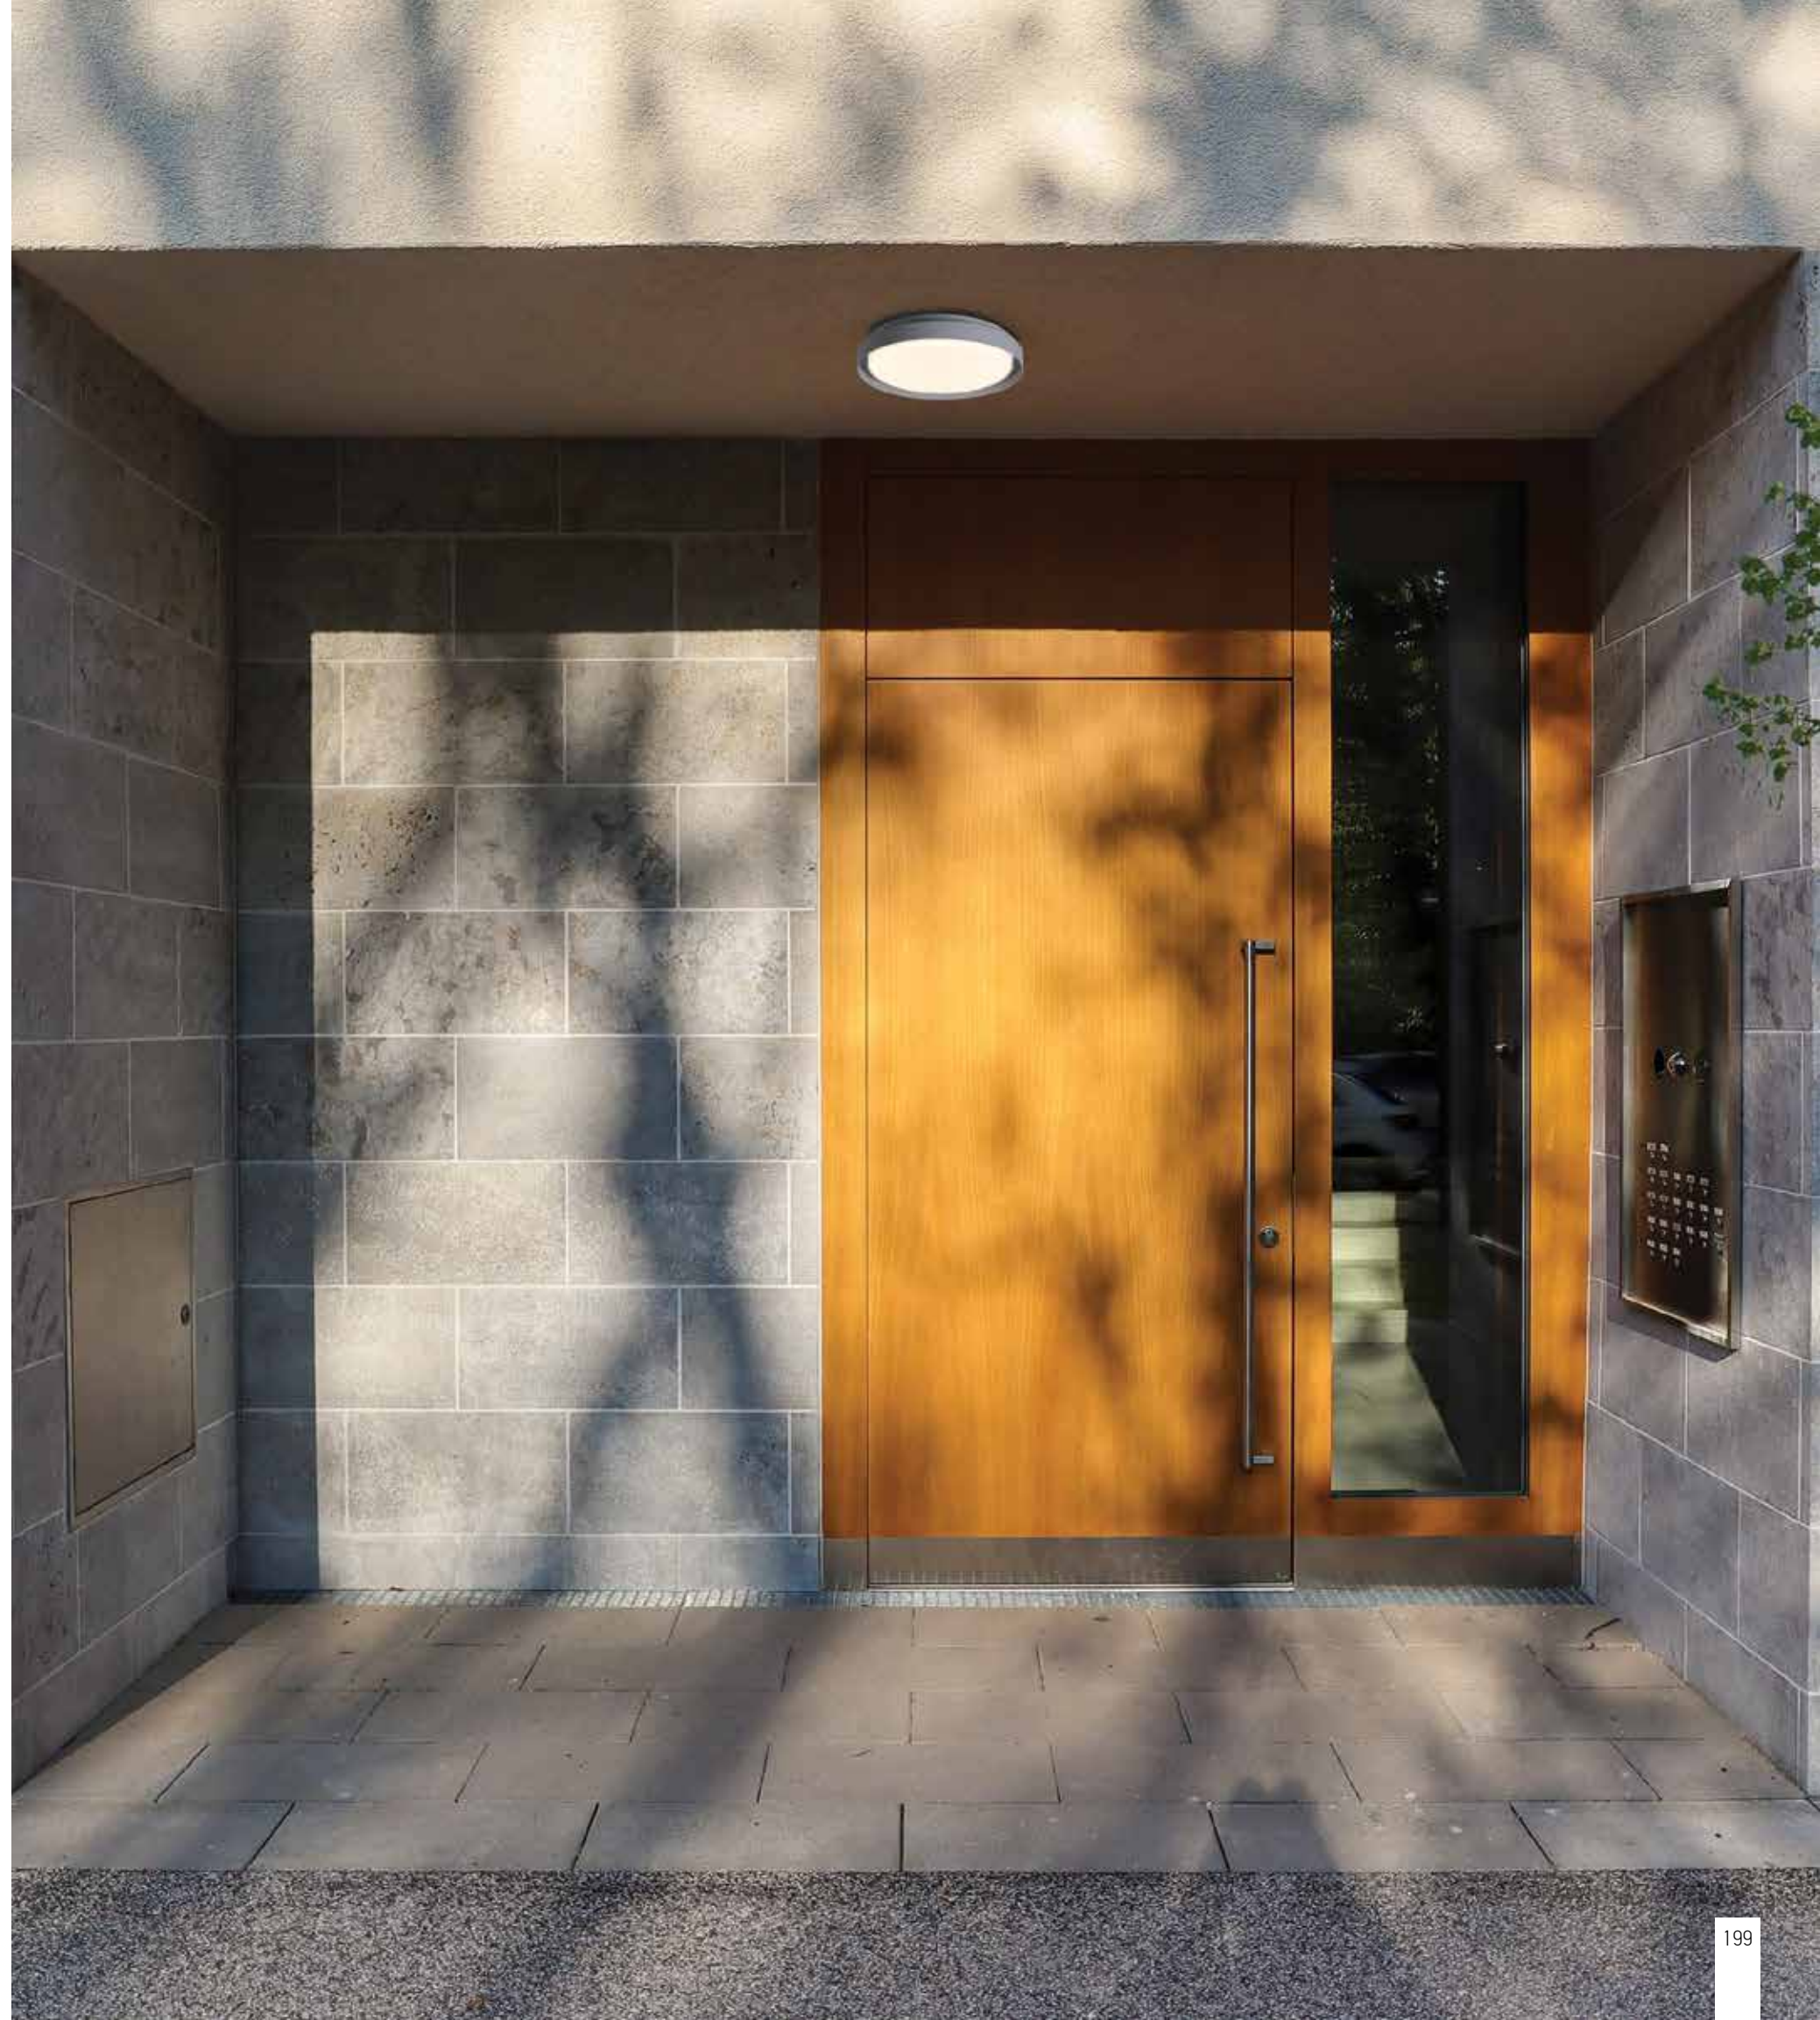

INGROUND | p.200-213

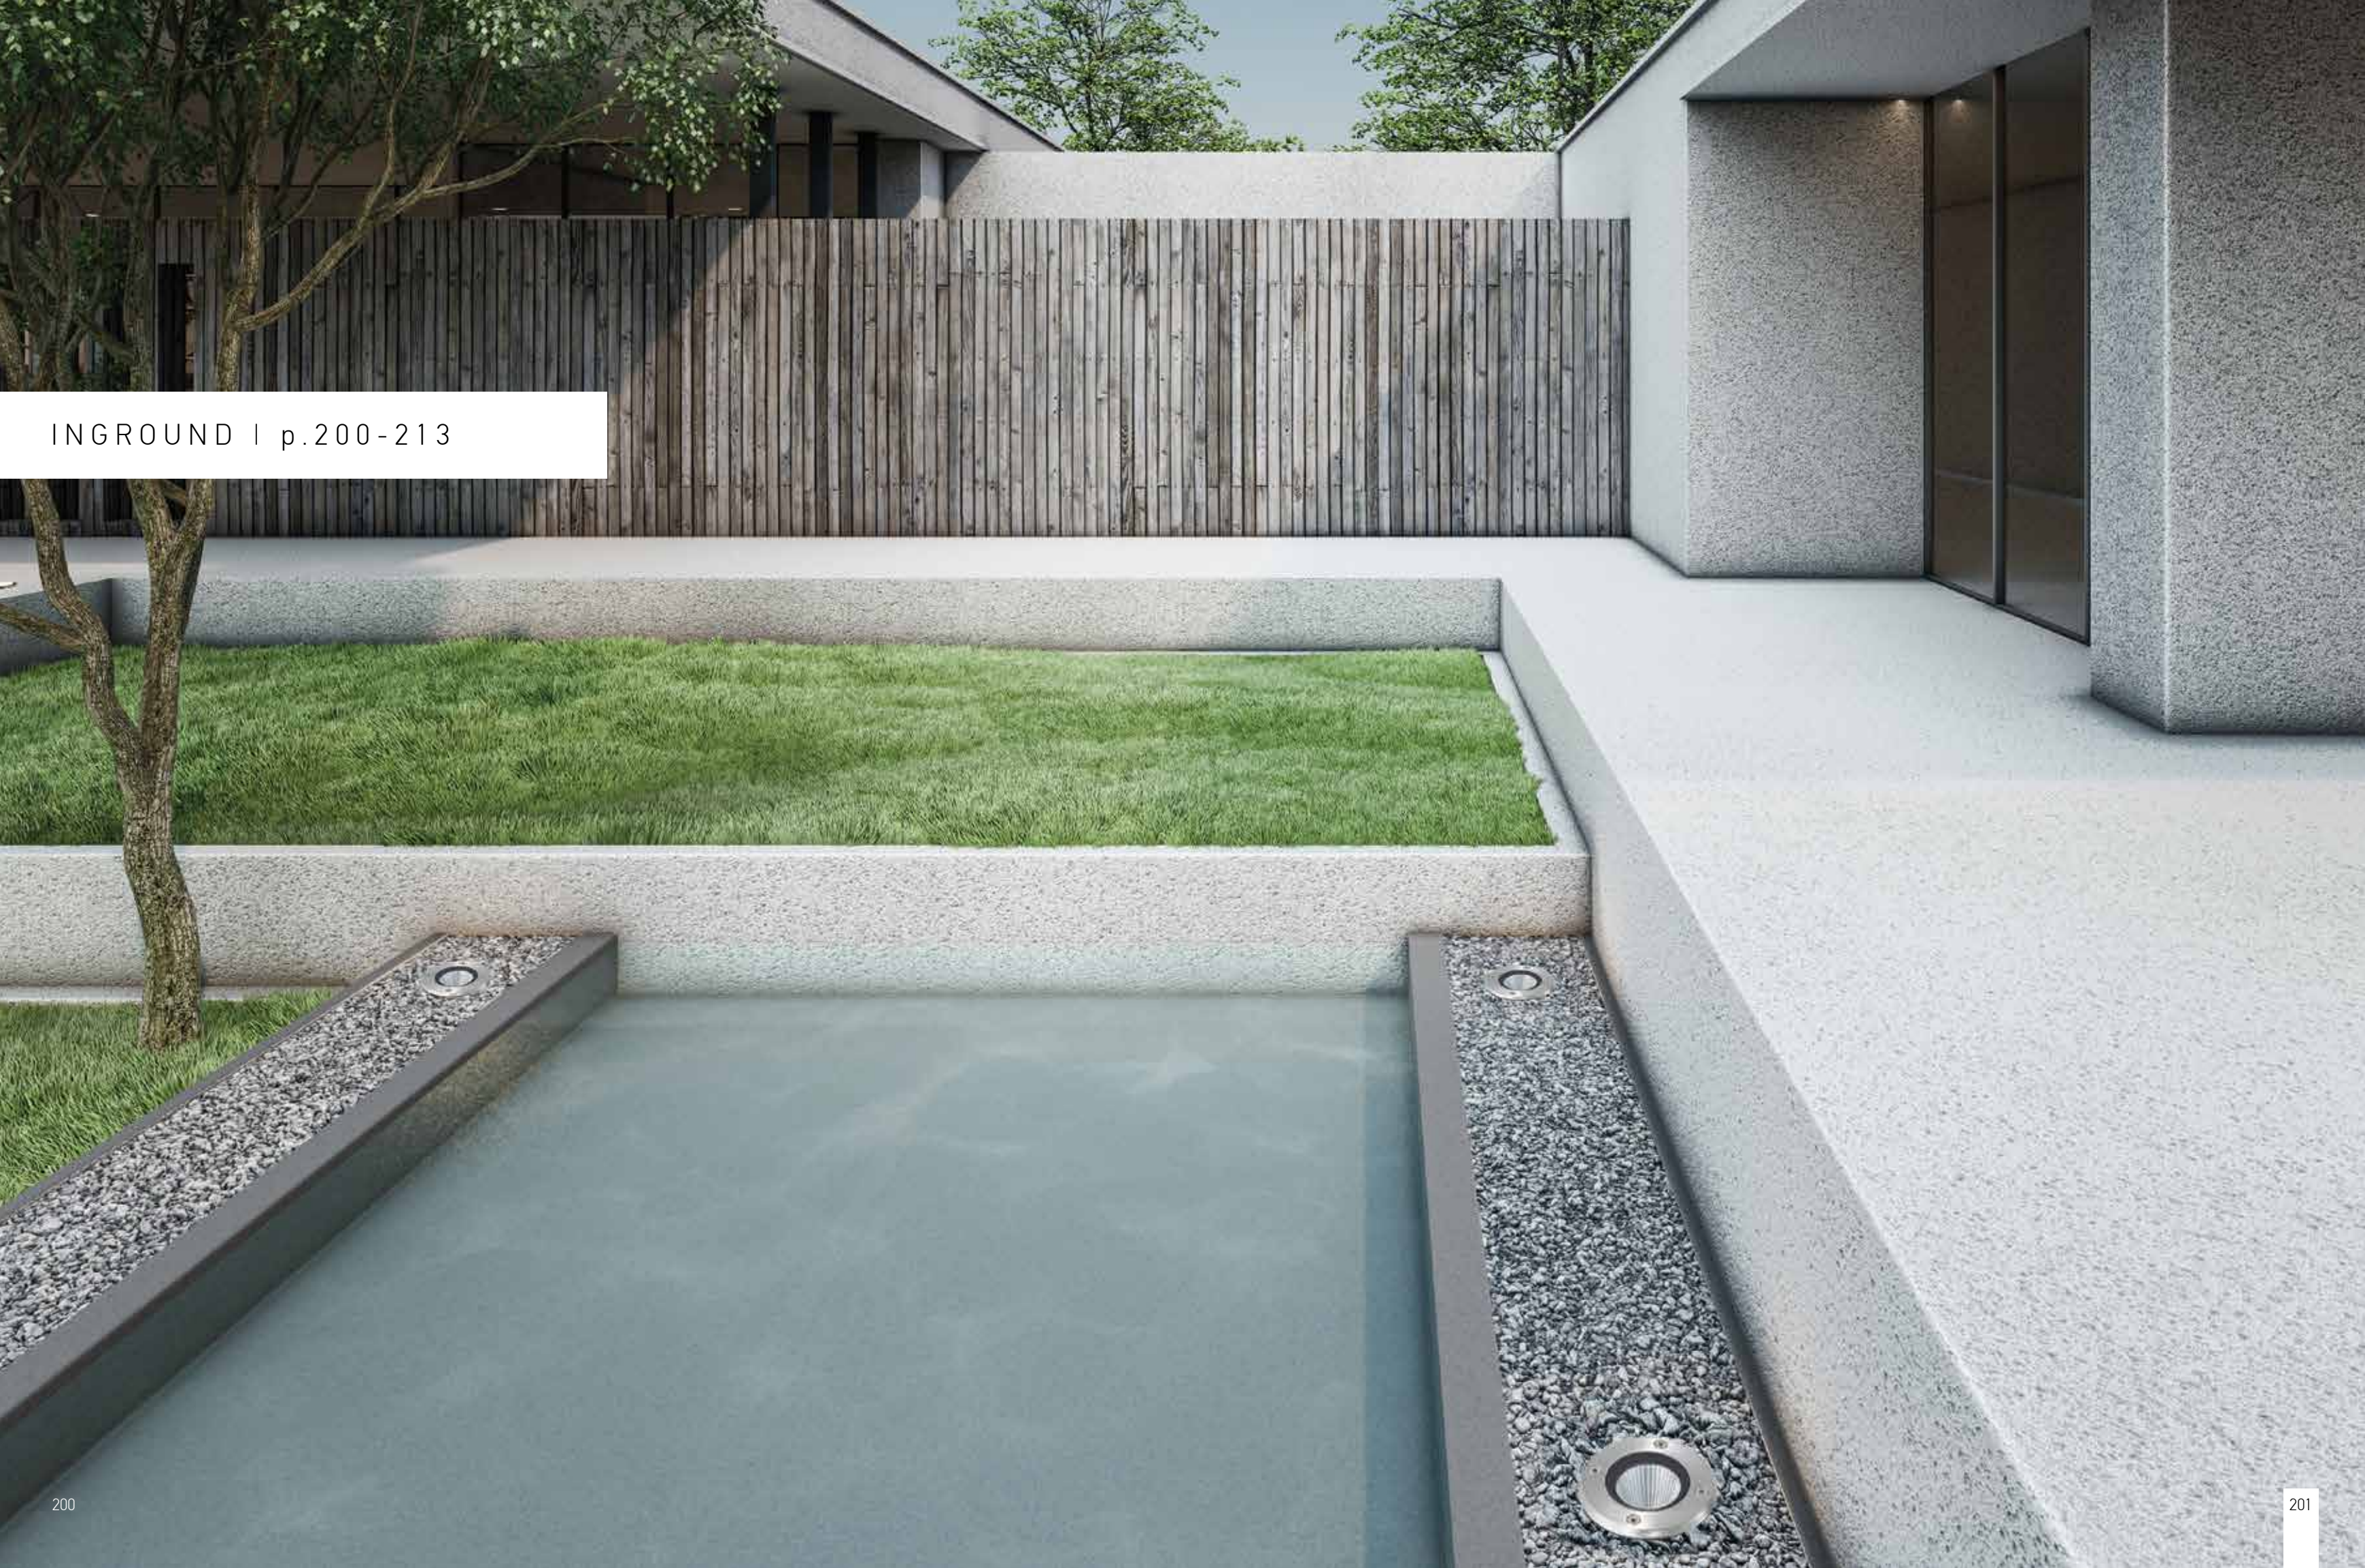


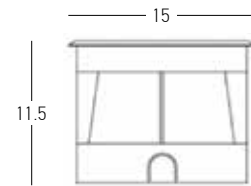


Asymmetric

Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 15cm H: 11.5cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11.5cm  
 Recessed Mounting Box Included  
 Special Feature Asymmetric  
 50cm Cable Available  
 Driver Included

Color

Stainless Steel / **Code E363**





Asymmetric

Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 13cm H: 14cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11.5cm  
 Recessed Mounting Box Included  
 Special Feature Asymmetric  
 50cm Cable Available  
 Driver Included



Color

Stainless Steel / **Code E362**

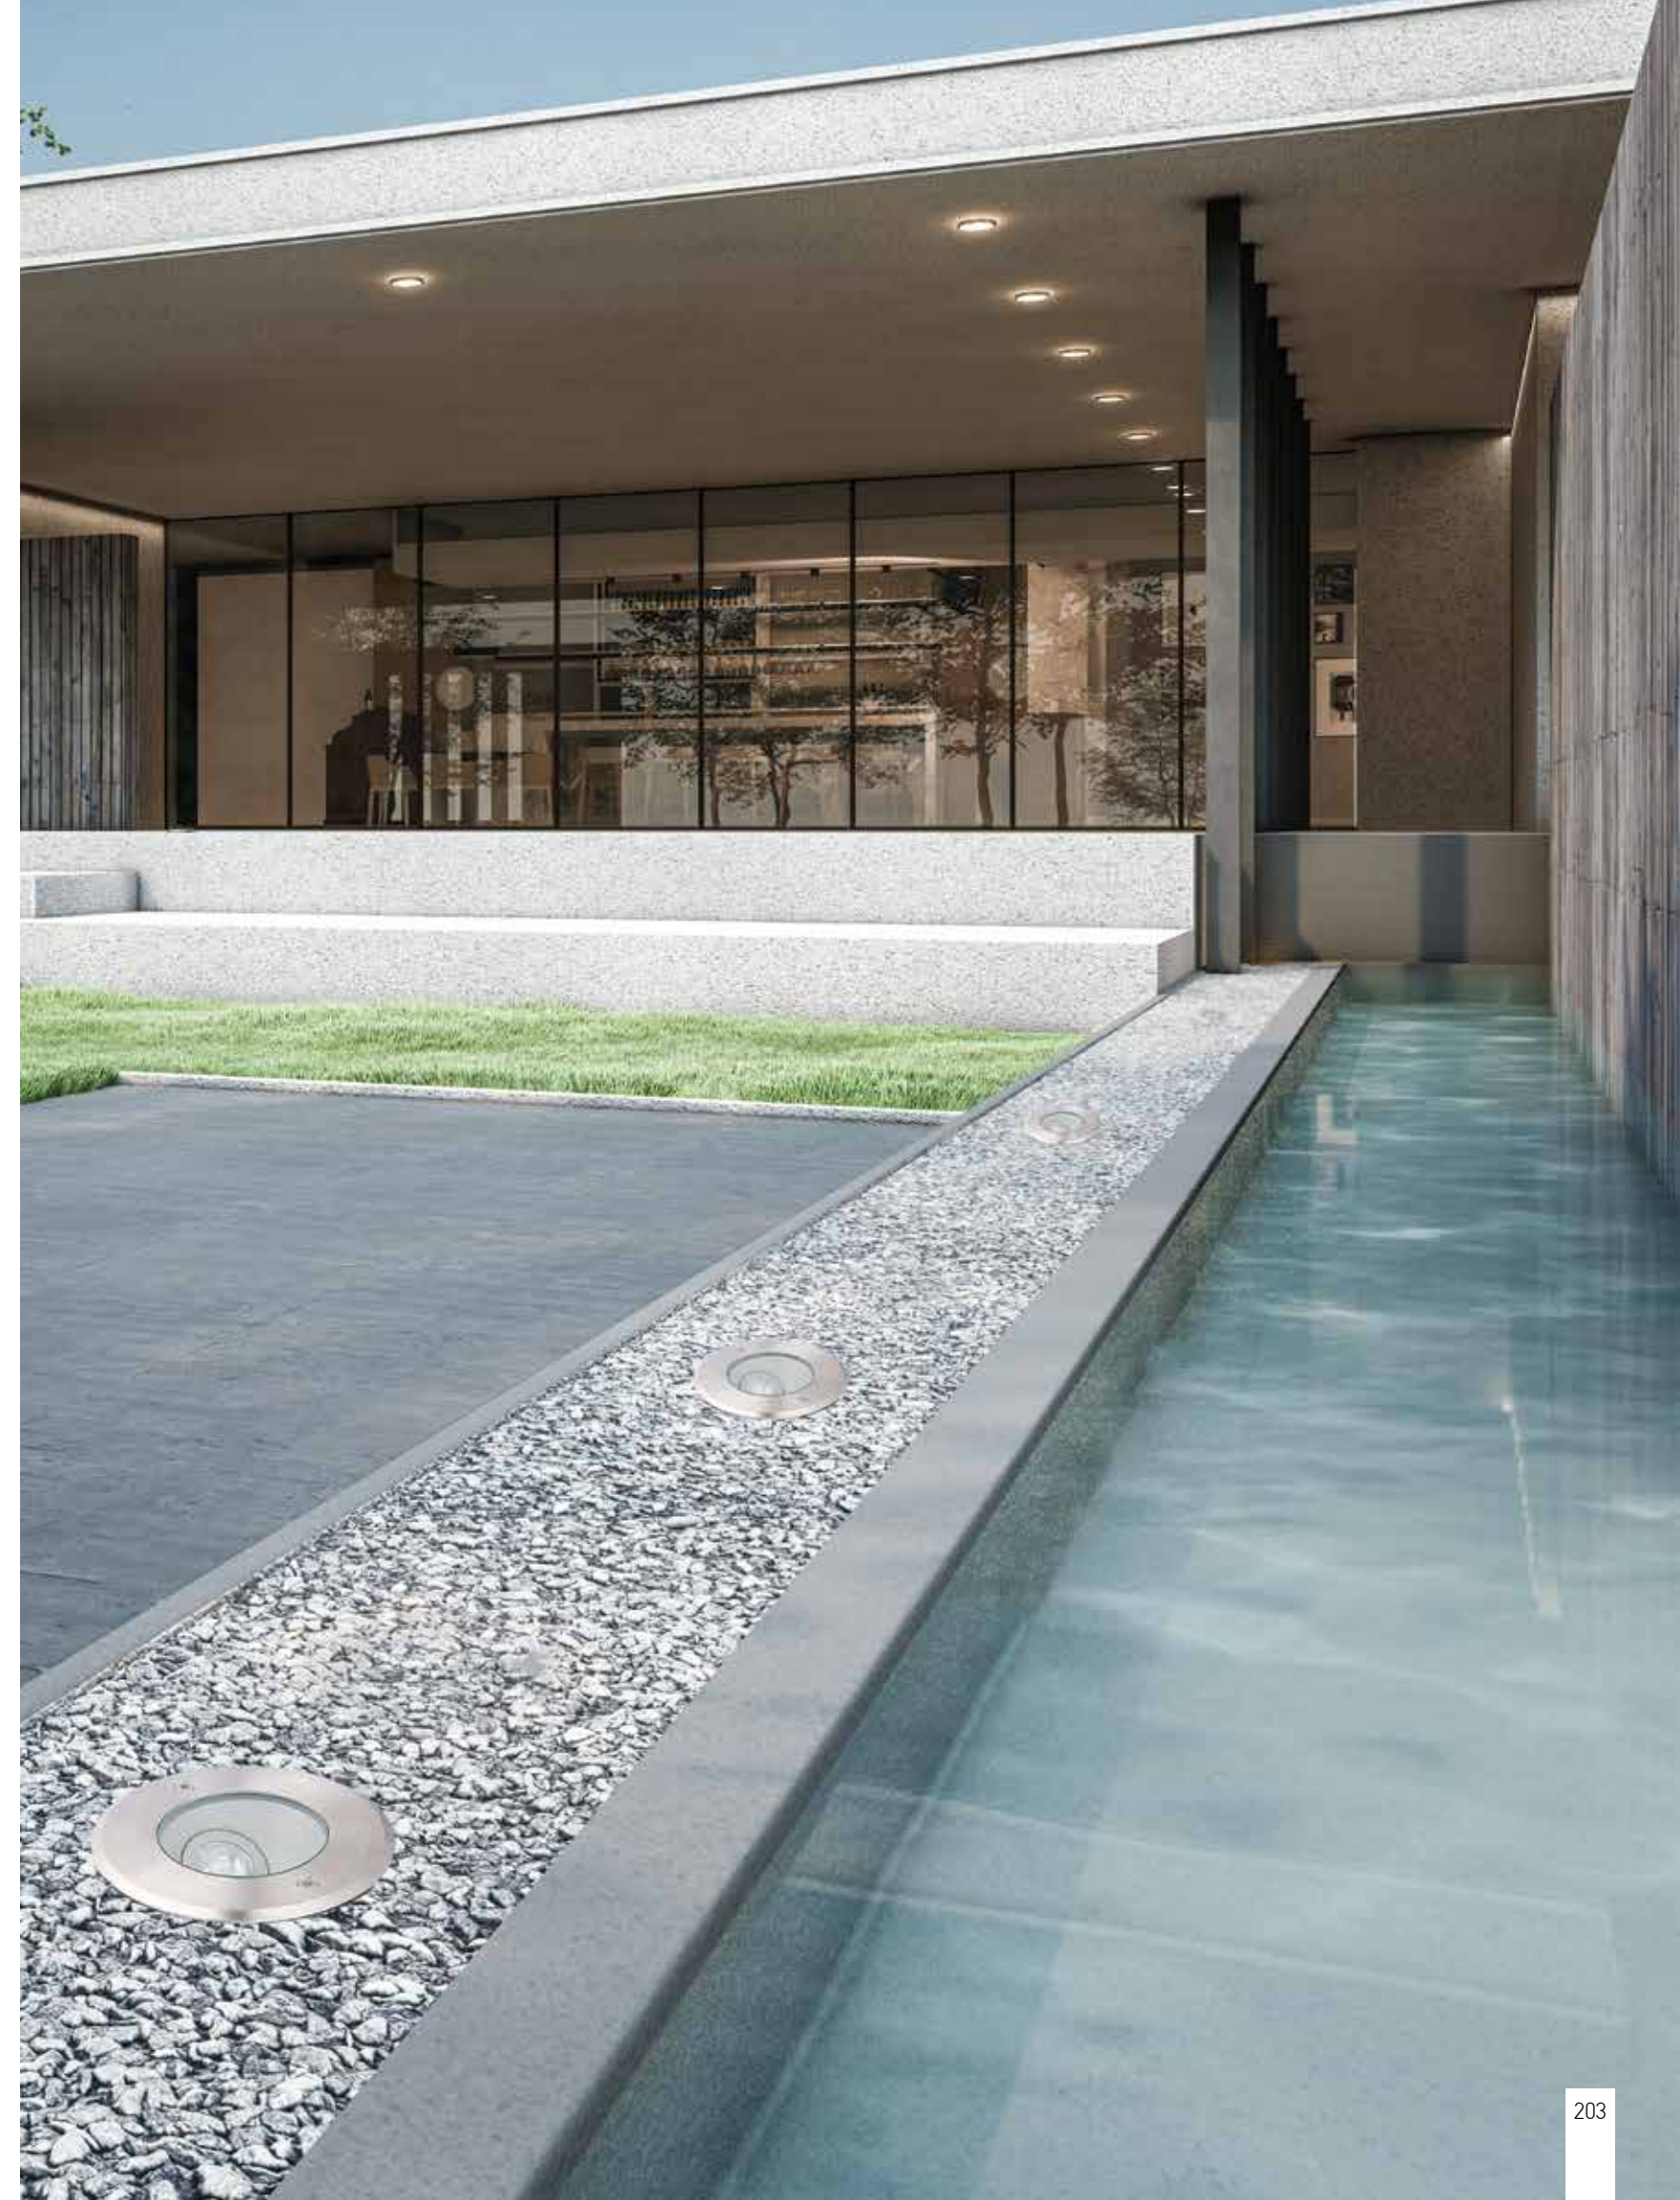





Power 0.2W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 23Lm  
 Cri 80  
 IP 68  
 IK 10  
 Dimensions Ø: 1.5cm H: 3.5cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11: 5cm  
 Special Feature 50cm Cable Available  
 Recommended Driver D-20-24 (Not Included)  
 Color Stainless Steel / **Code E364**

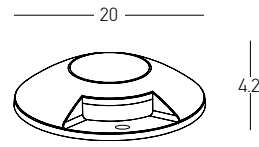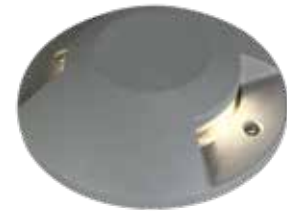


Power 2x 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 600Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions Ø: 20cm H: 4.2cm  
 Material Aluminium  
 Special Feature Surface Ground  
 Driver Included  
 Color Grey / **Code Z69058-B**

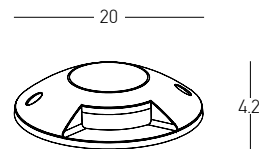


Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 300Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions Ø: 20cm H: 4.2cm  
 Material Aluminium  
 Special Feature Surface Ground  
 Driver Included  
 Color Grey / **Code Z69058-A**

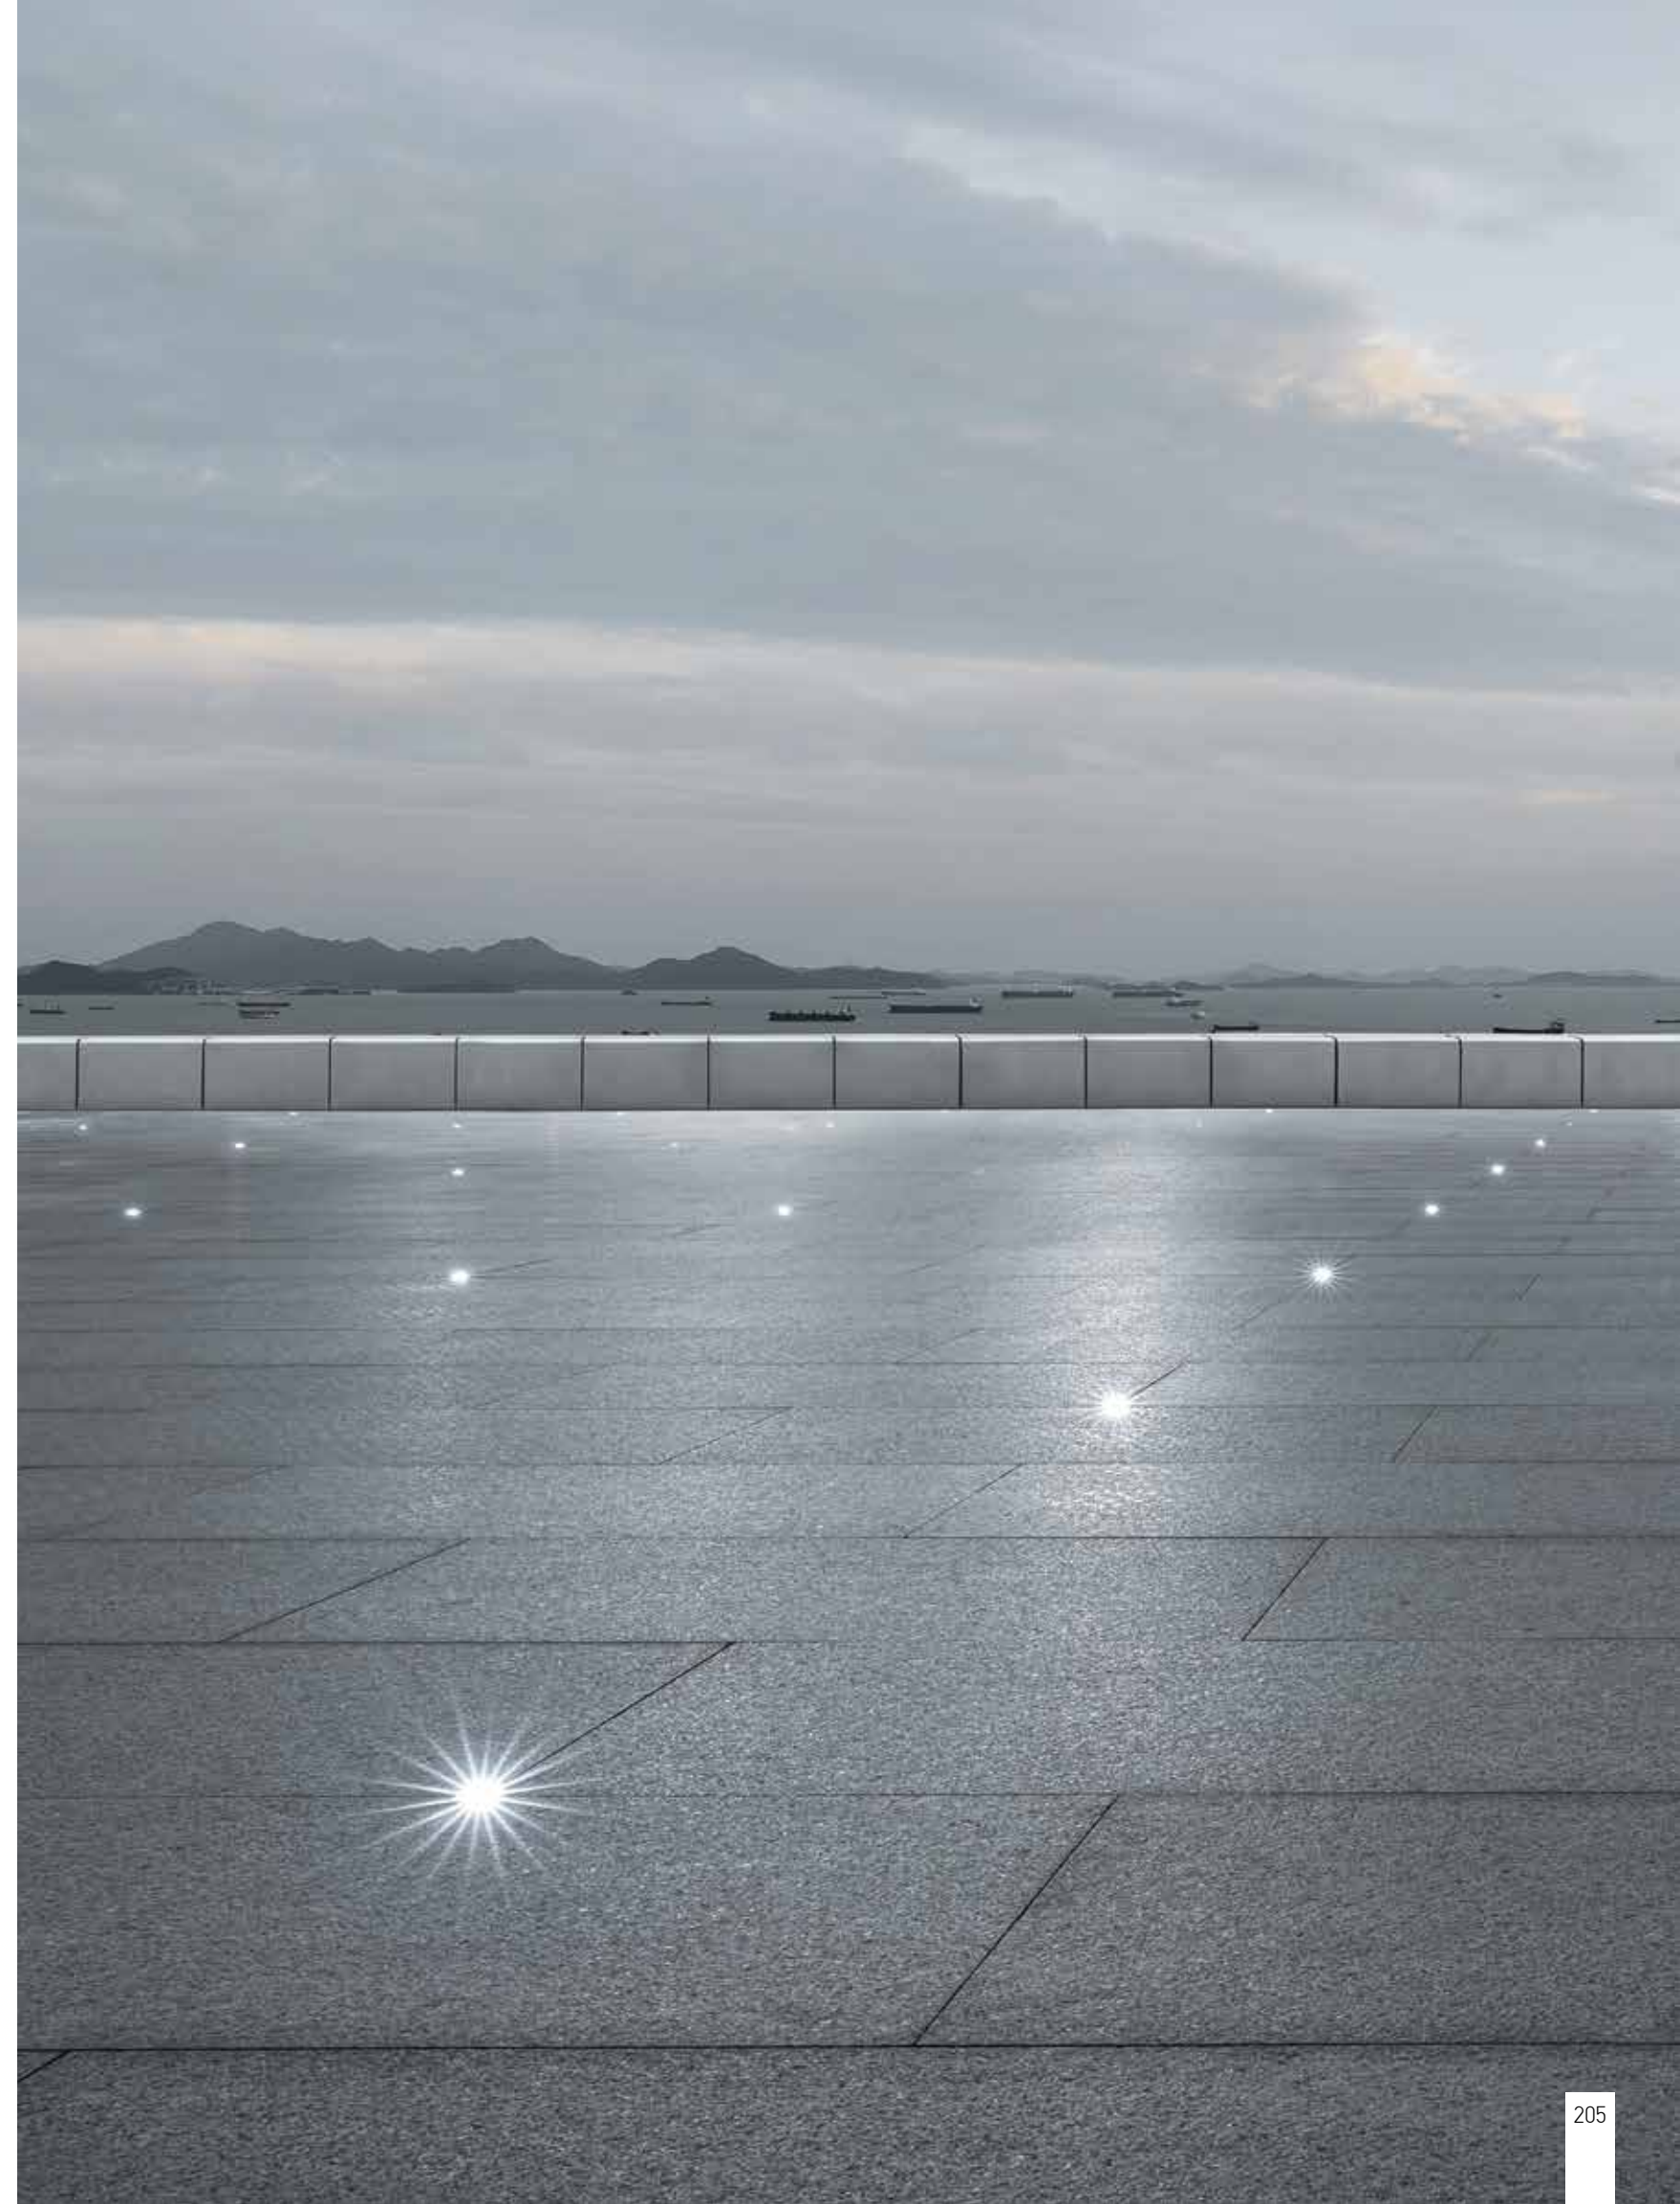


OUTDOOR LIGHTING | INGROUND




Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 232Lm  
 Cri 80  
 IP 65  
 IK 8  
 Dimensions Ø: 4.5cm H: 9.3cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 12cm  
 Recessed Mounting Box Included  
 Recommended Driver D-20-24 (Not Included)  
 Color Aluminium / **Code E178**




Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 150Lm  
 Cri 80  
 IP 65  
 IK 10  
 Dimensions Ø: 4.8cm H: 10cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 13cm  
 Recessed Mounting Box Included  
 Recommended Driver D-20-24 (Not Included)  
 Color Aluminium / **Code E180**



Power 3W  
 Input 24V  
 Color Temperature 3000K  
 Lumen 95Lm  
 Cri 80  
 IP 65  
 IK 10  
 Dimensions Ø: 4.8cm H: 10cm  
 Material Aluminium - Stainless Steel - PC Diffuser  
 Depth Required 13cm  
 Recessed Mounting Box Included  
 Recommended Driver D-20-24 (Not Included)  
 Color Aluminium / **Code E179**

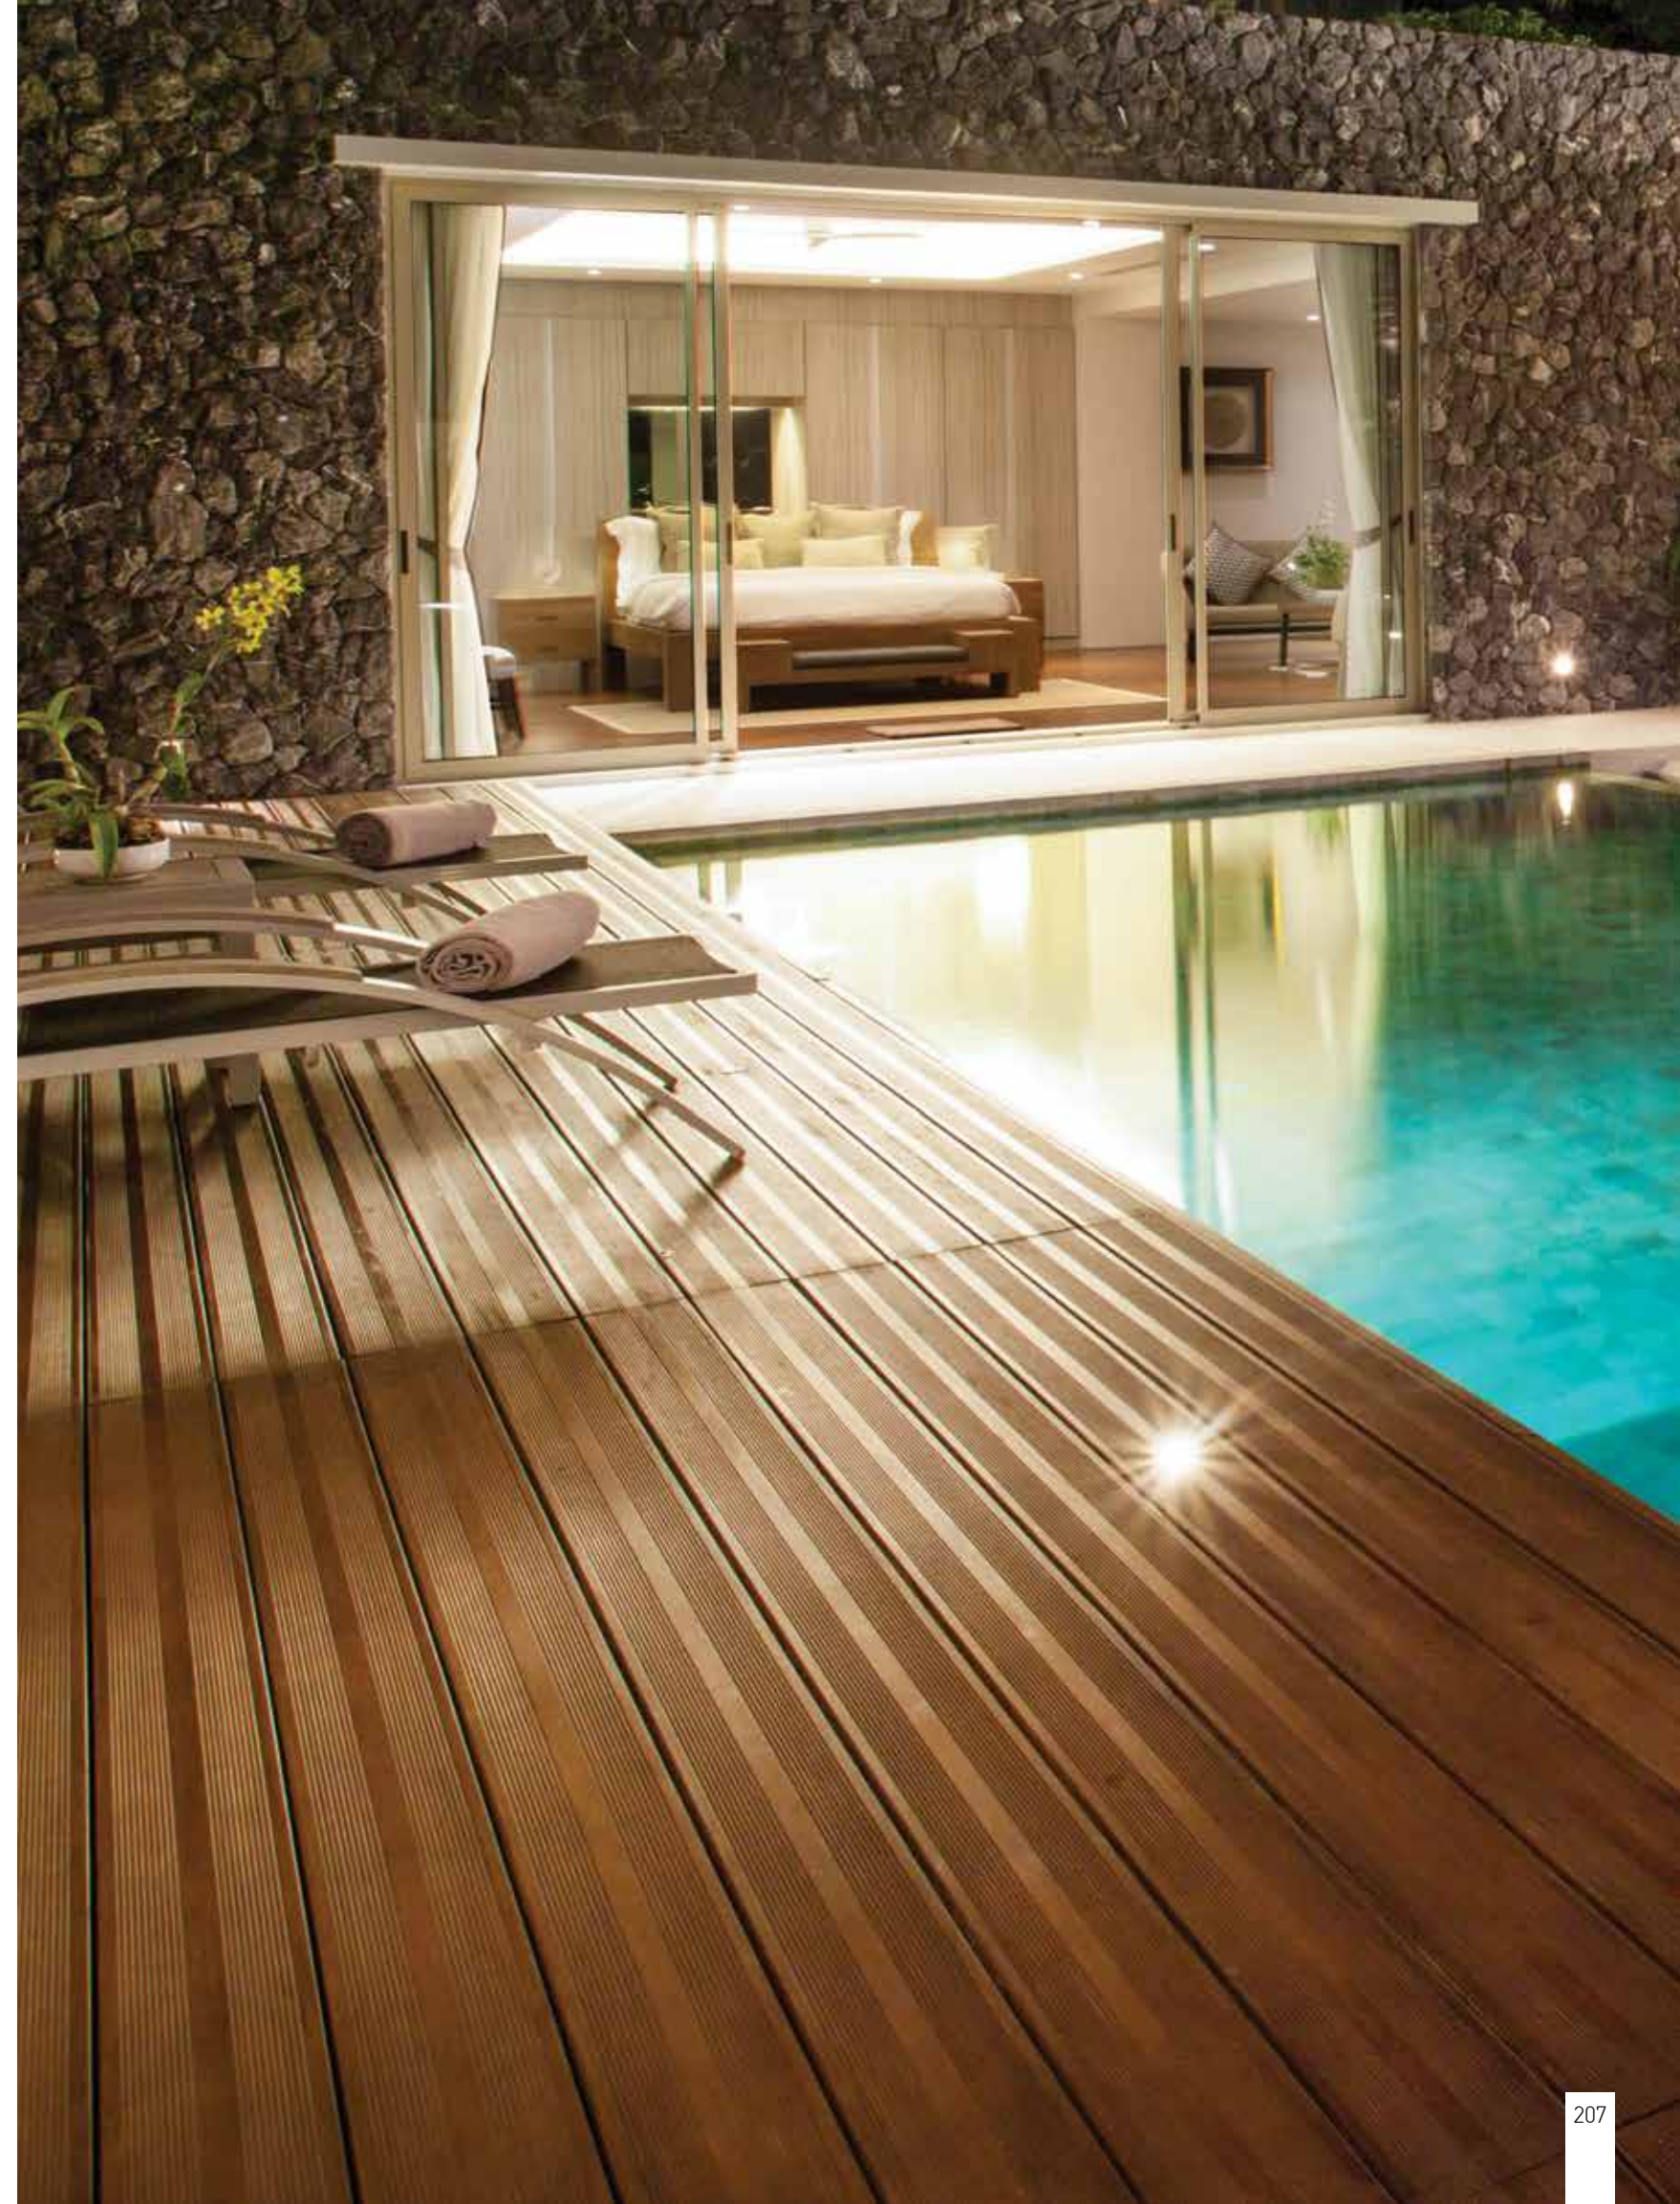




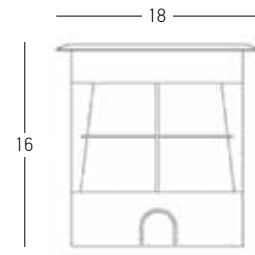


Power 15W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 1200Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 18cm H: 16cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 17cm  
 Recessed Mounting Box Included  
 Special Feature Externally Adjustable Light on the frame  
 50cm Cable Available  
 Driver Included

Color Stainless Steel / Code E361




Adjustable




Power 7W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 560Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 13cm H: 14cm  
 Beam Angle 45°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 15cm  
 Recessed Mounting Box Included  
 Special Feature Internal Adjustable Light  
 50cm Cable Available  
 Driver Included

Color Stainless Steel / Code E360




Adjustable







Bulb 1x GU10 LED  
 Power 10W MAX  
 Input 220-240V, 50/60Hz  
 IP 65  
 IK 8  
 Dimensions Ø: 10cm H: 10cm  
 Material Stainless Steel - Tempered Glass  
 Depth Required 11cm  
 Recessed Mounting Box Included  
 Special Feature 50cm Cable Available  
 GU10 Lampholder Included  
 Color Stainless Steel / **Code E359**






Power 6W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 618Lm  
 Cri 80  
 IP 67  
 IK 8  
 Dimensions Ø: 10cm H: 9.5cm  
 Beam Angle 36°  
 Material Stainless Steel - Tempered Glass  
 Depth Required 12cm  
 Recessed Mounting Box Included  
 Special Feature Driver Included  
 Color Stainless Steel / **Code E189**

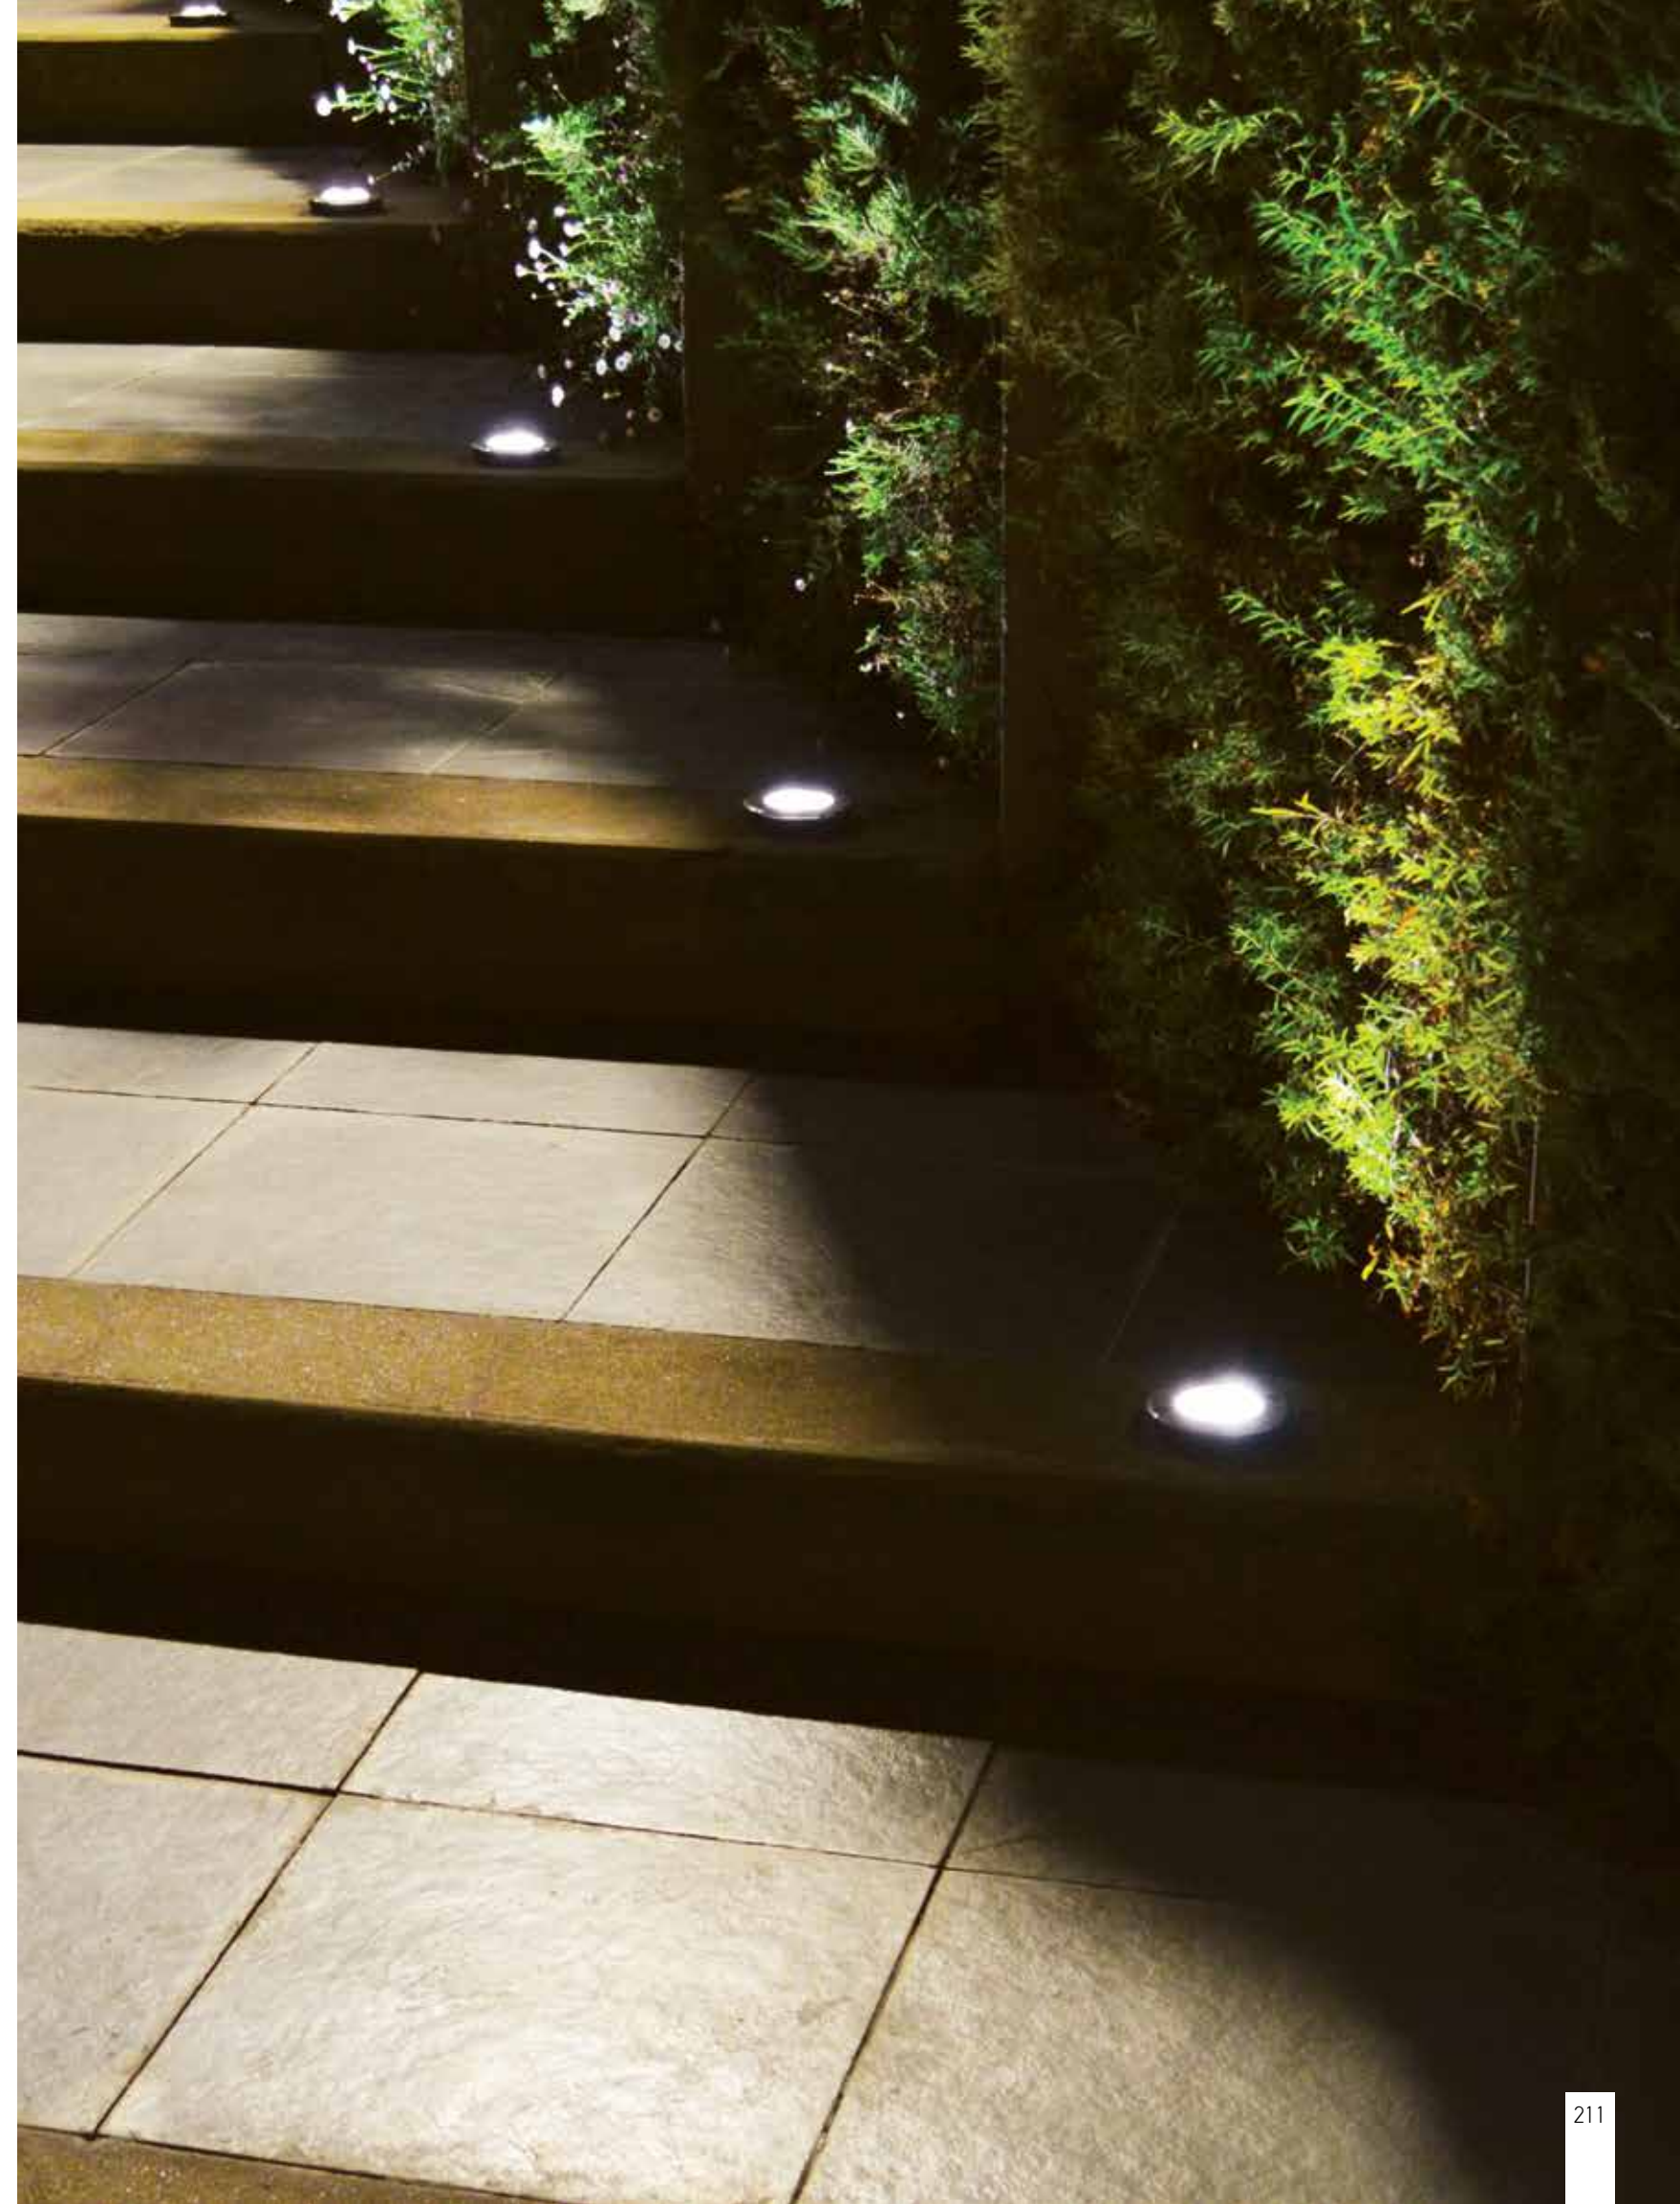

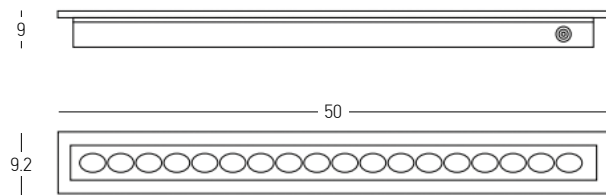


Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 720Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions L: 50cm W: 9.2cm H: 9cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 11cm  
 Recessed Mounting Box Included  
 Special Feature 50cm Cable Available  
 Driver Included

Color Stainless Steel / **Code E366**

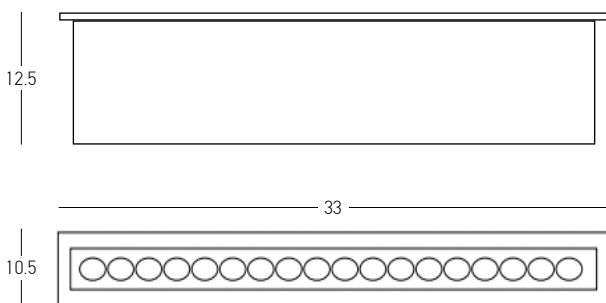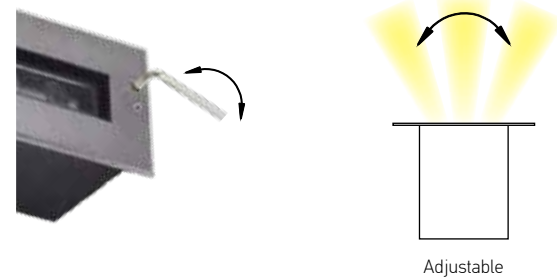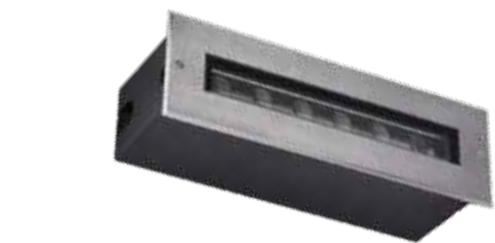

Power 9W  
 Input 220-240V, 50/60Hz  
 Color Temperature 3000K  
 Lumen 720Lm  
 Cri 80  
 IP 67  
 IK 10  
 Dimensions L: 33cm W: 10.5cm H: 12.5cm  
 Beam Angle 45°  
 Material Aluminium - Stainless Steel - Tempered Glass  
 Depth Required 14.5cm  
 Recessed Mounting Box Included  
 Special Feature Externally Adjustable Light on the frame  
 50cm Cable Available  
 Driver Included

Color Stainless Steel / **Code E365**

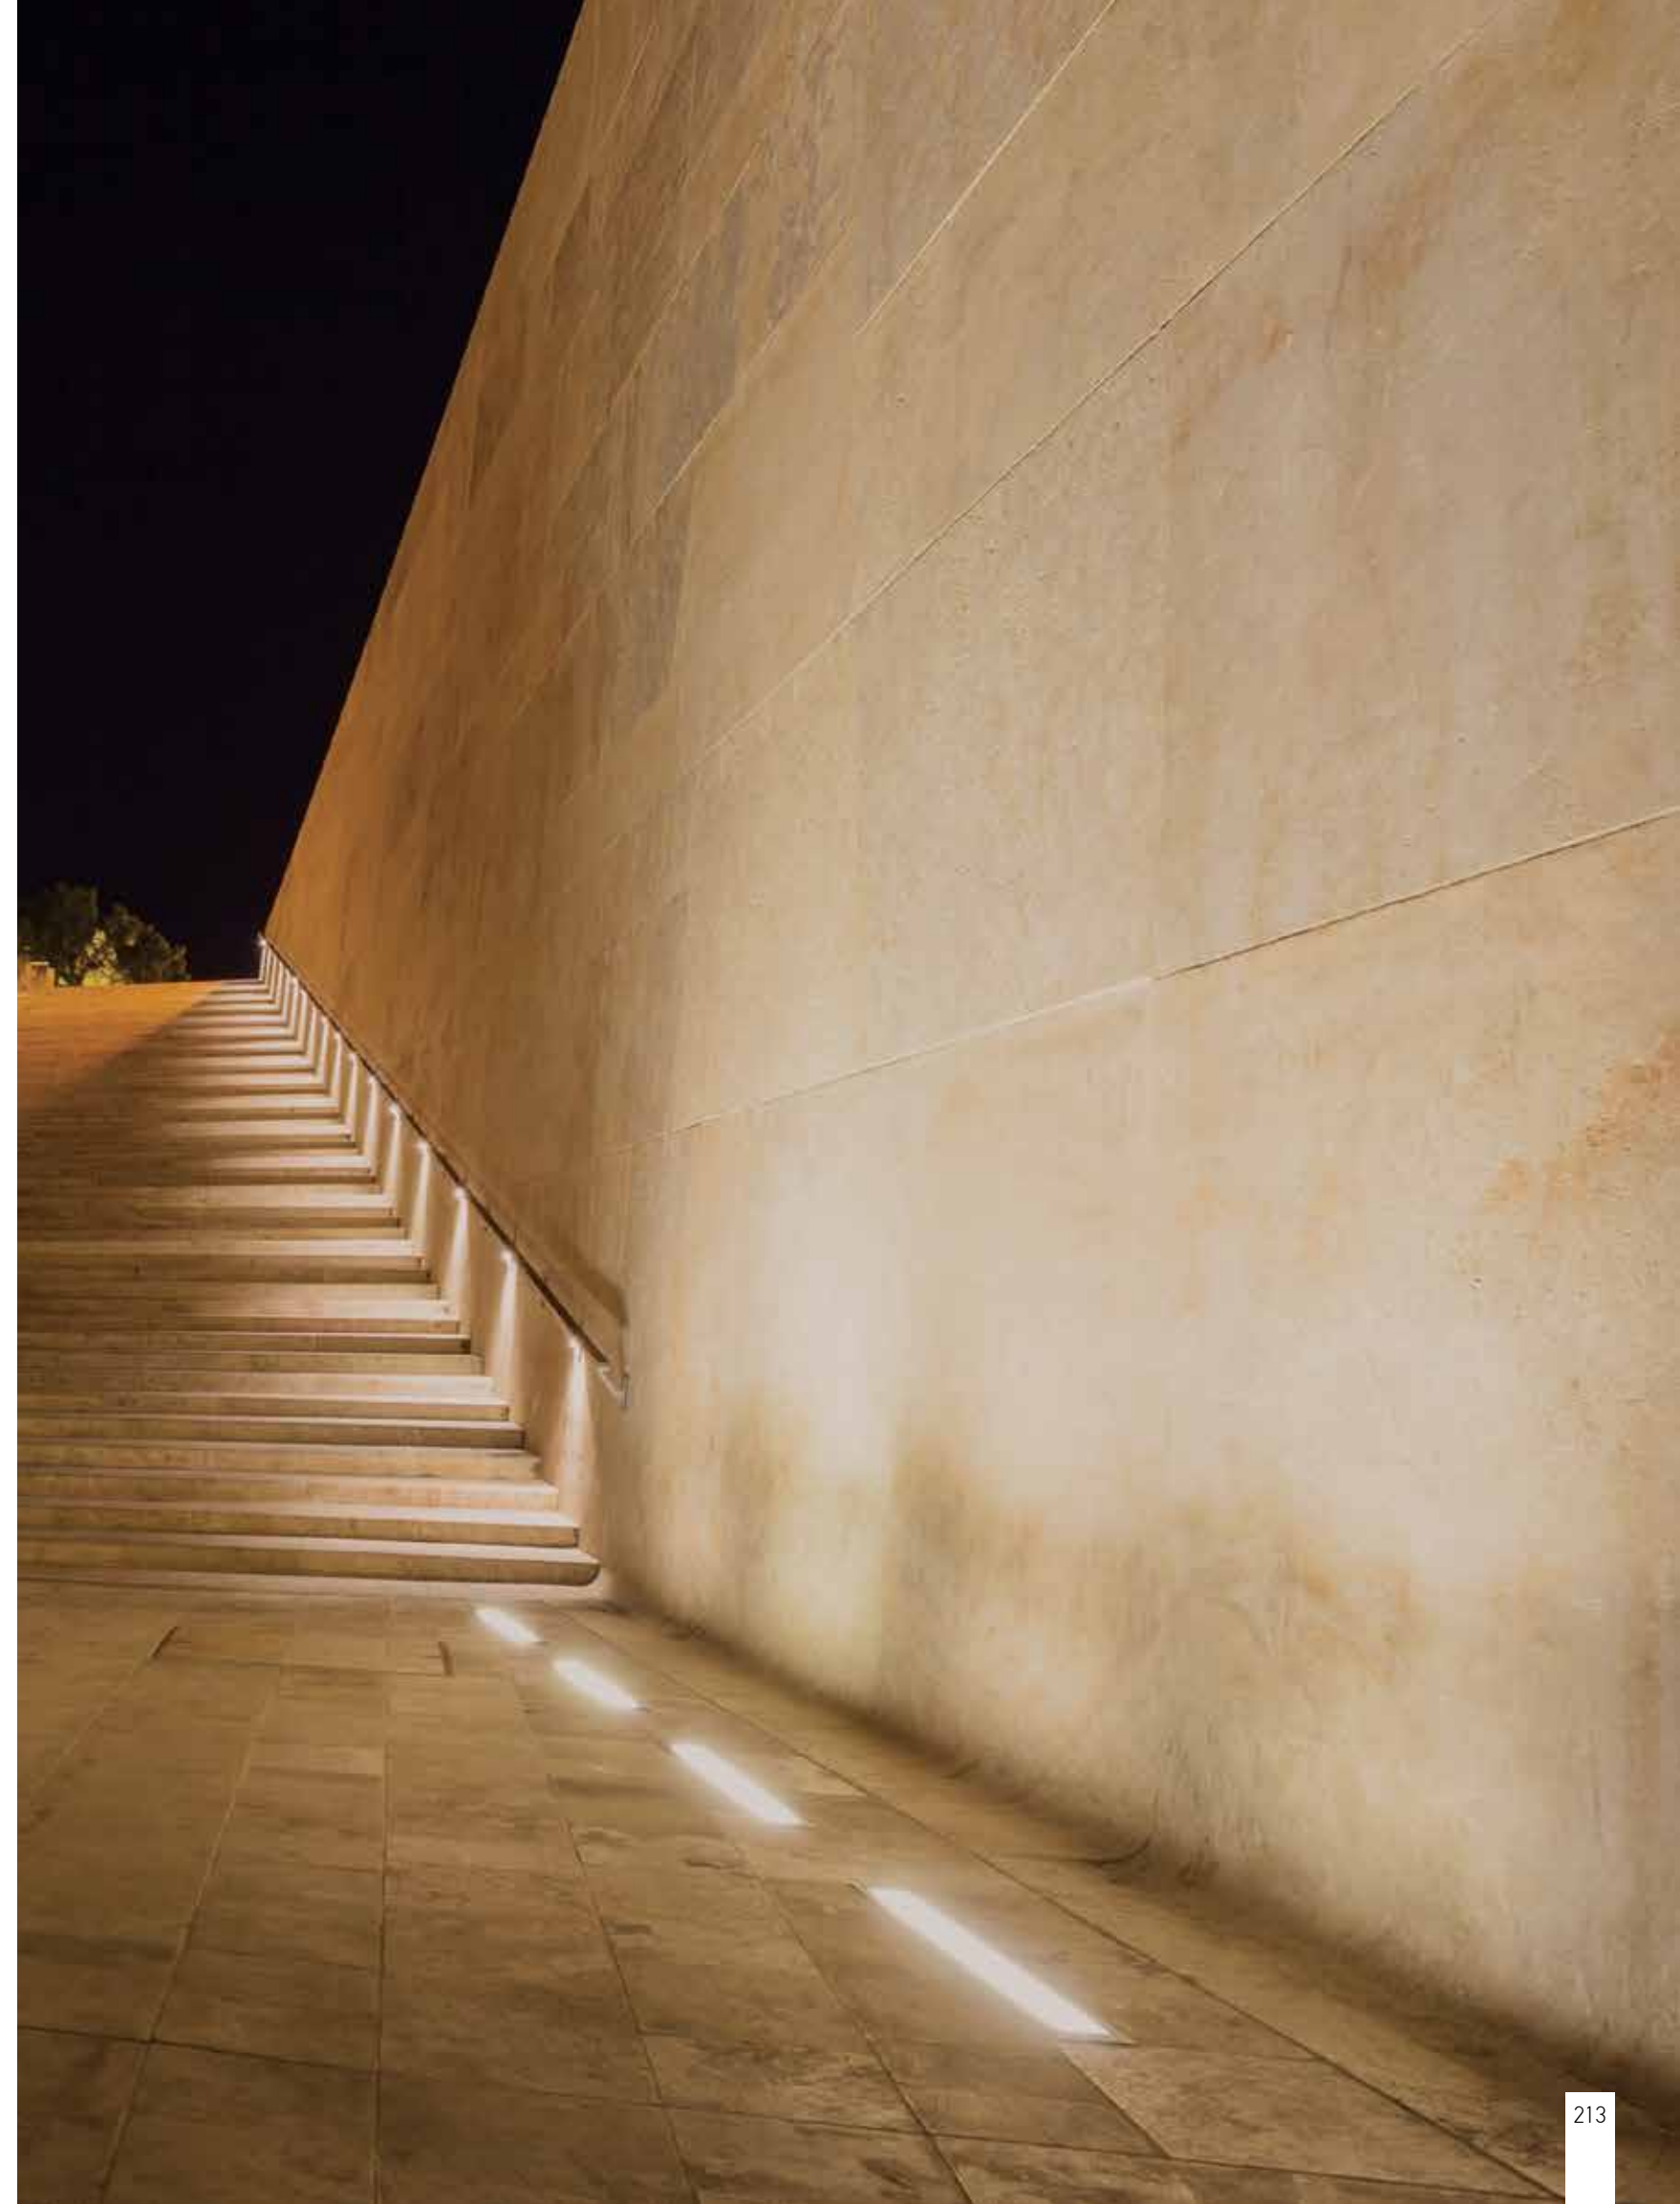

WALL WASHER | p.214-219

# OUTDOOR LIGHTING | WALL WASHER

## Wall Washers RGB - RGBW 12W



Code	IP	Kelvin	CRI	Watt	Lumen
E380	66	RGB	80	12W	MAX 280
E381	66	RGBW 4000	80	12W	MAX 480



Power 12x 1W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey


### Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

## Wall Washer RGB - RGBW 24W



Code	IP	Kelvin	CRI	Watt	Lumen
E378	66	RGB	80	24W	MAX 560
E379	66	RGBW 4000	80	24W	MAX 960



Power 24x 1W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey


### Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)

## Wall Washers Tunable White



Code	IP	Kelvin	CRI	Watt	Lumen
E382	66	2700 - 6500	80	24W	1580-1770



Power 24x 1W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey

### Dimming Options

1. DALI Dimming : Element Driver 24V Up to 240W+OTi DALI DIM 1-4CH
2. BLUETOOTH Dimming : Element Driver 24V+OT BLE (CASAMBI App)


### OTi DALI DIM 1-4CH

Input 24V  
 Output Up to 240W  
 Dimensions W: 4.2cm H: 2cm L: 18cm  
 DALI Dimming  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172166010



### Connectors Male & Female


Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / Code CNCTR 2

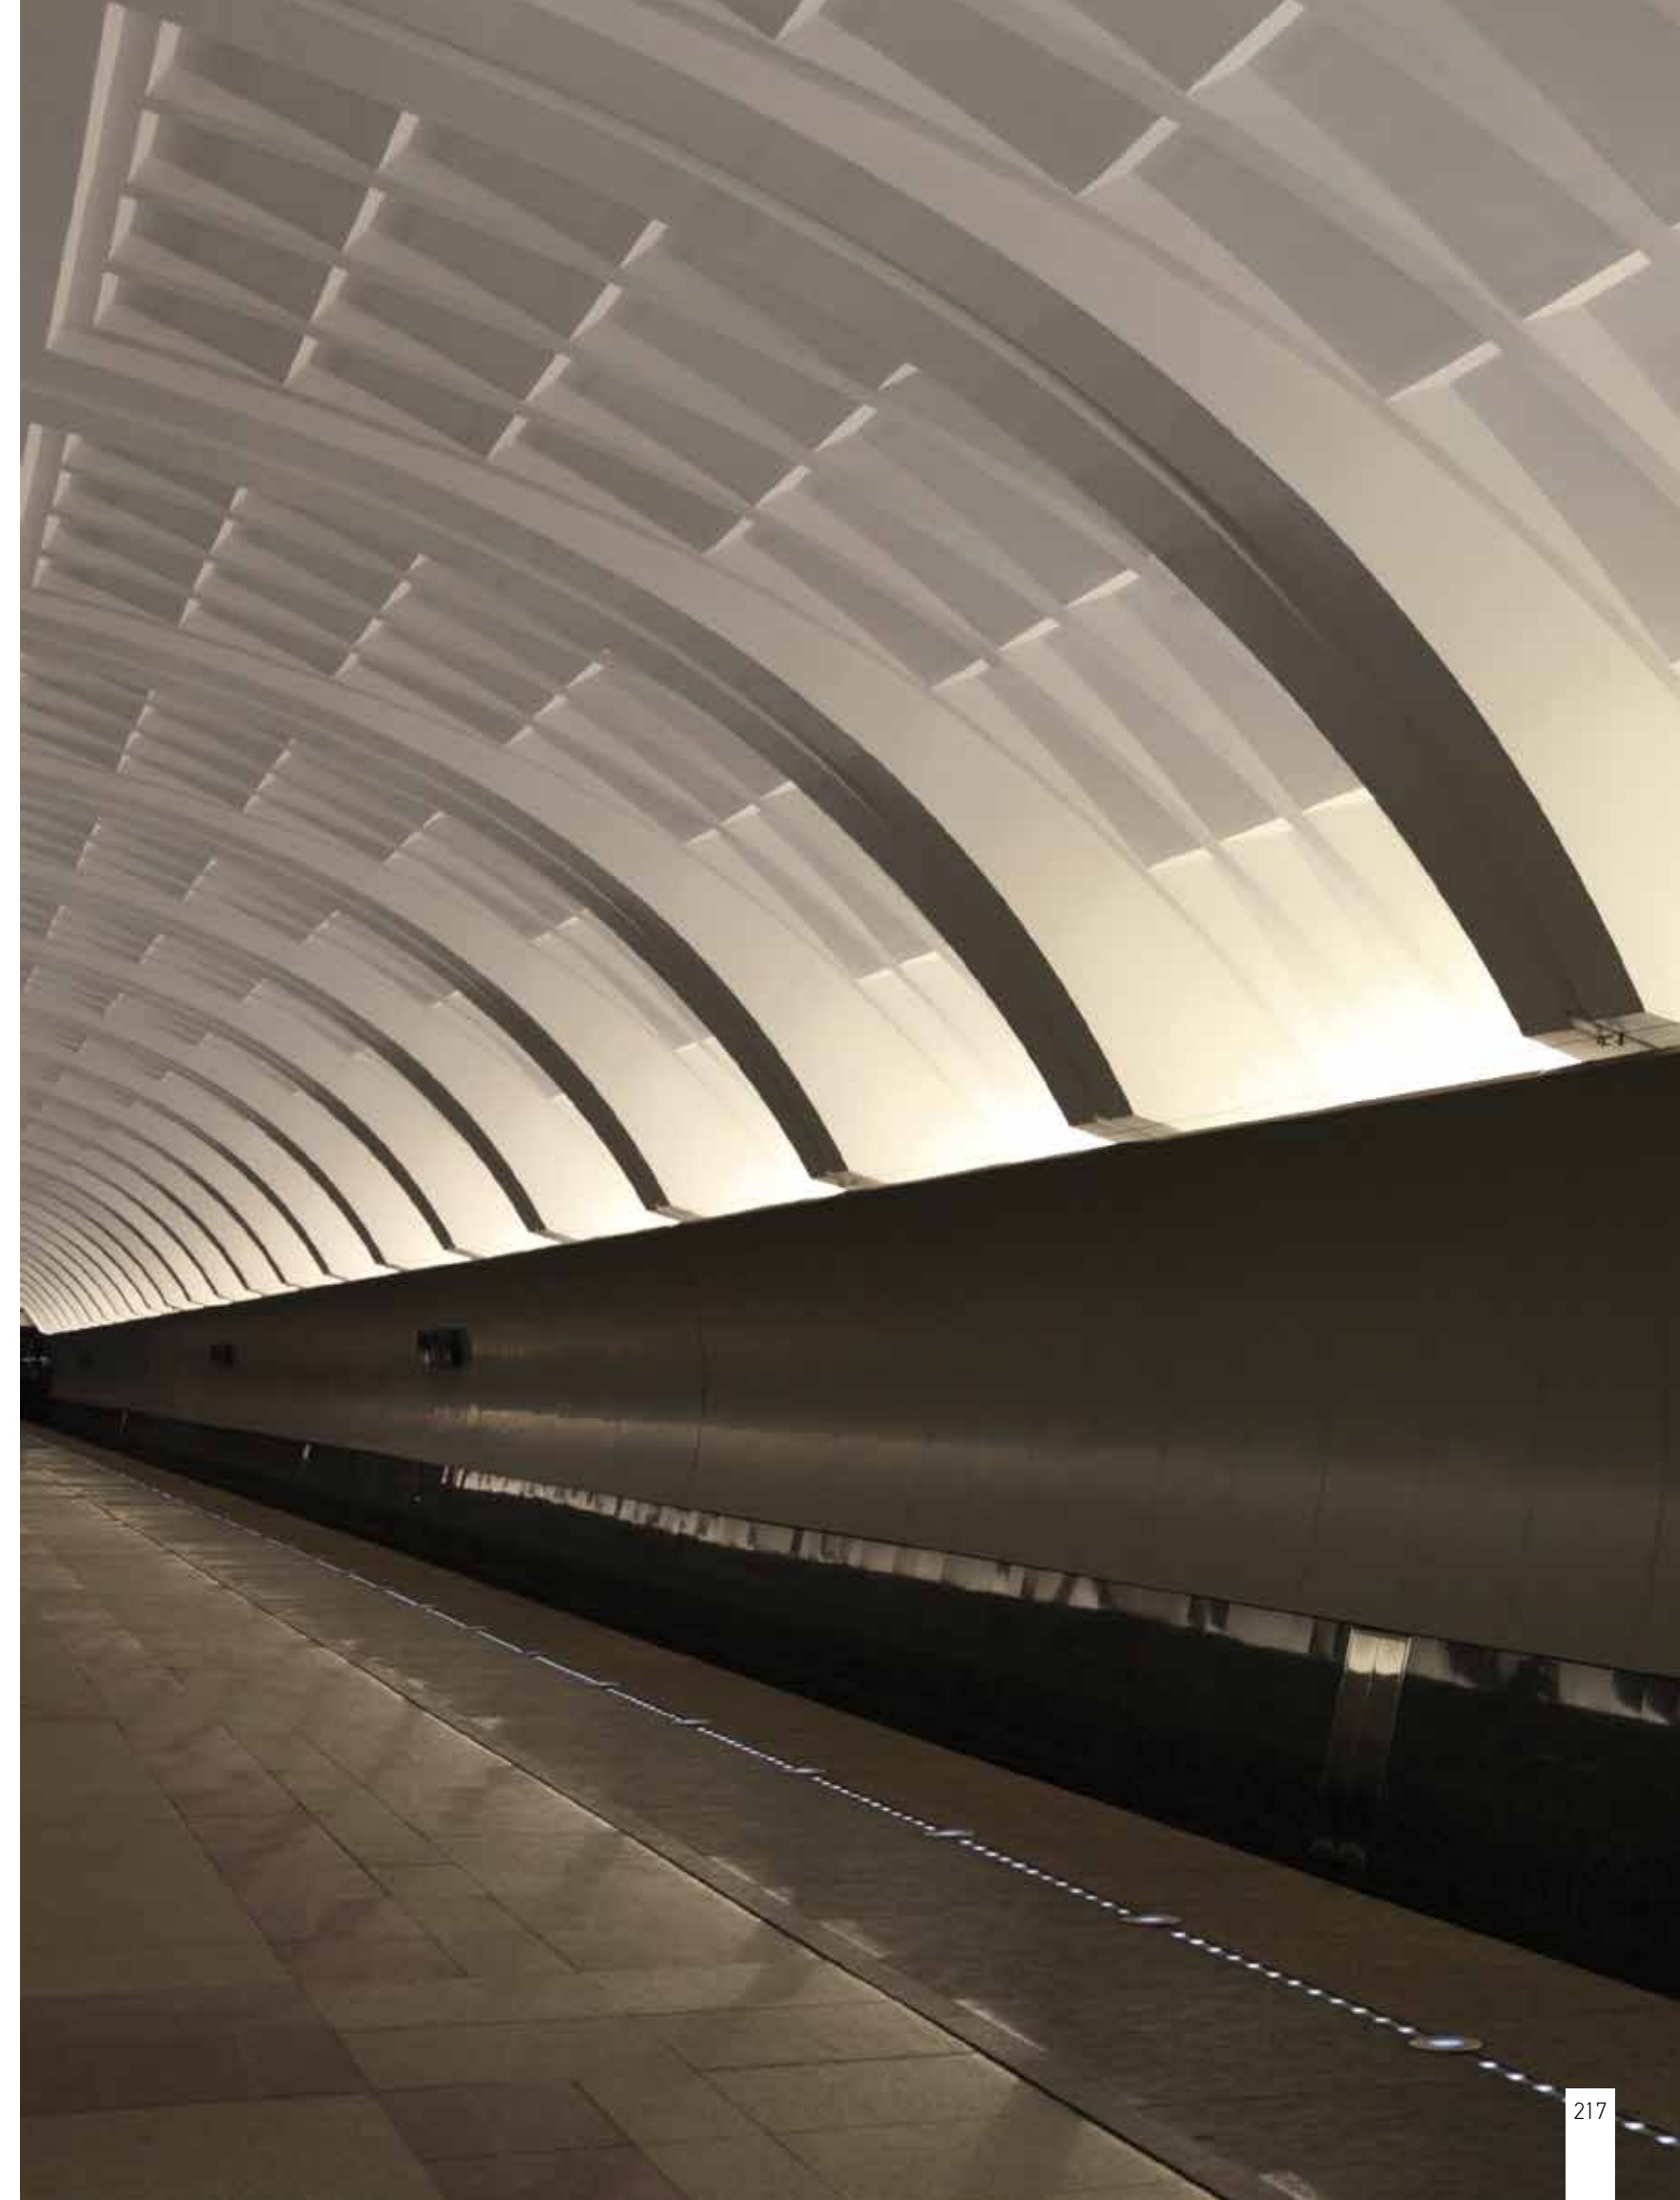

Wall Washers 12W



Code	IP	Kelvin	CRI	Watt	Lumen
E376	66	3000	80	12W	MAX 850
E377	66	4000	80	12W	MAX 870

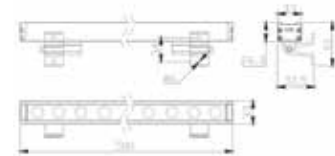

Power Input 12x1W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 50cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 12pcs MAX  
 Color Grey

Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
2. 1-10 Dimming : 1-10V Driver 24V
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
4. ON-OFF Dimming : ON-OFF Driver 24V

Wall Washers 24W



Code	IP	Kelvin	CRI	Watt	Lumen
E374	66	3000	80	24W	MAX 1700
E375	66	4000	80	24W	MAX 1720





Power Input 24x1W  
 Input 24V  
 Cri 80  
 IP 66  
 Dimensions L: 100cm W: 3.3cm H: 2.6cm  
 Beam Angle 60° x 10°  
 Material Aluminium  
 Special Feature Honeycomb Included  
 Driver Not Included  
 Connect 6pcs MAX  
 Color Grey

Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU
2. 1-10 Dimming : 1-10V Driver 24V
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1
4. ON-OFF Dimming : ON-OFF Driver 24V



**Connectors Male & Female**  
 Cable 25cm  
 Input 24V  
 IP 66  
 Color Black / Code CNCTR 1

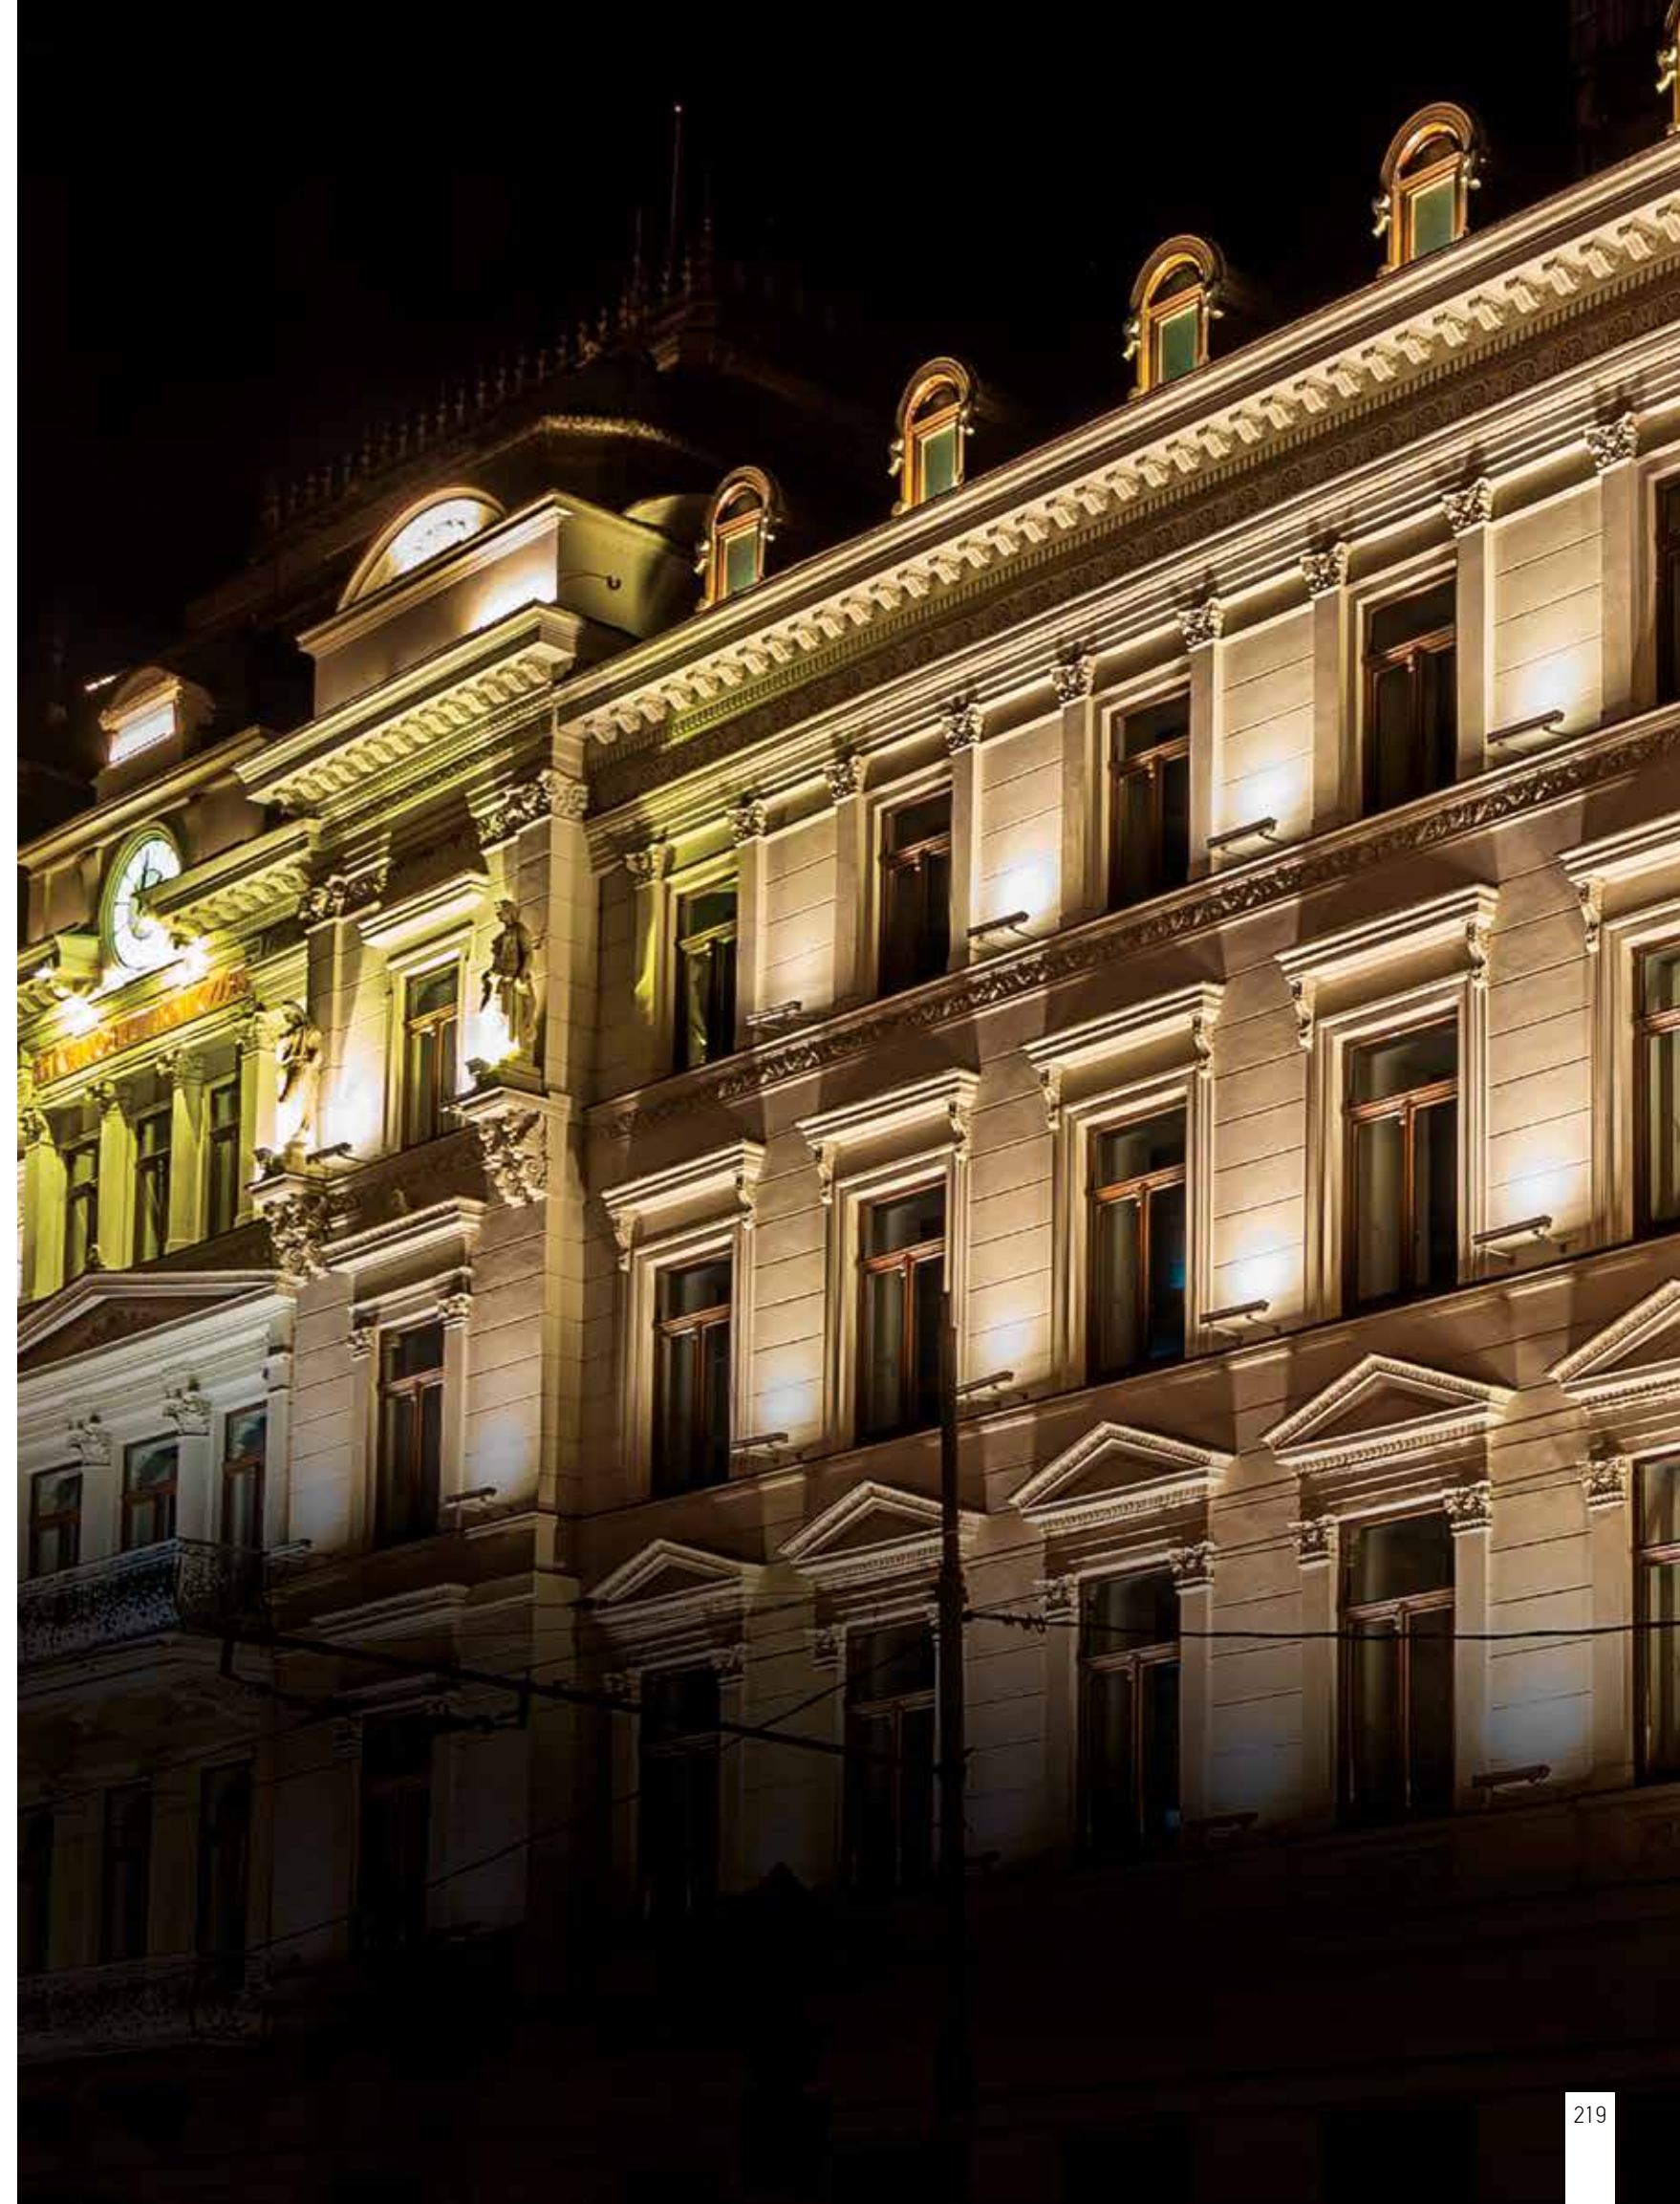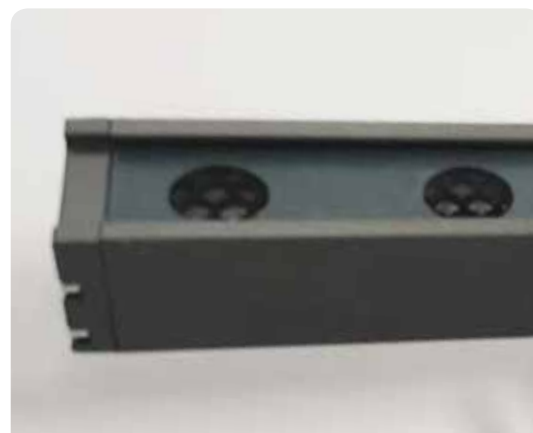

OUTDOOR LIGHTING | 24V DRIVERS

Power 30W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4.1cm H: 2.7cm L: 14.5cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 30/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899605503



Power 60W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4.1cm H: 3.1cm L: 20.1cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 60/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899605527



Power 120W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4.1cm H: 3.1cm L: 26cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 120/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899605541



Power 180W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 4cm H: 3.1cm L: 30cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 180/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899605565



Power 250W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.5cm H: 5cm L: 37.5cm  
 Non Dimmable ☒ On-Off  
 ELEMENT 250/220-240/24 G2  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172333467



Power 30W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 6.7cm H: 3cm L: 10.3cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172329767



Power 50W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172274340



Power 80W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172274364



Power 160W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3.5cm L: 30cm  
 DALI Dimming ○ Push Button - DALI2  
 1 CHANNEL  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4062172274388



Power 182W  
 Input 220-240V, 50/60Hz  
 Dimensions W: 4.2cm H: 2cm L: 17.2cm  
 DMX Dimming ○  
 OT DMX RGBW DIM 0-100%  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899557949



Power 240W  
 Input 220-240V, 50/60Hz  
 Dimensions W: 4.2cm H: 2cm L: 17.2cm  
 Bluetooth Dimming ○  
 OT BLE DIM 0-100%  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899557833



Input 220-240V, 50/60Hz  
 Dimensions W: 5cm H: 8cm L: 8cm  
 DALI Dimming ○  
 DALI MCU Tunable White Switch  
 Material Plastic  
 Special Feature IP 20  
 Color White / Code 4052899465916




Power 100W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3cm L: 23cm  
 Dimmable Triac, 1-10 ○  
 Material Metal  
 Special Feature IP 20  
 Color Metal / Code Z89100VND



Power 200W  
 Input 220-240V, 50/60Hz  
 Output 24V  
 Dimensions W: 5cm H: 3cm L: 28.7cm  
 Dimmable Triac, 1-10 ○  
 Material Metal  
 Special Feature IP 20  
 Color Metal / Code Z89200VND



CNCTR 1	218	E208	66	E283	152	E341	116	4052899465916	221
CNCTR 2	216	E211	70	E284	142	E342	118	4052899557833	221
D-20-24	132	E216	112	E285	140	E343	114	4052899557949	221
V350-1050	138	E217	162	E286	140	E344	28	4052899605503	220
Z0800-BA	132	E219	194	E287	82	E345	28	4052899605527	220
Z69058-A	204	E220	194	E288	170	E346	174	4052899605541	220
Z69058-B	204	E227	99	E289	16	E347	174	4052899605565	220
Z89100VND	221	E229	180	E290	16	E348	62	4062172166010	216
Z89200VND	221	E230	181	E291	16	E349	136	4062172274340	221
E109	101	E235	74	E292	148	E350	136	4062172274364	221
E114	95	E235-12D	74	E293	149	E351	26	4062172274388	221
E121	104	E236	74	E294	179	E352	26	4062172329767	220
E122	104	E237	40	E295	56	E353	22	4062172333467	220
E123	104	E238	86	E296	122	E354	30		
E124	104	E239	86	E297	24	E355	36		
E127	102	E240	86	E298	52	E356	32		
E128	102	E241-G	178	E299	156	E357	34		
E132	58	E241-W	178	E300	170	E358	34		
E133	58	E242-G	178	E301	170	E359	210		
E135	100	E242-W	178	E302	54	E360	208		
E146	98	E243	92	E304	110	E361	208		
E149	102	E245	92	E305	110	E362	202		
E150	106	E246-G	176	E306	106	E363	202		
E151	106	E246-W	176	E307	106	E364	204		
E152	145	E247-G	176	E308	194	E365	212		
E153	144	E247-W	176	E309	194	E366	212		
E156	100	E248	185	E310	162	E367	36		
E159	101	E249	40	E311	160	E368	22		
E168	112	E250	76	E312	160	E369	10		
E177-A	146	E250-12D	76	E313	12	E370	10		
E177-B	146	E251	76	E314	12	E371	10		
E178	206	E253	46	E315	80	E372	132		
E179	206	E254	46	E316	81	E373	132		
E180	206	E256	70	E317	81	E374	218		
E181	182	E257	70	E318	94	E375	218		
E182	182	E261	98	E319	166	E376	218		
E183	182	E262	98	E320	166	E377	218		
E184	182	E263	120	E321	166	E378	216		
E185	108	E265	126	E322	168	E379	216		
E186	108	E266	126	E323	172	E380	216		
E187	184	E267	128	E324	172	E381	216		
E189	210	E268	124	E325	38	E382	216		
E190	44	E269	196	E326	198	E383	42		
E191	44	E270	196	E327	198	E384	42		
E192	44	E271	124	E328	134	E398	14		
E193	18	E272	89	E329	134	E399	14		
E194	18	E273	84	E330	134	E400	14		
E195	96	E274	88	E331	134	E401	15		
E197	90	E275	116	E332	188	E402	15		
E199	91	E276	60	E333	188	E403	138		
E201	122	E277	60	E334	48	E404	138		
E202	122	E278	85	E335	48	S112	192		
E203	50	E279	154	E336	48	S113	192		
E204	50	E280	158	E337	72	S131	190		
E205	68	E281	150	E338	64	S132	190		
E206	68	E282	150	E339	64	S133	190		
E207	66	E282-SP	150	E340	192	S134	190		





ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri

Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

[info@zambelislights.gr](mailto:info@zambelislights.gr) | [zambelislights.gr](http://zambelislights.gr)

