



THE —  
**BEST**  
— OF

VOL.  
—  
**01**

## PASSION, TRADITION AND INNOVATION SINCE 1978



Since 1978 Egoluce, founded by three friends: Bruno, Mario and Renato with a great lighting experience and passion, has been manufacturing 100% Made in Italy lighting products, collaborating with Italian companies and artisans to offer the highest quality and long-lasting light fixtures for various applications. Experience, innovation, and technology are the values that have made Egoluce one of the important players in the worldwide lighting industry.

Our know-how and attention to detail in every production phase have been the main aspects of Egoluce success. We constantly research and test innovative solutions to develop products with the latest materials, technologies, and design trends.

At Egoluce, we believe that modern lighting controls should consider the human biorhythm and positively impact our health and well-being. We are dedicated to create lighting solutions that enhance the perception of the spaces and provide an unforgettable sensorial experience.

Egoluce offers lighting solutions to Architects, Lighting Specialists, Designers, and Specifiers. We also provide our customers with tailored solutions and custom products for every market demand.

At Egoluce, we are proud to be part of the great Italian tradition of craftsmanship and design.

Depuis 1978, Egoluce, fondée par trois amis : Bruno, Mario et Renato avec une grande expérience et passion de l'éclairage, fabrique des produits d'éclairage 100% Made in Italy, en collaborant avec des entreprises et des artisans italiens afin d'offrir des luminaires de la plus haute qualité et de longue durée pour diverses applications. L'expérience, l'innovation et la technologie sont les valeurs qui ont fait d'Egoluce l'un des principaux acteurs de l'industrie mondiale de l'éclairage.

Notre savoir-faire et l'attention portée aux détails dans chaque phase de production ont été les principaux aspects du succès d'Egoluce. Nous recherchons et testons constamment des solutions innovantes pour développer des produits avec les derniers matériaux, technologies et tendances en matière de design.

Chez Egoluce, nous pensons que les commandes d'éclairage modernes doivent tenir compte du biorhythme humain et avoir un impact positif sur notre santé et notre bien-être. Nous nous engageons à créer des solutions d'éclairage qui améliorent la perception des espaces et offrent une expérience sensorielle inoubliable.

Egoluce propose des solutions d'éclairage aux architectes, aux spécialistes de l'éclairage, aux concepteurs et aux prescripteurs. Nous fournissons également à nos clients des solutions sur mesure et des produits personnalisés pour chaque demande du marché.

Chez Egoluce, nous sommes fiers de faire partie de la grande tradition italienne de l'artisanat et du design.



## 4 GOOD REASONS TO CHOOSE EGOLUCE

### LED

*LED technology is the heart of our lighting products.*

- **Outstanding Luminous Efficacy:** Brilliant illumination that conserves energy, reducing your carbon footprint.
- **Superior Color Rendering:** Bringing out the true beauty of colors, enhances the aesthetics of your space.
- **Versatile Light Colors:** A range of hues to suit your needs, creating the perfect ambiance.
- **Longevity:** Designed to last, reducing the need for frequent replacements, and minimizing waste.

### MATERIALS

*We are committed to creating products with a long-lasting life, and it all begins with the right materials.*

- **Aluminum:** Renowned for its ductility and durability, aluminum ensures optimal heat dissipation, contributing to the extended operational life of our LEDs.
- **Stainless Steel:** We use stainless steel to guarantee that our fixtures can withstand the harshest environmental conditions, including exposure to atmospheric and chemical agents like salt and chlorine.
- **Clear Crystal:** Our clear crystal elements don't just provide illumination; they create mesmerizing light effects and reflections, turning fixtures into pieces of art.
- **Methacrylate:** Helps us diffuse and shade the focused light of LEDs, creating a harmonious lighting experience.

### LED

*La technologie LED est au cœur de nos produits d'éclairage.*

- **Efficacité lumineuse exceptionnelle:** Un éclairage brillant qui économise l'énergie, réduisant ainsi votre empreinte carbone.
- **Rendu des couleurs supérieur:** En faisant ressortir la véritable beauté des couleurs, vous améliorez l'esthétique de votre espace.
- **Couleurs de lumière polyvalentes:** Une gamme de teintes pour répondre à vos besoins et créer l'ambiance parfaite.
- **Longévité:** Conçus pour durer, ils réduisent le besoin de remplacements fréquents et minimisent les déchets.

### MATÉRIAUX

*Nous nous engageons à créer des produits durables, et cela commence par le choix des bons matériaux.*

- **L'aluminium:** Réputé pour sa ductilité et sa durabilité, l'aluminium assure une dissipation optimale de la chaleur, contribuant ainsi à prolonger la durée de vie de nos LED.
- **Acier inoxydable:** Nous utilisons l'acier inoxydable pour garantir que nos luminaires peuvent résister aux conditions environnementales les plus difficiles, y compris l'exposition aux agents atmosphériques et chimiques tels que le sel et le chlore.
- **Cristal clair:** nos éléments en cristal clair ne se contentent pas d'éclairer, ils créent des effets de lumière et des reflets hypnotiques, transformant les luminaires en œuvres d'art.
- **Méthacrylate:** Il nous aide à diffuser et à ombrager la lumière focalisée des LED, créant ainsi une expérience lumineuse harmonieuse.

### GENERAL FEATURES

*It's the finer aspects that set EGOLUCE products apart.*

- **Easy LED Replacement:** Our LED units are designed for easy replacement, ensuring that you can enjoy your lighting for years to come.
- **Efficient Heat Dissipation:** Each product incorporates a proper heat sink device, guaranteeing maximum LED lifetime.
- **Versatility in Current:** Most of our products can operate at both 350 mA and 500 mA, offering flexibility and energy efficiency.
- **Optimized Light Distribution:** With lenses and reflectors, we optimize luminous flux, minimizing waste and maximizing illumination where it's needed.

### QUALITY AND SAFETY

*Quality and safety are non-negotiable for us.*

- **Rigorous Testing:** Every EGOLUCE model undergoes extensive temperature and functional testing to ensure performance and reliability.
- **Certified Components:** All electronic components featured in our catalogue, including drivers and dimmers, bear European quality certification (ENEC), assuring you of their reliability.
- **100% Quality Assurance:** We subject our products to stringent quality and sustainability checks, giving you peace of mind with every purchase.

### CARACTÉRISTIQUES GÉNÉRALES


*Ce sont les aspects les plus fins qui distinguent les produits EGOLUCE.*

- **Remplacement facile des LED:** Nos unités LED sont conçues pour être facilement remplacées, ce qui vous permet de profiter de votre éclairage pendant des années.
- **Dissipation efficace de la chaleur:** Chaque produit incorpore un dispositif de dissipation thermique approprié, garantissant une durée de vie maximale des LED.
- **Polyvalence du courant:** La plupart de nos produits peuvent fonctionner à la fois à 350 mA et à 500 mA, offrant ainsi flexibilité et efficacité énergétique.
- **Distribution optimisée de la lumière:** Grâce aux lentilles et aux réflecteurs, nous optimisons le flux lumineux, minimisant ainsi les pertes et maximisant l'éclairage là où il est nécessaire.

### QUALITÉ ET SÉCURITÉ

*La qualité et la sécurité ne sont pas négociables pour nous.*

- **Tests rigoureux:** Chaque modèle EGOLUCE est soumis à des tests de température et de fonctionnement approfondis afin de garantir ses performances et sa fiabilité.
- **Composants certifiés:** Tous les composants électroniques figurant dans notre catalogue, y compris les pilotes et les variateurs, portent la certification de qualité européenne (ENEC), ce qui vous garantit leur fiabilité.
- **Assurance qualité à 100 %:** Nous soumettons nos produits à des contrôles de qualité et de durabilité rigoureux, ce qui vous garantit une tranquillité d'esprit à chaque achat.

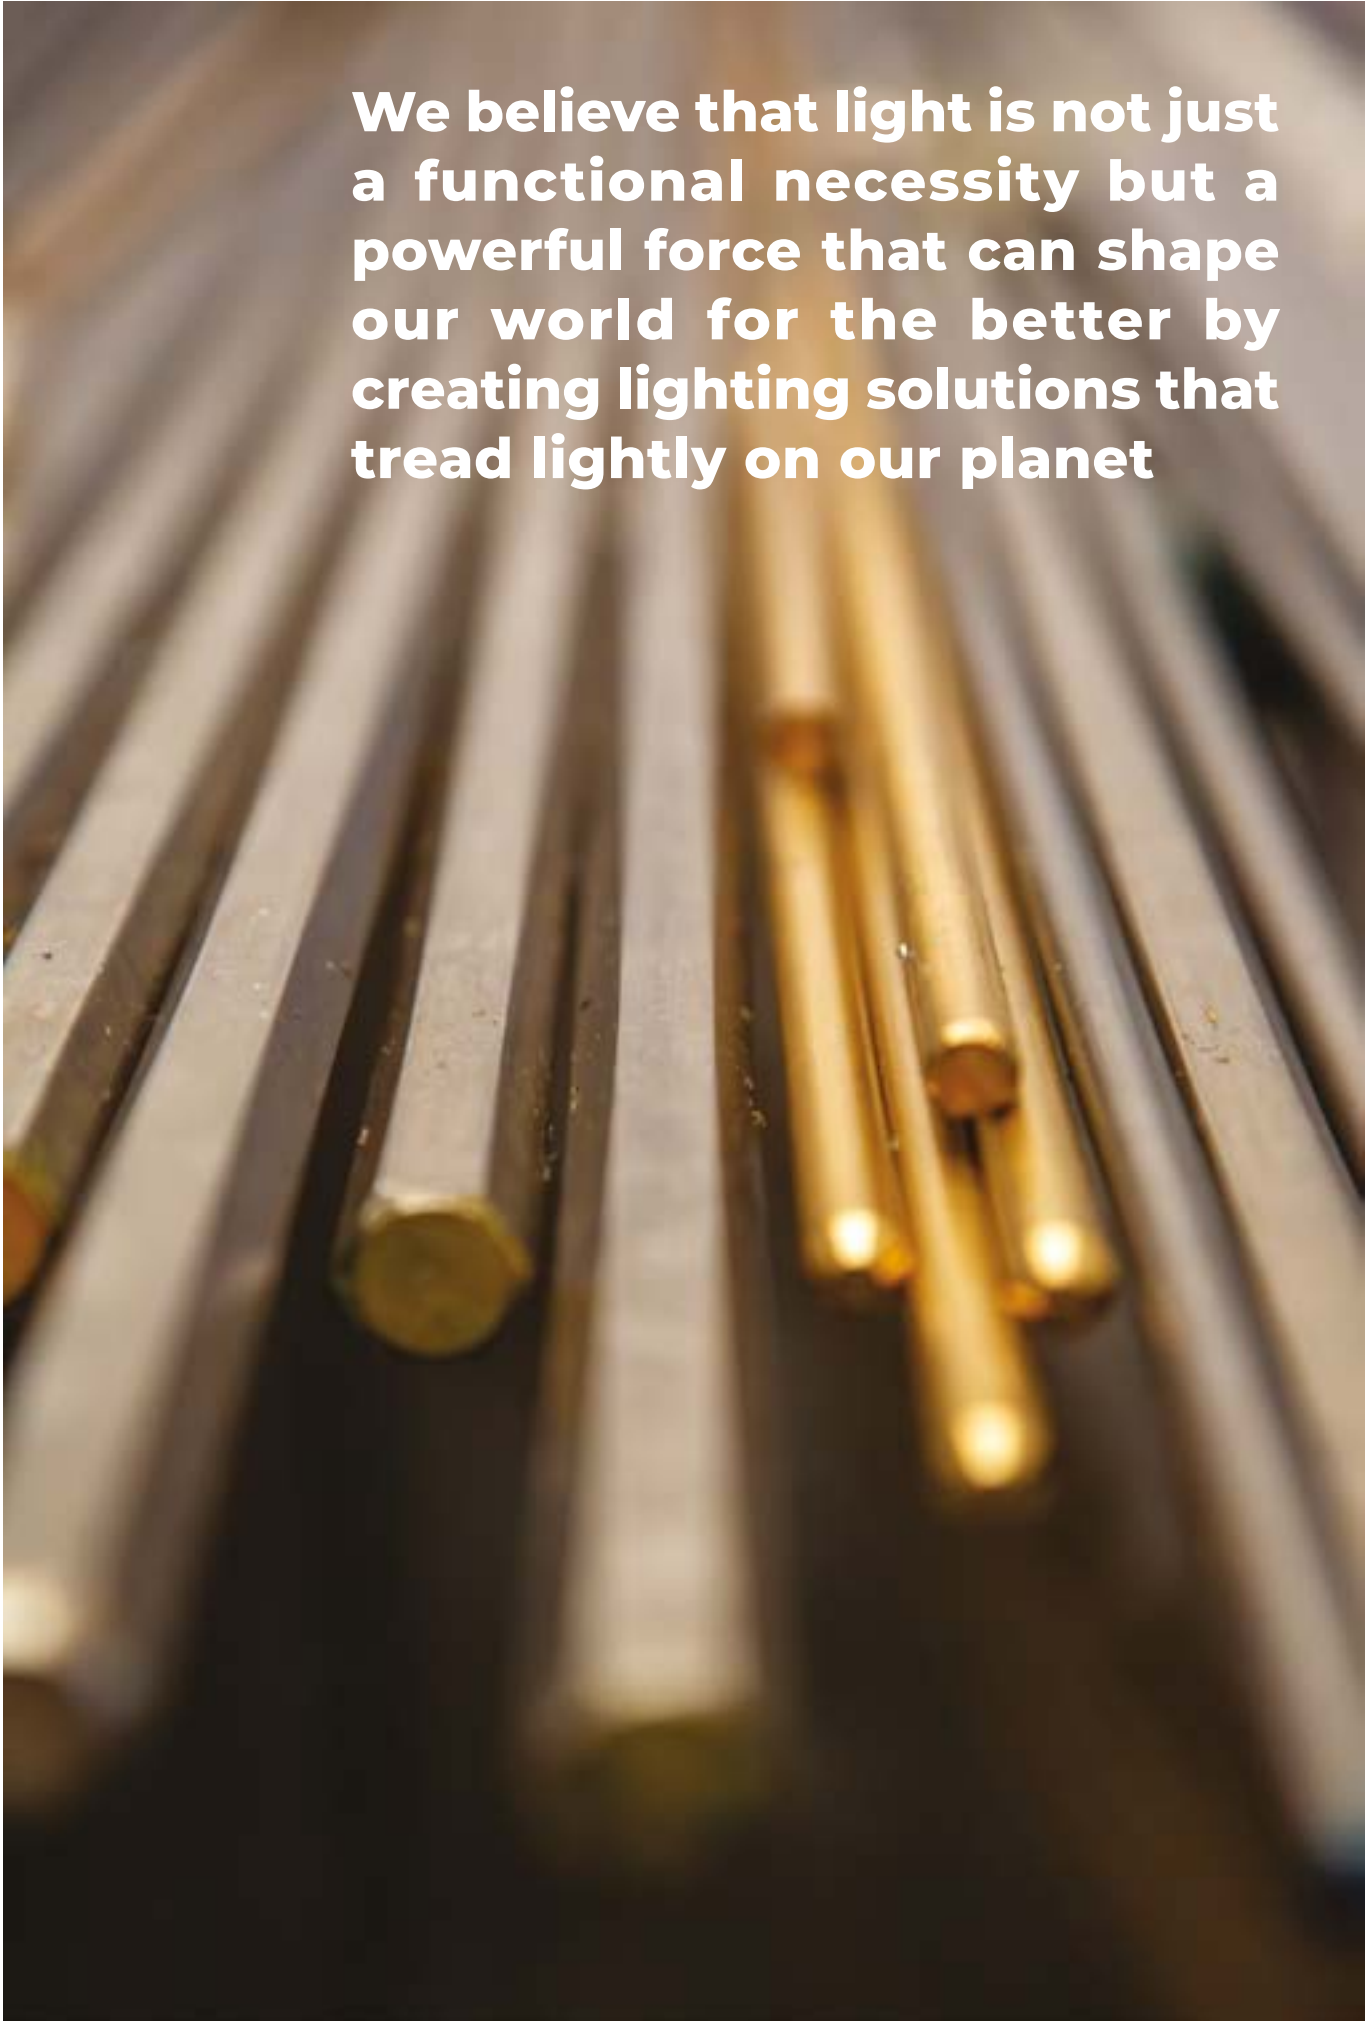

**We believe that light is not just a functional necessity but a powerful force that can shape our world for the better by creating lighting solutions that tread lightly on our planet**



## FIXTURE REPARABLE

EGOLUCE models are designed and produced according to the best quality standards existing on the technical lighting market following the “**well made**” standard: in full compliance with both quality and regulatory rules, in the fields of application of our products.


- Care and precision of the design aimed at a production of the highest quality.
- Excellent quality in the manufacture of products thanks to: high selection of high-end components, attention to coating, precise and punctual assembly and packaging, perfect for all types of shipping.
- Extremely severe durability and reliability tests: both on individual components and on final products.

These targets guarantee 5 years warranty on correctly installed EGOLUCE products and components following the instruction for users.

Les modèles EGOLUCE sont conçus et produits selon les meilleurs standards de qualité existant sur le marché de l'éclairage technique selon les meilleurs standards de qualité existant sur le marché de l'éclairage technique suivant la norme “**well made**”: dans le plein respect des règles de qualité et de réglementation, dans les domaines d'application de nos produits.

- Le soin et la précision de la conception visent une production de la plus haute qualité.
- Excellente qualité dans la fabrication des produits grâce à une sélection rigoureuse de composants haut de gamme, à l'attention au revêtement, à l'assemblage et à l'emballage précis et ponctuel l'emballage, parfait pour tous les types d'expédition.
- Tests de durabilité et de fiabilité extrêmement sévères : à la fois sur les composants individuels et sur les produits finis. sur les composants individuels et sur les produits finaux.

Ces objectifs garantissent une garantie de 5 ans sur les produits et composants EGOLUCE correctement installés.

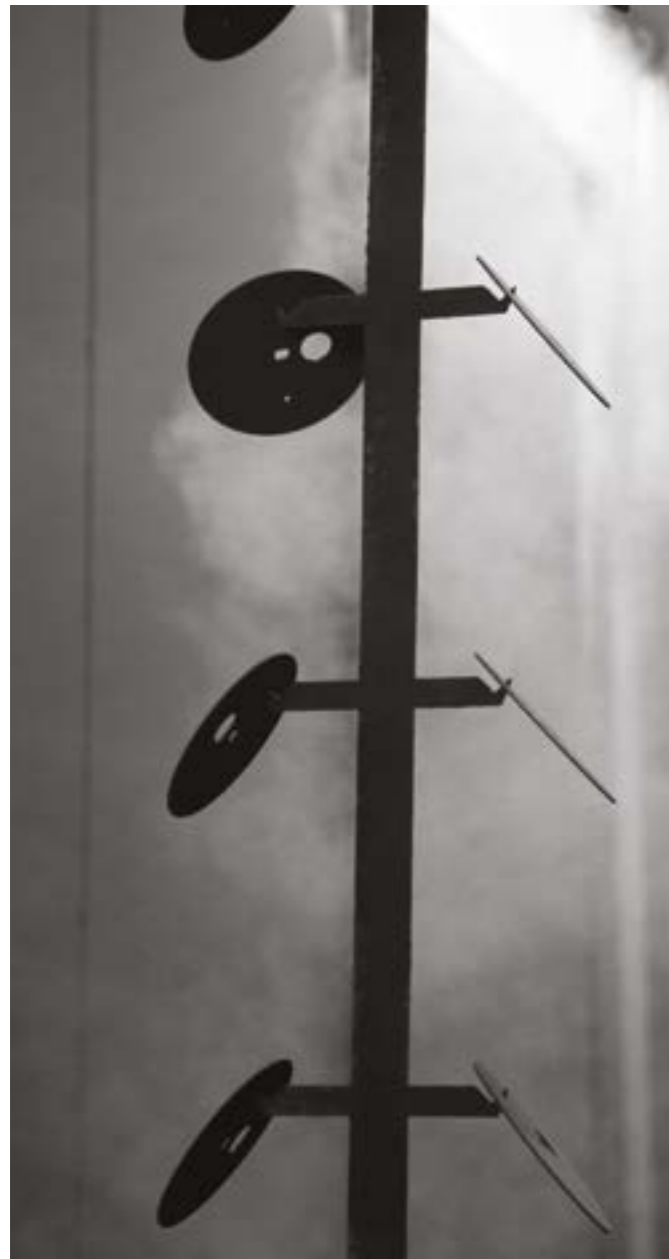

## TAILOR-MADE LIGHTING

Egoluce, a leader in lighting with over 45 years of experience, stands out for its Italian expertise and technology by offering a highly professional consultancy service for the creation of custom products and guaranteeing pre- and post-sales assistance to ensure maximum customer satisfaction. Thanks to a short supply chain, we create **custom products** with extreme precision and highly technological.

This approach allows us to combine attention to detail and innovation, ensuring unique, design and cutting-edge solutions in the lighting panorama.

We value Taylor made products as an invaluable added value to our collections. With over **8000 variations in 130 product families**, we offer **unique and customized solutions**, meeting the specific needs of our customers.





























Egoluce, leader dans le domaine de l'éclairage avec plus de 45 ans d'expérience, se distingue par son expertise et sa technologie italienne en offrant un service de conseil hautement professionnel pour la création de produits personnalisés et en garantissant une assistance avant et après-vente afin d'assurer la plus grande satisfaction du client. Grâce à une chaîne d'approvisionnement courte, nous créons des **produits sur mesure** avec une extrême précision et une haute technicité.

Cette approche nous permet de combiner le souci du détail et l'innovation, en garantissant des solutions uniques, design et d'avant-garde dans le panorama de l'éclairage.

Nous considérons les produits fabriqués par Taylor comme une valeur ajoutée inestimable à nos collections. Avec plus de **8000 variations dans 130 familles de produits**, nous offrons des **solutions uniques et personnalisées**, répondant aux besoins spécifiques de nos clients.



# FINISHES

 .01 White	 .02 Black	 .05 Red	 .06 Green
 .09 Orange	 .10 Blue	 .11 Pink	 .14 Blackboard
 .21 Shiny Gold	 .23 Satin Aluminum	 .24 Black Chrome	 .25 Golden Satin
 .28 Copper Leaf	 .29 Gold Leaf	 .30 Silver Leaf	 .31 Chromed
 .32 Nickel Mat	 .33 Stainless steel AISI 316L	 .34 Painted Corten	 .35 Painted Sand
 .38 Shiny Copper	 .39 Painted Anthracite	 .56 Mirror	 .57 White Glass
 .85 Painted Silver	 .86 Painted Gold	 .87 Painted Copper	 .88 Painted Bronze



# LAYOUT

Product Name	Product Code	Technical drawings	Tipology symbol
<b>FARO</b>			
<b>Technical data</b>	<b>Technical symbols</b>	<b>Product picture</b>	

## PRODUCT SPECIFICATIONS

Characters in bold are used for codes and specifications which are necessary to identify the product code to be specified in the order.

Les caractères en gras sont utilisés pour les codes et spécifications sont utilisés pour identifier le code produit à mentionner dans la commande.

Color code	Light color	Gross Lumen Package
<b>WW</b>	<b>4000K</b>	<b>12000lm</b>
<b>WW</b>	<b>3000K</b>	<b>12000lm</b>
<b>WW</b>	<b>2700K</b>	<b>12000lm</b>

## SYMBOLS

- Suspension
- Cable
- Track
- Wall
- Ceiling
- Recessed Wall
- Recessed Ceiling
- Table
- Floor
- Converter included
- Converter not included
- Cable length
- Dimmer included
- CRI Color Rendering Index
- Reparable fixture
- Rotation
- Beam angle
- IP65 Protection class
- Cut Out
- Walk over fitting
- Drive over fitting
- Surface Temperature

## MARKS

- Fixture on Class II, with double or reinforced insulation
- SELV fixture with remote transformer
- Fixture ready for installation on normally inflammable surfaces

## ACCESSORIES CODES

- /DIM** Dimmer
- /DIM** Dimmer
- /DALI** Dimmer

## LIGHT COLOR CODES

- /W** Natural White Led 4000K
- /WW** Warm white Led 3000K
- /XW** Extra white Led 2700K

## IP

**1st digit:** protection against penetration by solid bodies

- 0** No protection
- 1** Protected against solid matters (over 50mm)
- 2** Protected against solid matters (over 12mm)
- 3** Protected against solid matters (over 2,5mm)
- 4** Protected against solid matters (over 1mm)
- 5** Dust proof
- 6** Fully dust proof

*Protection class I = dust / P = water*

**2nd digit:** protection against penetration by water

- 0** No protection
- 1** Protected against drops of water falling vertically
- 3** Rain proof fixture
- 4** Splash proof fixture
- 5** Water jet proof
- 6** Wave proof
- 7** Watertight immersion fixture

# INDEX

## SUSPENSION



**Bagliori**  
496



**Frame**  
132



**Fusion**  
490



**Giove**  
428



**Iris**  
182



**Iris**  
184



**Lancia Cavo**  
74



**Lancia di Achille**  
118



**Lancia No Limits**  
96



**Lancia System**  
80



**Lancia Tonda**  
22



**Lancia Tonda Cavo**  
44



**Lancia Tonda System**  
38



**Lancia Tonda XL**  
30



**Matita**  
146



**Multi Lancia System**  
88



**Newton System**  
308



**Radar**  
418



**Rail**  
246



**Rail Biemissione**  
248



**Rail Biemissione UGR**  
252



**Rail Quadra**  
256



**Rail System**  
262



**Rail UGR**  
250



**Spirits**  
410




**Stick**  
372



**Tre&Sessanta**  
232



**Tre&Sessanta**  
234



**Tulipano**  
382



**Virgola**  
402

## WALL



**Aurora**  
436



**Bagliori**  
498



**Bagliori**  
500



**Ci**  
508




**Diesis**  
484



**Eclipse**  
468




**Iris**  
186



**Iris**  
188



**Iris**  
190



**Iris**  
192



**Kalla**  
222



**Lancia**  
106



**Lancia Tonda**  
48



**Matita**  
152



**Matita**  
156




**Matita**  
160



**Moonlight**  
444



**Multi Lancia System**  
88



**Newton**  
324



**Newton Easy**  
338



**Newton Flat**  
334



**Newton Slim**  
330



**Q-Light**  
460



**Raccordi di luce Joy**  
724



**Raccordi di luce Joy System**  
736

# INDEX

## CEILING



**Aurora**  
438



**Diesis**  
484



**Iris**  
200



**Iris**  
200



**Lancia**  
112



**Lancia Tonda**  
56



**Moonlight**  
444



**Multi Lancia System**  
88



**Radar**  
422




**Raccordi di luce Joy**  
724



**Rail**  
280



**Rail System**  
286



**Q-Light**  
460


## RECESSED



**Alya**  
670



**Cerchietto**  
676



**Dot Plus**  
706



**Easy Quadro**  
656



**Easy Tondo**  
658



**Iris**  
194



**Iris**  
196




**Iris**  
198



**Krono**  
640



**Linea**  
576



**Lucciola**  
700



**Matita**  
164



**Modus**  
628



**Newton**  
342

## RECESSED



**Newton Easy  
230V - GU10**  
346



**Newton Flat**  
352



**Newton Recessed**  
356



**Newton Slim**  
348



**Okkio**  
682



**Pix**  
694



**Snorky**  
712



**Snorky Maxi**  
716



**Snorky**  
718




**Star**  
596



**Star**  
600



**Star Medium**  
610




**Star Medium**  
612



**Star Assymmetric**  
614



**Star Adjustable**  
620



**Star Maxi**  
606



**Star Maxi**  
608



**Star IP**  
604



**Star Zero**  
594



**Tanya**  
664



**Tappo**  
646



**Tappo Adjustable**  
648



**Tappo 230V**  
650



**Top**  
688



**Zen**  
634


## TRACK



**Tiny Track 24V**  
518



**Track 48V**  
532



**Track 48V  
Recessed**  
544



**Track 48V  
Suspension**  
552



# INDEX


## FLOOR - TABLE



**Bi Lancia**  
124



**Faro**  
212



**Faro**  
214



**Iris**  
204



**Kalla**  
226




**Lancia**  
120



**Lancia**  
126



**Lancia Tonda**  
64



**Matita**  
170



**Matita**  
176



**Newton**  
362



**Tre&Seassanta**  
236



**Virgola**  
402



**Zeta**  
140

## OUTDOOR



**Agos**  
780



**Agos**  
782



**Cerchio**  
834



**Cruise**  
816



**Drive**  
864



**Eclipse IP**  
476



**Kross**  
848



**Kross Mini**  
850




**Lara**  
892



**Raccordi di luce  
Joy System**  
730



**Raccordi di luce  
Joy System**  
732




**Raccordi di luce  
Joy System**  
736



**Soft**  
876



**Spillo**  
788



**Spook**  
822

## OUTDOOR



**Step Mini**  
842



**Trilli**  
898




**Tris**  
870




**Vision 01**  
882




**Vision 02**  
884



**Vision 03**  
886



**Vista**  
856



**Vista Mini**  
858



**Wanda**  
754



**Wanda System**  
768



**Zeppelin Mini**  
808



**Zeppelin Mini Plus**  
806



**Zeppelin**  
796



**Zeppelin Plus**  
800



**Zeppelin Maxi COB**  
804



**Zeppelin Maxi**  
802





**Zeppelin Adjustable**  
810

INDOOR


# LANCIA

Design P. Pepere

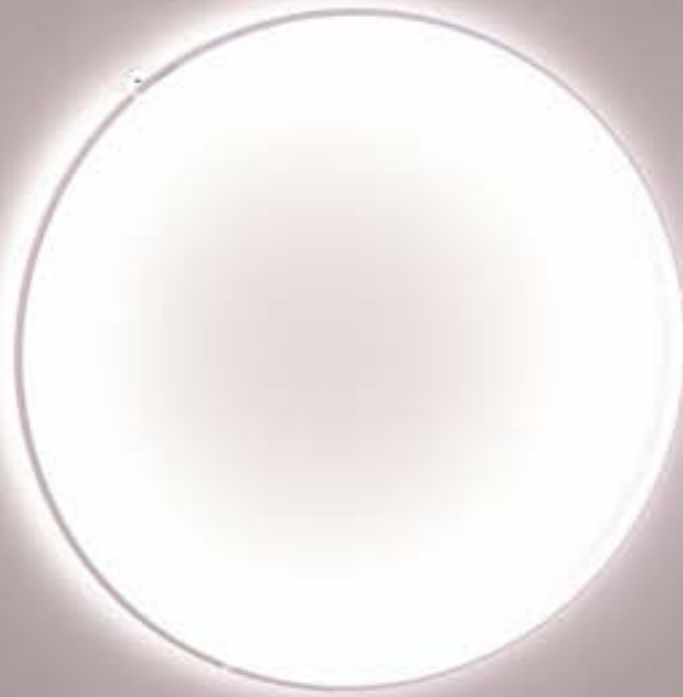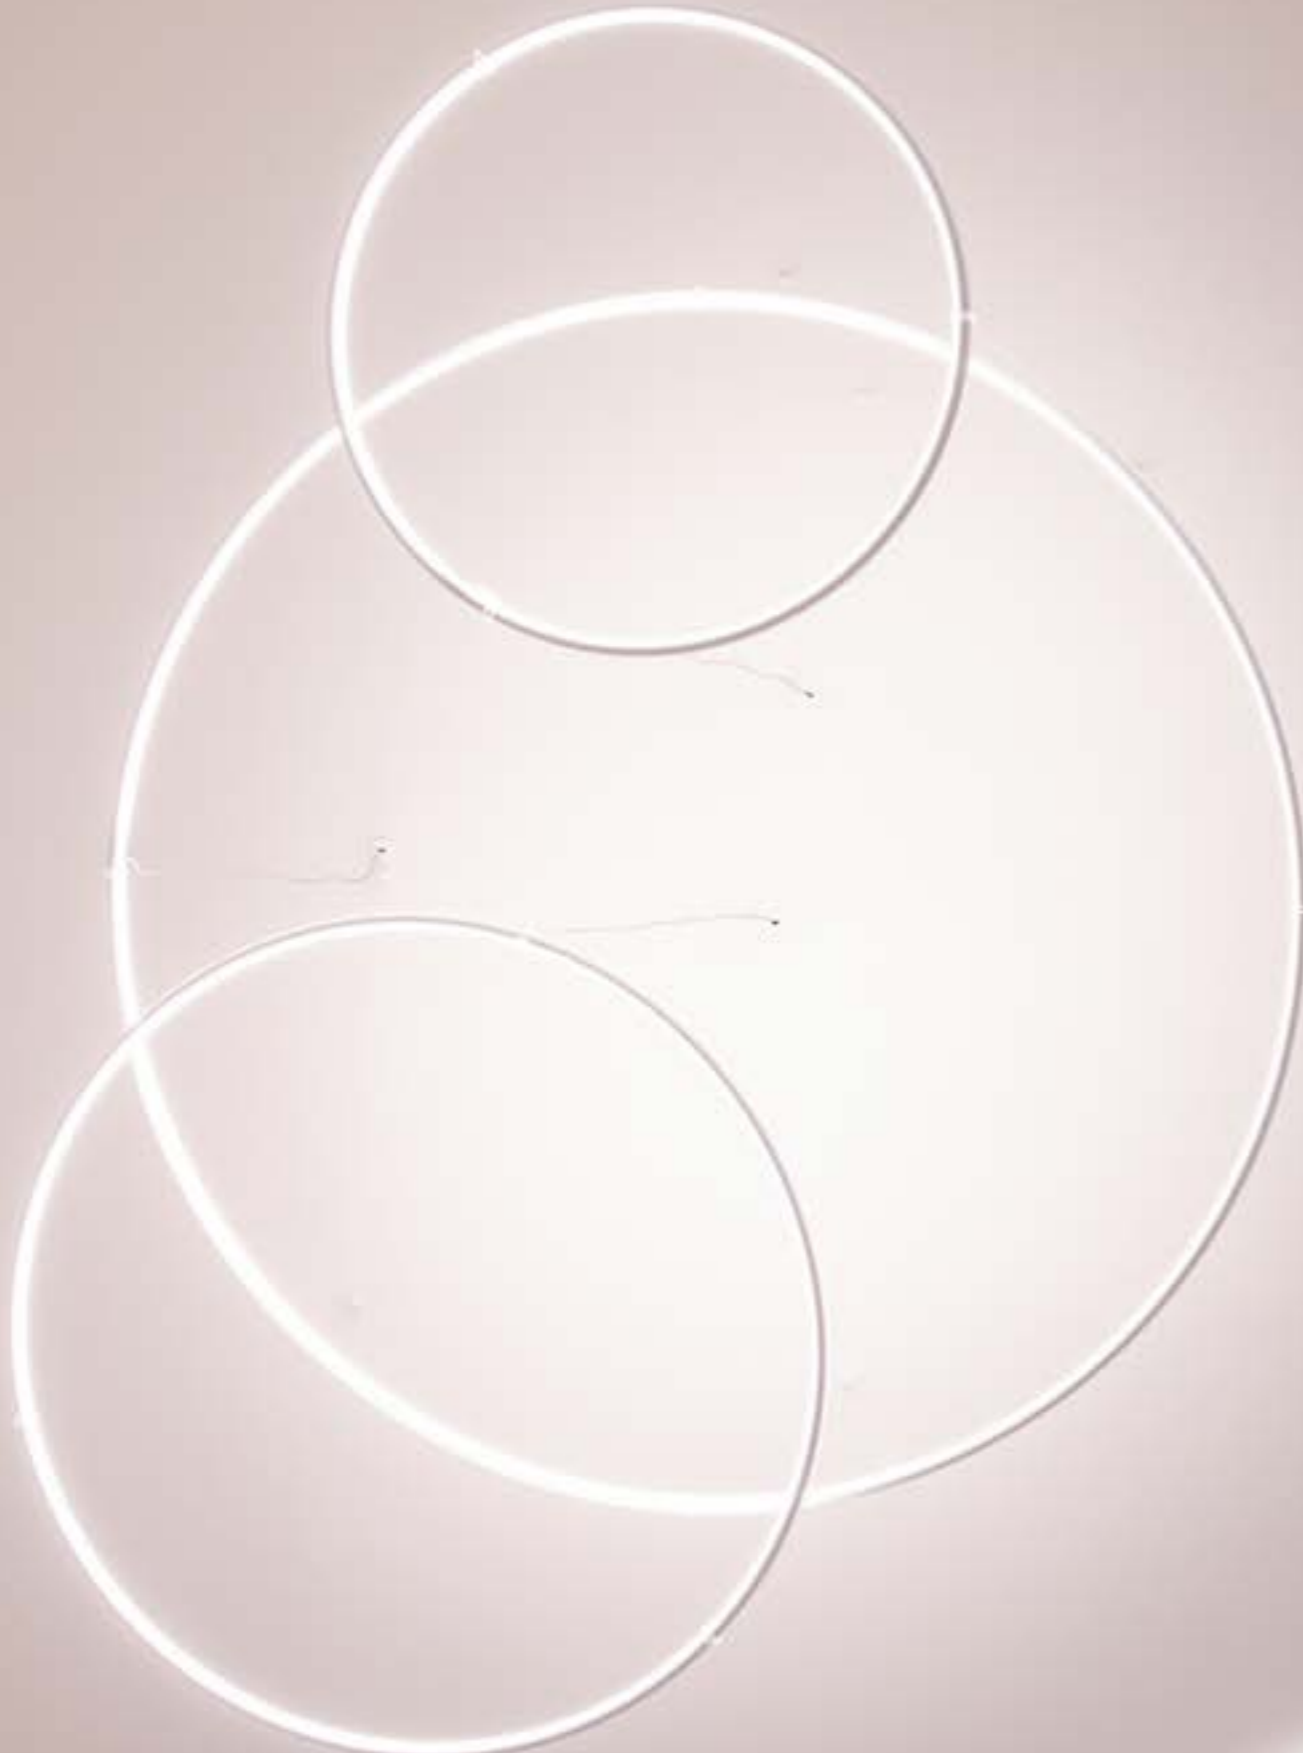



## LANCIA FAMILY



Lancia family with simple and essential design provides a continuous and uniform light. The body is made of a calendered aluminum profile, an opal polycarbonate diffuser, and a coaxial power cable.

The particularity of the luminous flux directed towards the inside of the circumference guarantees a particularly high visual comfort and helps to enhance the lightness of the structure.

*La famille Lancia, au design simple et essentiel, fournit une lumière continue et uniforme. Le corps est constitué d'un profilé en aluminium calandré, d'un diffuseur en polycarbonate opalin et d'un câble d'alimentation coaxial.*


*La particularité du flux lumineux dirigé vers l'intérieur de la circonférence garantit un confort visuel particulièrement élevé et contribue à renforcer la légèreté de la structure.*

*Die Lancia-Familie mit ihrem einfachen und essentiellen Design bietet ein kontinuierliches und gleichmäßiges Licht. Das Gehäuse besteht aus einem kalandrierten Aluminiumprofil, einem opalen Polycarbonatdiffusor und einem koaxialen Stromkabel.*

*Die Besonderheit des auf die Innenseite des Umfangs gerichteten Lichtstroms garantiert einen besonders hohen Sehkomfort und trägt zur Leichtigkeit der Struktur bei.*




# LANCIA TONDA

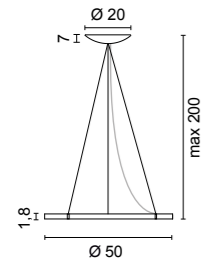

**1566** 1,20 Kg

- .01** White
- .02** Black
- .25** Satin gold
- .31** Chromed
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted bronze finishing


<b>/W</b>	4000K	LED 27W	CRI>90	3390lm
<b>/WW</b>	3000K	LED 27W	CRI>90	3030lm
<b>/XW</b>	2700K	LED 27W	CRI>90	2835lm



**1562** 1,40 Kg

- .01** White
- .02** Black
- .25** Satin gold
- .31** Chromed
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted bronze finishing


<b>/W</b>	4000K	LED 37,8W	CRI>90	4746lm
<b>/WW</b>	3000K	LED 37,8W	CRI>90	4242lm
<b>/XW</b>	2700K	LED 37,8W	CRI>90	3969lm

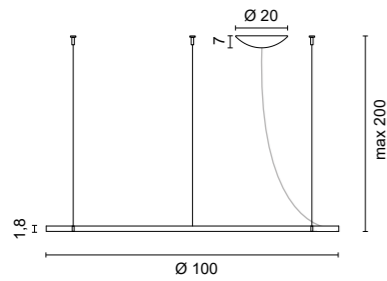

**1563** 1,70 Kg

- .01** White
- .02** Black
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted bronze finishing

<b>/W</b>	4000K	LED 54W	CRI>90	6780lm
<b>/WW</b>	3000K	LED 54W	CRI>90	6060lm
<b>/XW</b>	2700K	LED 54W	CRI>90	5670lm

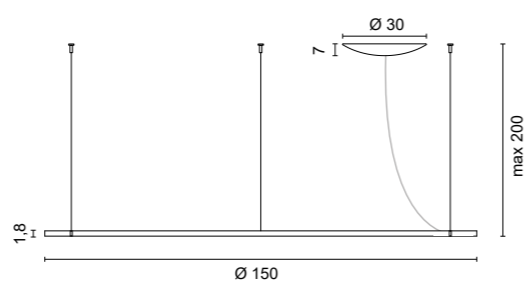


**1564** 2,50 Kg

- .01** White
- .02** Black
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted bronze finishing

<b>/W</b>	4000K	LED 81W	CRI>90	10170lm
<b>/WW</b>	3000K	LED 81W	CRI>90	9090lm
<b>/XW</b>	2700K	LED 81W	CRI>90	8505lm



## FINISHES CODES

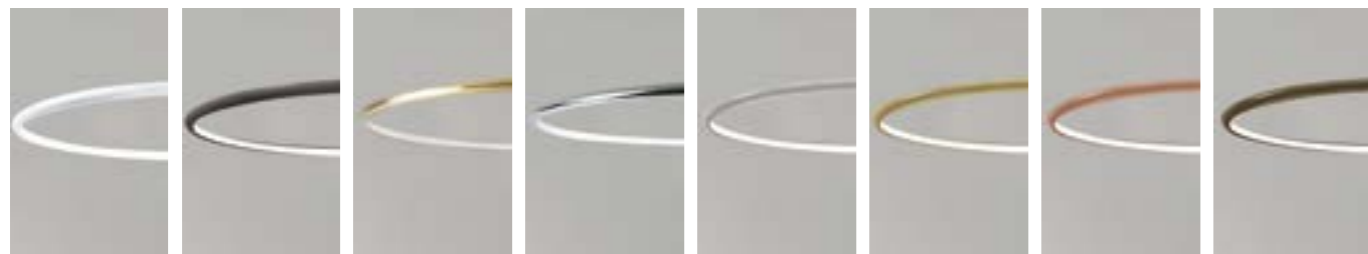

**.01** White    **.02** Black    **.25** Satin gold    **.31** Chrome    **.85** Painted Silver    **.86** Painted Gold    **.87** Painted Copper    **.88** Painted Bronze



## OPTIONAL

Fixing element for 3 cables  
Ø 1,7 cm H 5 cm

### 0536

- .01** White
- .02** Black
- .25** Satin gold
- .31** Chromed






SomVita Suites  
Ph. Hannes Niederkofler





# LANCIA TONDA XL - XXL - MEGA

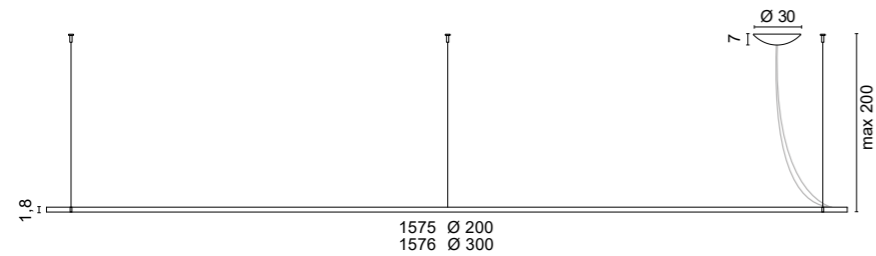

**1575** 3,00 Kg

- .01 White
- .02 Black


/W	4000K	LED 67W	CRI>90	7560lm
/WW	3000K	LED 67W	CRI>90	7140lm
/XW	2700K	LED 67W	CRI>90	6720lm



**1576** 4,00 Kg

- .01 White
- .02 Black

/W	4000K	LED 96W	CRI>90	10800lm
/WW	3000K	LED 96W	CRI>90	10120lm
/XW	2700K	LED 96W	CRI>90	9600lm

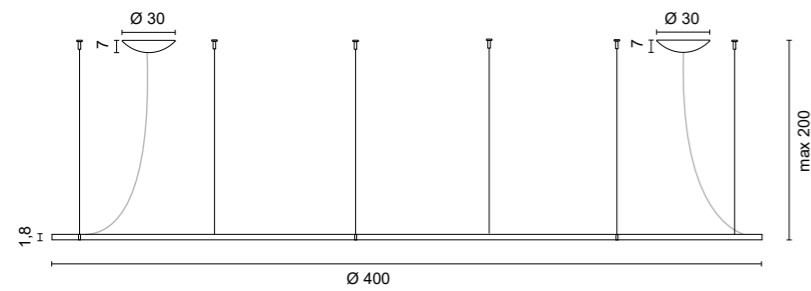

**1578** 5,00 Kg

- .01 White
- .02 Black

/W	4000K	LED 134W	CRI>90	15120lm
/WW	3000K	LED 134W	CRI>90	14280lm
/XW	2700K	LED 134W	CRI>90	13440lm



## FINISHES CODES



.01 White    .02 Black










LANCIA TONDA SYSTEM




# LANCIA TONDA SYSTEM



## COMPOSITIONS WITH MULTIPLE ATTACKS

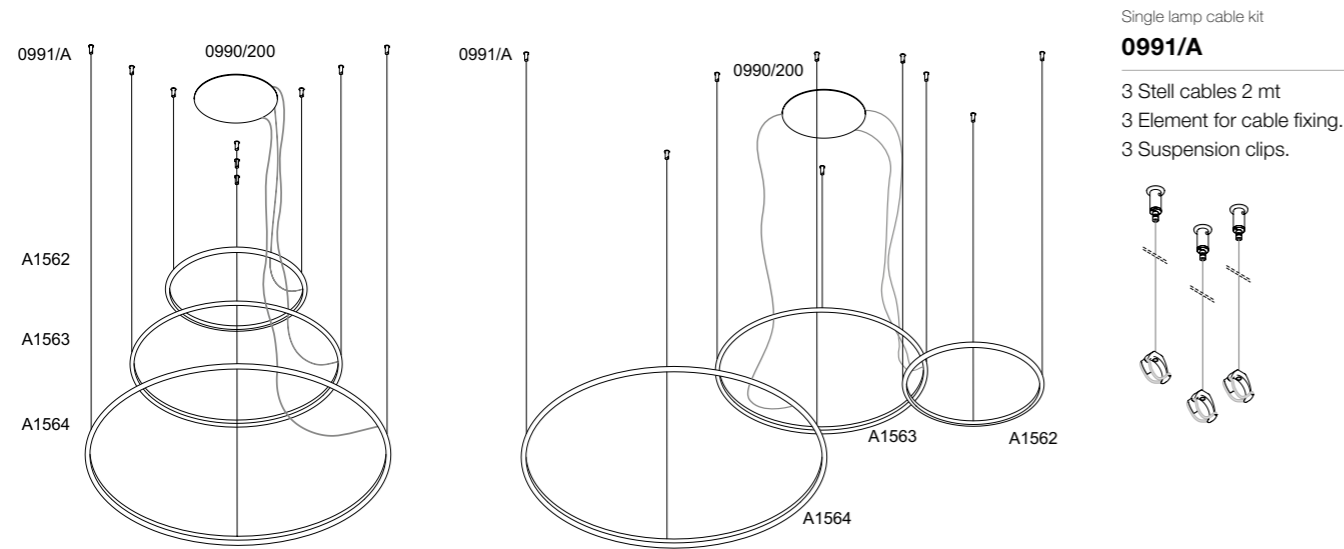

## COMPOSITIONS WITH SINGLE ATTACKS (MAX 3 LAMPS)

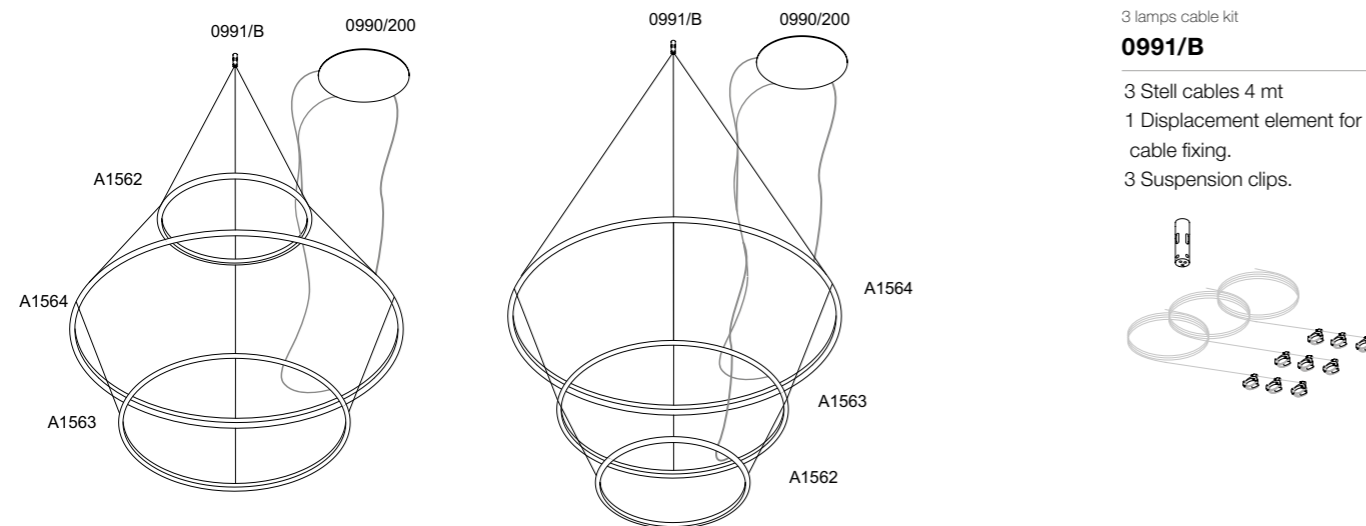


## FINISHES CODES



.01 White    .02 Black    .25 Satin gold    .31 Chrome    .85 Painted Silver    .86 Painted Gold    .87 Painted Copper    .88 Painted Bronze

## COMPOSITION EXAMPLES

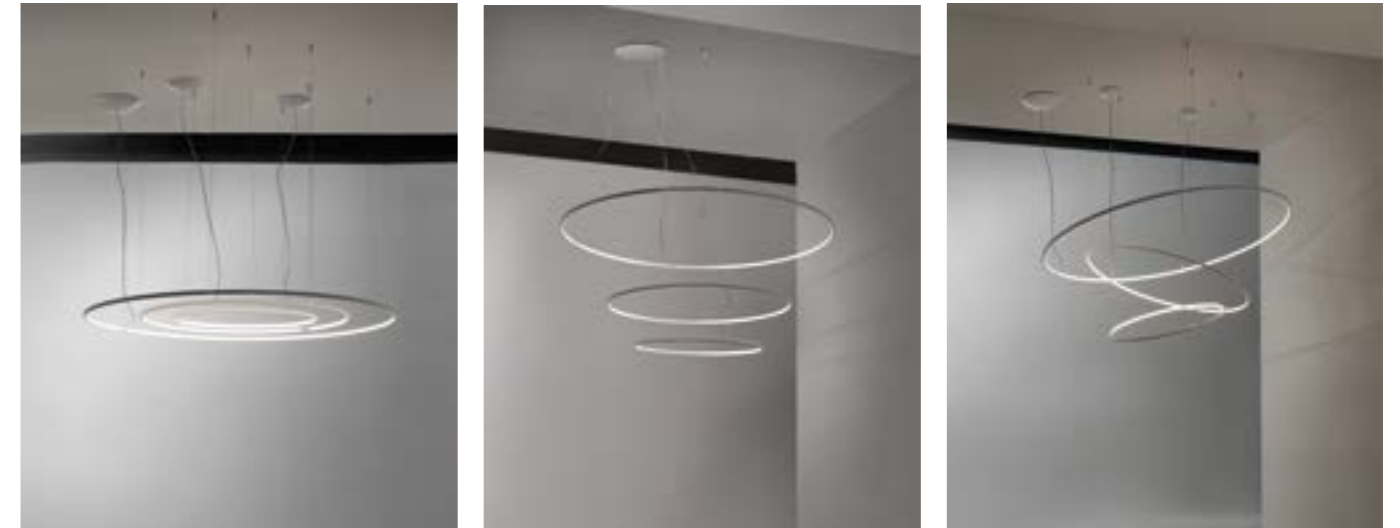

LED source 24V-18W/mt - Electric cable length 250 cm

## CUSTOM SIZE

Table of available lengths on request.

code	Ø cm	watt	finishes	2700K	lm	3000K	lm	4000K	lm
A1566	50	27	.01 White	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.02 Black	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.25 Satin gold	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.31 Chromed	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.85 Painted silver finishing	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.86 Painted gold finishing	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.87 Painted copper finishing	/XW	2835	/WW	3030	/W	3390
A1566	50	27	.88 Painted bronze finishing	/XW	2835	/WW	3030	/W	3390
A1562	70	37,8	.01 White	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.02 Black	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.25 Satin gold	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.31 Chromed	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.85 Painted silver finishing	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.86 Painted gold finishing	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.87 Painted copper finishing	/XW	3969	/WW	4242	/W	4776
A1562	70	37,8	.88 Painted bronze finishing	/XW	3969	/WW	4242	/W	4776
A1563	100	54	.01 White	/XW	5670	/WW	6060	/W	6780
A1563	100	54	.02 Black	/XW	5670	/WW	6060	/W	6780
A1563	100	54	.85 Painted silver finishing	/XW	5670	/WW	6060	/W	6780
A1563	100	54	.86 Painted gold finishing	/XW	5670	/WW	6060	/W	6780
A1563	100	54	.87 Painted copper finishing	/XW	5670	/WW	6060	/W	6780
A1563	100	54	.88 Painted bronze finishing	/XW	5670	/WW	6060	/W	6780
A1564	150	81	.01 White	/XW	8505	/WW	9090	/W	10170
A1564	150	81	.02 Black	/XW	8505	/WW	9090	/W	10170
A1564	150	81	.85 Painted silver finishing	/XW	8505	/WW	9090	/W	10170
A1564	150	81	.86 Painted gold finishing	/XW	8505	/WW	9090	/W	10170
A1564	150	81	.87 Painted copper finishing	/XW	8505	/WW	9090	/W	10170
A1564	150	81	.88 Painted bronze finishing	/XW	8505	/WW	9090	/W	10170

Fixing kit to be ordered separately

Ceiling roses with converter for suspension systems p.102




Arch. Stefano Campelli, JRC  
Zighetti Illuminazione - EgoLuce



Arch. Paola Sola, Casa Toledo  
Ph. Dario Borruto

# LANCIA TONDA CAVO

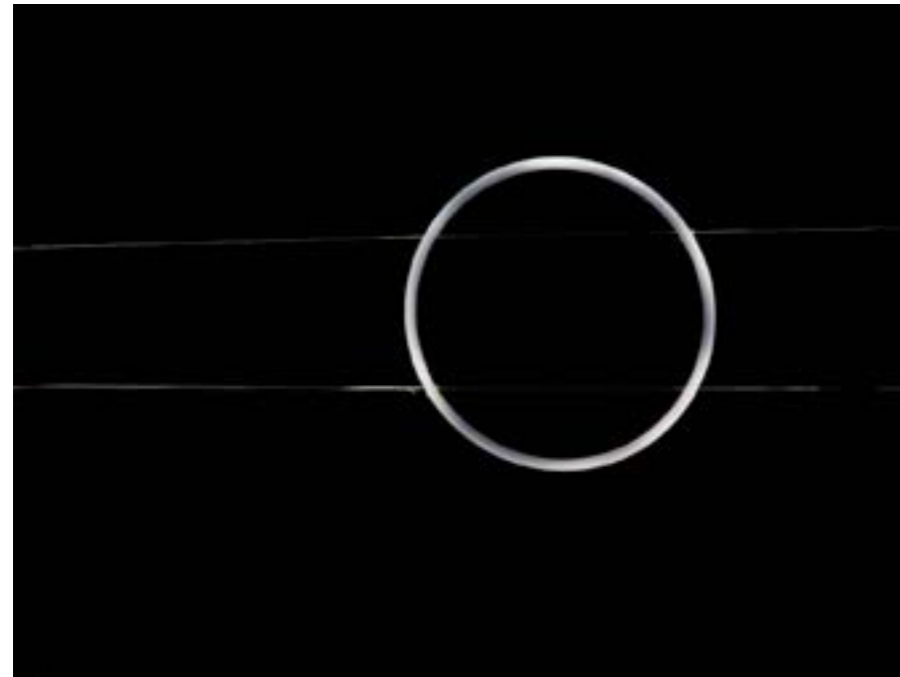

**A1171** 0,40 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed

/W	4000K	LED 18W	CRI>90	2260lm
/WW	3000K	LED 18W	CRI>90	2020lm
/XW	2700K	LED 18W	CRI>90	1890lm

F
600 cm
CRI >90
R
Ø 35cm

**A1172** 0,50 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed

/W	4000K	LED 27W	CRI>90	3390lm
/WW	3000K	LED 27W	CRI>90	3030lm
/XW	2700K	LED 27W	CRI>90	2835lm

F
550 cm
CRI >90
R
Ø 50cm


**A1173** 0,80 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed

/W	4000K	LED 37,8W	CRI>90	4746lm
/WW	3000K	LED 37,8W	CRI>90	4242lm
/XW	2700K	LED 37,8W	CRI>90	3969lm

F
550 cm
CRI >90
R
Ø 70cm

Tensors are to be ordered separately

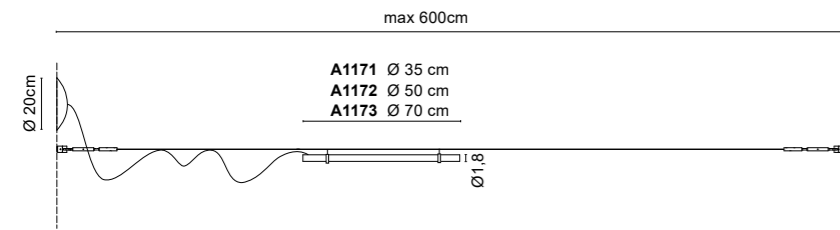

## ACCESSORIES



Kit  
**0970.31**

4 chromed brass tensors  
with 2 steel cables L 6 mt

Kit  
**0970.31/10**


4 chromed brass tensors  
with 2 steel cables L 10 mt

## FINISHES CODES



.01 White    .02 Black    .25 Satin gold    .31 Chrome

**A1172**  
Lancia Tonda Cavo Ø 50  
without ceiling rose

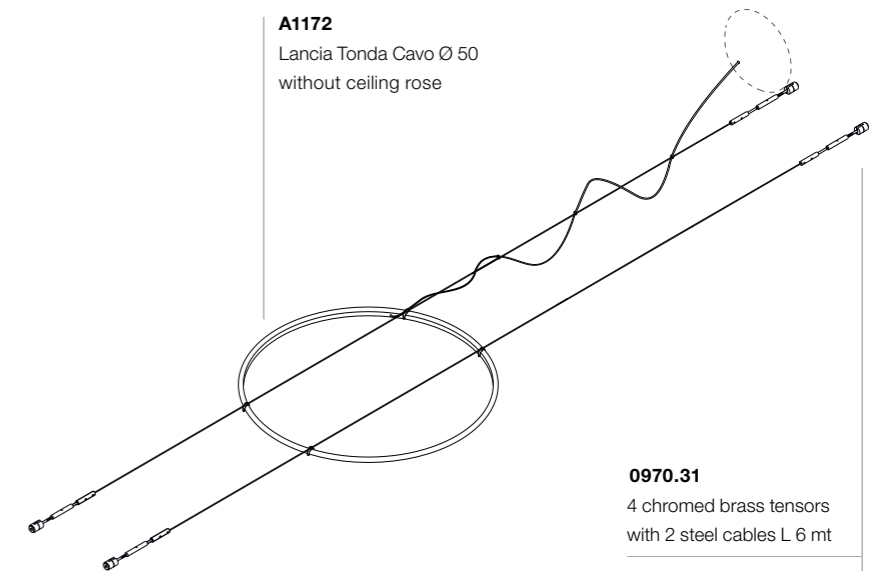

**0970.31**  
4 chromed brass tensors  
with 2 steel cables L 6 mt


**0970.31/10**  
4 chromed brass tensors  
with 2 steel cables L 10 mt



Arch. Laura Verdi, DEMO HOTEL  
Ph. Flavio Ricci




# LANCIA TONDA

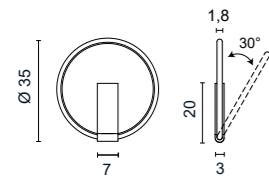

**4605** 0,75 Kg

<b>.01</b>	White	□
<b>.02</b>	Black	■
<b>.25</b>	Satin gold	■
<b>.31</b>	Chromed	■
<b>.85</b>	Painted silver finishing	■
<b>.86</b>	Painted gold finishing	■
<b>.87</b>	Painted copper finishing	■
<b>.88</b>	Painted bronze finishing	■

<b>/W</b>	4000K	LED 18W	CRI>90	2260lm
<b>/WW</b>	3000K	LED 18W	CRI>90	2020lm
<b>/XW</b>	2700K	LED 18W	CRI>90	1890lm

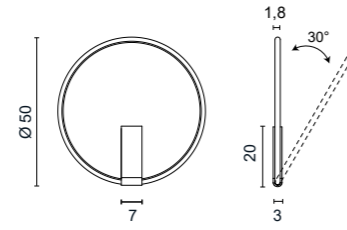


**4606** 1,10 Kg

<b>.01</b>	White	□
<b>.02</b>	Black	■
<b>.25</b>	Satin gold	■
<b>.31</b>	Chromed	■
<b>.85</b>	Painted silver finishing	■
<b>.86</b>	Painted gold finishing	■
<b>.87</b>	Painted copper finishing	■
<b>.88</b>	Painted bronze finishing	■

<b>/W</b>	4000K	LED 27W	CRI>90	3390lm
<b>/WW</b>	3000K	LED 27W	CRI>90	3030lm
<b>/XW</b>	2700K	LED 27W	CRI>90	2835lm



Dimmable on request

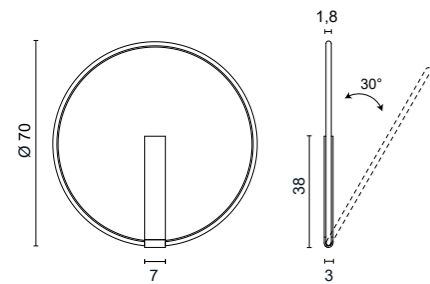

**4607** 2,30 Kg

<b>.01</b>	White	□
<b>.02</b>	Black	■
<b>.25</b>	Satin gold	■
<b>.31</b>	Chromed	■
<b>.85</b>	Painted silver finishing	■
<b>.86</b>	Painted gold finishing	■
<b>.87</b>	Painted copper finishing	■
<b>.88</b>	Painted bronze finishing	■

<b>/W</b>	4000K	LED 36W	CRI>90	4520lm
<b>/WW</b>	3000K	LED 36W	CRI>90	4040lm
<b>/XW</b>	2700K	LED 36W	CRI>90	3780lm




Dimmable on request

## FINISHES CODES



**.01** White    **.02** Black    **.25** Satin gold    **.31** Chrome    **.85** Painted Silver    **.86** Painted Gold    **.87** Painted Copper    **.88** Painted Bronze




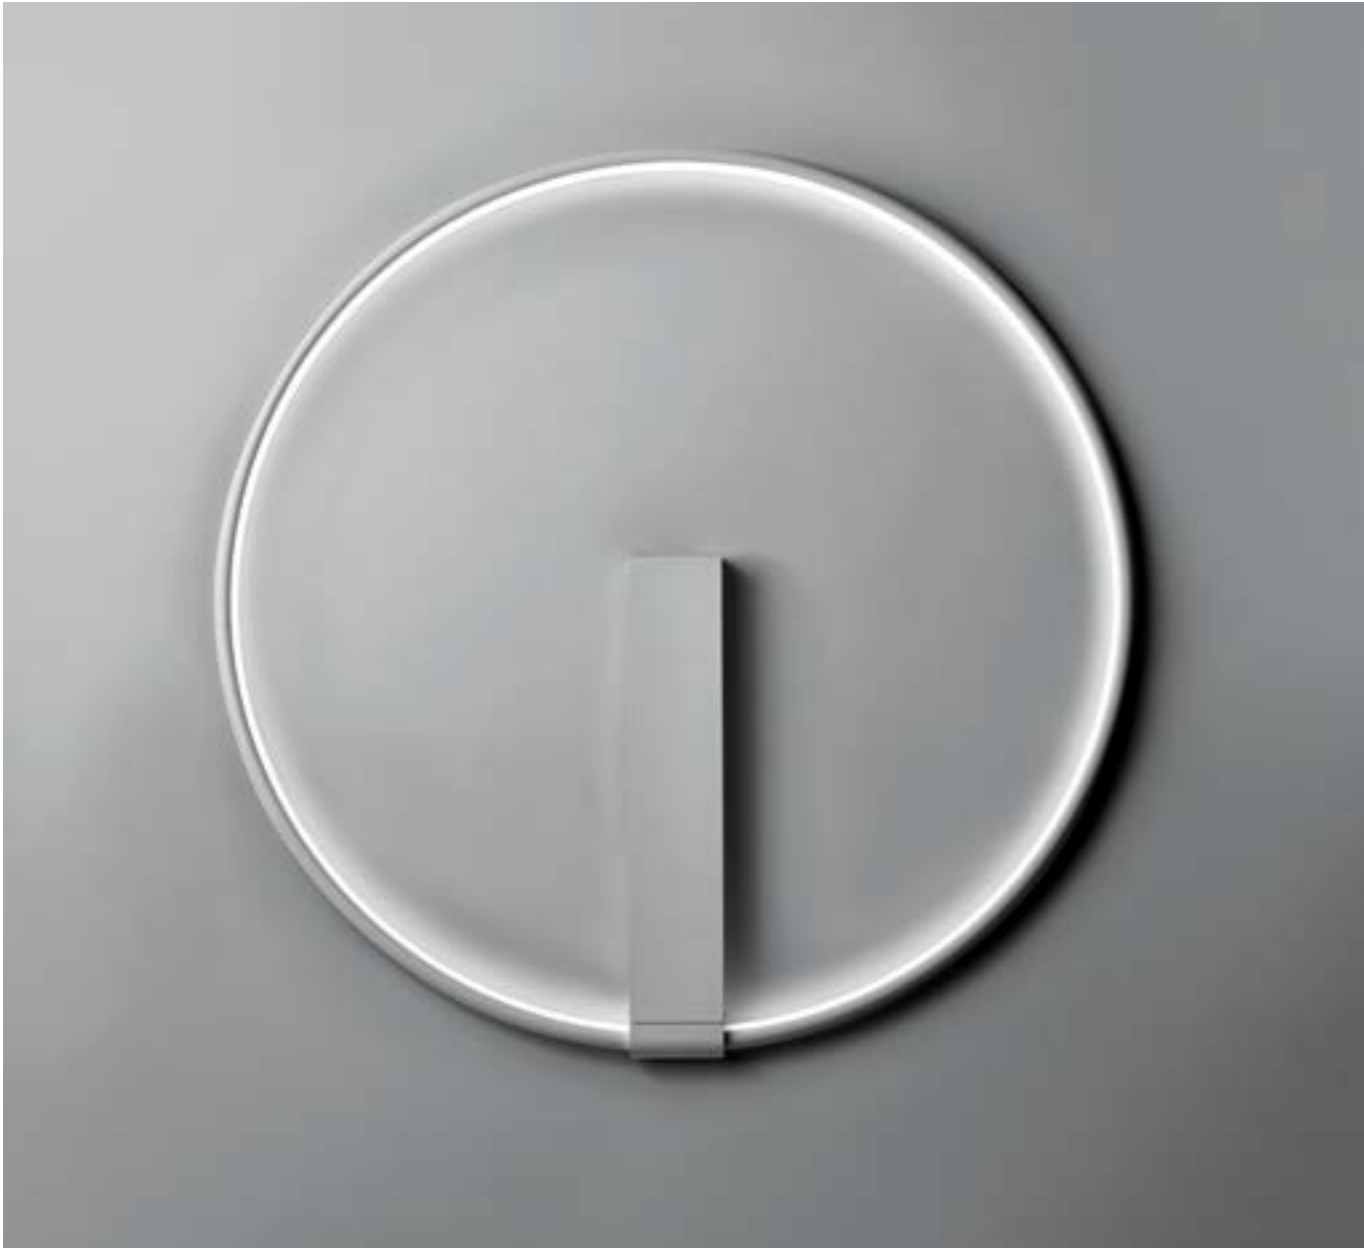






# LANCIA TONDA



**5602** 0,75 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed
- .85 Painted silver finishing
- .86 Painted gold finishing
- .87 Painted copper finishing
- .88 Painted bronze finishing




/W	4000K	LED 18W	CRI>90	2260lm
/WW	3000K	LED 18W	CRI>90	2020lm
/XW	2700K	LED 18W	CRI>90	1890lm

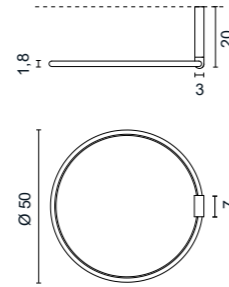

**5603** 1,10 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed
- .85 Painted silver finishing
- .86 Painted gold finishing
- .87 Painted copper finishing
- .88 Painted bronze finishing

/W	4000K	LED 27W	CRI>90	3390lm
/WW	3000K	LED 27W	CRI>90	3030lm
/XW	2700K	LED 27W	CRI>90	2835lm

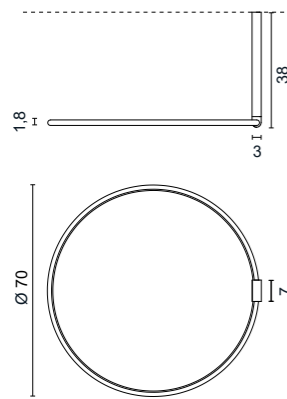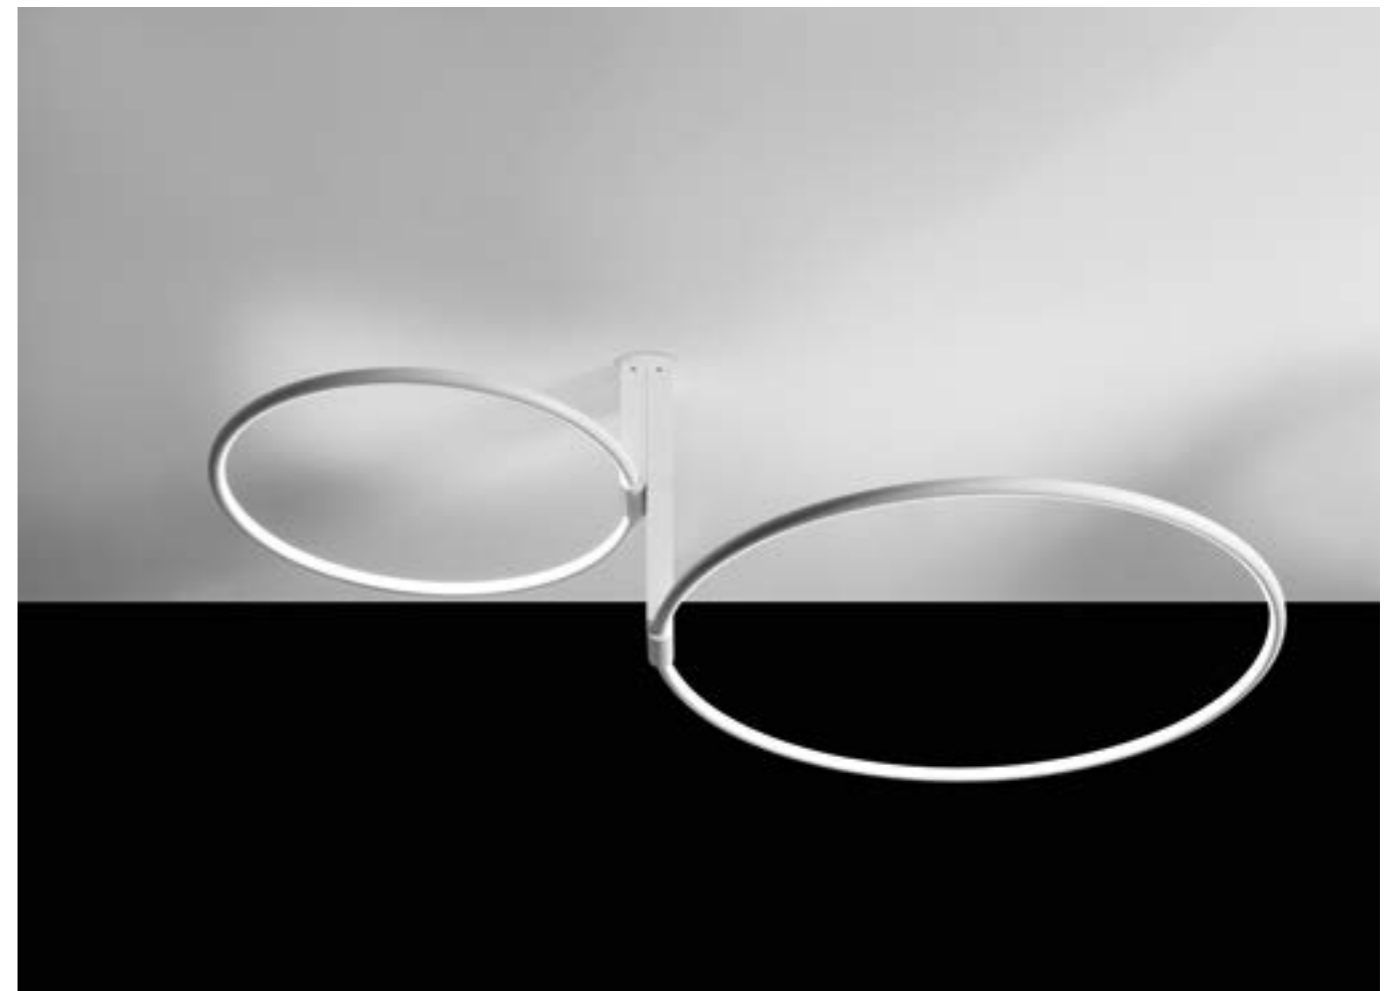


**5604** 2,30 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .31 Chromed
- .85 Painted silver finishing
- .86 Painted gold finishing
- .87 Painted copper finishing
- .88 Painted bronze finishing

/W	4000K	LED 36W	CRI>90	4520lm
/WW	3000K	LED 36W	CRI>90	4040lm
/XW	2700K	LED 36W	CRI>90	3780lm




Dimmable on request

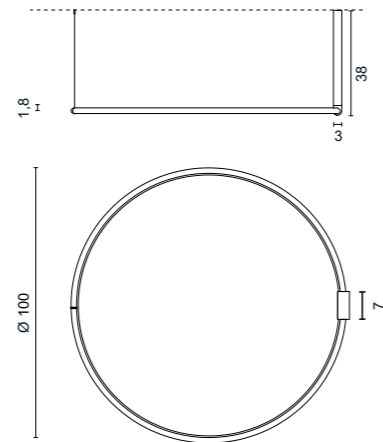

**5605** 3,30 Kg

- .01 White
- .02 Black
- .85 Painted silver finishing
- .86 Painted gold finishing
- .87 Painted copper finishing
- .88 Painted bronze finishing

/W	4000K	LED 54W	CRI>90	6780lm
/WW	3000K	LED 54W	CRI>90	6060lm
/XW	2700K	LED 54W	CRI>90	5670lm




Dimmable on request

## OPTIONAL

Plate for coupled installation  
Ø 9,5cm - H 3,5 cm - 0,20Kg

**0995**

- .01 White
- .02 Black





Ceiling hook provided with Lancia Tonda 5605

FINISHES CODES



.01 White

.02 Black

.25 Satin gold

.31 Chrome

.85 Painted Silver

.86 Painted Gold

.87 Painted Copper


.88 Painted Bronze







# LANCIA TONDA

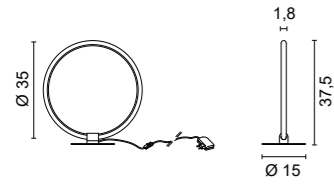


**2513** 0,70 Kg

.01	White	
.02	Black	
.25	Satin gold	
.31	Chromed	

/W	4000K	LED 9,6W	CRI>90	1080lm
/WW	3000K	LED 9,6W	CRI>90	1020lm
/XW	2700K	LED 9,6W	CRI>90	960lm



With PUSH DIMMER on cable

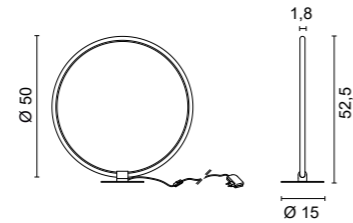

**2514** 1,00 Kg

.01	White	
.02	Black	
.25	Satin gold	
.31	Chromed	

/W	4000K	LED 14W	CRI>90	1620lm
/WW	3000K	LED 14W	CRI>90	1530lm
/XW	2700K	LED 14W	CRI>90	1440lm



With PUSH DIMMER on cable


## FINISHES CODES



.01 White    .02 Black    .25 Satin gold    .31 Chrome



# LANCIA TONDA

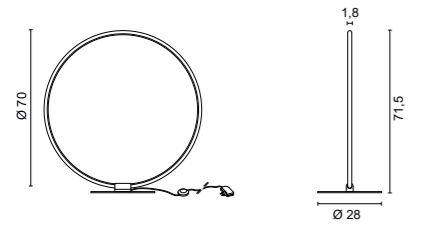


**3513** 2,00 Kg

- .01** White
- .02** Black
- .25** Satin gold
- .31** Chromed

<b>/W</b>	4000K	LED 20W	CRI>90	2268lm
<b>/WW</b>	3000K	LED 20W	CRI>90	2142lm
<b>/XW</b>	2700K	LED 20W	CRI>90	2016lm



With PUSH DIMMER on cable

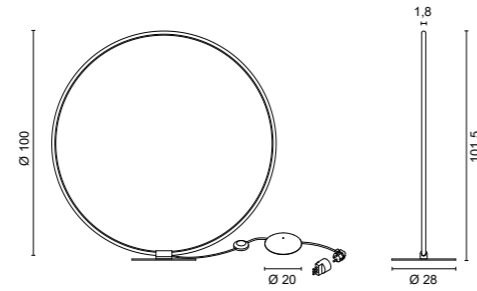


**3514** 3,90 Kg

- .01** White
- .02** Black

<b>/W</b>	4000K	LED 29W	CRI>90	3240lm
<b>/WW</b>	3000K	LED 29W	CRI>90	3060lm
<b>/XW</b>	2700K	LED 29W	CRI>90	2880lm



With PUSH DIMMER on cable

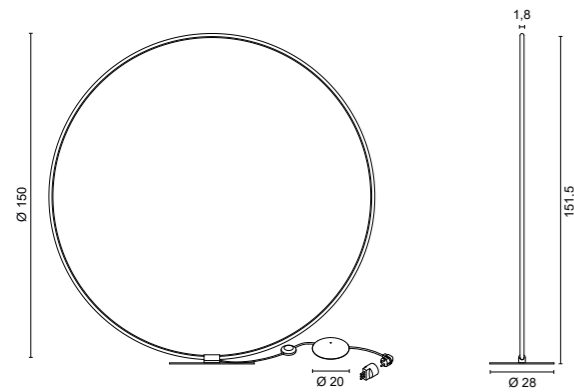

**3515** 4,50 Kg


- .01** White
- .02** Black

<b>/W</b>	4000K	LED 43W	CRI>90	4860lm
<b>/WW</b>	3000K	LED 43W	CRI>90	4590lm
<b>/XW</b>	2700K	LED 43W	CRI>90	4224lm



With PUSH DIMMER on cable

## FINISHES CODES

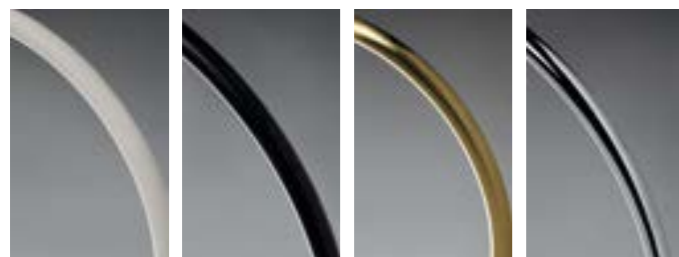

**.01** White    **.02** Black    **.25** Satin gold    **.31** Chrome











# LANCIA CAVO



## A1565


.01	White	
.02	Black	
.85	Painted silver finishing	
.86	Painted gold finishing	
.87	Painted copper finishing	
.88	Painted bronze finishing	

<b>L 100 cm</b>		0,80 Kg
/100/W	4000K LED 18W	2260lm
/100/WW	3000K LED 18W	2020lm
/100/XW	2700K LED 18W	1890lm


<b>L 150 cm</b>		1,00 Kg
/150/W	4000K LED 27W	3390lm
/150/WW	3000K LED 27W	3030lm
/150/XW	2700K LED 27W	2835lm

<b>L 200 cm</b>		1,20 Kg
/200/W	4000K LED 36W	4520lm
/200/WW	3000K LED 36W	4040lm
/200/XW	2700K LED 36W	3780lm

<b>L 300 cm</b>		2,00 Kg
/300/W	4000K LED 54W	6780lm
/300/WW	3000K LED 54W	6060lm
/300/XW	2700K LED 54W	5670lm



Tensors are to be ordered separately

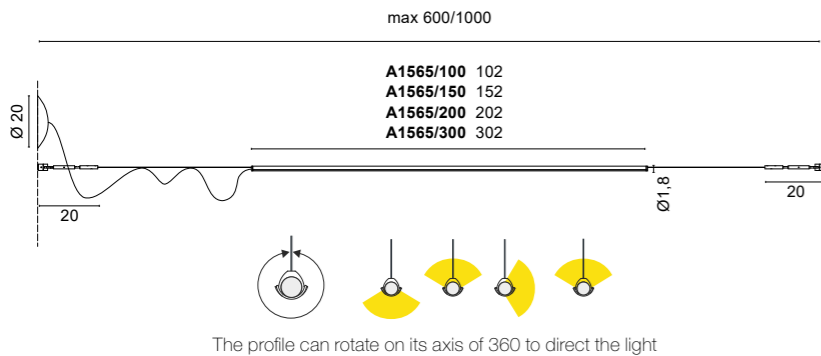

## ACCESSORIES




Kit  
**0965.31**  
2 chromed brass tensors  
with 2 steel cables L 6 mt

Kit  
**0965.31/10**  
2 chromed brass tensors  
with 2 steel cables L 10 mt

Single lamp cable kit  
**0991./C**  
1 Steel cable 2 mt  
1 Element for cable fixing  
1 Suspension clip




## FINISHES CODES

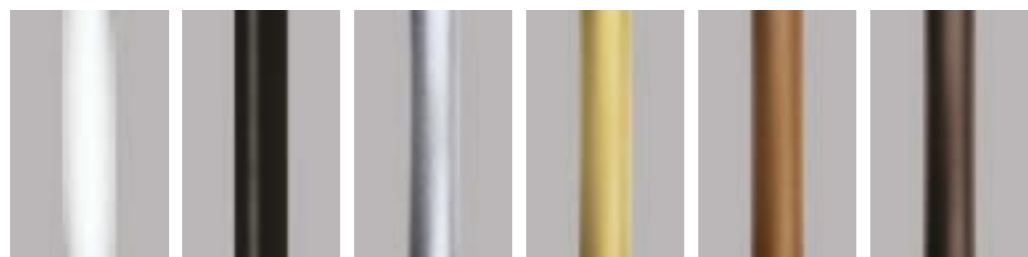

.01 White .02 Black .85 Decor silver .86 Decor gold .87 Decor copper .88 Decor bronze



**A1565**  
Lancia Cavo System  
without ceiling rose

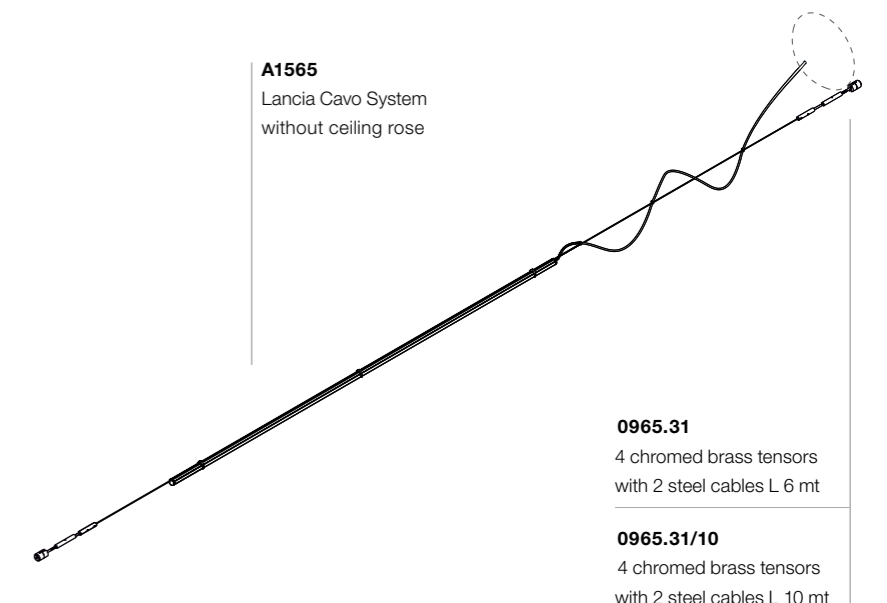

**0965.31**  
4 chromed brass tensors  
with 2 steel cables L 6 mt



**0965.31/10**  
4 chromed brass tensors  
with 2 steel cables L 10 mt

Ceiling roses with converter for suspension systems p.102





# LANCIA SYSTEM

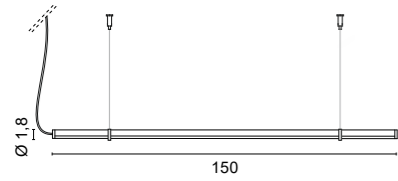

The profile can rotate on its axis of 360 to direct the light


**1539** 1,10 Kg

- .01** White ■
- .02** Black ■
- .85** Painted silver finishing ■
- .86** Painted gold finishing ■
- .87** Painted copper finishing ■
- .88** Painted bronze finishing ■

- /W** 4000K LED 27W CRI>90 3390lm
- /WW** 3000K LED 27W CRI>90 3030lm
- /XW** 2700K LED 27W CRI>90 2835lm



Suspension fixing kit supplied with the lamp

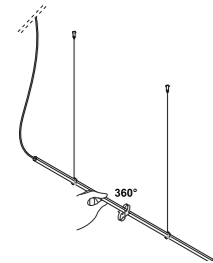


## CUSTOM SIZE

Table of available lengths on request

cm	watt	2700K	lm	3000K	lm	4000K	lm
102	18W	A1539. /100/XW	1890	A1539. /100/WW	2020	A1539. /100/W	2260
127	22,5W	A1539. /125/XW	2362	A1539. /125/WW	2525	A1539. /125/W	2825
<b>152</b>	<b>27W</b>	<b>1539. /XW</b>	<b>2835</b>	<b>1539. /WW</b>	<b>3030</b>	<b>1539. /W</b>	<b>3390</b>
177	31,5W	A1539. /175/XW	3307	A1539. /175/WW	3535	A1539. /175/W	3955
202	36W	A1539. /200/XW	3780	A1539. /200/WW	4040	A1539. /200/W	4520
227	40,5W	A1539. /225/XW	4252	A1539. /225/WW	4545	A1539. /225/W	5085
252	45W	A1539. /250/XW	4725	A1539. /250/WW	5050	A1539. /250/W	5650
277	49,5W	A1539. /275/XW	5197	A1539. /275/WW	5555	A1539. /275/W	6215
302	54W	A1539. /300/XW	5670	A1539. /300/WW	6060	A1539. /300/W	6780

Finishes codes: **.01 .02 .85 .86 .87 .88**

## FINISHES CODES

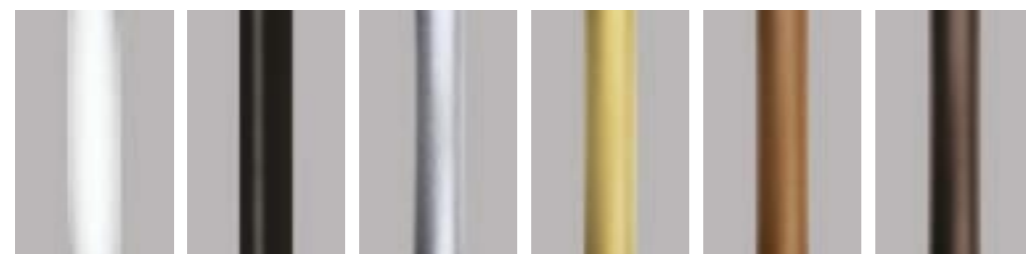

- .01** White
- .02** Black
- .85** Painted Silver
- .86** Painted Gold
- .87** Painted Copper
- .88** Painted Bronze










# MULTI LANCIA SYSTEM


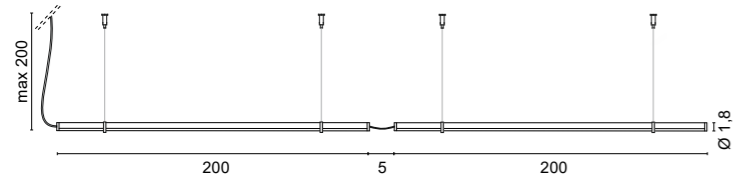


**1670** 2x200 cm 2,80 Kg

.01	White	
.02	Black	
/W	4000K LED 72W CRI>90	9040lm
/WW	3000K LED 72W CRI>90	8080lm
/XW	2700K LED 72W CRI>90	7560lm



Suspension fixing kit supplied with the lamp

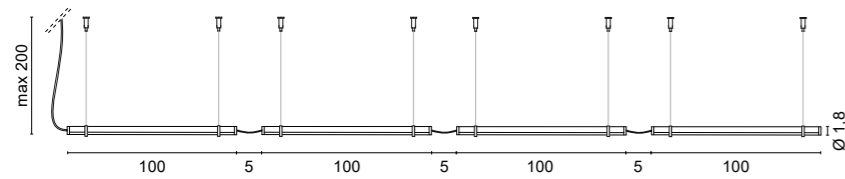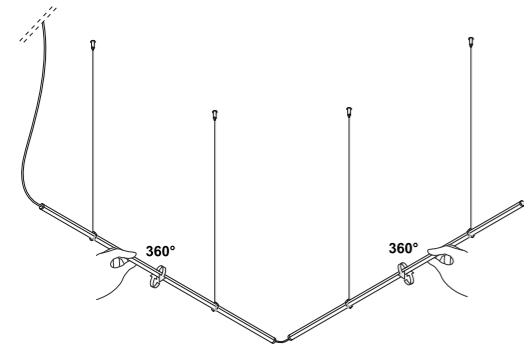


**1671** 4x100 cm 2,80 Kg

.01	White	
.02	Black	
/W	4000K LED 72W CRI>90	9040lm
/WW	3000K LED 72W CRI>90	8080lm
/XW	2700K LED 72W CRI>90	7560lm



Suspension fixing kit supplied with the lamp

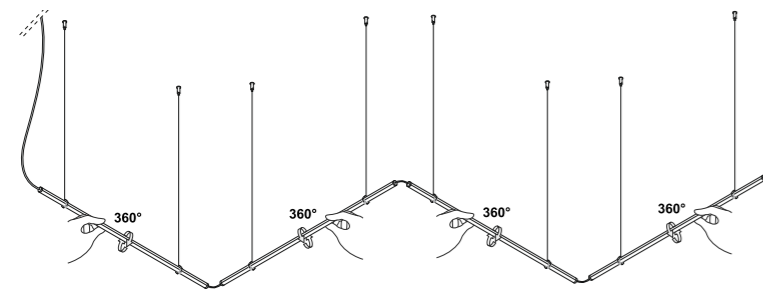

The profile can rotate on its axis of 360 to direct the light



## FINISHES CODES



.01 White

.02 Black



# MULTI LANCIA SYSTEM



## OPTIONAL


Fixing kit between the lamps  
**0092**

.00 Clear




Ceiling fixing clip  
**0093**


.00 Clear

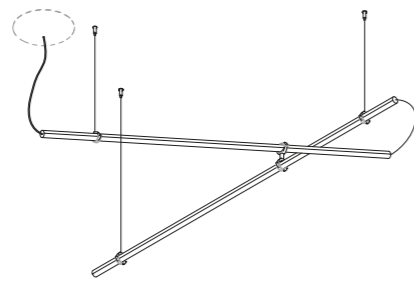


Example of installation  
with 1 **art 0092** + 1 **art 1670**

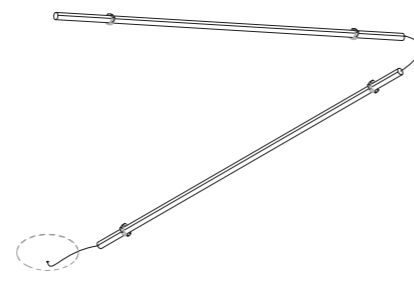


Example of installation  
with 4 **art 0093** + 1 **art 1670**

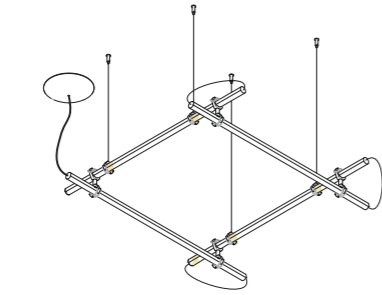

Example of installation  
with 4 **art 0092** + 1 **art 1671**

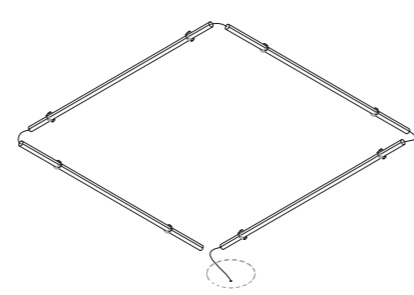

Example of installation  
with 8 **art 0093** + 1 **art 1671**

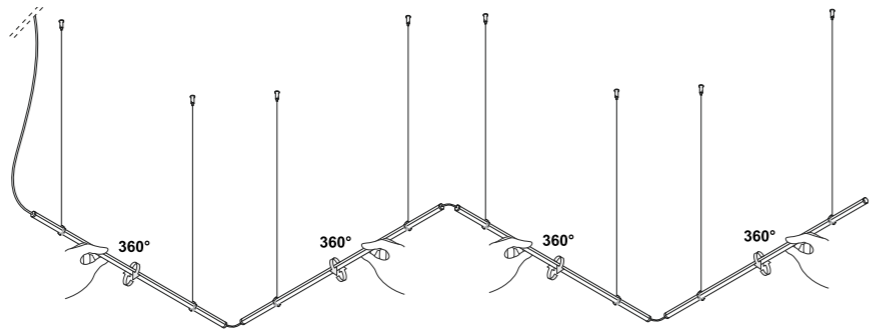

Example of installation  
with 8 **art 0991/C** + 1 **art 1671**



Example of installation with 1 **art 0092** + 1 **art 1670**



Example of installation with 8 **art 0093** + 1 **art 1671**








# LANCIA NO LIMITS



max 600/1000

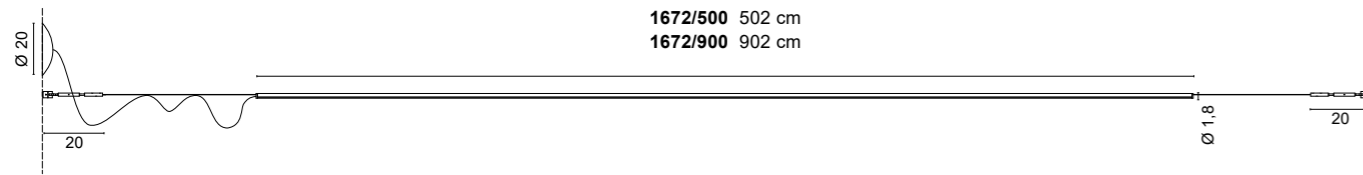

**1672/500** 502 cm  
**1672/900** 902 cm

## 1672


- .01 White
- .02 Black

**L 500 cm** 3,00 Kg


<b>/500/W</b>	4000K	LED 24V 60W	9200lm
<b>/500/WW</b>	3000K	LED 24V 60W	8250lm
<b>/500/XW</b>	2700K	LED 24V 60W	7800lm

**L 900 cm** 5,60 Kg

<b>/900/W</b>	4000K	LED 24V 108W	16560lm
<b>/900/WW</b>	3000K	LED 24V 108W	14850lm
<b>/900/XW</b>	2700K	LED 24V 108W	14040lm



Tensor and ceiling roses with power supplies are to be ordered separately.

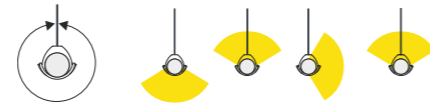

The profile can rotate on its axis of 360° to direct the light

## ACCESSORIES



Kit  
**0965.31**  
2 chromed brass tensors  
with 2 steel cables L 6 mt

Kit  
**0965.31/10**  
2 chromed brass tensors  
with 2 steel cables L 10 mt

Single lamp cable kit  
**0991/C**  
1 Steel cable 2 mt  
1 Element for cable fixing  
1 Suspension clip



## FINISHES CODES




.01 White

.02 Black





# LANCIA NO LIMITS

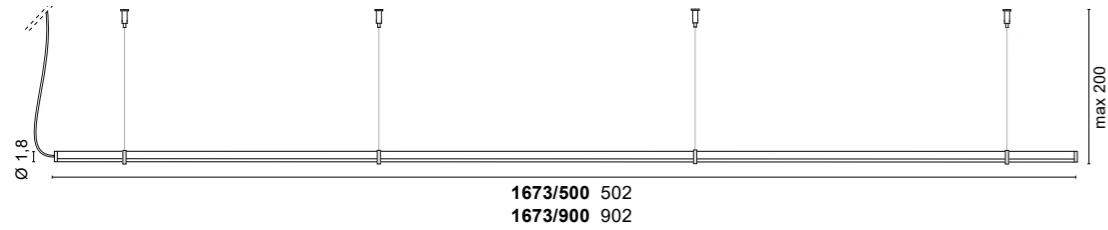

## 1673

- .01 White
- .02 Black

**L 500 cm** 4,20 Kg


<b>/500/W</b>	4000K	LED 24V 60W	9200lm
<b>/500/WW</b>	3000K	LED 24V 60W	8250lm
<b>/500/XW</b>	2700K	LED 24V 60W	7800lm

**L 900 cm** 6,30 Kg

<b>/900/W</b>	4000K	LED 24V 108W	16560lm
<b>/900/WW</b>	3000K	LED 24V 108W	14850lm
<b>/900/XW</b>	2700K	LED 24V 108W	14040lm



Tensor and ceiling roses with power supplies are to be ordered separately.

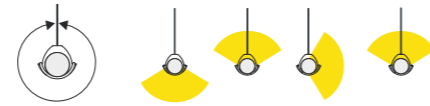

The profile can rotate on its axis of 360° to direct the light



## ACCESSORIES



Single lamp cable kit  
**0991/C**

- 1 Steel cable 2 mt
- 1 Element for cable fixing
- 1 Suspension clip



## FINISHES CODES




.01 White

.02 Black

## CEILING ROSES SYSTEM 24V

LANCIA SYSTEM - MULTI LANCIA SYSTEM - LANCIA NO LIMITS




Ceiling rose with **30W** driver

50/60Hz 220-230V

**0990/30**

0,50Kg

.01	White	□
.02	Black	■
.23	Satin Aluminium	■



Ceiling rose with **60W** driver


50/60Hz 220-230V

**0990/60**

0,70Kg

.01	White	□
.02	Black	■
.85	Painted silver finishing	■
.86	Painted gold finishing	■
.87	Painted copper finishing	■
.88	Painted bronze finishing	■

/P	DIMMER		MAX 60W
/V	DIMMER		MAX 60W
/D	DIMMER		MAX 60W



Ceiling rose with **150W** driver


50/60Hz 220-230V

**0990/150**

1,30Kg

.01	White	□
.02	Black	■
.85	Painted silver finishing	■
.86	Painted gold finishing	■
.87	Painted copper finishing	■
.88	Painted bronze finishing	■

/P	DIMMER		MAX 150W
/V	DIMMER		MAX 150W
/D	DIMMER		MAX 150W
/T	DIMMER		MAX 150W



Ceiling rose with **60W** driver


50/60Hz 220-230V

**0993/60**

0,60Kg

.01	White	□
.02	Black with white base	■

/P	DIMMER	
/V	DIMMER	
/D	DIMMER	



Ceiling rose with **100W** driver


50/60Hz 220-230V

**0990/100**

1,30Kg

.01	White	□
.02	Black	■
.85	Painted silver finishing	■
.86	Painted gold finishing	■
.87	Painted copper finishing	■
.88	Painted bronze finishing	■

/P	DIMMER		MAX 100W
/V	DIMMER		MAX 100W
/D	DIMMER		MAX 100W
/T	DIMMER		MAX 100W



Ceiling rose with **200W** driver

50/60Hz 220-230V

**0990/200**

2,00kg

.01	White	□
.02	Black	■
.85	Painted silver finishing	■
.86	Painted gold finishing	■
.87	Painted copper finishing	■
.88	Painted bronze finishing	■

/P	DIMMER		MAX 2x100W
/V	DIMMER		MAX 2x100W
/D	DIMMER		MAX 2x100W
/T	DIMMER		MAX 2x100W




### EXAMPLES OF MULTIPLE INSTALLATION

The choice of the ceiling rose depends on total power consumption.


#### 0990/150

Ceiling rose with driver 150W

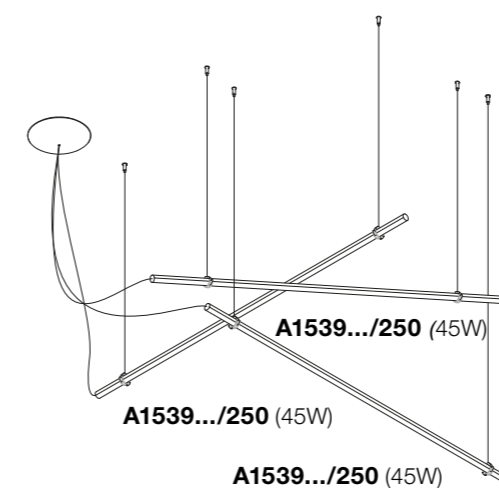

#### 0990/60


Ceiling rose with driver 60W

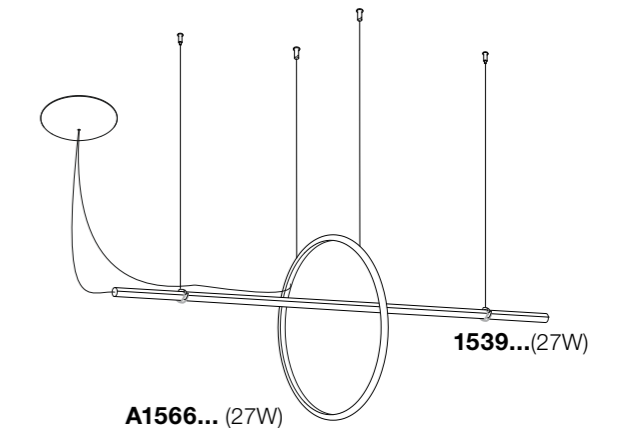

Suspension fixing kit supplied with the lamp.





# LANCIA

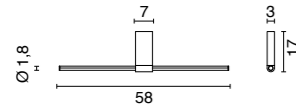

**4567** 0,80 Kg

- .01 White
- .02 Black
- .24 Black chrome
- .25 Satin gold
- .31 Chromed
- .32 Nickel mat


/W	4000K	LED 9W	CRI>90	1130lm
/WW	3000K	LED 9W	CRI>90	1010lm
/XW	2700K	LED 9W	CRI>90	945lm

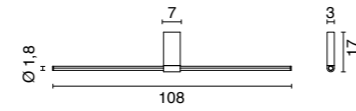

**4568** 1,00 Kg

- .01 White
- .02 Black
- .24 Black chrome
- .25 Satin gold
- .31 Chromed
- .32 Nickel mat


/W	4000K	LED 18W	CRI>90	2260lm
/WW	3000K	LED 18W	CRI>90	2020lm
/XW	2700K	LED 18W	CRI>90	1890lm

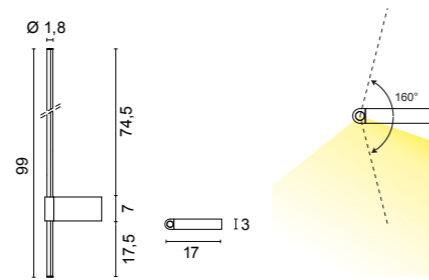


**4569** 0,90 Kg

- .01 White
- .02 Black
- .24 Black chrome
- .25 Satin gold
- .31 Chromed
- .32 Nickel mat

/W	4000K	LED 16,5W	CRI>90	2072lm
/WW	3000K	LED 16,5W	CRI>90	1852lm
/XW	2700K	LED 16,5W	CRI>90	1732lm




## FINISHES CODES

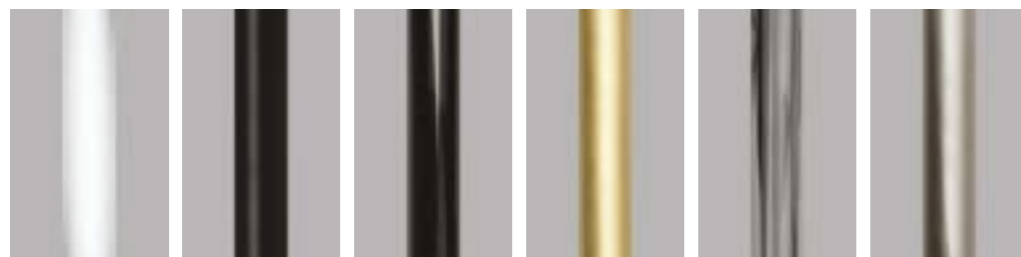

- .01 White
- .02 Black
- .24 Black chrome
- .25 Satin gold
- .31 Chromed
- .32 Nickel mat







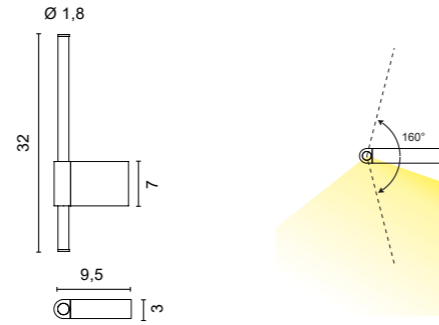

**4566** 0,40 Kg

- .01 White
- .02 Black
- .25 Satin gold


/W	4000K	LED 5,4W	CRI>90	600lm
/WW	3000K	LED 5,4W	CRI>90	595lm
/XW	2700K	LED 5,4W	CRI>90	537lm

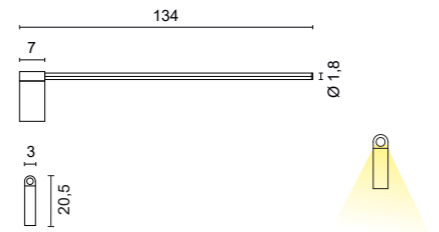

**4570** 1,10 Kg

- .01 White
- .02 Black

/W	4000K	LED 22,5W	CRI>90	2825lm
/WW	3000K	LED 22,5W	CRI>90	2525lm
/XW	2700K	LED 22,5W	CRI>90	2362lm




Diffuser not orientable.



FINISHES CODES



.01 White    .02 Black    .25 Satin gold

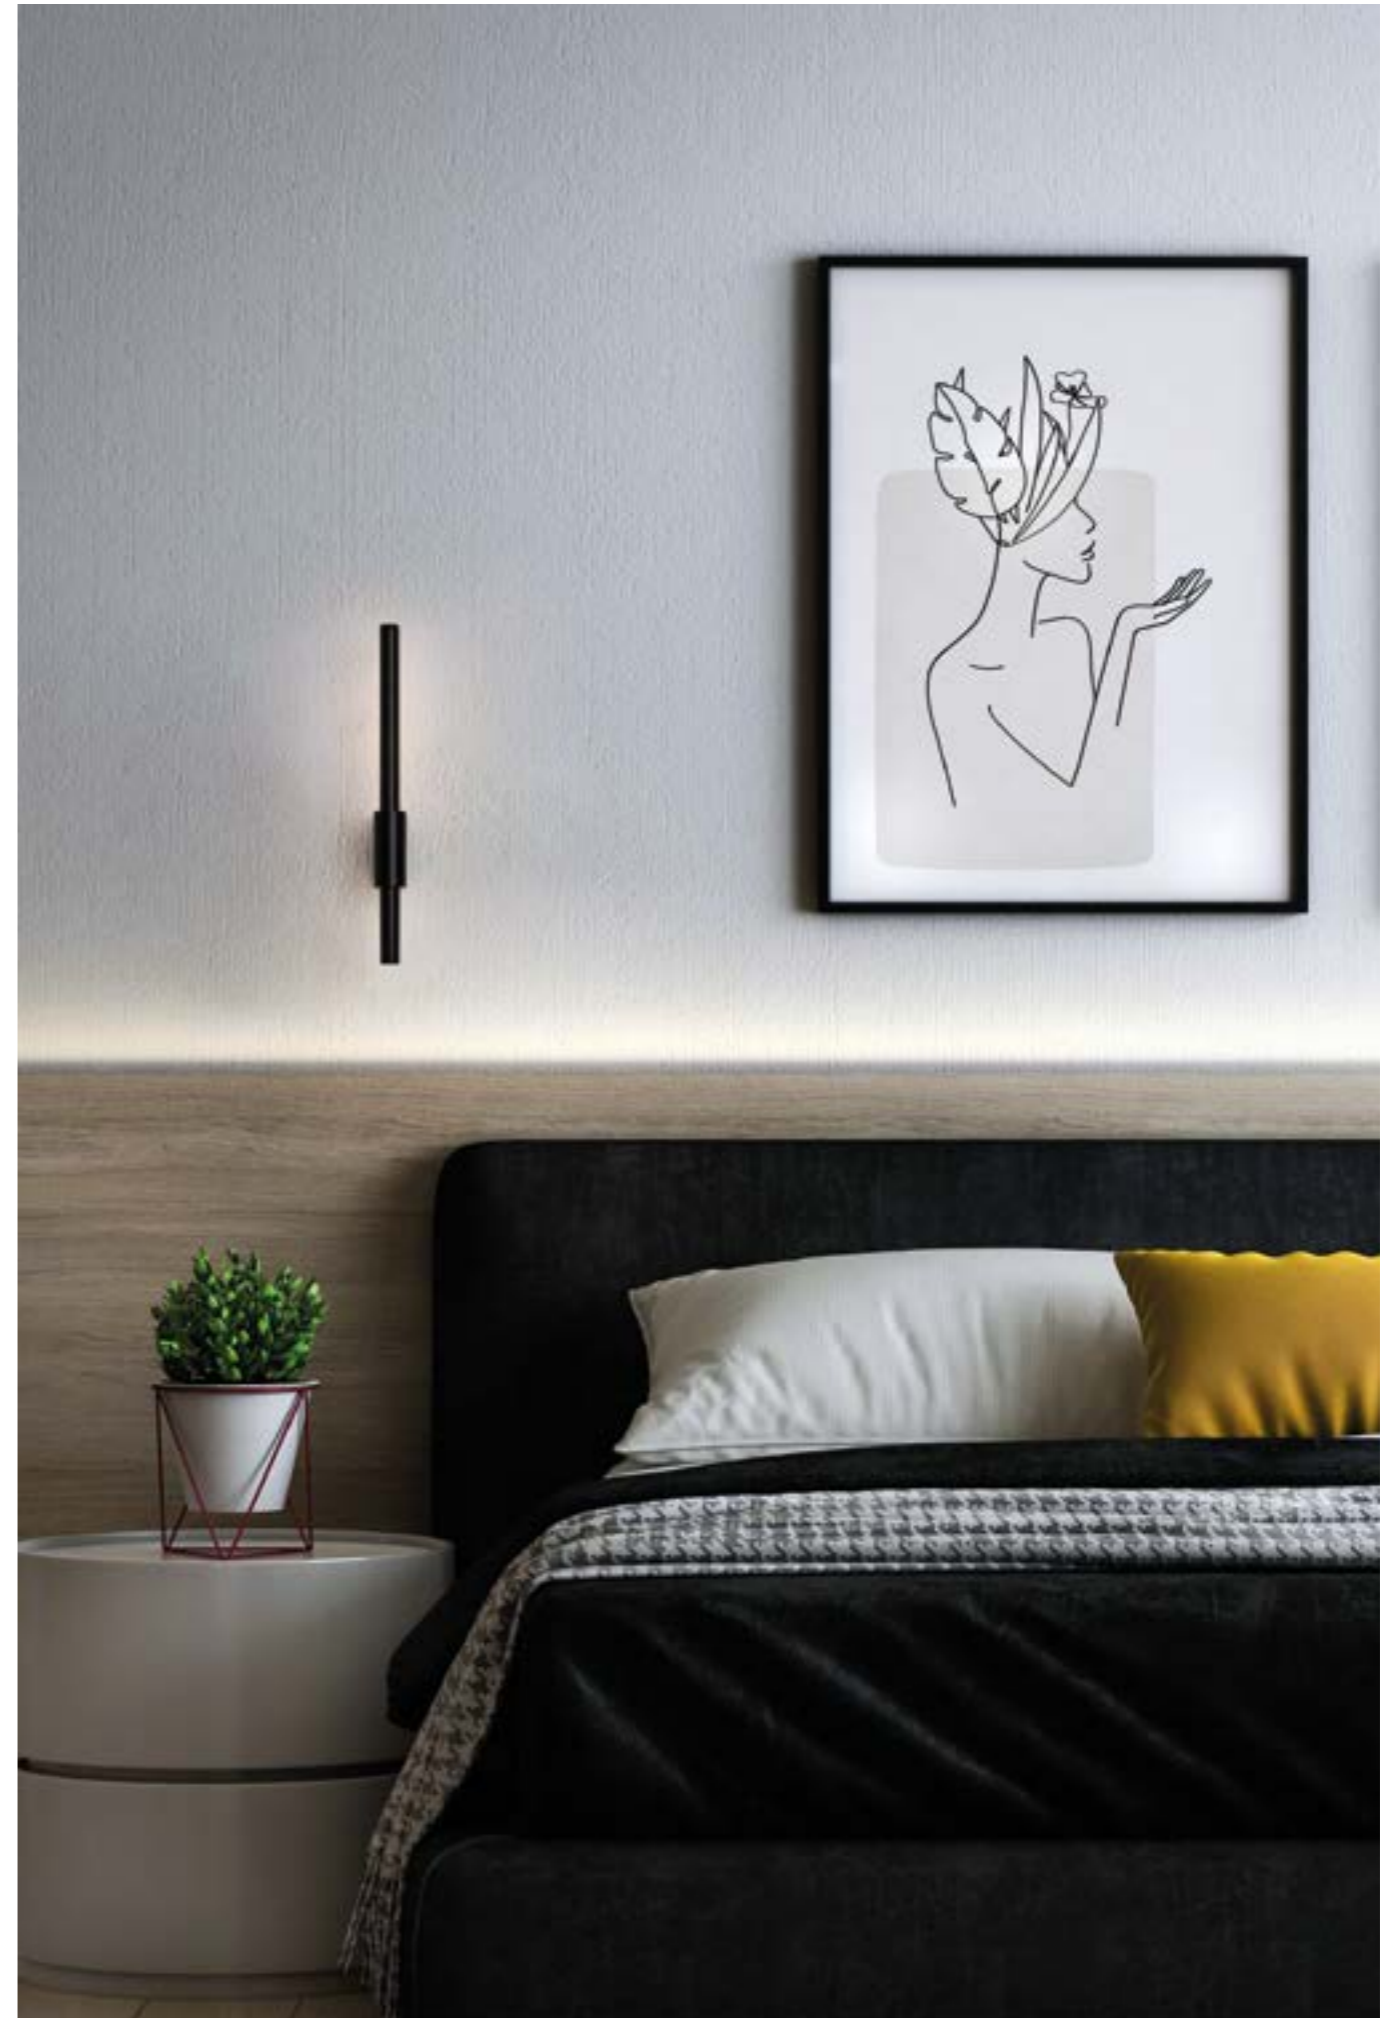



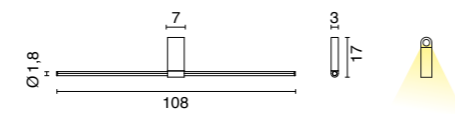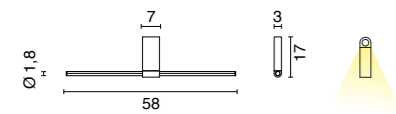

**5567** 0,80 Kg

- .01** White ■
- .02** Black ■
- .31** Chromed ■


<b>/W</b>	4000K	LED 9W	CRI>90	1130lm
<b>/WW</b>	3000K	LED 9W	CRI>90	1010lm
<b>/XW</b>	2700K	LED 9W	CRI>90	945lm



**5568** 0,80 Kg

- .01** White ■
- .02** Black ■
- .31** Chromed ■

<b>/W</b>	4000K	LED 18W	CRI>90	2260lm
<b>/WW</b>	3000K	LED 18W	CRI>90	2020lm
<b>/XW</b>	2700K	LED 18W	CRI>90	1890lm




FINISHES CODES




**.01** White    **.02** Black    **.31** Chromed



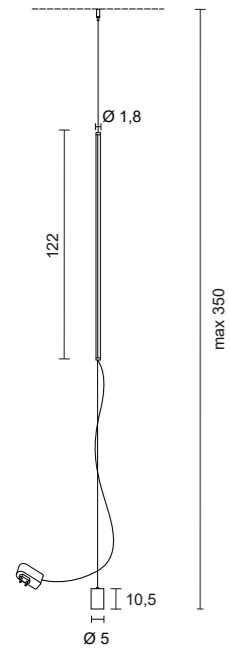

**1577** 2,80 Kg

.01	White	□
.02	Black	■
.31	Chromed	■
/W	4000K LED 19,5W CRI>90	2486lm
/WW	3000K LED 19,5W CRI>90	2222lm
/XW	2700K LED 19,5W CRI>90	2079lm

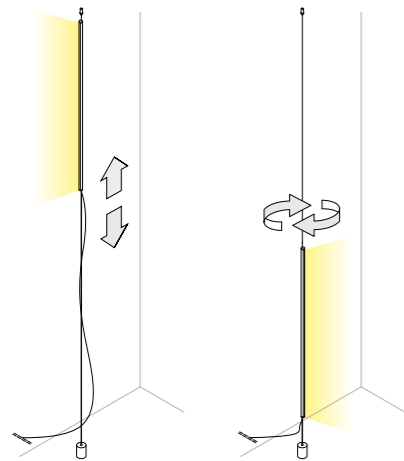

The counterweight maintains the lamp in the desired position



The dimmer-switch with memory is integrated in the stem\*  
\*The stem can move and be orientated along the vertical steel cable.



FINISHES CODES




.01 White .02 Black .31 Chromed

LANCIA DI ACHILLE




# LANCIA DI ACHILLE

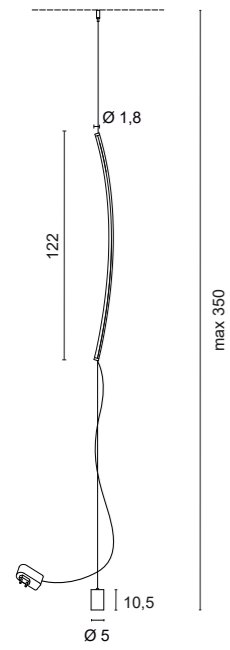


**1567** 2,80 Kg

- .01** White ■
- .02** Black ■
- .31** Chromed ■


<b>/W</b>	4000K	LED 19,5W	CRI>90	2486lm
<b>/WW</b>	3000K	LED 19,5W	CRI>90	2222lm
<b>/XW</b>	2700K	LED 19,5W	CRI>90	2079lm

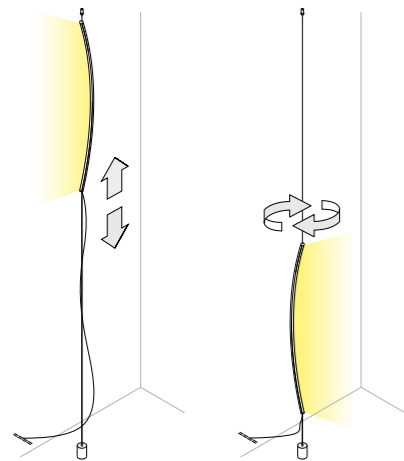

## FINISHES CODES

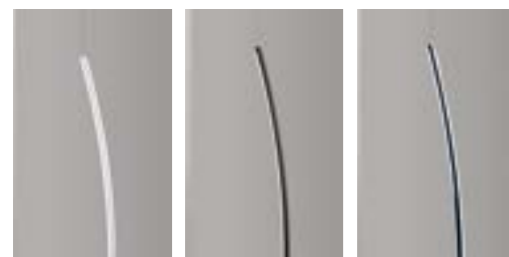



**.01** White    **.02** Black    **.31** Chromed

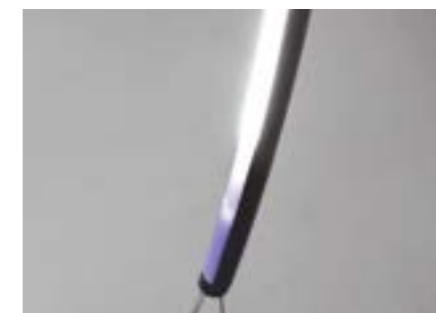

The dimmer-switch with memory is integrated in the stem.



The counterweight maintains the lamp in the desired position.

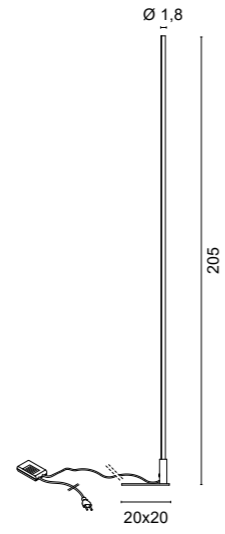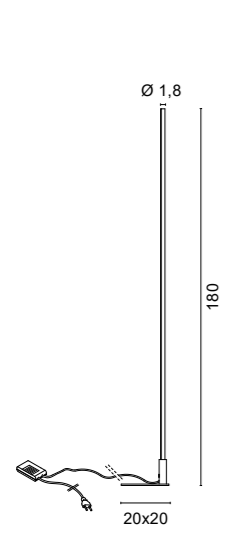

**3522** 2,50 Kg

- .01 White
- .02 Black

<b>/W</b>	4000K	LED 31,5W	CRI>90	3955lm
<b>/WW</b>	3000K	LED 31,5W	CRI>90	3535lm
<b>/XW</b>	2700K	LED 31,5W	CRI>90	3308lm



With DIMMER on black cable

**3523** 2,50 Kg

- .01 White
- .02 Black

<b>/W</b>	4000K	LED 36W	CRI>90	4520lm
<b>/WW</b>	3000K	LED 36W	CRI>90	4040lm
<b>/XW</b>	2700K	LED 36W	CRI>90	3780lm



With DIMMER on black cable


FINISHES CODES



.01 White    .02 Black





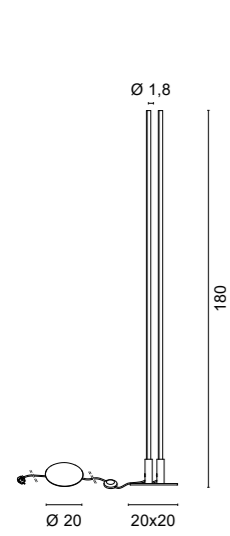


**3524** 4,00 Kg

- .01 White
- .02 Black

/W	4000K	LED 52,5W	CRI>90	6400lm
/WW	3000K	LED 52,5W	CRI>90	5770lm
/XW	2700K	LED 52,5W	CRI>90	5460lm



With DIMMER on black cable

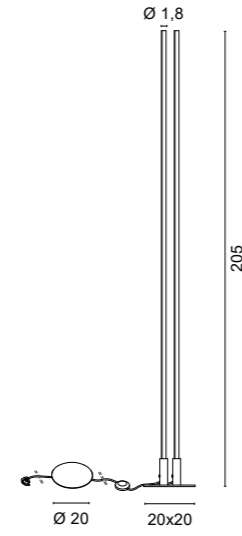


**3525** 4,00 Kg

- .01 White
- .02 Black

/W	4000K	LED 60W	CRI>90	7360lm
/WW	3000K	LED 60W	CRI>90	6600lm
/XW	2700K	LED 60W	CRI>90	6240lm



With DIMMER on black cable

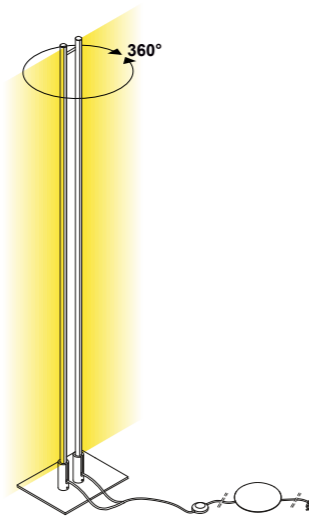


FINISHES CODES



.01 White .02 Black



# LANCIA

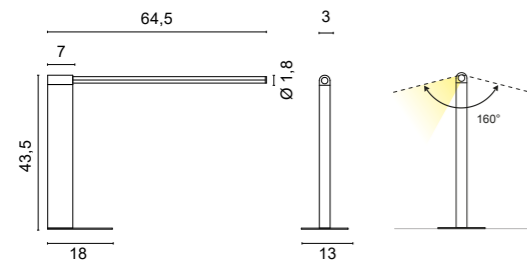

**2506** 2,20 Kg

- .01** White
- .02** Black

<b>/W</b>	4000K	LED 9W	CRI>90	1190lm
<b>/WW</b>	3000K	LED 9W	CRI>90	1010lm
<b>/XW</b>	2700K	LED 9W	CRI>90	945lm



The lamp is supplied with a touch dimmer integrated in the profile

## FINISHES CODES



**.01** White **.02** Black







INDOOR

# FRAME

Design LUX Studio





## FRAME



Square and rectangular pendant lamps with diffused light with aluminum body and opal polycarbonate diffuser.

The galvanic finishes, as well as the powder coated ones, make FRAME extremely elegant.

The particularity of the luminous flux directed downwards guarantees excellent illumination, further enhancing the lightness of the structure.

The ceiling rose with the integrated driver must be ordered separately.

*Suspensions carrées et rectangulaires à lumière diffuse avec corps en aluminium et diffuseur en polycarbonate opale.*

*Les finitions galvaniques et thermolaquées rendent FRAME extrêmement élégant.*

*La particularité du flux lumineux dirigé vers le bas garantit un excellent éclairage, renforçant encore la légèreté de la structure.*

*La rosace avec l'alimentation doit être commandée séparément*


*Quadratische und rechteckige Pendelleuchten mit diffusem Licht mit Aluminiumgehäuse und opalem Polycarbonat-Diffusor.*

*Sowohl die galvanischen als auch die pulverbeschichteten Oberflächen machen FRAME äußerst elegant.*

*Die Besonderheit des nach unten gerichteten Lichtstroms garantiert eine hervorragende Ausleuchtung und erhöht die Leichtigkeit der Struktur zusätzlich.*

*Die Rosette mit Netzteil muss separat bestellt werden.*

## FRAME



### 1608


0,30 Kg

.01	White	
.02	Black	
.25	Satin Gold	
.31	Chromed	

/W	4000K	LED 24V 43,2W	5420lm
/WW	3000K	LED 24V 43,2W	4848lm
/XW	2700K	LED 24V 43,2W	4536lm



Transparent nylon suspension cable



### 1609

0,30 Kg

.01	White	
.02	Black	
.25	Satin Gold	
.31	Chromed	

/W	4000K	LED 24V 43,2W	5420lm
/WW	3000K	LED 24V 43,2W	4848lm
/XW	2700K	LED 24V 43,2W	4536lm



Transparent nylon suspension cable

## FINISHES CODES



.01 White

.02 Black


.25 Satin gold

.31 Chromed




Example of installation with ceiling rose **0993/60.02**

**CEILING ROSES SYSTEM 24V**  
FRAME




Ceiling rose with **30W** driver 50/60Hz 220-230V

<b>0990/30</b>	0,50Kg
.01 White	<input type="checkbox"/>
.02 Black	<input checked="" type="checkbox"/>
.23 Satin Aluminium	<input type="checkbox"/>




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0990/60</b>	0,70Kg
.01 White	<input type="checkbox"/>
.02 Black	<input checked="" type="checkbox"/>
.85 Painted silver finishing	<input type="checkbox"/>
.86 Painted gold finishing	<input type="checkbox"/>
.87 Painted copper finishing	<input type="checkbox"/>
.88 Painted bronze finishing	<input type="checkbox"/>
/P DIMMER	<input type="checkbox"/> PUSH MAX 60W
/V DIMMER	<input type="checkbox"/> 1...10V MAX 60W
/D DIMMER	<input type="checkbox"/> DALI MAX 60W




Ceiling rose with **150W** driver 50/60Hz 220-230V

<b>0990/150</b>	1,30Kg
.01 White	<input type="checkbox"/>
.02 Black	<input checked="" type="checkbox"/>
.85 Painted silver finishing	<input type="checkbox"/>
.86 Painted gold finishing	<input type="checkbox"/>
.87 Painted copper finishing	<input type="checkbox"/>
.88 Painted bronze finishing	<input type="checkbox"/>
/P DIMMER	<input type="checkbox"/> PUSH MAX 150W
/V DIMMER	<input type="checkbox"/> 1...10V MAX 150W
/D DIMMER	<input type="checkbox"/> DALI MAX 150W
/T DIMMER	<input type="checkbox"/> TRIAC MAX 150W




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0993/60</b>	0,60Kg
.01 White	<input type="checkbox"/>
.02 Black with white base	<input checked="" type="checkbox"/>
/P DIMMER	<input type="checkbox"/> PUSH
/V DIMMER	<input type="checkbox"/> 1...10V
/D DIMMER	<input type="checkbox"/> DALI



Ceiling rose with **100W** driver 50/60Hz 220-230V

<b>0990/100</b>	1,30Kg
.01 White	<input type="checkbox"/>
.02 Black	<input checked="" type="checkbox"/>
.85 Painted silver finishing	<input type="checkbox"/>
.86 Painted gold finishing	<input type="checkbox"/>
.87 Painted copper finishing	<input type="checkbox"/>
.88 Painted bronze finishing	<input type="checkbox"/>
/P DIMMER	<input type="checkbox"/> PUSH MAX 100W
/V DIMMER	<input type="checkbox"/> 1...10V MAX 100W
/D DIMMER	<input type="checkbox"/> DALI MAX 100W
/T DIMMER	<input type="checkbox"/> TRIAC MAX 100W



Ceiling rose with **200W** driver 50/60Hz 220-230V

<b>0990/200</b>	2,00kg
.01 White	<input type="checkbox"/>
.02 Black	<input checked="" type="checkbox"/>
.85 Painted silver finishing	<input type="checkbox"/>
.86 Painted gold finishing	<input type="checkbox"/>
.87 Painted copper finishing	<input type="checkbox"/>
.88 Painted bronze finishing	<input type="checkbox"/>
/P DIMMER	<input type="checkbox"/> PUSH MAX 2x100W
/V DIMMER	<input type="checkbox"/> 1...10V MAX 2x100W
/D DIMMER	<input type="checkbox"/> DALI MAX 2x100W
/T DIMMER	<input type="checkbox"/> TRIAC MAX 2x100W



INDOOR

# ZETA

Design Mati



## ZETA



Adjustable and dimmable table lamp with diffused light with aluminum body and opal polycarbonate diffuser.

The plug-in driver and the cable dimmer make ZETA functional and space-saving.

*Lampe de table orientable et dimmable à lumière diffuse avec corps en aluminium et diffuseur en polycarbonate opale.*


*L'alimentation enfichable et le variateur à câble rendent ZETA fonctionnel et peu encombrant.*

*Verstellbare und dimmbare Tischleuchte mit diffusem Licht mit Aluminiumgehäuse und opalem Polycarbonat-Diffusor.*

*Das Steckernetzteil und der Kabeldimmer machen ZETA funktional und platzsparend.*




# ZETA

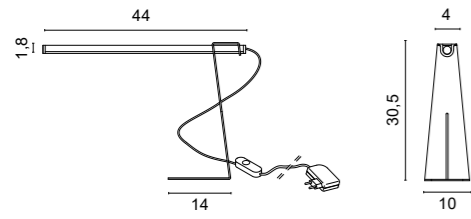

**2522** 1,30 Kg

- .01** White
- .02** Black


<b>/W</b>	4000K	LED 6W CRI>90	736lm
<b>/WW</b>	3000K	LED 6W CRI>90	660lm
<b>/XW</b>	2700K	LED 6W CRI>90	624lm



With DIMMER on cable



## FINISHES CODES



**.01** White **.02** Black



INDOOR

# MATITA


Design Mati







## MATITA



The Matita family is characterized by a slender aluminum profile and a high-efficiency LED microcircuit. The LED light source guarantees high luminous efficiency, a choice of savings, and eco-sustainability, but also light quality.

Designed to perceive only lines of light in space. Joints allow free movement along with transparent nylon cable that lets the suspensions float in the void. The structure fades away as the light creates new spaces.


*La famille Matita se caractérise par un profilé d'aluminium élancé et un microcircuit LED à haute efficacité. La source lumineuse LED garantit une efficacité lumineuse élevée, un choix d'économies et une éco-durabilité, mais aussi une qualité de lumière.*

*Conçu pour ne percevoir que des lignes de lumière dans l'espace. Les articulations permettent un mouvement libre avec un câble en nylon transparent qui laisse les suspensions flotter dans le vide.*

*Die Matita-Familie zeichnet sich durch ein schlankes Aluminiumprofil und einen hocheffizienten LED-Mikroschaltkreis aus. Die LED-Lichtquelle garantiert eine hohe Lichtausbeute, eine Auswahl an Einsparungen und Umweltverträglichkeit, aber auch Lichtqualität.*

*Entworfen, um nur Lichtlinien im Raum wahrzunehmen. Die Gelenke ermöglichen eine freie Bewegung zusammen mit den transparenten Nylonkabeln, die die Aufhängungen in der Leere schweben lassen.*



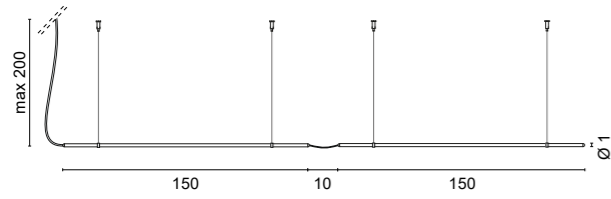

**1674** 2x150 cm 0,50 Kg

**.02** Black ■


**/W** 4000K LED 37,5W 4440lm

**/WW** 3000K LED 37,5W 4050lm

**/XW** 2700K LED 37,5W 3600lm



Suspension fixing kit supplied with the lamp

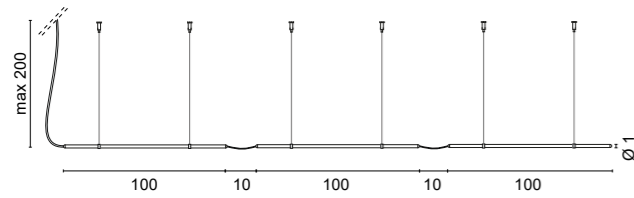

**1675** 3x100 cm 0,60 Kg

**.02** Black ■

**/W** 4000K LED 37,5W 4440lm

**/WW** 3000K LED 37,5W 4050lm


**/XW** 2700K LED 37,5W 3600lm



Suspension fixing kit supplied with the lamp




Nylon suspension cable. On each single cable, one can insert and slide more fixing clips.

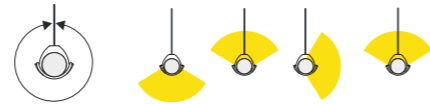

The profile can rotate on its axis of 360° to direct the light




**FINISHES CODES**




**.02** Black

**CEILING ROSES SYSTEM 24V**  
MATITA




Ceiling rose with **30W** driver 50/60Hz 220-230V

<b>0990/30</b>	0,50Kg	
.01	White	■
.02	Black	■
.23	Satin Aluminium	■




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0990/60</b>	0,70Kg		
.01	White	■	
.02	Black	■	
.85	Painted silver finishing	■	
.86	Painted gold finishing	■	
.87	Painted copper finishing	■	
.88	Painted bronze finishing	■	
/P	DIMMER		MAX 60W
/V	DIMMER		MAX 60W
/D	DIMMER		MAX 60W




Ceiling rose with **150W** driver 50/60Hz 220-230V

<b>0990/150</b>	1,30Kg		
.01	White	■	
.02	Black	■	
.85	Painted silver finishing	■	
.86	Painted gold finishing	■	
.87	Painted copper finishing	■	
.88	Painted bronze finishing	■	
/P	DIMMER		MAX 150W
/V	DIMMER		MAX 150W
/D	DIMMER		MAX 150W
/T	DIMMER		MAX 150W




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0993/60</b>	0,60Kg	
.01	White	■
.02	Black with white base	■
/P	DIMMER	
/V	DIMMER	
/D	DIMMER	



Ceiling rose with **100W** driver 50/60Hz 220-230V

<b>0990/100</b>	1,30Kg		
.01	White	■	
.02	Black	■	
.85	Painted silver finishing	■	
.86	Painted gold finishing	■	
.87	Painted copper finishing	■	
.88	Painted bronze finishing	■	
/P	DIMMER		MAX 100W
/V	DIMMER		MAX 100W
/D	DIMMER		MAX 100W
/T	DIMMER		MAX 100W





Ceiling rose with **200W** driver 50/60Hz 220-230V

<b>0990/200</b>	2,00kg		
.01	White	■	
.02	Black	■	
.85	Painted silver finishing	■	
.86	Painted gold finishing	■	
.87	Painted copper finishing	■	
.88	Painted bronze finishing	■	
/P	DIMMER		MAX 2x100W
/V	DIMMER		MAX 2x100W
/D	DIMMER		MAX 2x100W
/T	DIMMER		MAX 2x100W





**EXAMPLES OF MULTIPLE INSTALLATION**

The choice of the driver depends on total power consumption

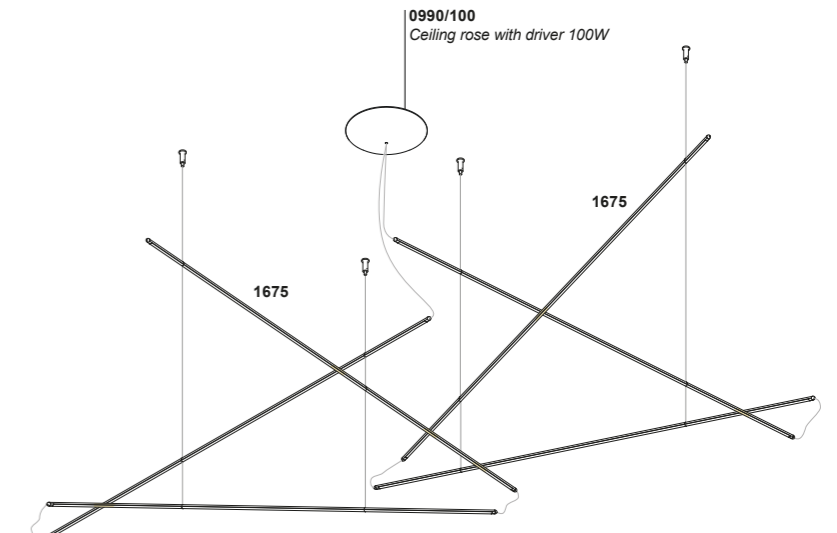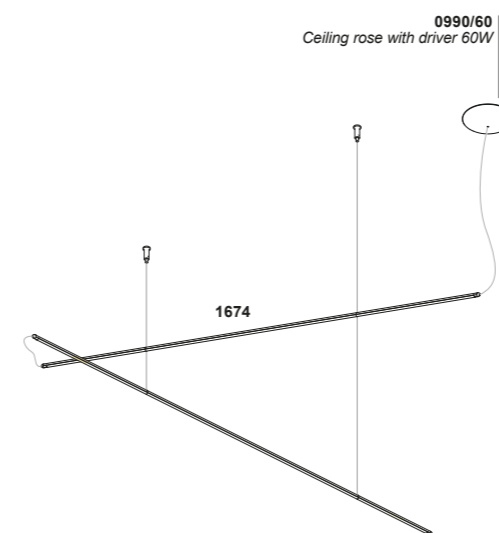



# MATITA



**4634** 0,80 Kg

**.02** Black ■

**/W** 4000K LED 27,5W 3256lm

**/WW** 3000K LED 27,5W 2970lm

**/XW** 2700K LED 27,5W 2640lm



Not adjustable - TRIAC dimming on request


## FINISHES CODES



**.02** Black





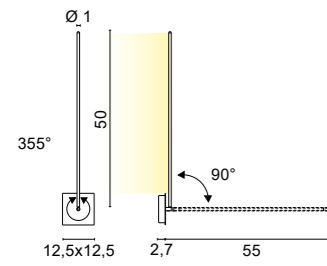


**4631** 0,80 Kg

**.02** Black ■

<b>/W</b>	4000K	LED 6,2W	740lm
<b>/WW</b>	3000K	LED 6,2W	675lm
<b>/XW</b>	2700K	LED 6,2W	600lm




Adjustable

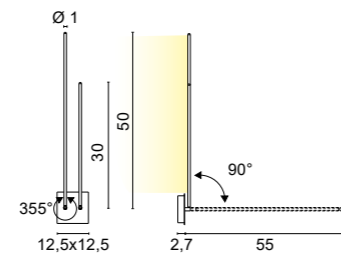

**4632** 1,00 Kg


**.02** Black ■

<b>/W</b>	4000K	LED 10,2W	1184lm
<b>/WW</b>	3000K	LED 10,2W	1080lm
<b>/XW</b>	2700K	LED 10,2W	960lm




Adjustable

**FINISHES CODES**



**.02** Black



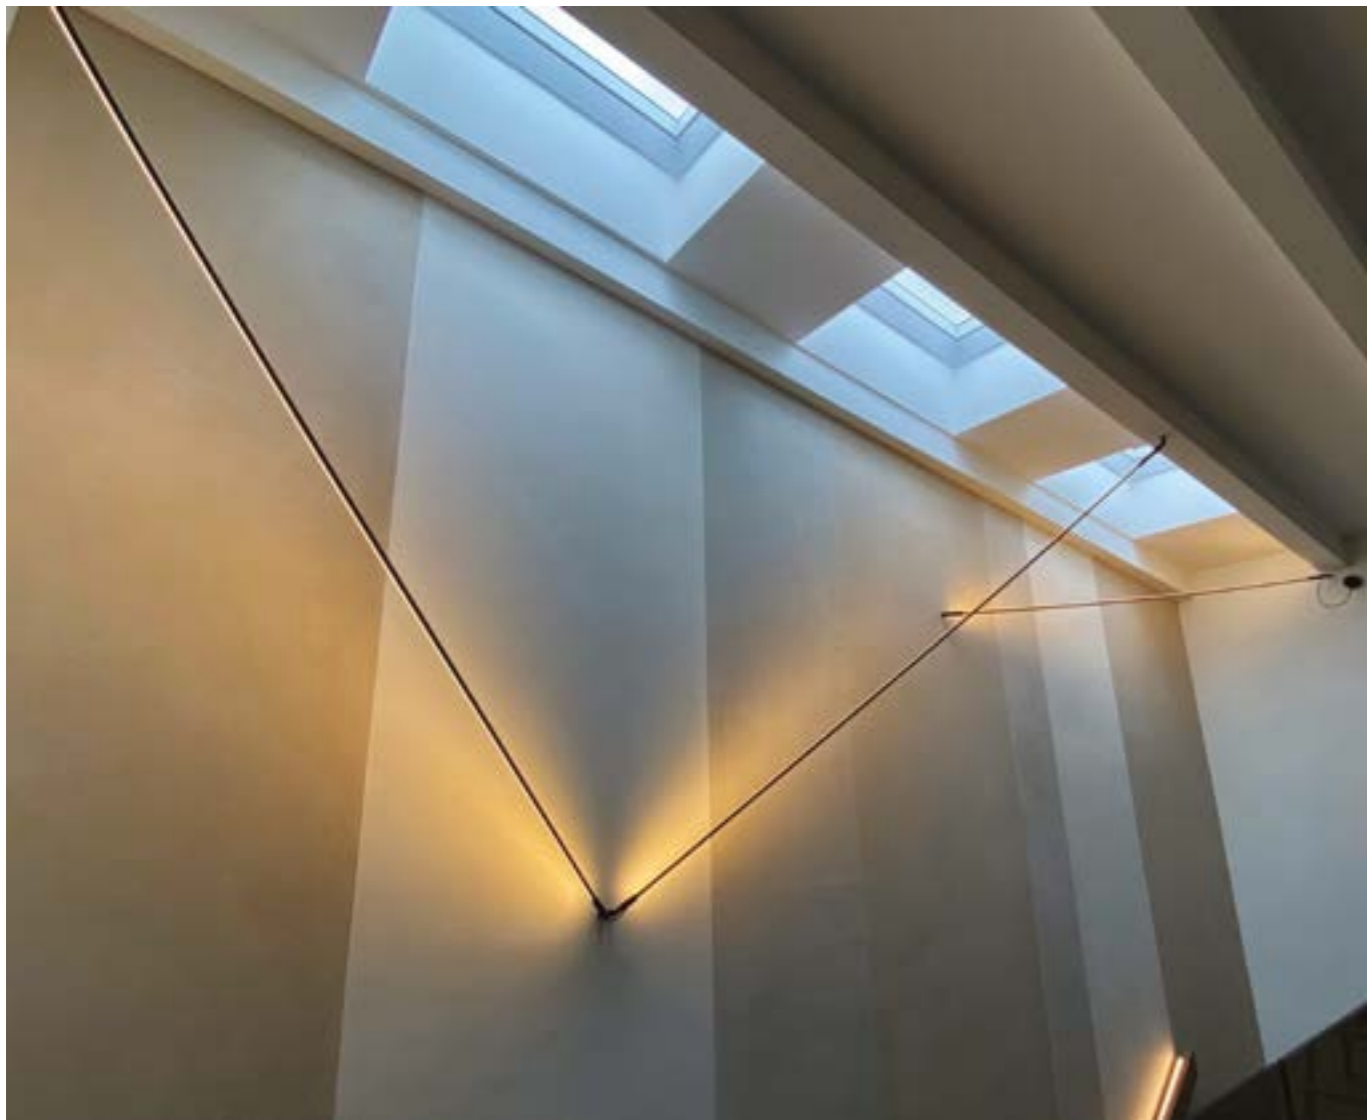


A new type of lamp that can be installed between the wall and ceiling to create free sign of light in the space



Special installation with remote driver and pass-through connection between two profiles.



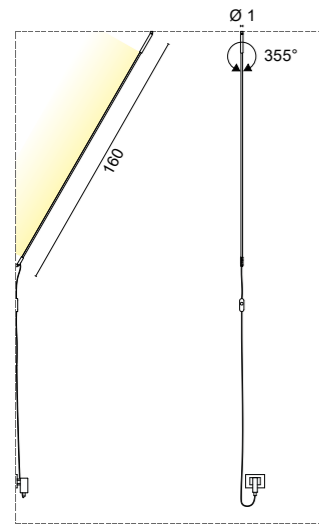

**4633** 0,30 Kg

---

**.02** Black ■

---

<b>/W</b>	4000K	LED 19W	2020lm
<b>/WW</b>	3000K	LED 19W	2025lm
<b>/XW</b>	2700K	LED 19W	1800lm



With PUSH DIMMER on black cable

**FINISHES CODES**




**.02** Black





# MATITA



5,9 cm


**6701** 0,20 Kg

**.02** Black ■

<b>/W</b>	4000K	24V 4W	444lm
<b>/WW</b>	3000K	24V 4W	405lm
<b>/XW</b>	2700K	24V 4W	360lm



Only parallel connection

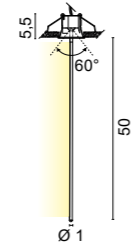

5,9 cm


**6702** 0,30 Kg

**.02** Black ■

<b>/W</b>	4000K	24V 6,2W	740lm
<b>/WW</b>	3000K	24V 6,2W	675lm
<b>/XW</b>	2700K	24V 6,2W	600lm



Only parallel connection

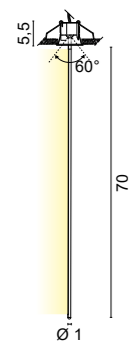

5,9 cm


**6703** 0,40 Kg

**.02** Black ■

<b>/W</b>	4000K	24V 9W	1036lm
<b>/WW</b>	3000K	24V 9W	945lm
<b>/XW</b>	2700K	24V 9W	940lm



Only parallel connection

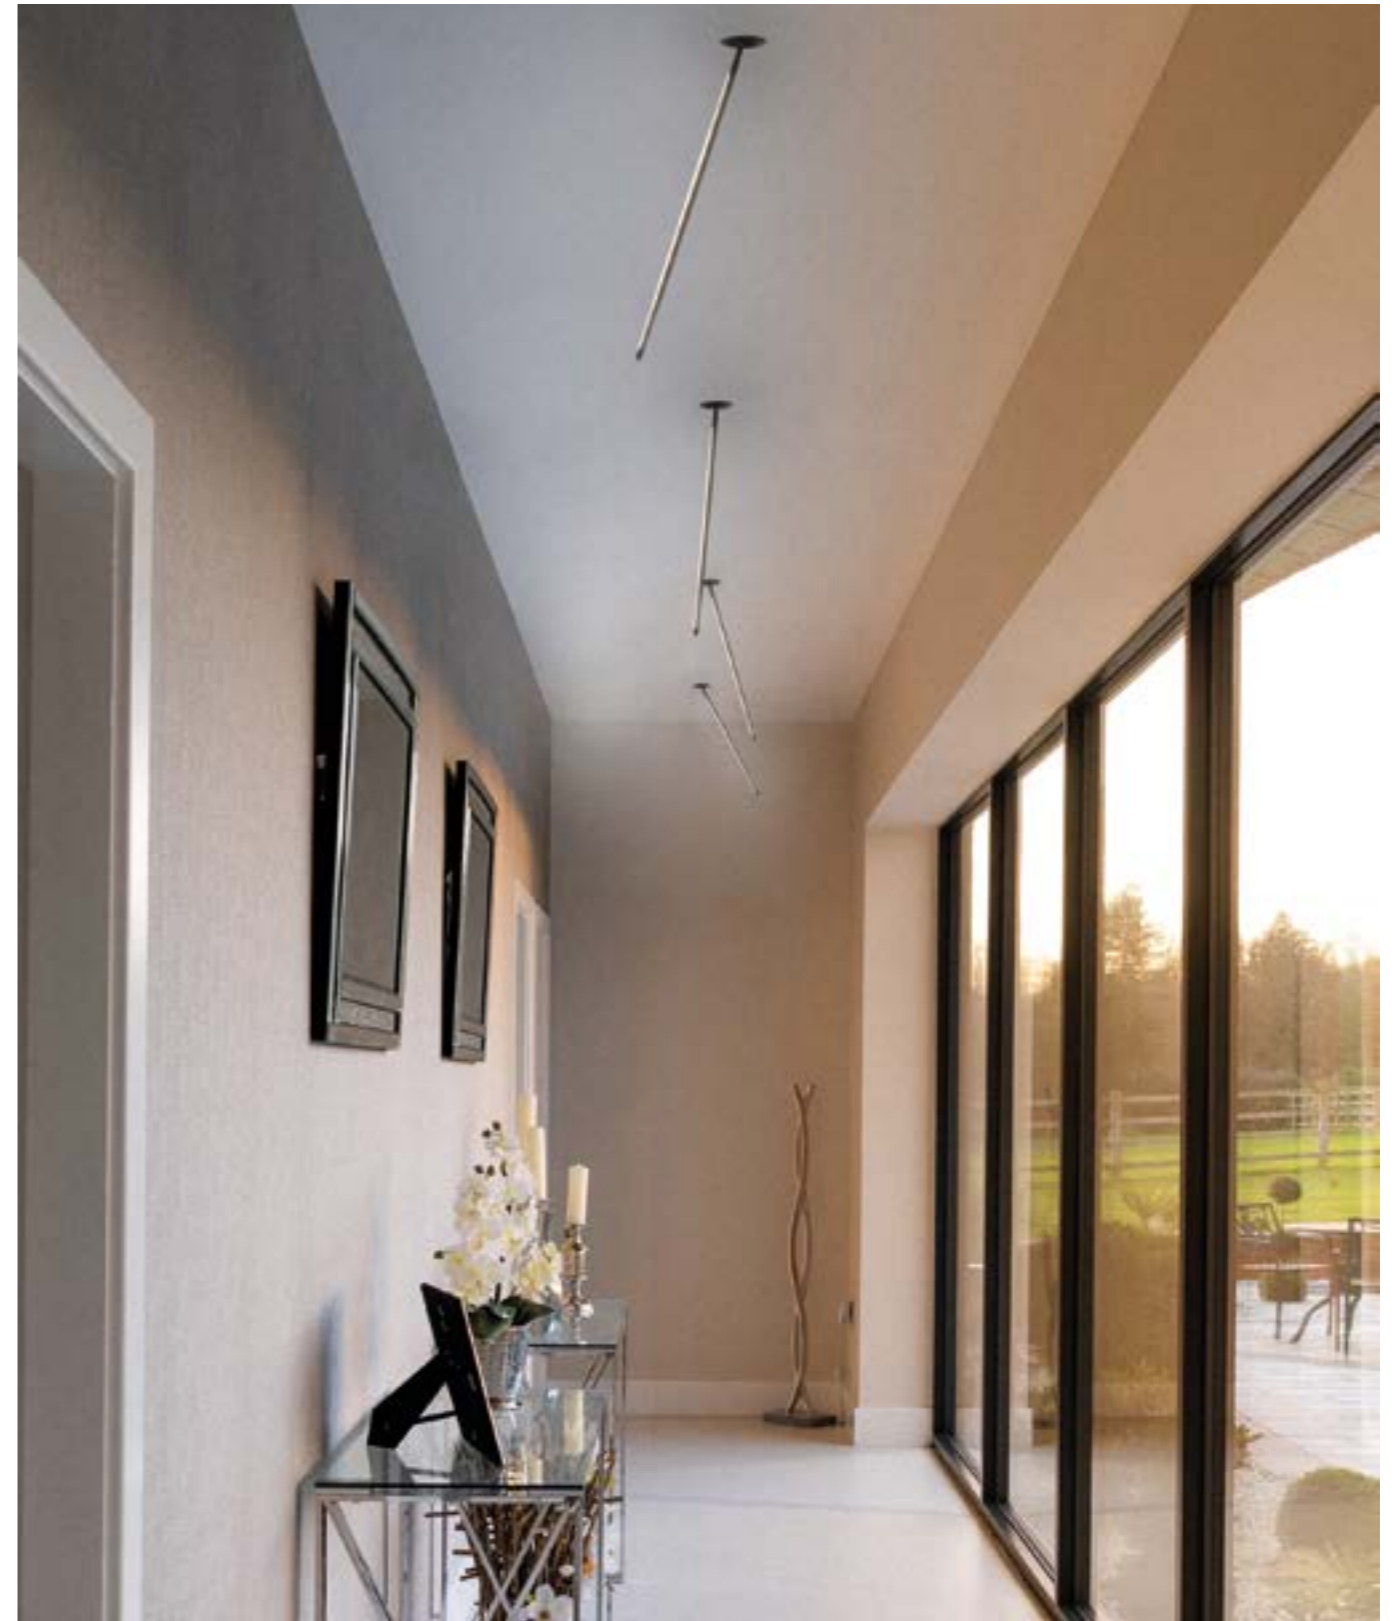

## FINISHES CODES



**.02** Black



## DRIVERS

### ON/OFF

<b>Cod.</b>	<b>0155</b>	<b>0156</b>	<b>0160</b>	<b>0167</b>	<b>0161/100</b>	<b>0161/150</b>
	24V-13W	24V-25W	24V-60W	24V-75W	24V-100W	24V-150W


### DIMMABLE

<b>Cod.</b>	<b>0717/DIM60/V</b>	<b>0717/DIM60</b>	<b>0717/DIM100</b>	<b>0717/DIM100</b>
	24V-60W 1...10V	24V-60W PUSH - DALI	24V-100W 1...10V PUSH - DALI	24V-100W TRIAC


### LED EMERGENCY UNIT

<b>Cod.</b>	<b>0115/EM</b>
	Inverter + Battery + LED indicator

Only Parallel Connection

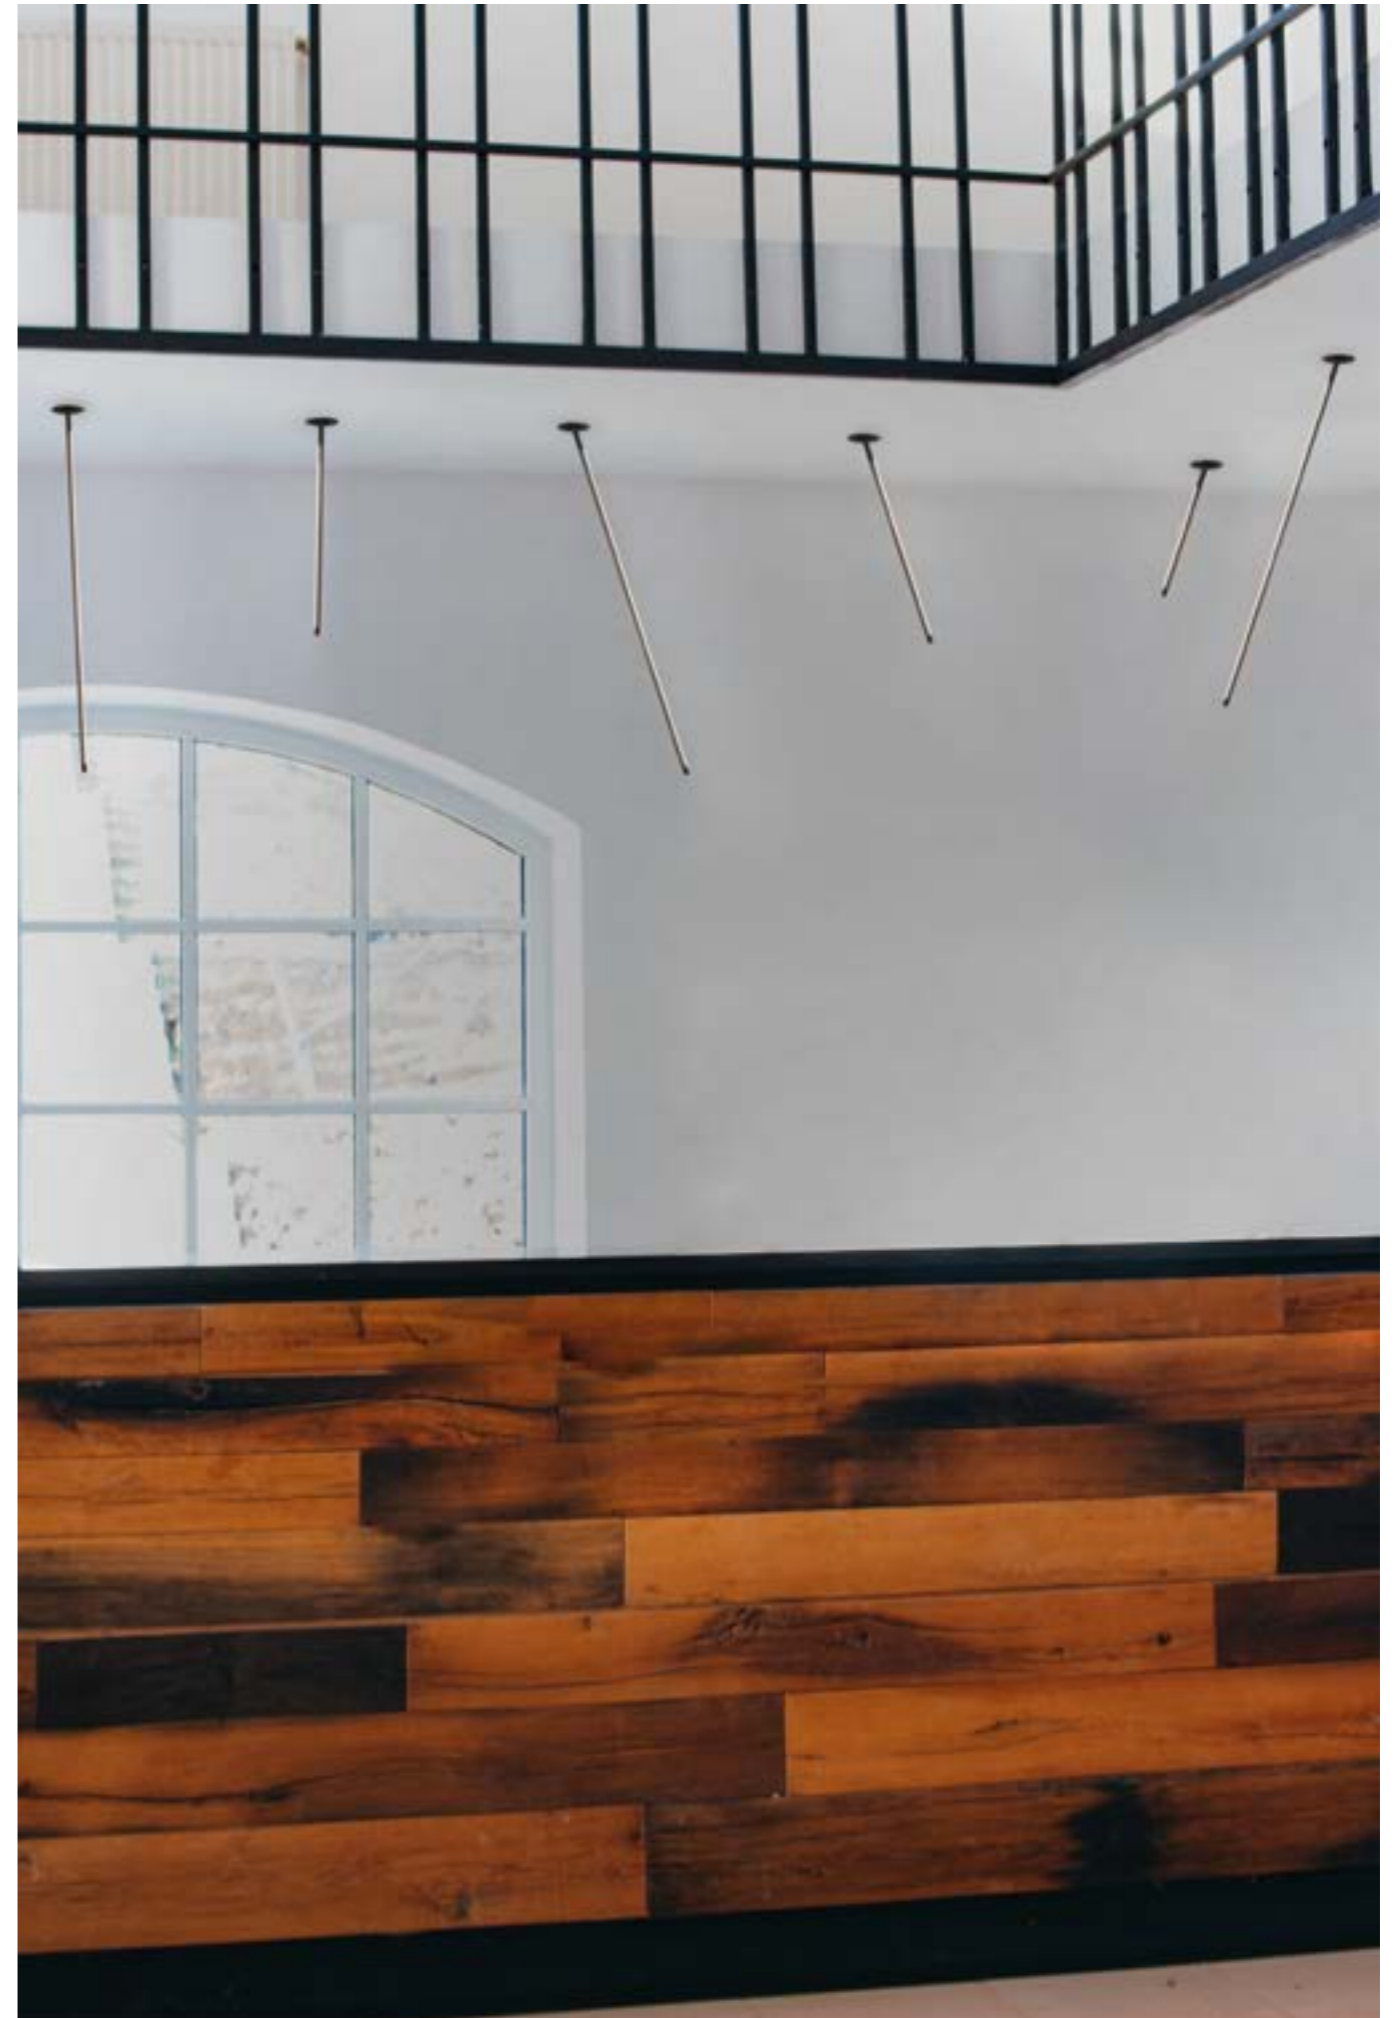



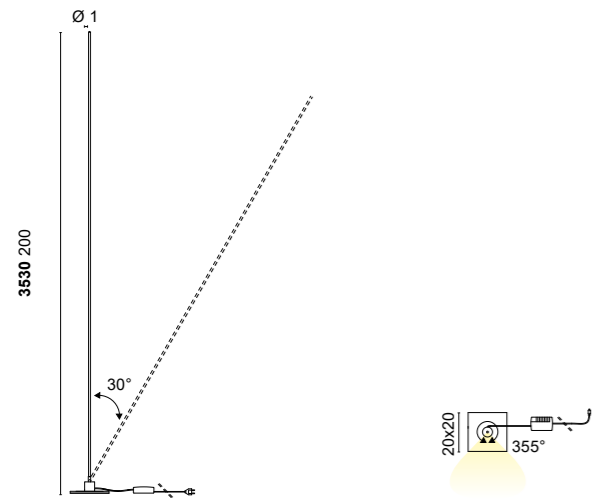

<b>3530</b>			3,50 Kg
<b>.02</b>	Black	<span style="display:inline-block; width:10px; height:10px; background-color:black;"></span>	
<b>/W</b>	4000K	LED 24W	2812lm
<b>/WW</b>	3000K	LED 24W	2565lm
<b>/XW</b>	2700K	LED 24W	2280lm




With DIMMER on black cable

**FINISHES CODES**



**.02** Black



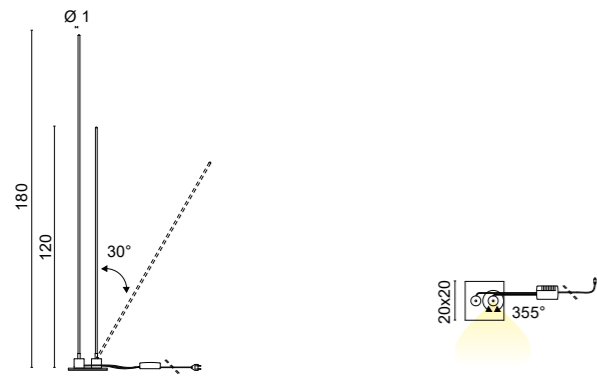

**3532** 4,10 Kg

**.02** Black ■

<b>/W</b>	4000K	LED 35W	4144lm
<b>/WW</b>	3000K	LED 35W	3780lm
<b>/XW</b>	2700K	LED 35W	3360lm



With DIMMER on black cable

**FINISHES CODES**




**.02** Black







# MATITA

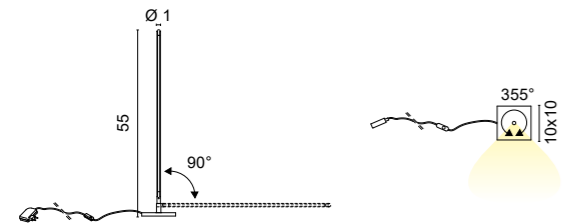

**2520** 0,50 Kg

**.02** Black ■

**/W** 4000K LED 6,2W 740lm

**/WW** 3000K LED 6,2W 675lm

**/XW** 2700K LED 6,2W 600lm




With DIMMER on black cable



The light profile can be tilted on the base until it becomes parallel to the table

## FINISHES CODES



**.02** Black





INDOOR


# IRIS

Design U.T. Egoluce





## IRIS



Collection of direct light lamps. The bodies are in aluminum, as are the small adjustable projectors designed to make the most of the quality of the accent light.

Iris reflectors may have different optical beams: 25°, 48° and 63°. On request CRI>90.

The integrated COB LED source with reflector offers high efficiency, plus the setback position guarantees perfect visual comfort.

*Collection de lampes à lumière directe. Les corps sont en aluminium, de même que les petits projecteurs orientables conçus pour tirer le meilleur parti de la qualité de la lumière d'accentuation.*

*Les réflecteurs Iris peuvent avoir différents faisceaux optiques : 25°, 48° et 63°. Sur demande CRI>90.*

*La source LED COB intégrée avec réflecteur offre une grande efficacité, et la position de recul garantit un confort visuel parfait.*



*Kollektion von Lampen mit direktem Licht. Die Gehäuse sind aus Aluminium, ebenso wie die kleinen verstellbaren Projektoren, die die Qualität des Akzentlichts optimal zur Geltung bringen.*

*Die Irisreflektoren können verschiedene Ausstrahlungswinkel haben: 25°, 48° und 63°. Auf Anfrage CRI>90.*

*Die integrierte COB-LED-Quelle mit Reflektor bietet eine hohe Effizienz, und die zurückgesetzte Position garantiert perfekten Sehkomfort.*



# IRIS

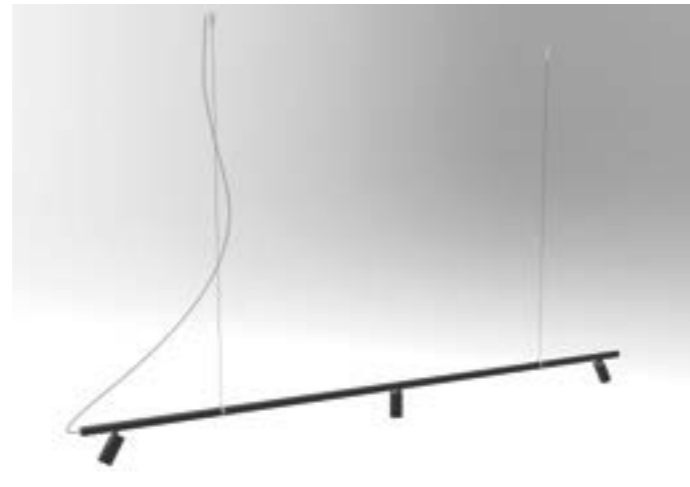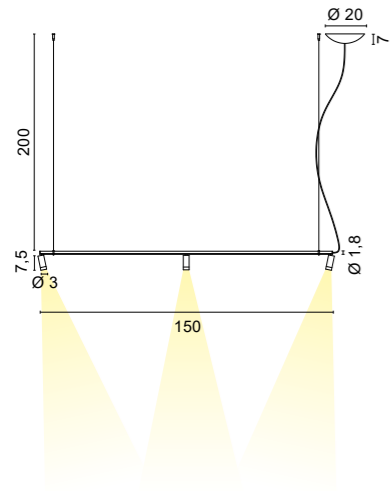

**1678** 1,40 Kg

- .01 White
- .02 Black

/W	4000K	LED 17,7W	2655lm
/WW	3000K	LED 17,7W	2508lm
/XW	2700K	LED 17,7W	2400lm



### PUSH - 1...10 dimming

/W/DIM	4000K	LED 17,7W	2655lm
/WW/DIM	3000K	LED 17,7W	2508lm
/XW/DIM	2700K	LED 17,7W	2400lm



### DALI dimming

/W/DALI	4000K	LED 17,7W	2655lm
/WW/DALI	3000K	LED 17,7W	2508lm
/XW/DALI	2700K	LED 17,7W	2400lm



Different optics on request

### FINISHES CODES



- .01 White
- .02 Black

### ACCESSORIES



Louvers

#### 0267/S

- .01 White
- .02 Black



# IRIS

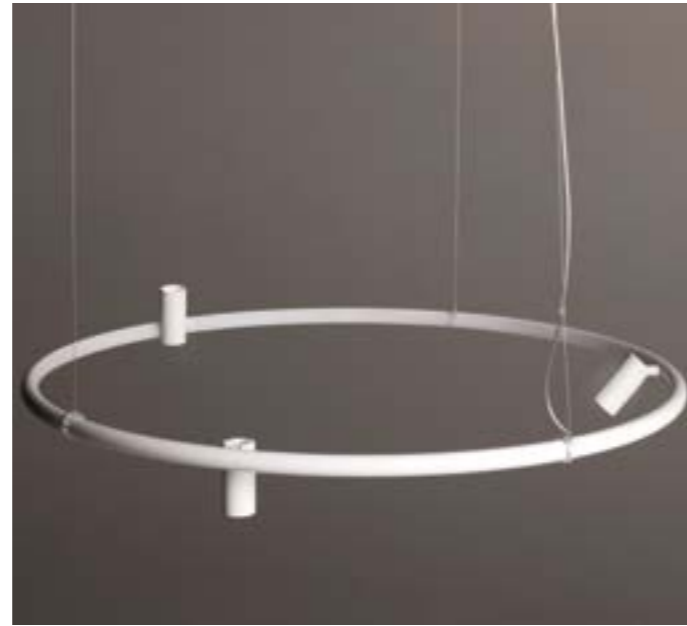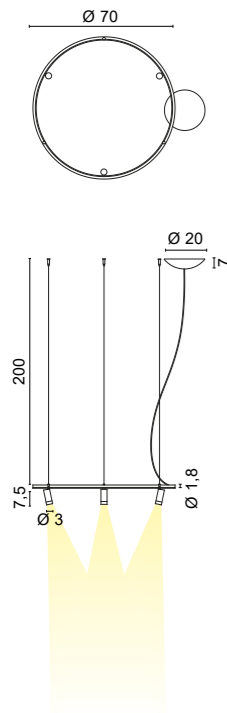

**1679** 1,40 Kg

- .01 White
- .02 Black

/W	4000K	LED 17,7W	2655lm
/WW	3000K	LED 17,7W	2508lm
/XW	2700K	LED 17,7W	2400lm



### PUSH - 1...10 dimming

/W/DIM	4000K	LED 17,7W	2655lm
/WW/DIM	3000K	LED 17,7W	2508lm
/XW/DIM	2700K	LED 17,7W	2400lm



### DALI dimming

/W/DALI	4000K	LED 17,7W	2655lm
/WW/DALI	3000K	LED 17,7W	2508lm
/XW/DALI	2700K	LED 17,7W	2400lm



Different optics on request

### FINISHES CODES



.01 White .02 Black



### ACCESSORIES

Louvres  
**0267/S**

- .01 White
- .02 Black



# IRIS

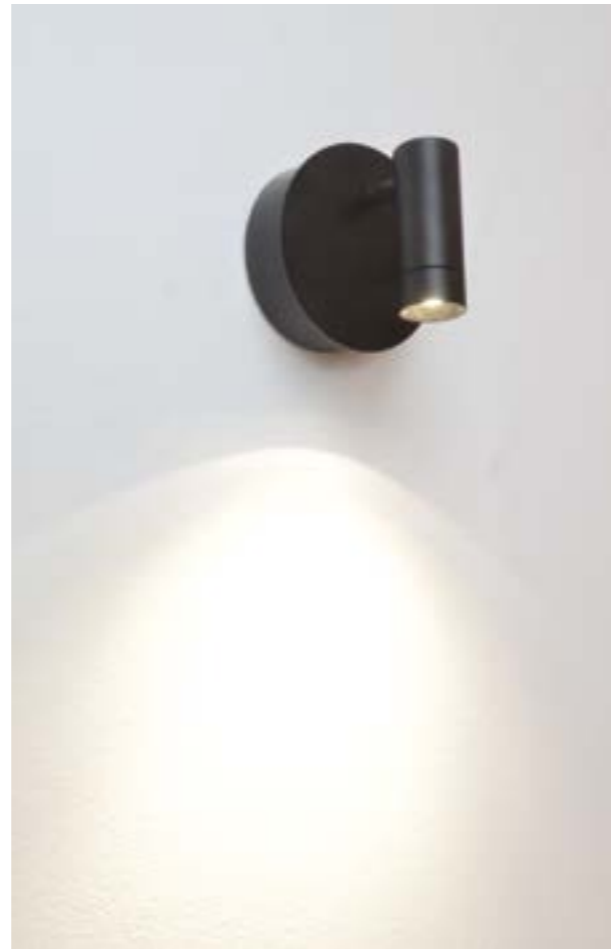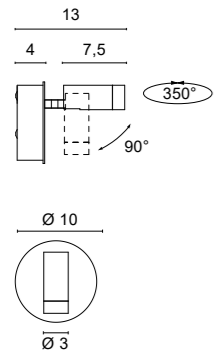

**4650** 0,30 Kg

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input checked="" type="checkbox"/>
<b>/W</b>	4000K /25 /48 /63	LED 5,9W 885lm
<b>/W</b>	4000K /ST Satin	LED 5,9W 885lm
<b>/WW</b>	3000K /25 /48 /63	LED 5,9W 836lm
<b>/WW</b>	3000K /ST Satin	LED 5,9W 836lm
<b>/XW</b>	2700K /25 /48 /63	LED 5,9W 800lm
<b>/XW</b>	2700K /ST Satin	LED 5,9W 800lm



The model has an integrated driver and can be installed both on the wall and on the ceiling

## ACCESSORIES

Louvres  
**0267/S**

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input checked="" type="checkbox"/>





## FINISHES CODES



**.01** White **.02** Black



# IRIS

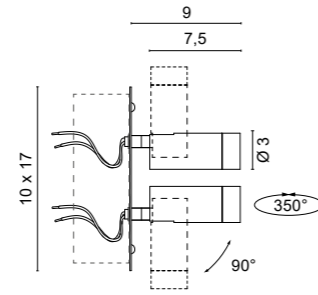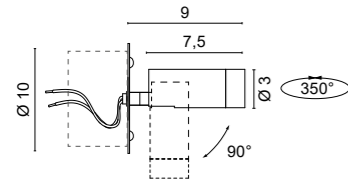

## 4640

0,20 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## 4642

0,35 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 11,8W 34V 350mA	2120lm	1760lm (out)
/W	4000K	/ST Satin	LED 11,8W 34V 350mA	2120lm	1632lm (out)
/WW	3000K	/25 /48 /63	LED 11,8W 34V 350mA	2060lm	1710lm (out)
/WW	3000K	/ST Satin	LED 11,8W 34V 350mA	2060lm	1586lm (out)
/XW	2700K	/25 /48 /63	LED 11,8W 34V 350mA	1938lm	1608lm (out)
/XW	2700K	/ST Satin	LED 11,8W 34V 350mA	1938lm	1492lm (out)



The lamp can be installed in masonry with a special formwork or directly on the paneling.  
Wall-mounted formwork can contain drivers.  
Drivers and housing are to be ordered separately.

## ACCESSORIES

Louvers

### 0267/S

- .01 White
- .02 Black



Wallbox

### 0279



Wallbox

### 0280



## DRIVERS

### ON/OFF

Cod.	0137/LED 350mA	0128 350mA
4640	1	NO
4642	NO	1

Only seial connection

## FINISHES CODES





.01 White

.02 Black



# IRIS

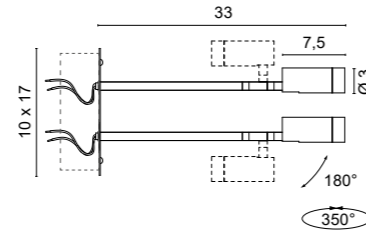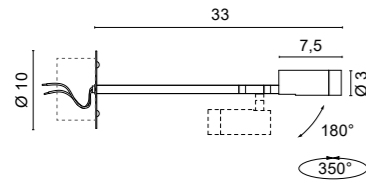

## 4641

0,20 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## 4643

0,42 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 11,8W 34V 350mA	2120lm	1760lm (out)
/W	4000K	/ST Satin	LED 11,8W 34V 350mA	2120lm	1632lm (out)
/WW	3000K	/25 /48 /63	LED 11,8W 34V 350mA	2060lm	1710lm (out)
/WW	3000K	/ST Satin	LED 11,8W 34V 350mA	2060lm	1586lm (out)
/XW	2700K	/25 /48 /63	LED 11,8W 34V 350mA	1938lm	1608lm (out)
/XW	2700K	/ST Satin	LED 11,8W 34V 350mA	1938lm	1492lm (out)



The lamp can be installed in masonry with a special formwork or directly on the paneling.  
Wall-mounted formwork can contain drivers.  
Drivers and housing are to be ordered separately.

## ACCESSORIES

### Louvres

#### 0267/S

- .01 White
- .02 Black



### Wallbox

#### 0279



### Wallbox

#### 0280



## DRIVERS

### ON/OFF

Cod.	0137/LED 350mA	0128 350mA
4641	1	NO
4643	NO	1

Only seal connection

## FINISHES CODES




.01 White

.02 Black





# IRIS

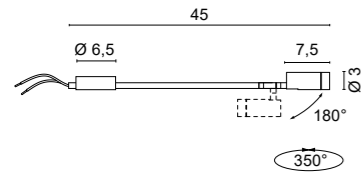

## 4655

0,30 Kg

.01	White	
.02	Black	
.25	Satin gold	

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



Only serial connection

## ACCESSORIES

Louvres

### 0267/S


.01	White	
.02	Black	



## FINISHES CODES



.01 White    .02 Black    .25 Satin Gold

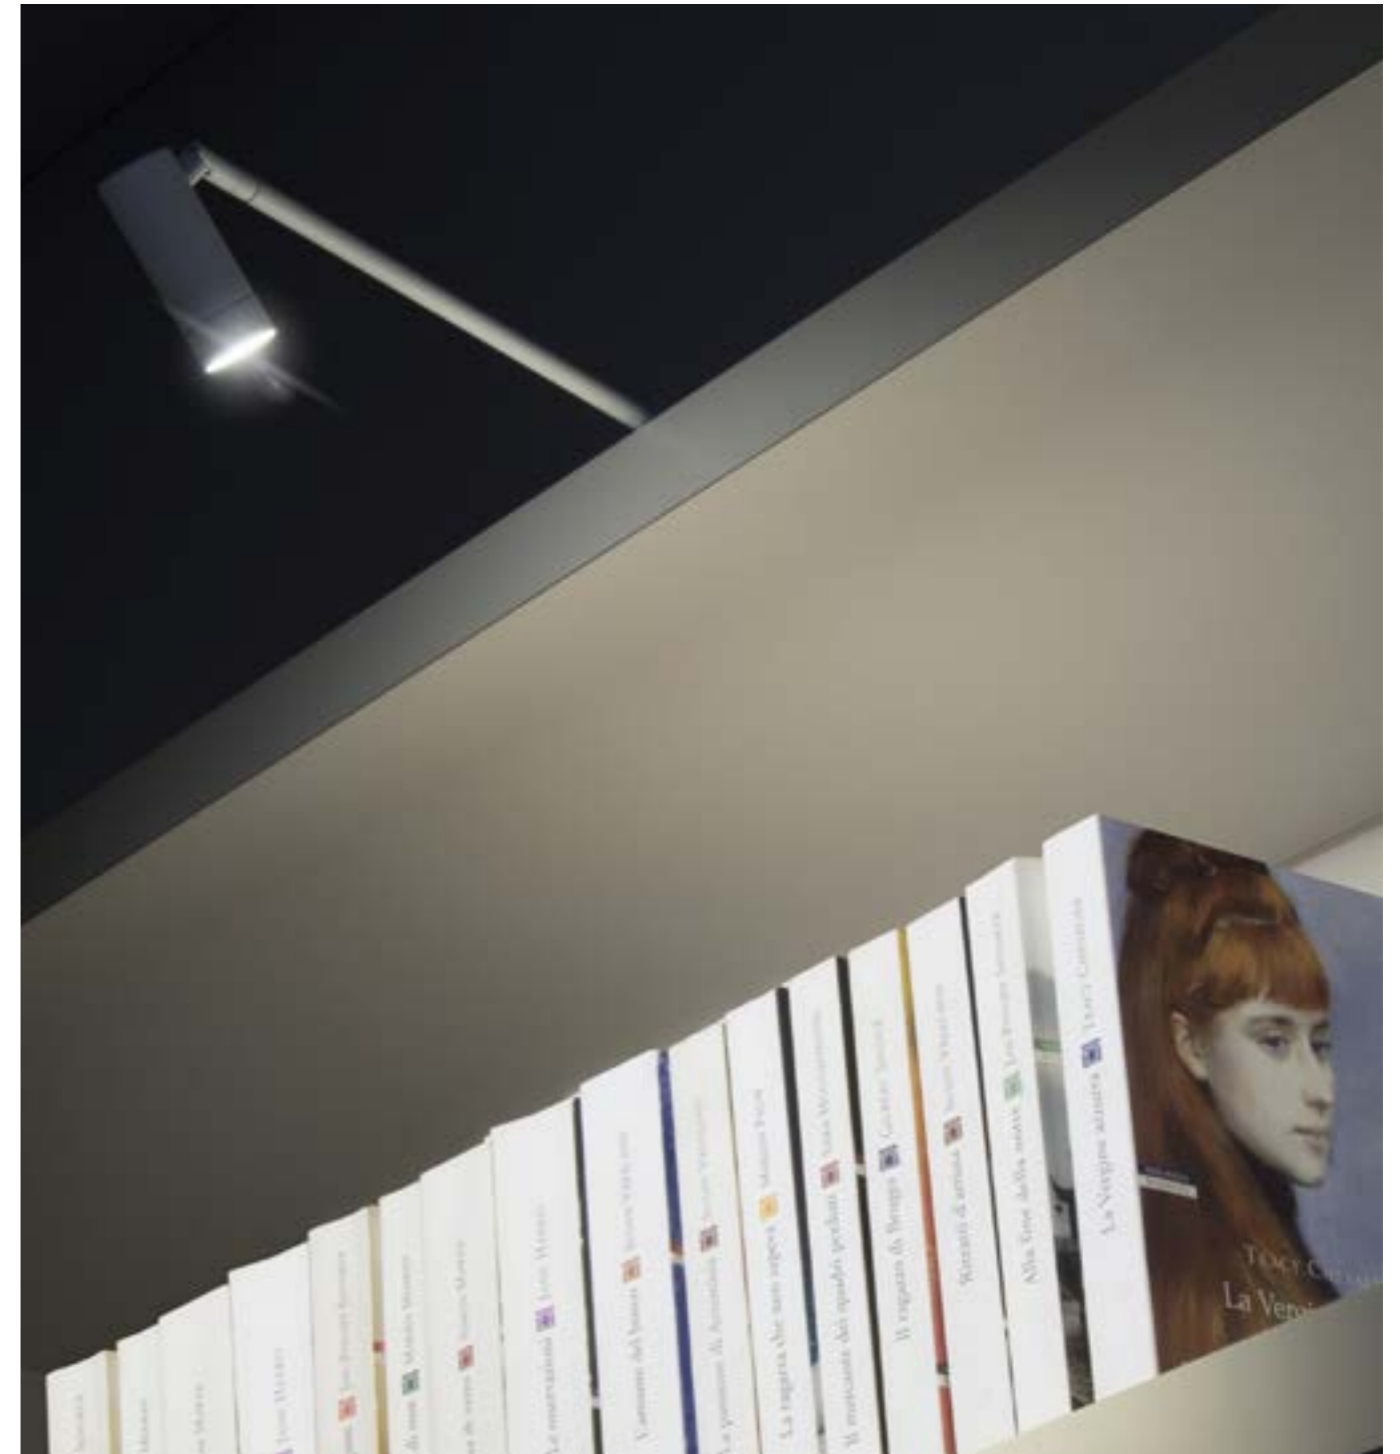

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
4655	1	1-2

### DIMMABLE

0129 PUSH - 1...10V	0141/DIM PUSH - 1...10V	0145/DIM PUSH - 1...10V	0733/DIM PHASE CUT
0129/DALI DIM DALI	0141/DALI DIM DALI	0145/DALI DIM DALI	1
1-2	1-2	1-3	1

### CASAMBI

#### 0145/CASA

1-3



### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

1

Only serial connection

# IRIS

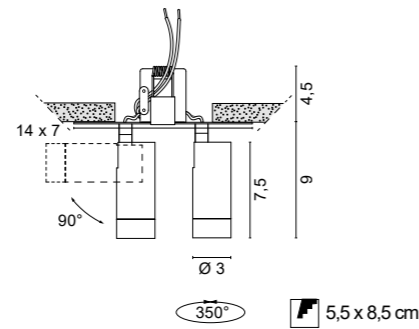

## 6750

0,23 Kg

- .01 White
- .02 Black
- .25 Satin gold

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## 6751

0,40 Kg

- .01 White
- .02 Black
- .25 Satin gold

/W	4000K	/25 /48 /63	LED 11,8W 34V 350mA	2120lm	1760lm (out)
/W	4000K	/ST Satin	LED 11,8W 34V 350mA	2120lm	1632lm (out)
/WW	3000K	/25 /48 /63	LED 11,8W 34V 350mA	2060lm	1710lm (out)
/WW	3000K	/ST Satin	LED 11,8W 34V 350mA	2060lm	1586lm (out)
/XW	2700K	/25 /48 /63	LED 11,8W 34V 350mA	1938lm	1608lm (out)
/XW	2700K	/ST Satin	LED 11,8W 34V 350mA	1938lm	1492lm (out)



Iris recessed, also available with double projector, must be installed on plasterboard surfaces. Also available version in brushed gold galvanic finish. The driver must be ordered separately.

## ACCESSORIES

Louvres

### 0267/S

- .01 White
- .02 Black



## FINISHES CODES



.01 White    .02 Black    .25 Satin Gold



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
6750	1	1-2
6751	NO	1

### DIMMABLE

	0129 PUSH - 1...10V	0141/DIM PUSH - 1...10V	0145/DIM PUSH - 1...10V	0733/DIM PHASE CUT
6750	1-2	1-2	1-3	1
6751	1	1	1	NO

### CASAMBI



0145/CASA	
6750	1-3
6751	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6750	1
6751	1

Only serial connection

# IRIS

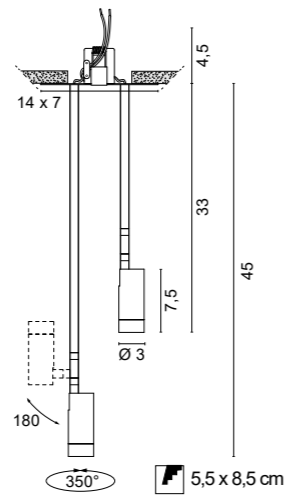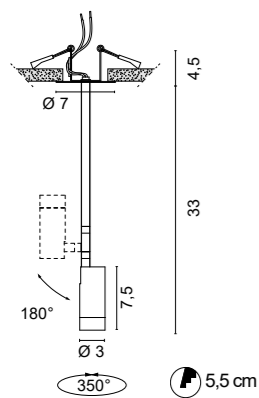

## 6753

0,23 Kg

## 6752

0,47 Kg

- .01 White
- .02 Black

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)

/W	4000K	/25 /48 /63	LED 11,8W 34V 350mA	2120lm	1760lm (out)
/W	4000K	/ST Satin	LED 11,8W 34V 350mA	2120lm	1632lm (out)
/WW	3000K	/25 /48 /63	LED 11,8W 34V 350mA	2060lm	1710lm (out)
/WW	3000K	/ST Satin	LED 11,8W 34V 350mA	2060lm	1586lm (out)
/XW	2700K	/25 /48 /63	LED 11,8W 34V 350mA	1938lm	1608lm (out)
/XW	2700K	/ST Satin	LED 11,8W 34V 350mA	1938lm	1492lm (out)



Iris recessed, also available with double projector, must be installed on plasterboard surfaces  
The driver must be ordered separately

## ACCESSORIES

### Louvres 0267/S

- .01 White
- .02 Black



## FINISHES CODES



.01 White

.02 Black



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
6752	NO	1
6753	1	1-2

### DIMMABLE

	0129 PUSH - 1...10V	0141/DIM PUSH - 1...10V	0145/DIM PUSH - 1...10V	0733/DIM PHASE CUT
6752	1	1	1	NO
6753	1-2	1-2	1-3	1

### CASAMBI



0145/CASA	
6752	1
6753	1-3

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6752	1
6753	1

Only serial connection

# IRIS



## 6755

0,20 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)

## 6756

0,45 Kg

- .01 White
- .02 Black

/W	4000K	/25 /48 /63	LED 11,8W 34V 350mA	2120lm	1760lm (out)
/W	4000K	/ST Satin	LED 11,8W 34V 350mA	2120lm	1632lm (out)
/WW	3000K	/25 /48 /63	LED 11,8W 34V 350mA	2060lm	1710lm (out)
/WW	3000K	/ST Satin	LED 11,8W 34V 350mA	2060lm	1586lm (out)
/XW	2700K	/25 /48 /63	LED 11,8W 34V 350mA	1938lm	1608lm (out)
/XW	2700K	/ST Satin	LED 11,8W 34V 350mA	1938lm	1492lm (out)



Iris recessed, also available with double projector, must be installed on plasterboard surfaces.  
Also available version in brushed gold galvanic finish  
The driver must be ordered separately

## ACCESSORIES

Louvres

### 0267/S

- .01 White
- .02 Black



## FINISHES CODES



.01 White

.02 Black



Optic 25°



Optic 48°



Optic 63°



Optic satin

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
6755	1	1-2
6756	NO	1

### DIMMABLE

0129 PUSH - 1...10V	0141/DIM PUSH - 1...10V	0145/DIM PUSH - 1...10V	0733/DIM PHASE CUT
6755	1-2	1-3	1
6756	1	1	NO

### CASAMBI


0145/CASA	
6755	1-3
6756	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6755	1
6756	1

Only serial connection

# IRIS

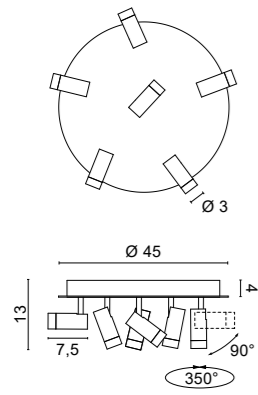


## 5680

2,80 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>
/W	4000K /25 /48 /63	LED 35,4W 5310lm
/W	4000K /ST Satin	LED 35,4W 5310lm
/WW	3000K /25 /48 /63	LED 35,4W 5016lm
/WW	3000K /ST Satin	LED 35,4W 5016lm
/XW	2700K /25 /48 /63	LED 35,4W 4800lm
/XW	2700K /ST Satin	LED 35,4W 4800lm



The ceiling lamps are made in two versions with 3 or 6 projectors.  
DALI - PUSH - 1...10V - TRIAC dimming on request.

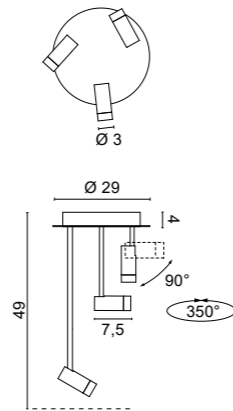

## 5681

1,70 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>
/W	4000K /25 /48 /63	LED 17,7W 2655lm
/W	4000K /ST Satin	LED 17,7W 2655lm
/WW	3000K /25 /48 /63	LED 17,7W 2508lm
/WW	3000K /ST Satin	LED 17,7W 2508lm
/XW	2700K /25 /48 /63	LED 17,7W 2400lm
/XW	2700K /ST Satin	LED 17,7W 2400lm



The ceiling lamps are made in two versions with 3 or 6 projectors.  
DALI - PUSH - 1...10V - TRIAC dimming on request.



## ACCESSORIES

### Louvers

#### 0267/S

.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>



## FINISHES CODES




.01 White

.02 Black





# IRIS

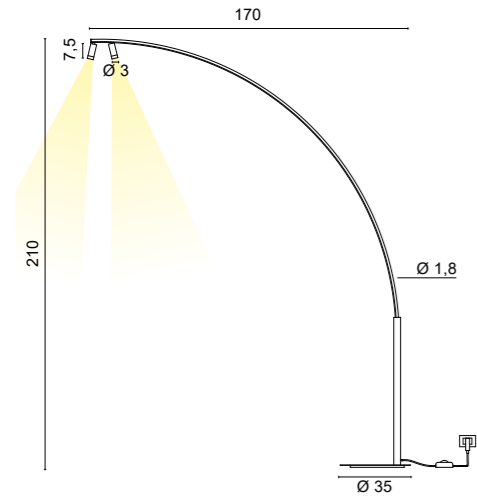

**3533** 7,00 Kg

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input checked="" type="checkbox"/>
<b>.02.25</b>	Black, Satin gold	<input checked="" type="checkbox"/>
<b>/W</b>	4000K LED 11,8W	1770lm
<b>/WW</b>	3000K LED 11,8W	1672lm
<b>/XW</b>	2700K LED 11,8W	1600lm



With PUSH DIMMER on black cable

## ACCESSORIES

Louvres  
**0267/S**

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input checked="" type="checkbox"/>



## FINISHES CODES



**.01** White    **.02** Black    **.25** Satin Gold









INDOOR

# FARO

Design LUX Studio



## FARO



Table and floor lamps with aluminum structure characterized by small adjustable projectors to make the most of the quality of the accent light.

The rearward positioning of the source and its dimming guarantee perfect visual comfort.

*Lampes de table et lampadaires avec structure en aluminium caractérisées par de petits projecteurs orientables pour tirer le meilleur parti de la qualité de la lumière d'accentuation.*


*Le positionnement reculé de la source et sa gradation garantissent un parfait confort visuel.*

*Tisch und Stehleuchten mit Aluminiumstruktur, gekennzeichnet durch kleine verstellbare Projektoren, um die Qualität des Akzentlichts optimal zu nutzen.*

*Die nach hinten gerichtete Positionierung der Quelle und deren Dimmung garantieren perfekten Sehkomfort.*



# FARO

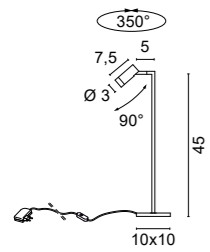

**2525** 0,95 Kg

- .01 White
- .02 Black

/W	4000K	LED 5,9W	885lm
/WW	3000K	LED 5,9W	836lm
/XW	2700K	LED 5,9W	800lm



With DIMMER on black cable  
Different optics on request


## ACCESSORIES

Louvers  
**0267/S**

- .01 White
- .02 Black




## FINISHES CODES



- .01 White
- .02 Black



# FARO

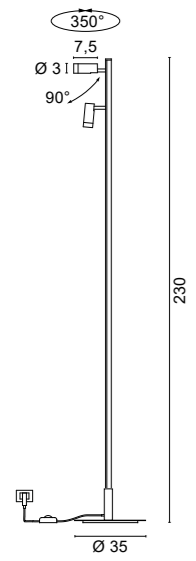

**3536** 5,40 Kg

.01	White	
.02	Black	
.02.25	Black, Satin gold	
/W	4000K LED 11,8W	1770lm
/WW	3000K LED 11,8W	1672lm
/XW	2700K LED 11,8W	1600lm



With DIMMER on black cable  
Different optics on request

## ACCESSORIES

Louvres  
**0267/S**

.01	White	
.02	Black	



## FINISHES CODES



.01 White .02 Black







INDOOR

# KALLA

Design ABS Studio



## KALLA



Flexible and adjustable wall or table lamp providing direct light with aluminum and ABS structure. The power LED and driver are integrated. Available in different types of fixing with or without a switch.

The small size, the simple but captivating line, and the proposals in different colors make KALLA an extremely versatile lamp; ideal as a reading lamp on a bedside table or a desk, it can be used in corners of living rooms as an accent light to highlight objects or furnishing components.

*Lampe murale ou de table flexible et ajustable fournissant une lumière directe avec une structure en aluminium et ABS. La LED de puissance et le driver sont intégrés. Disponible dans différents types de fixation avec ou sans interrupteur.*


*Les dimensions réduites, la ligne simple mais captivante et les propositions en différentes couleurs font de KALLA une lampe extrêmement polyvalente; idéale comme lampe de lecture sur une table de chevet ou un bureau, elle peut être utilisée dans les coins du salon comme lumière d'accentuation pour mettre en valeur des objets ou des éléments d'ameublement.*

*Flexible und verstellbare Wand- oder Tischleuchte für direktes Licht mit Aluminium- und ABS-Struktur. Die Power-LED und der Treiber sind integriert. Erhältlich in verschiedenen Arten der Befestigung mit oder ohne Schalter.*

*Die geringe Größe, die einfache, aber fesselnde Linie und die Vorschläge in verschiedenen Farben machen KALLA zu einer äußerst vielseitigen Leuchte; ideal als Leselampe auf einem Nachttisch oder einem Schreibtisch, kann sie in Wohnzimmercken als Akzentlicht verwendet werden, um Objekte oder Einrichtungsgegenstände hervorzuheben.*



# KALLA / KALLA DUE

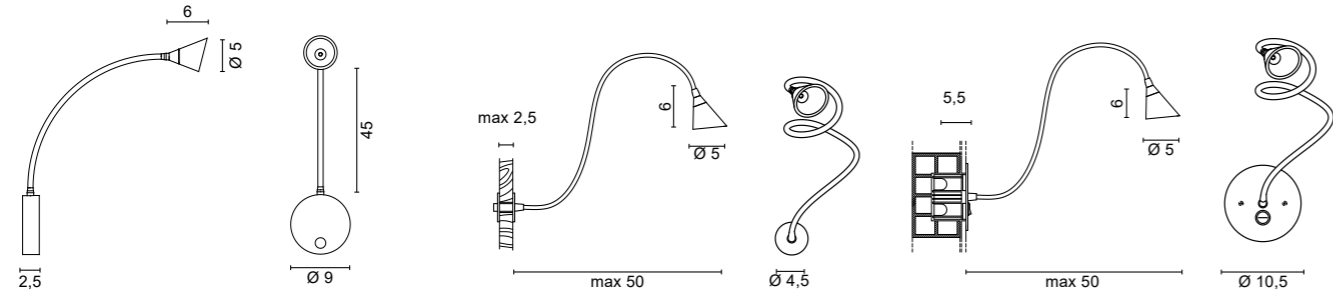

**4501** 0,30 Kg

.01	White	□
.02	Black	■
.06	Green	■
.09	Orange	■
.10	Light blue	■
.11	Pink	■

/W	4000K	LED 1W	on request
/WW	3000K	LED 1W	146lm
/XW	2700K	LED 1W	on request



**KALLA**  
Wall model with ON - OFF switch

**4540** 0,30 Kg

.01	White	□
.02	Black	■
.06	Green	■
.09	Orange	■
.10	Light blue	■
.11	Pink	■

/W	4000K	LED 1W	on request
/WW	3000K	LED 1W	146lm
/XW	2700K	LED 1W	on request



**KALLA DUE**  
Model for mounting on panel

**4541** 0,40 Kg

.01	White	□
.02	Black	■
.06	Green	■
.09	Orange	■
.10	Light blue	■
.11	Pink	■

/W	4000K	LED 1W	on request
/WW	3000K	LED 1W	146lm
/XW	2700K	LED 1W	on request




**KALLA DUE**  
Model with ON - OFF switch for mounting on wall

## FINISHES CODES




.01 White    .02 Black    .06 Green    .09 Orange    .10 Light Blue    .11 Pink

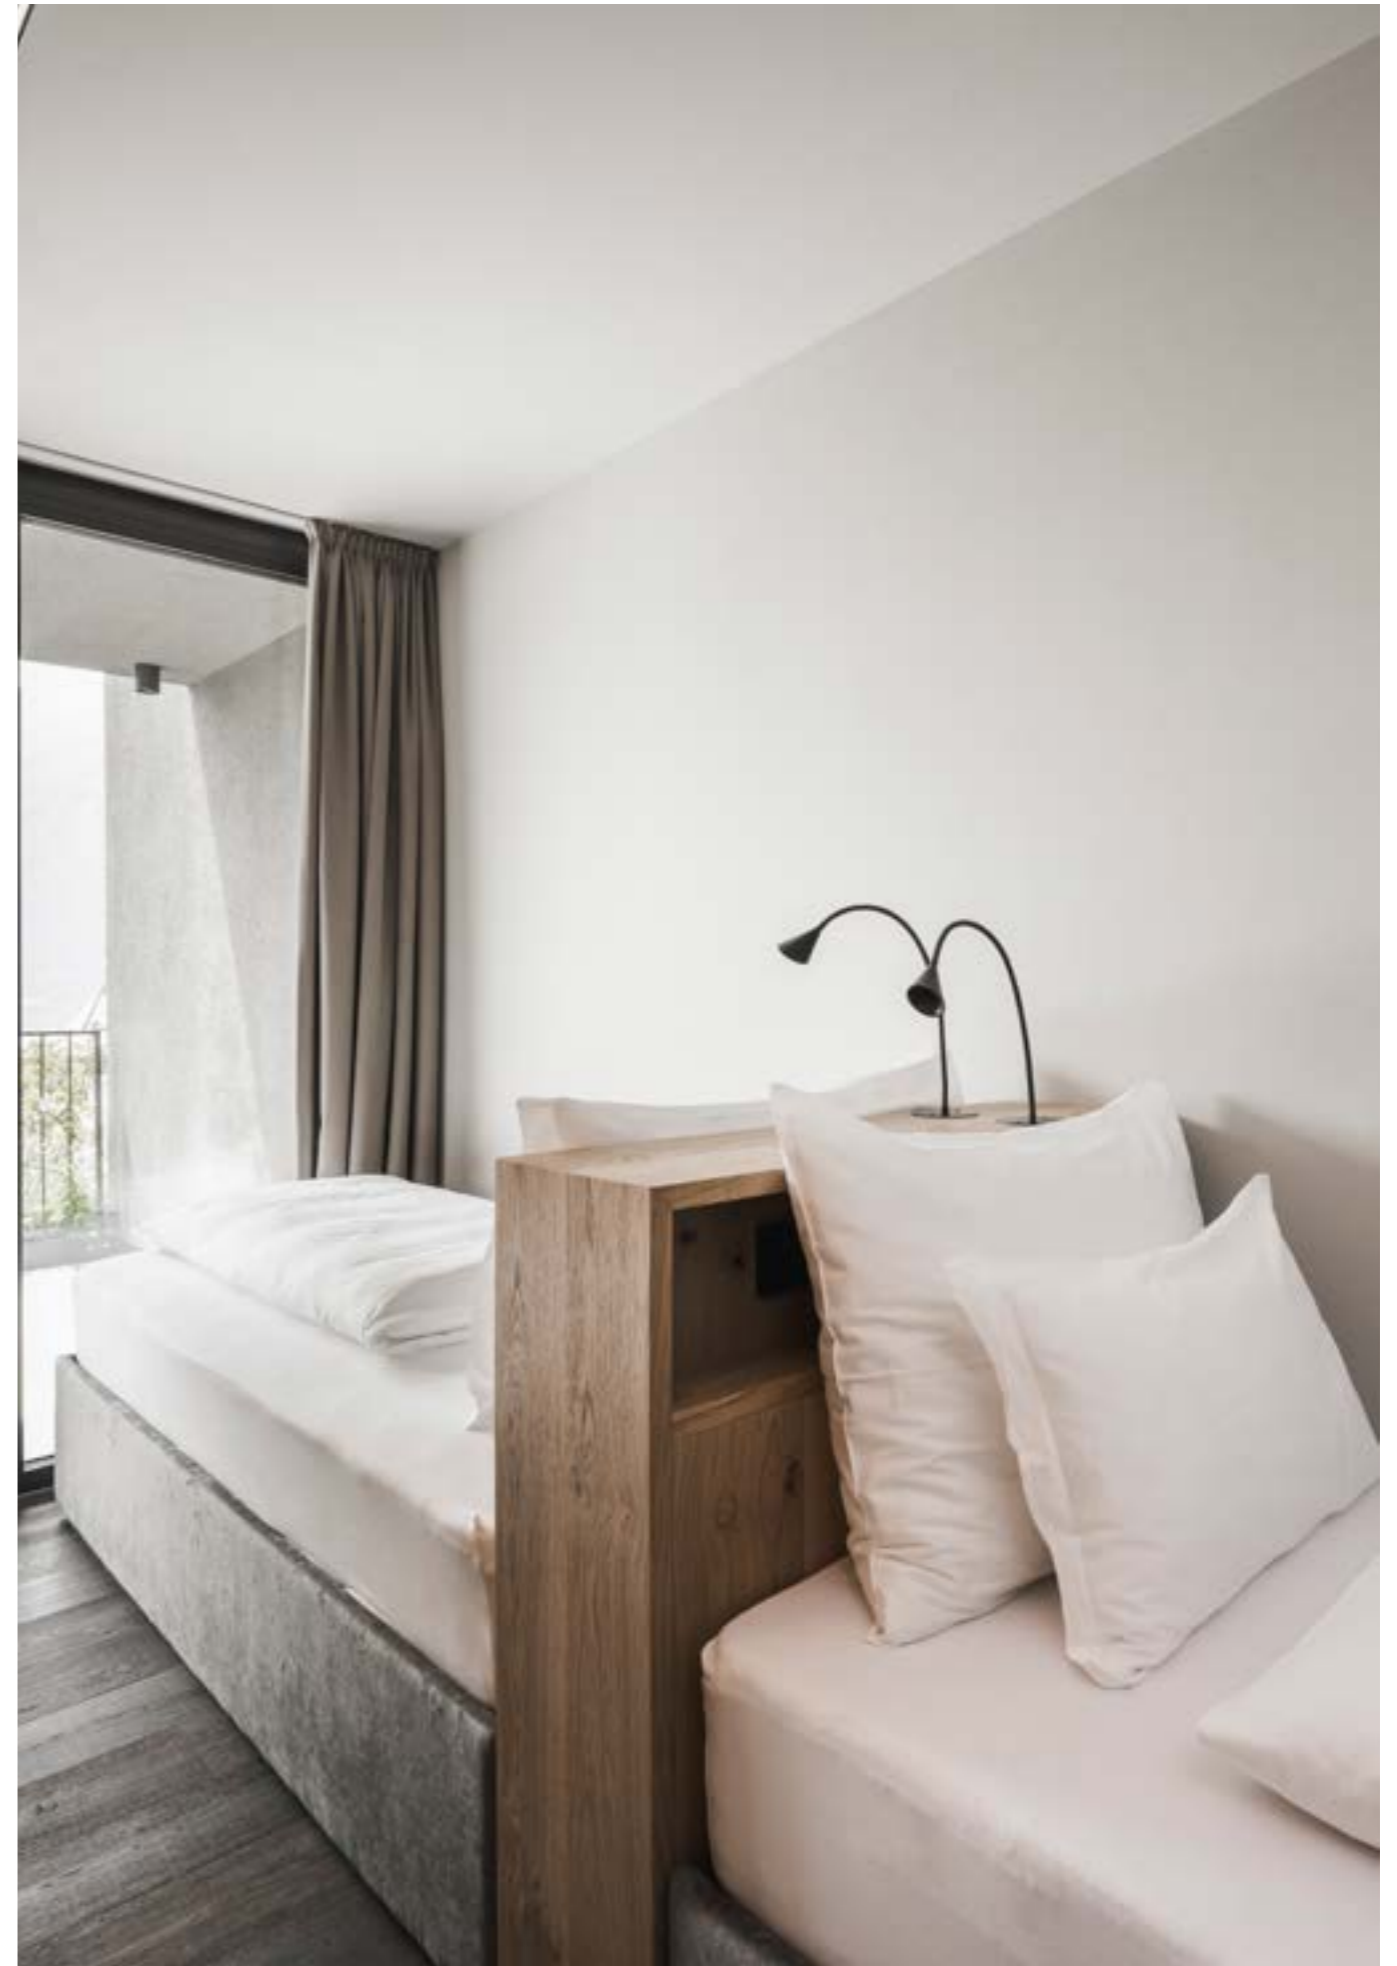





# KALLA

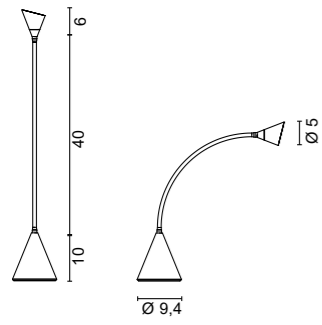


2502

0,90 Kg

.01	White	
.02	Black	
.06	Green	
.09	Orange	
.10	Light blue	
.11	Pink	

/W	4000K	LED 1W	on request
/WW	3000K	LED 1W	146lm
/XW	2700K	LED 1W	on request



Model with ON - OFF switch

## FINISHES CODES



.01 White

.02 Black

.06 Green

.09 Orange

.10 Light Blue

.11 Pink



INDOOR

# TRE&SESSANTA

Design U.T. EGOLUCE



Suspension and floor lamps with diffused light, characterized by a 360-degree light emission, with a transparent methacrylate body and aluminum closing caps. The light source is a double opposing LED circuit wrapped in an extruded white silicone.

The characteristic of the lamp is precisely the 360° light emission that is free of shadows and dark parts along its entire length.

The ceiling roses with the driver are ordered separately according to the usage of lighting elements. (p. 238).

*Suspensions et lampadaires à lumière diffuse, caractérisés par une émission de lumière à 360 degrés, avec un corps en méthacrylate transparent et des capuchons de fermeture en aluminium. La source lumineuse est un double circuit de LED opposées enveloppées dans un silicone blanc extrudé.*

*La caractéristique de la lampe est précisément l'émission de lumière à 360°, sans ombres ni parties sombres sur toute sa longueur.*

*Les rosaces de plafond avec le pilote sont commandées séparément en fonction de l'utilisation des éléments d'éclairage. (p. 238).*

*Hänge- und Stehleuchten mit diffuserem Licht, die sich durch einen 360-Grad-Lichtaustritt auszeichnen, mit einem transparenten Methacrylat-Körper und Verschlusskappen aus Aluminium. Die Lichtquelle ist ein doppelter LED-Schaltkreis, der von einem extrudierten weißen Silikon umhüllt ist.*

*Die Leuchte zeichnet sich durch einen 360°-Lichtaustritt aus, der über die gesamte Länge frei von Schatten und dunklen Stellen ist.*

*Die Deckenrosetten mit dem Treiber werden je nach Verwendung der Beleuchtungselemente separat bestellt. (S. 238).*





**1662** 0,75 Kg

<b>.01</b> White	
<b>.02</b> Black	
<b>.23</b> Satin aluminium	

**/WW** 3000K LED 24V 20W 1920lm

2700K on request

1 displacement component included

**1663** 1,10 Kg

<b>.01</b> White	
<b>.02</b> Black	
<b>.23</b> Satin aluminium	

**/WW** 3000K LED 24V 30W 2880lm


2700K on request

1 displacement component included

FINISHES CODES




**.01** White    **.02** Black    **.23** Satin aluminium

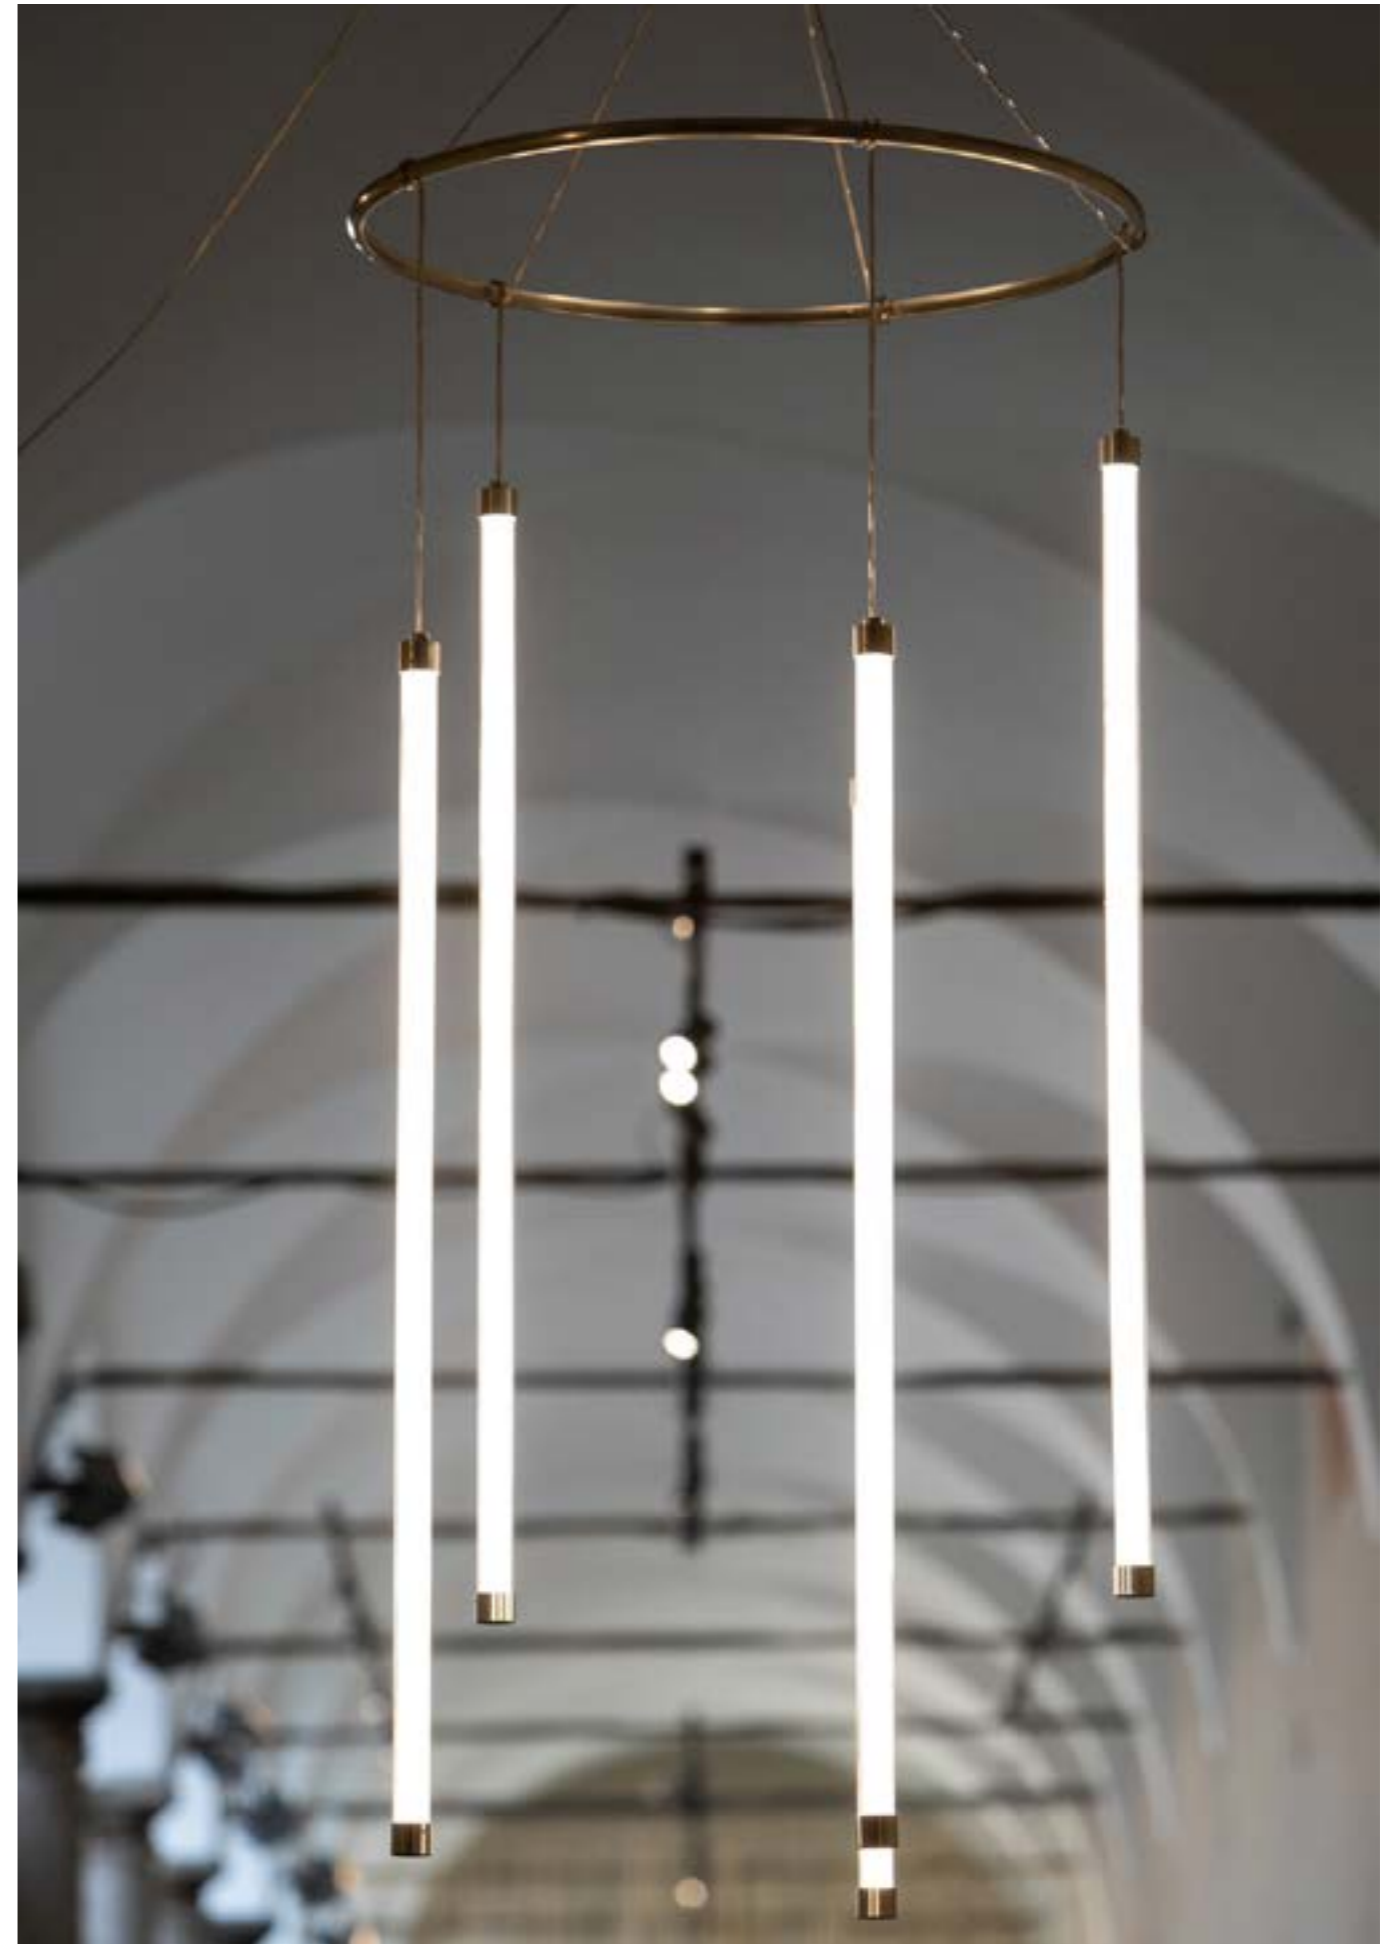

Ceiling roses with converter for suspension systems p.240

# TRE&SESSANTA

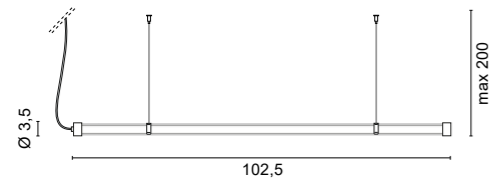


**1666** 0,75 Kg

- .01** White
- .02** Black
- .23** Satin aluminium

**/WW** 3000K LED 24V 20W 1920lm



2700K on request  
Suspension fixing kit supplied with the lamp

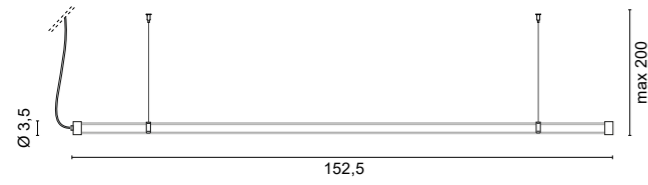

**1667** 1,10 Kg


- .01** White
- .02** Black
- .23** Satin aluminium

**/WW** 3000K LED 24V 30W 2880lm




2700K on request  
Suspension fixing kit supplied with the lamp

## FINISHES CODES

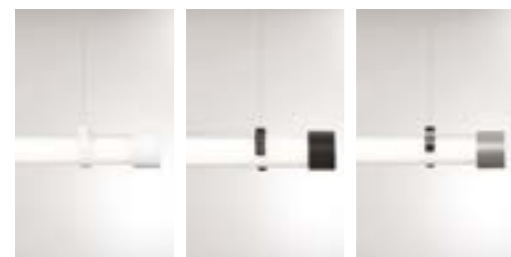

**.01** White    **.02** Black    **.23** Satin aluminium



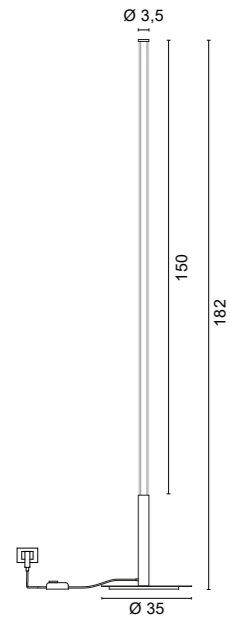

**3546** 5,00 Kg


- .01** White ■
- .02** Black ■

**/WW** 3000K LED 24V 30W 2880lm





2700K on request  
With DIMMER on black cable

FINISHES CODES




**.01** White **.02** Black



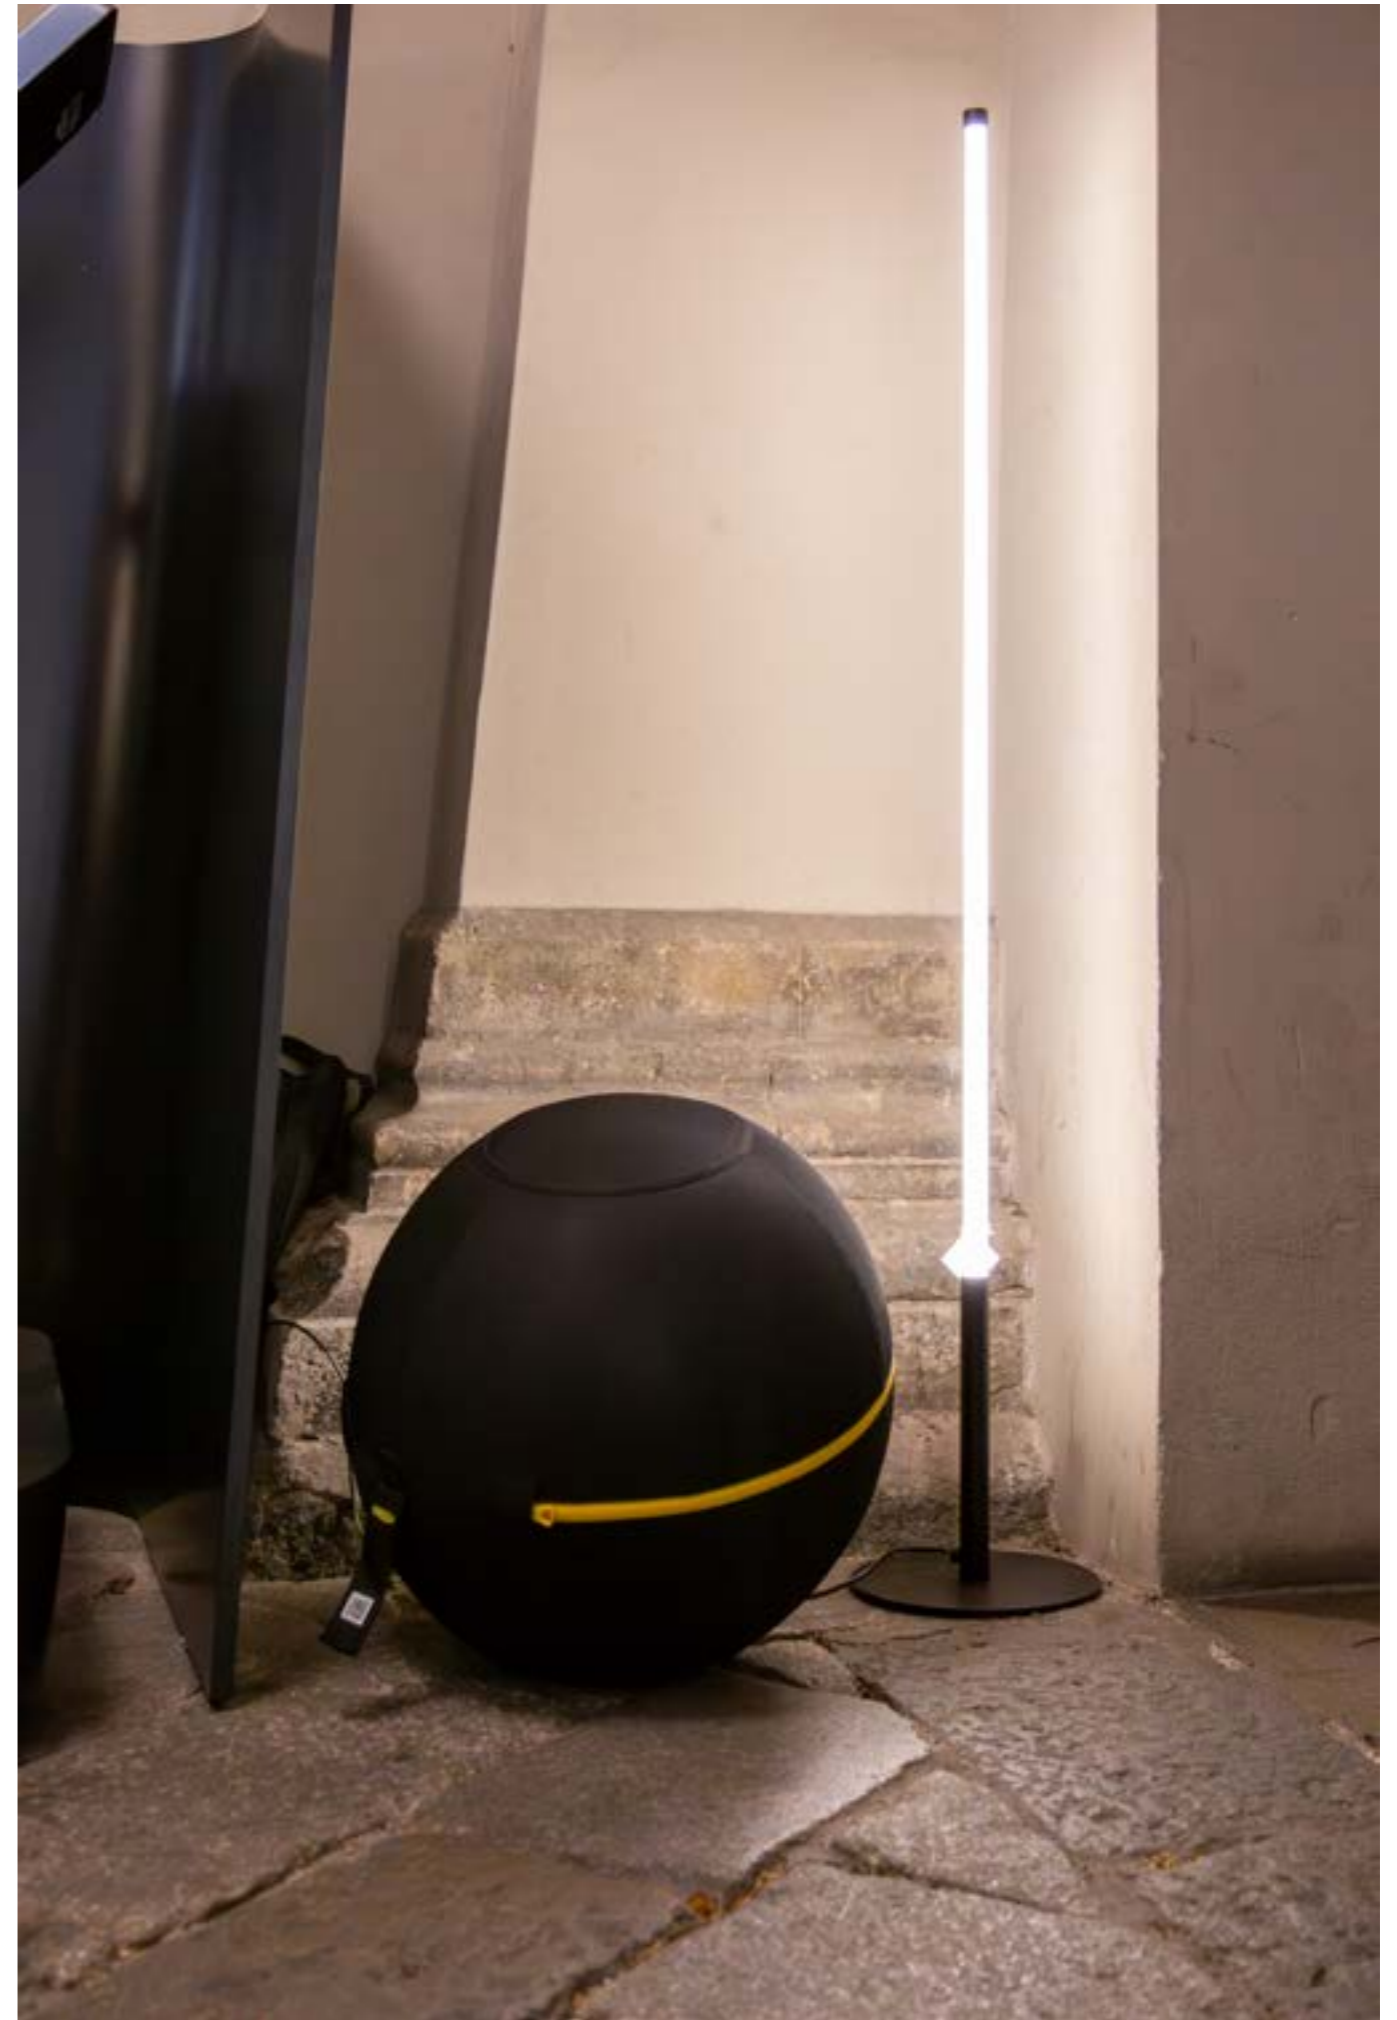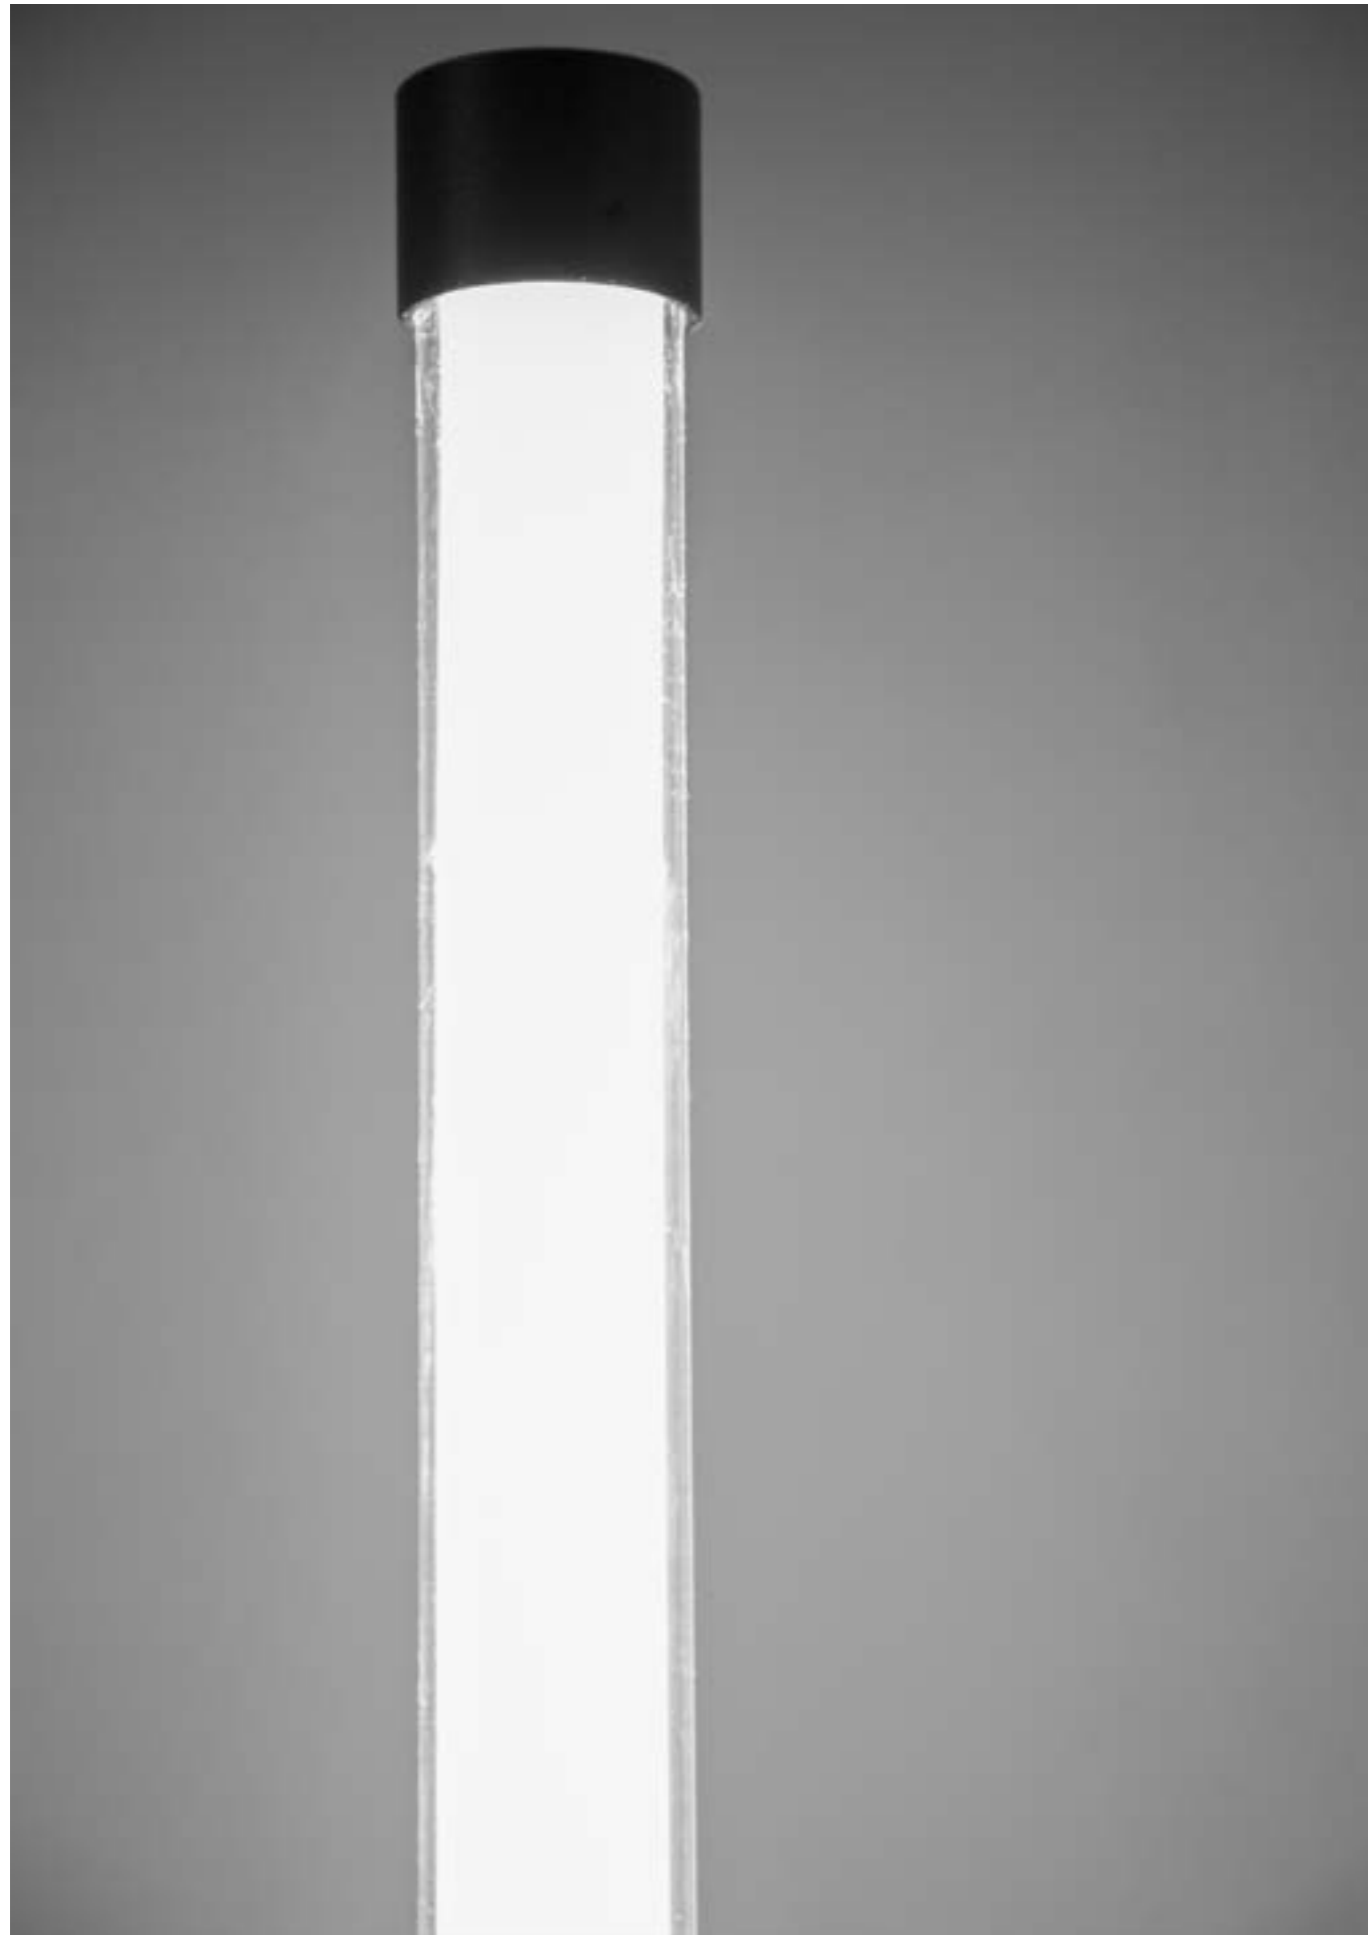




**CEILING ROSES SYSTEM 24V**  
TRE&SESSANTA system




Ceiling rose with **30W** driver 50/60Hz 220-230V

<b>0990/30</b>	0,50Kg	
.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>
.23	Satin Aluminium	<input type="checkbox"/>




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0990/60</b>	0,70Kg		
.01	White	<input type="checkbox"/>	
.02	Black	<input checked="" type="checkbox"/>	
.85	Painted silver finishing	<input type="checkbox"/>	
.86	Painted gold finishing	<input type="checkbox"/>	
.87	Painted copper finishing	<input type="checkbox"/>	
.88	Painted bronze finishing	<input type="checkbox"/>	
/P	DIMMER		MAX 60W
/V	DIMMER		MAX 60W
/D	DIMMER		MAX 60W




Ceiling rose with **150W** driver 50/60Hz 220-230V

<b>0990/150</b>	1,30Kg		
.01	White	<input type="checkbox"/>	
.02	Black	<input checked="" type="checkbox"/>	
.85	Painted silver finishing	<input type="checkbox"/>	
.86	Painted gold finishing	<input type="checkbox"/>	
.87	Painted copper finishing	<input type="checkbox"/>	
.88	Painted bronze finishing	<input type="checkbox"/>	
/P	DIMMER		MAX 150W
/V	DIMMER		MAX 150W
/D	DIMMER		MAX 150W
/T	DIMMER		MAX 150W




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0993/60</b>	0,60Kg	
.01	White	<input type="checkbox"/>
.02	Black with white base	<input checked="" type="checkbox"/>
/P	DIMMER	
/V	DIMMER	
/D	DIMMER	




Ceiling rose with **100W** driver 50/60Hz 220-230V

<b>0990/100</b>	1,30Kg		
.01	White	<input type="checkbox"/>	
.02	Black	<input checked="" type="checkbox"/>	
.85	Painted silver finishing	<input type="checkbox"/>	
.86	Painted gold finishing	<input type="checkbox"/>	
.87	Painted copper finishing	<input type="checkbox"/>	
.88	Painted bronze finishing	<input type="checkbox"/>	
/P	DIMMER		MAX 100W
/V	DIMMER		MAX 100W
/D	DIMMER		MAX 100W
/T	DIMMER		MAX 100W



Ceiling rose with **200W** driver 50/60Hz 220-230V

<b>0990/200</b>	2,00kg		
.01	White	<input type="checkbox"/>	
.02	Black	<input checked="" type="checkbox"/>	
.85	Painted silver finishing	<input type="checkbox"/>	
.86	Painted gold finishing	<input type="checkbox"/>	
.87	Painted copper finishing	<input type="checkbox"/>	
.88	Painted bronze finishing	<input type="checkbox"/>	
/P	DIMMER		MAX 2x100W
/V	DIMMER		MAX 2x100W
/D	DIMMER		MAX 2x100W
/T	DIMMER		MAX 2x100W

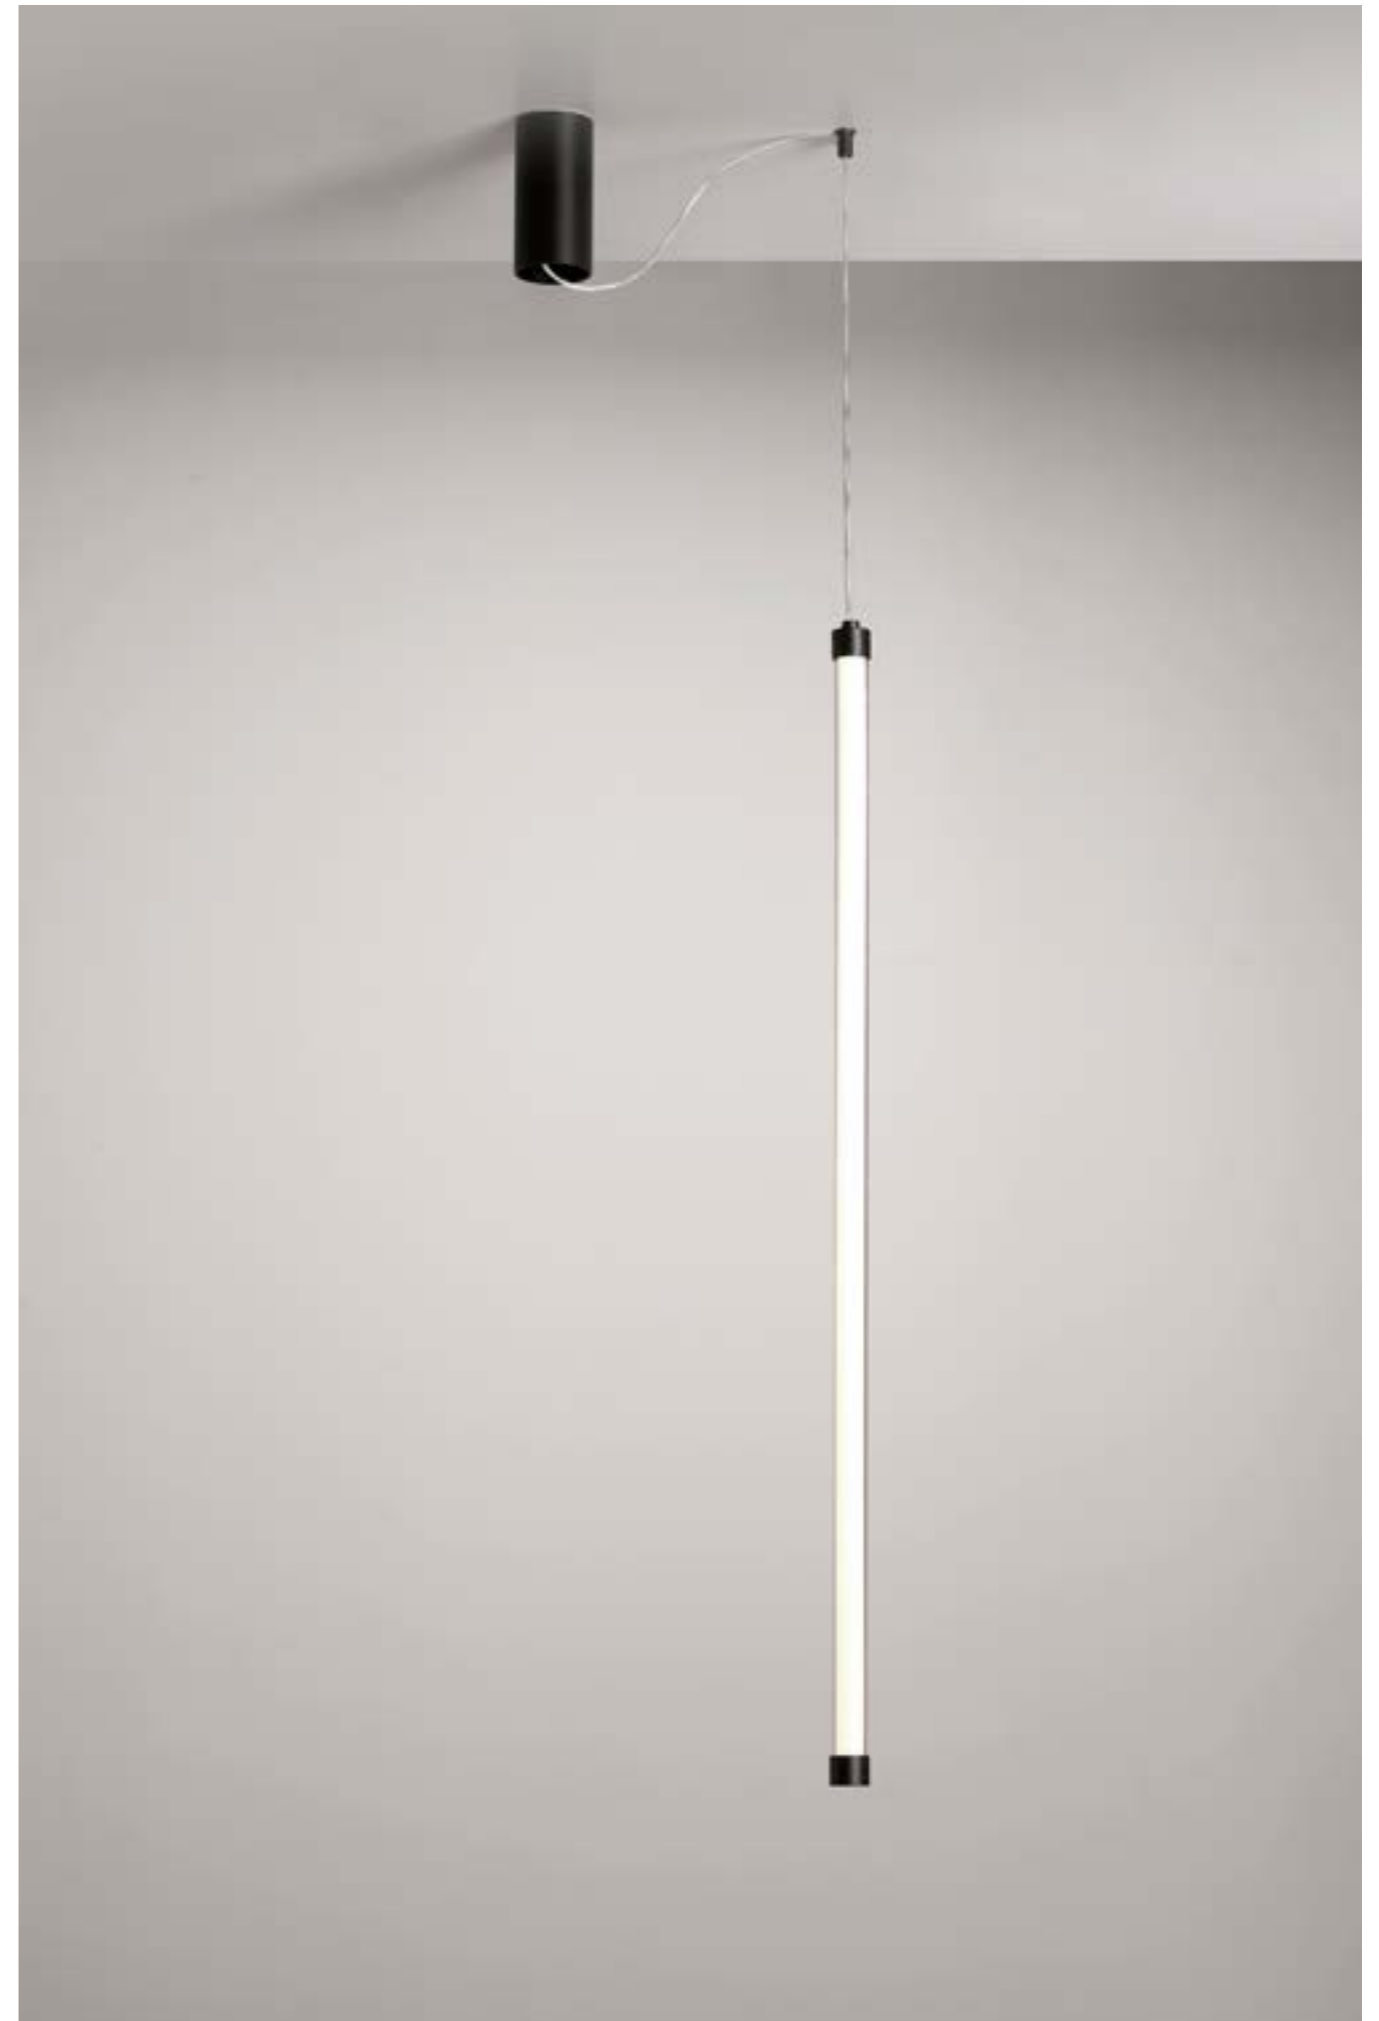




INDOOR

# RAIL

Design ABS Studio





## RAIL



Suspension lamps and systems in extruded aluminum with satin or microprismatic methacrylate diffuser (UGR <19). Available in single or double emission versions in different lengths and various finishes.

Linear lighting system with direct/diffused light with extruded aluminum body, sized to contain the drivers, opal methacrylate diffuser, 18W/mt circuit and CRI>90.

A screwless fitting with built in driver and cable's fixing hidden into the profile make Rail an easy to install lamp.

**Integration with Newton projectors** is a possible option.

The Rail collection is completed with the wall and ceiling solutions

*Lampes à suspension en aluminium extrudé avec diffuseur en méthacrylate satiné ou microprismatique (UGR <19). Disponible en versions simple ou double émission en différentes longueurs et différentes finitions.*

*Système d'éclairage linéaire à lumière directe/diffuse avec corps en aluminium extrudé, dimensionné pour contenir les alimentations, diffuseur en méthacrylate opale, circuit 18W/mt et CRI>90.*

*L'absence de vis, l'alimentation intégrée à la structure et la fixation des câbles à l'intérieur de la barre font de Rail une lampe facile à installer.*

**L'intégration de projecteurs Newton** est possible.

*La collection Rail est complétée par les versions murales et plafonniers.*


*Pendelleuchten aus stranggepresstem Aluminium mit Diffusor aus satiniertem oder mikroprismatischem Methacrylat (UGR <19). Erhältlich in Einzel oder Doppellemissionsversionen in verschiedenen Längen und verschiedenen Ausführungen.*

*Lineares Beleuchtungssystem mit direktem/diffusem Licht mit Körper aus extrudiertem Aluminium, der so bemessen ist, dass er die Vorschaltgeräte aufnehmen kann, Diffusor aus opalem Methacrylat, Schaltung mit 18 W/mt und CRI>90.*


*Eine schraubenlose Halterung mit eingebautem Treiber und einer im Profil versteckten Kabelbefestigung machen Rail zu einer einfach zu installierenden Lampe.*

**Die Integration von Newton-Projektoren** ist möglich.

*Die Rail-Kollektion wird durch die Wand- und Decken Versionen vervollständigt.*

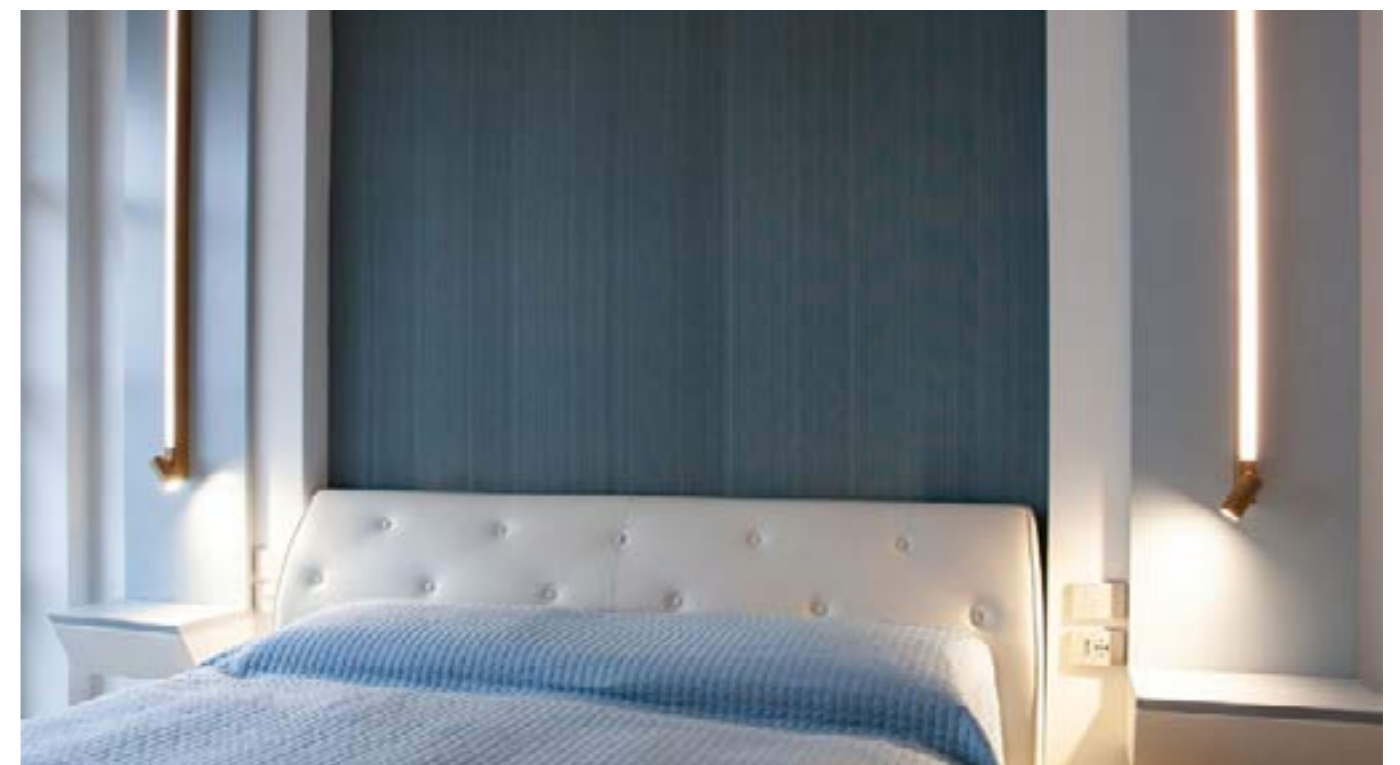

# RAIL

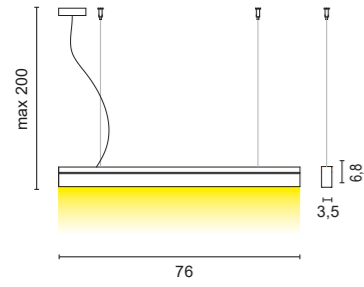

**1541** 1,10 Kg


- .01** White
- .02** Black
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted Bronze finishing

<b>/W</b>	4000K	LED 13,5W CRI>90	1695lm
<b>/WW</b>	3000K	LED 13,5W CRI>90	1515lm
<b>/XW</b>	2700K	LED 13,5W CRI>90	1417lm



Dimmable PUSH - 1... 10V DALI on request

The product code refers to the complete lamp.  
2 closing heads and polycarbonate satin diffuser are included.

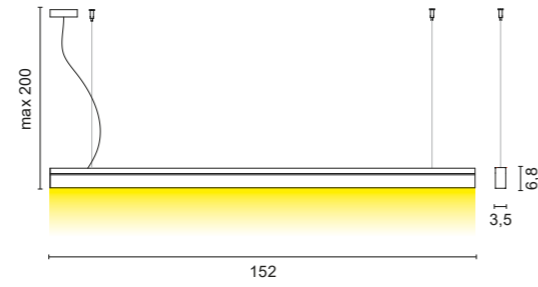

**1542** 1,50 Kg

- .01** White
- .02** Black
- .85** Painted silver finishing
- .86** Painted gold finishing
- .87** Painted copper finishing
- .88** Painted Bronze finishing

<b>/W</b>	4000K	LED 27W CRI>90	3390lm
<b>/WW</b>	3000K	LED 27W CRI>90	3030lm
<b>/XW</b>	2700K	LED 27W CRI>90	2835lm



Dimmable PUSH - 1... 10V DALI on request

The product code refers to the complete lamp.  
2 closing heads and polycarbonate satin diffuser are included.

## FINISHES CODES



- .01** White
- .02** Black
- .85** Painted silver
- .86** Painted gold
- .87** Painted copper
- .88** Painted bronze




## CUSTOM SIZE

Table of available lengths on request

cm	watt	2700K	lm	3000K	lm	4000K	lm
77	13,5W	1541 * /XW	1417	1541 * /WW	1515	1541 * /W	1695
102	18W	A1541 * /100/XW	1890	1541 * /100/WW	2020	1541 * /100/W	2260
127	22,5W	A1541 * /125/XW	2362	A1541 * /125/WW	2325	A1541 * /125/W	2825
152	27W	1542 * /XW	2835	1542 * /WW	3030	1542 * /W	3390
177	31,5W	A1541 * /175/XW	3307	A1541 * /175/WW	3535	A1541 * /175/W	3955
202	36W	A1541 * /200/XW	3780	A1541 * /200/WW	4040	A1541 * /200/W	4520
227	40,5W	A1541 * /225/XW	4252	A1541 * /225/WW	4545	A1541 * /225/W	5085
252	45W	A1541 * /250/XW	4725	A1541 * /250/WW	5050	A1541 * /250/W	5650
277	49,5W	A1541 * /275/XW	5197	A1541 * /275/WW	5555	A1541 * /275/W	6215
302	54W	A1541 * /300/XW	5670	A1541 * /300/WW	6060	A1541 * /300/W	6780

\* Finishes codes : **.01 .02 .85 .86 .87 .88**

# RAIL BIEMISSIONE

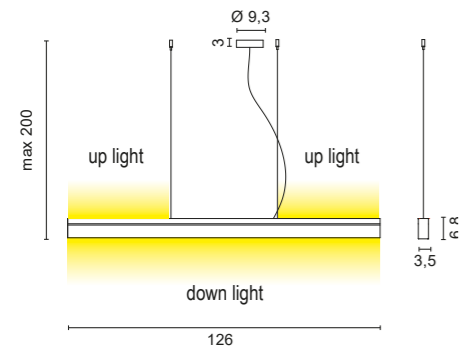

**1545**

1,90 Kg

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.85</b>	Painted silver finishing	
<b>.86</b>	Painted gold finishing	
<b>.87</b>	Painted copper finishing	
<b>.88</b>	Painted Bronze finishing	

<b>/W</b>	4000K	LED 37,5W	1883lm (up light) + 2825lm (down light)
<b>/WW</b>	3000K	LED 37,5W	1683lm (up light) + 2525lm (down light)
<b>/XW</b>	2700K	LED 37,5W	1575lm (up light) + 2362lm (down light)




Dimmable PUSH - 1... 10V - DALI on request

The product code refers to the complete lamp  
2 closing heads and polycarbonate satin diffuser are included

## FINISHES CODES



**.01** White    **.02** Black    **.85** Painted silver    **.86** Painted gold    **.87** Painted copper    **.88** Painted bronze

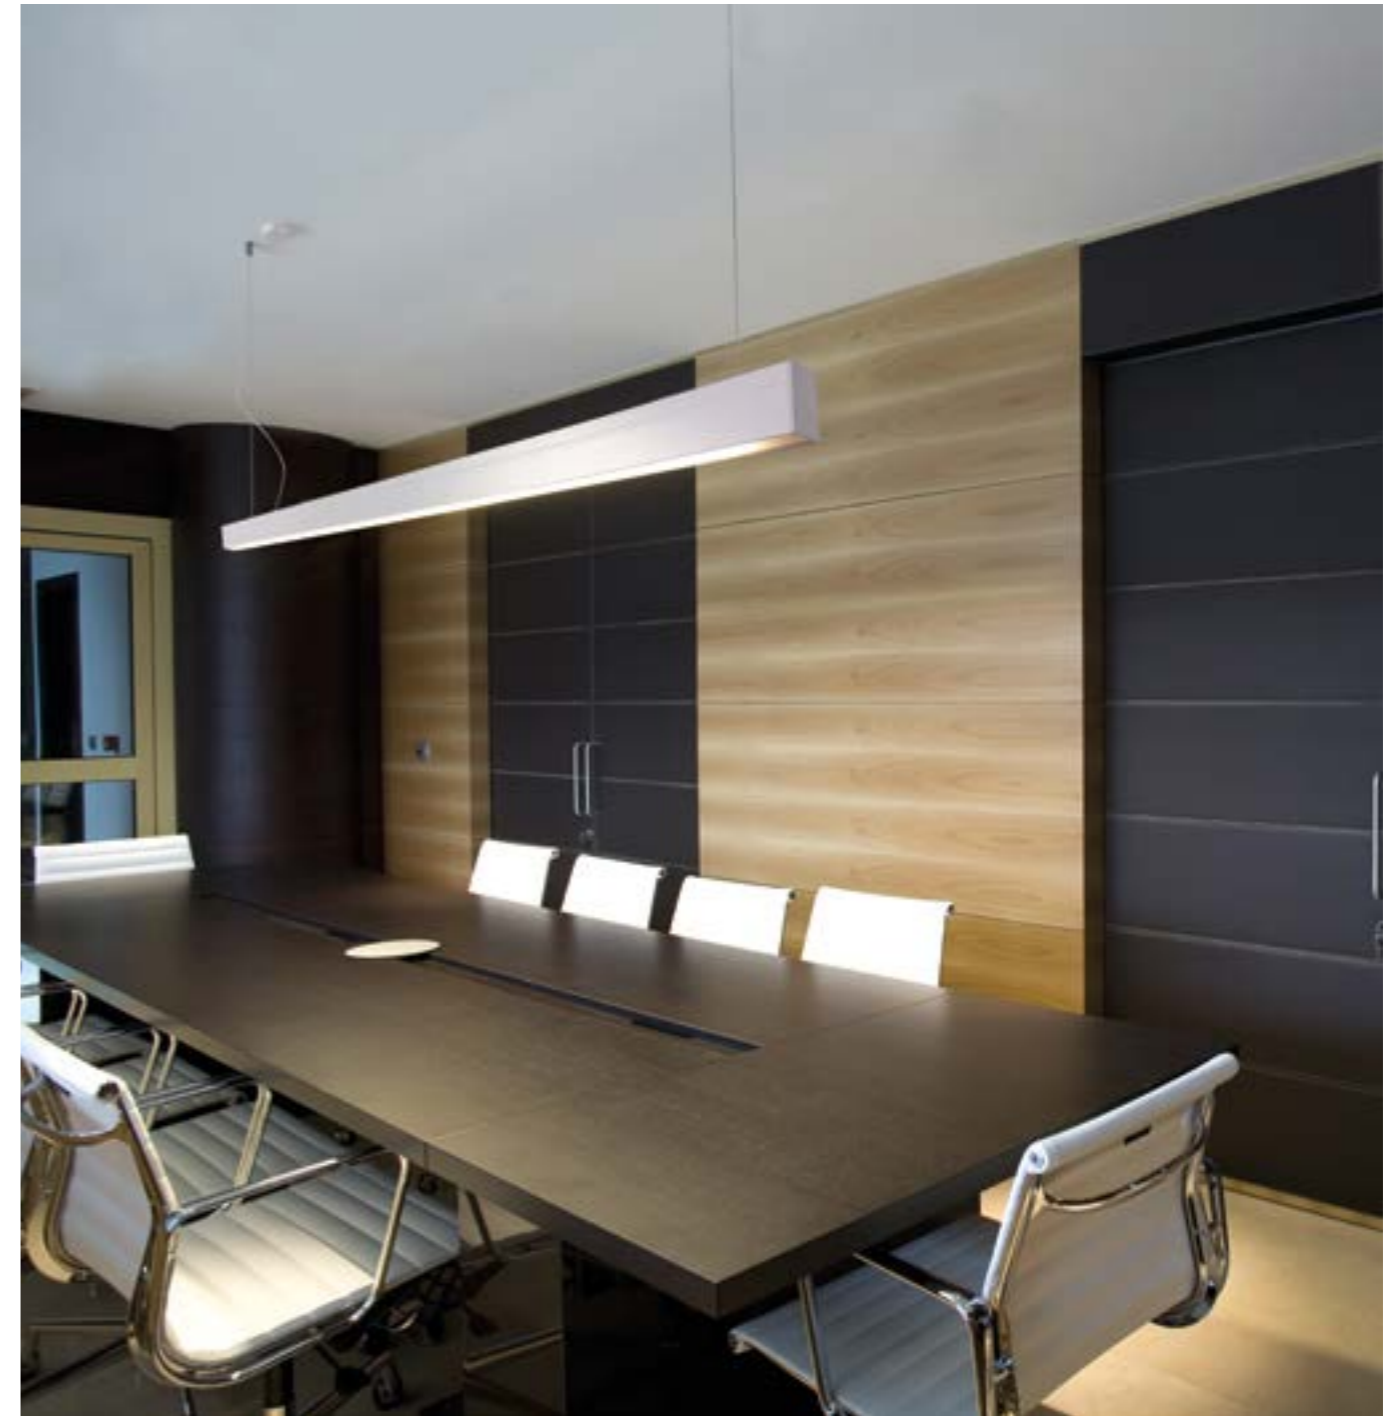


## CUSTOM SIZE

Table of available lengths on request

cm	watt	2700K	lm (up)	lm (down)	3000K	lm (up)	lm (down)	4000K	lm (up)	lm (down)
127	37,5W	1545 * /XW	1575	2362	1545 * /WW	1683	2525	1545 * /W	1883	2825
152	45W	A1545 * /150/XW	1890	2835	A1545 * /150/WW	2020	3030	A1545 * /150/W	2260	3290
177	55,5W	A1545 * /175/XW	2520	3307	A1545 * /175/WW	2693	3535	A1545 * /175/W	3013	3955
202	60W	A1545 * /200/XW	2520	3780	A1545 * /200/WW	2693	4040	A1545 * /200/W	3013	4520
227	67,5W	A1545 * /225/XW	2835	4252	A1545 * /225/WW	3030	4545	A1545 * /225/W	3390	5085
252	75W	A1545 * /250/XW	3150	4725	A1545 * /250/WW	3366	5050	A1545 * /250/W	3767	5650
277	82,5W	A1545 * /275/XW	3465	5197	A1545 * /275/WW	3703	5555	A1545 * /275/W	4143	6215
302	93W	A1545 * /300/XW	4095	5670	A1545 * /300/WW	4377	6060	A1545 * /300/W	4897	6780

\* Finishes codes : **.01 .02 .85.86 .87. 88**

# RAIL UGR

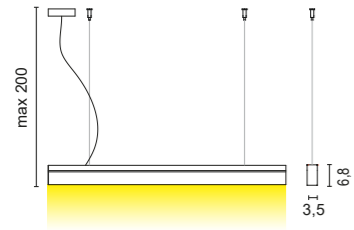

1547/125 127  
 1547/150 152  
 1547/176 177

## 1547

.01 White ■

**L 127 cm** 1,80 Kg


<b>/125/W</b>	4000K	LED 31W	3440lm
<b>/125/WW</b>	3000K	LED 31W	3000lm
<b>/125/XW</b>	2700K	LED 31W	2860lm

**L 152 cm** 2,10 Kg

<b>/150/W</b>	4000K	LED 37,5W	4130lm
<b>/150/WW</b>	3000K	LED 37,5W	3600lm
<b>/150/XW</b>	2700K	LED 37,5W	3440lm

**L 177 cm** 2,50 Kg

<b>/175/W</b>	4000K	LED 44W	4800lm
<b>/175/WW</b>	3000K	LED 44W	4200lm
<b>/175/XW</b>	2700K	LED 44W	4000lm



Dimmable PUSH - 1... 10V - DALI on request

With high efficiency microprismatic diffuser


## FINISHES CODES



.01 White



# RAIL BIEMISSION UGR

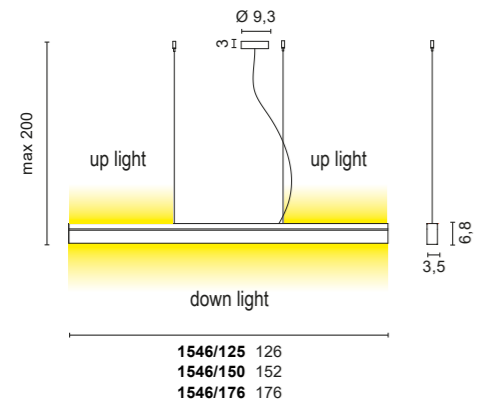

## 1546

.01 White ■

**L 127 cm** 1,90 Kg


/125/W	4000K	LED 46W	1883lm (up light) + 3440lm (down light)
/125/WW	3000K	LED 46W	1683lm (up light) + 3000lm (down light)
/125/XW	2700K	LED 46W	1575lm (up light) + 2860lm (down light)

**L 152 cm** 2,30 Kg

/150/W	4000K	LED 55,5W	2260lm (up light) + 4130lm (down light)
/150/WW	3000K	LED 55,5W	2020lm (up light) + 3600lm (down light)
/150/XW	2700K	LED 55,5W	1890lm (up light) + 3440lm (down light)

**L 177 cm** 2,70 Kg

/175/W	4000K	LED 68W	3013lm (up light) + 4800lm (down light)
/175/WW	4000K	LED 68W	2693lm (up light) + 4200lm (down light)
/175/XW	2700K	LED 46W	2520lm (up light) + 4000lm (down light)




Dimmable PUSH - 1... 10V - DALI on request

With high efficiency microprismatic diffuser

## FINISHES CODES




.01 White

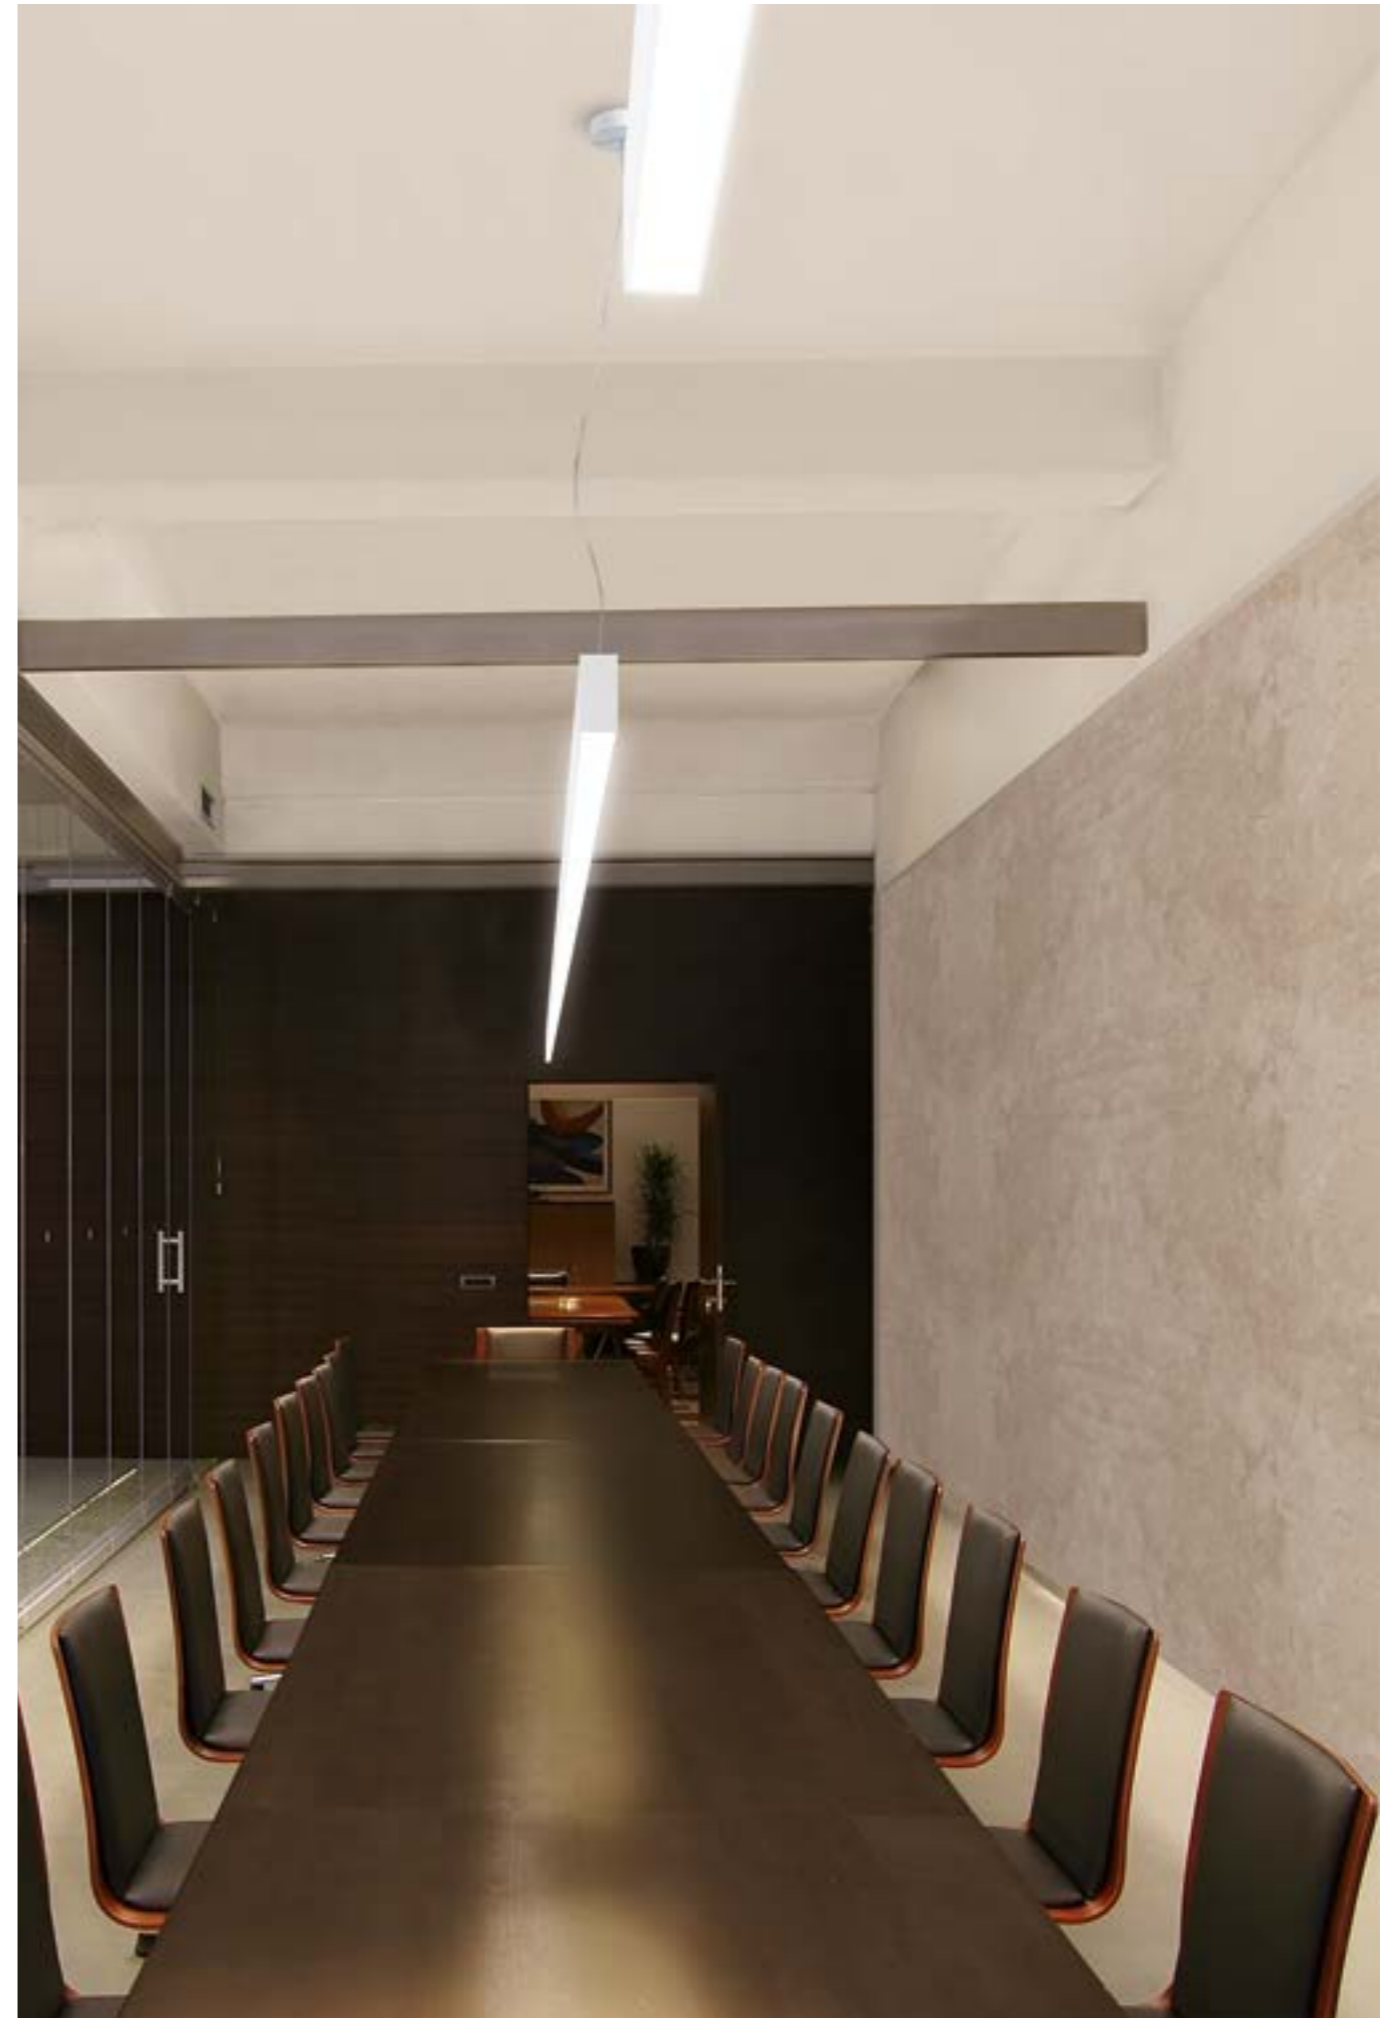






# RAIL QUADRA

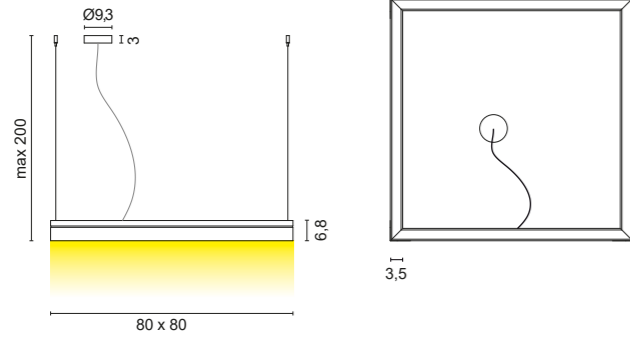

**1561** 3,80 Kg

- .01** White ■
- .02** Black ■
- .85** Painted silver finishing ■
- .86** Painted gold finishing ■
- .87** Painted copper finishing ■
- .88** Painted Bronze finishing ■

<b>/W</b>	4000K	LED 54W CRI>90	6780lm
<b>/WW</b>	3000K	LED 54W CRI>90	6060lm
<b>/XW</b>	2700K	LED 54W CRI>90	5670lm




Dimmable PUSH - 1...10V - DALI on request  
Biemission on request

## FINISHES CODES




- .01** White
- .02** Black
- .85** Painted silver
- .86** Painted gold
- .87** Painted copper
- .88** Painted bronze

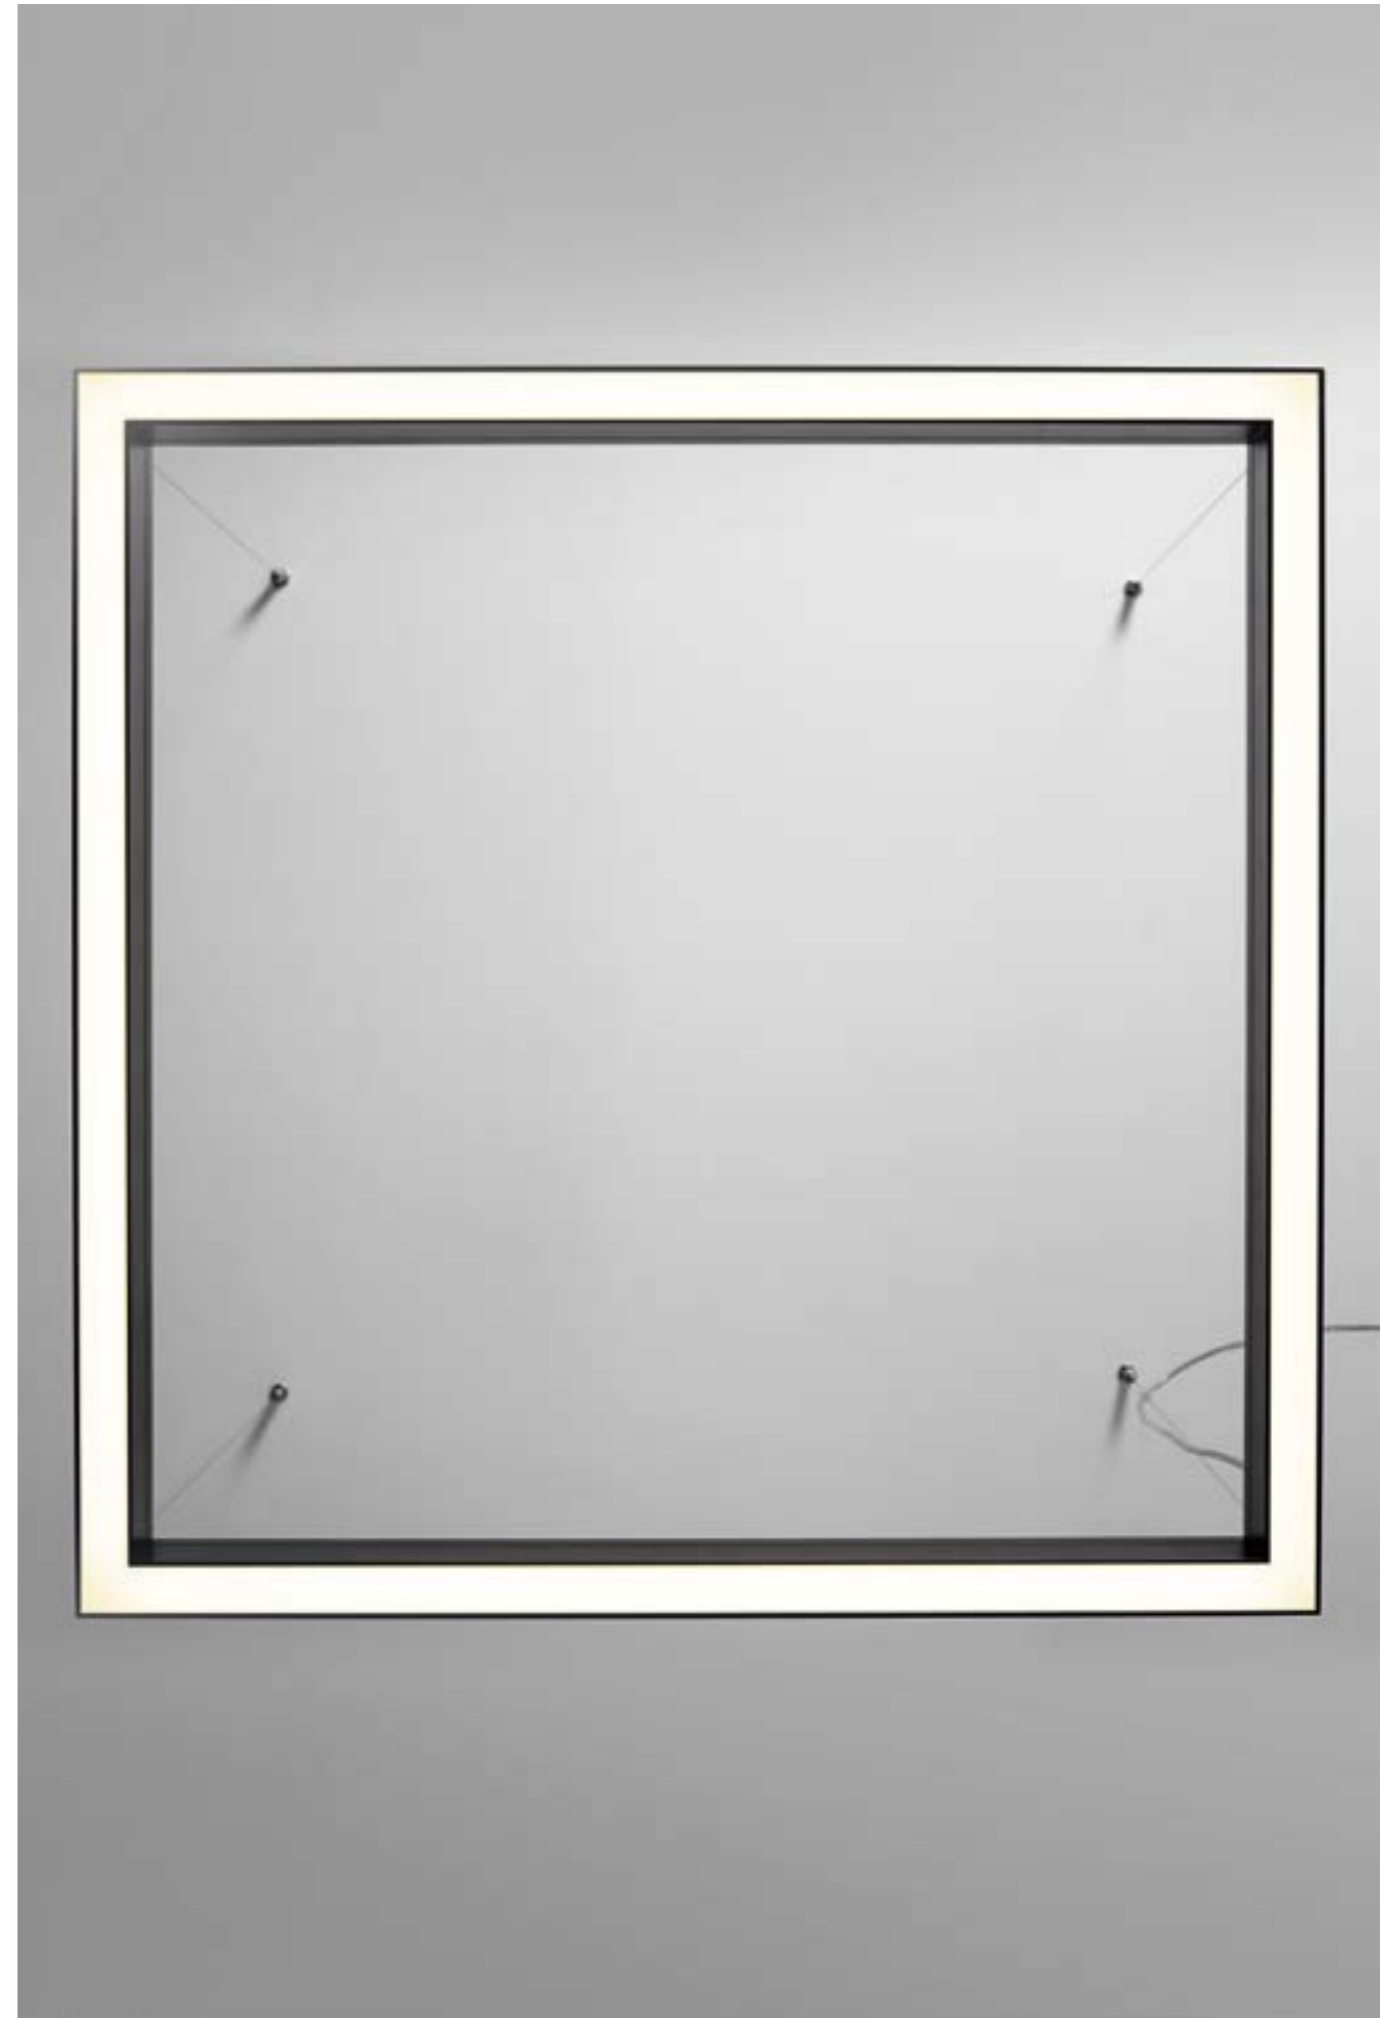






# RAIL SYSTEM

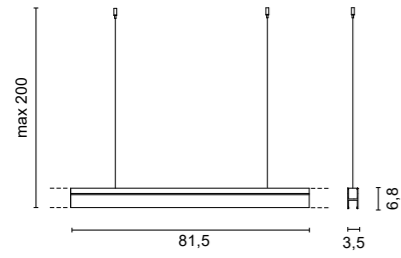


**1543** 1,00 Kg

.01 White

/W	4000K	LED 14,4W	1808lm
/WW	3000K	LED 14,4W	1616lm
/XW	2700K	LED 14,4W	1512lm



New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request

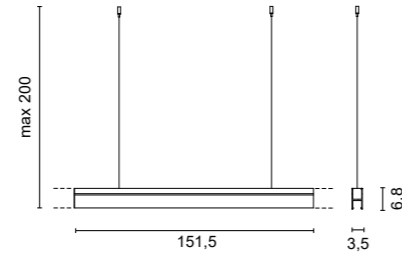

**1544** 1,40 Kg

.01 White

/W	4000K	LED 27W	3390lm
/WW	3000K	LED 27W	3030lm
/XW	2700K	LED 27W	2835lm



New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request

## FINISHES CODES




.01 White



# RAIL SYSTEM




## ACCESSORIES



Element  
**0941**

90° Corner. 0,40 Kg


.01	White		
/W	4000K	LED 3,6W	452lm
/WW	3000K	LED 3,6W	404lm
/XW	2700K	LED 3,6W	378lm



Element  
**0944**

Wall -Ceiling Joint 0,15 Kg


.01	White	
-----	-------	--



Element  
**0946**

Ceiling rose with cable 0,07 Kg

.01	White	
-----	-------	--



Element  
**0942**

T Joint. 0,35 Kg


.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 5,4W	606lm
/XW	2700K	LED 5,4W	567lm



Element  
**0945**

2 end stoppers


.01	White	
-----	-------	--



Element  
**0947**

Ceiling plate with springs 0,08 Kg

.01	White	
-----	-------	--



Element  
**0943**

Cross Joint. 0,35 Kg

.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 5,4W	606lm
/XW	2700K	LED 5,4W	567lm



Element  
**0948**

Satin methacrylate diffuser

.01	White	
/100	105 cm	
/200	205 cm	
/300	305 cm	



## CUSTOM SIZE

Table of available lengths on request.



cm	watt	2700K	lm	3000K	lm	4000K	lm
61,5	10,8W	A1543.01/60/XW	1134	A1543.01/60/WW	1212	A1543.01/60/W	1356
71,5	12,6W	A1543.01/70/XW	1323	A1543.01/70/WW	1414	A1543.01/70/W	1582
81,5*	14,4W	1543.01/XW	1512	1543.01/WW	1616	1543.01/W	1808
91,5	16,2W	A1543.01/90/XW	1701	A1543.01/90/WW	1818	A1543.01/90/W	2034
101,5	18W	A1543.01/100/XW	1890	A1543.01/100/WW	2020	A1543.01/100/W	2260
111,5	19,8W	A1543.01/110/XW	2079	A1543.01/110/WW	2222	A1543.01/110/W	2486
121,5	21,6W	A1543.01/120/XW	2268	A1543.01/120/WW	2424	A1543.01/120/W	2712
131,5	23,4W	A1543.01/130/XW	2457	A1543.01/130/WW	2626	A1543.01/130/W	2938
141,5	25,2W	A1543.01/140/XW	2646	A1543.01/140/WW	2828	A1543.01/140/W	3164
151,5*	27W	1544.01/XW	2835	1544.01/WW	3030	1544.01/W	3390
161,5	28,8W	A1543.01/160/XW	3024	A1543.01/160/WW	3232	A1543.01/160/W	3616
171,5	30,6W	A1543.01/170/XW	3213	A1543.01/170/WW	3434	A1543.01/170/W	3842
181,5	32,4W	A1543.01/180/XW	3402	A1543.01/180/WW	3636	A1543.01/180/W	4068
191,5	34,2W	A1543.01/190/XW	3591	A1543.01/190/WW	3838	A1543.01/190/W	4294
201,5	36W	A1543.01/200/XW	3780	A1543.01/200/WW	4040	A1543.01/200/W	4520
211,5	37,8W	A1543.01/210/XW	3969	A1543.01/210/WW	4242	A1543.01/210/W	4746
221,5	39,6W	A1543.01/220/XW	4158	A1543.01/220/WW	4444	A1543.01/220/W	4972
231,5	41,4W	AA1543.01/230/XW	4347	A1543.01/230/WW	4646	A1543.01/230/W	5198
241,5	43,2W	A1543.01/240/XW	4536	A1543.01/240/WW	4848	A1543.01/240/W	5424
251,5	45W	A1543.01/250/XW	4725	A1543.01/250/WW	5050	A1543.01/250/W	5650
261,5	46,8W	A1543.01/260/XW	4914	A1543.01/260/WW	5252	A1543.01/260/W	5876
271,5	48,6W	A1543.01/270/XW	5103	A1543.01/270/WW	5454	A1543.01/270/W	6102
281,5	50,4W	A1543.01/280/XW	5292	A1543.01/280/WW	5656	A1543.01/280/W	6328
291,5	52,2W	A1543.01/290/XW	5481	A1543.01/290/WW	5858	A1543.01/290/W	6554
301,5	54W	A1543.01/300/XW	5670	A1543.01/300/WW	6060	A1543.01/300/W	6780


\* Standard catalogue item


# RAIL SYSTEM



## CONFIGURATION EXAMPLE

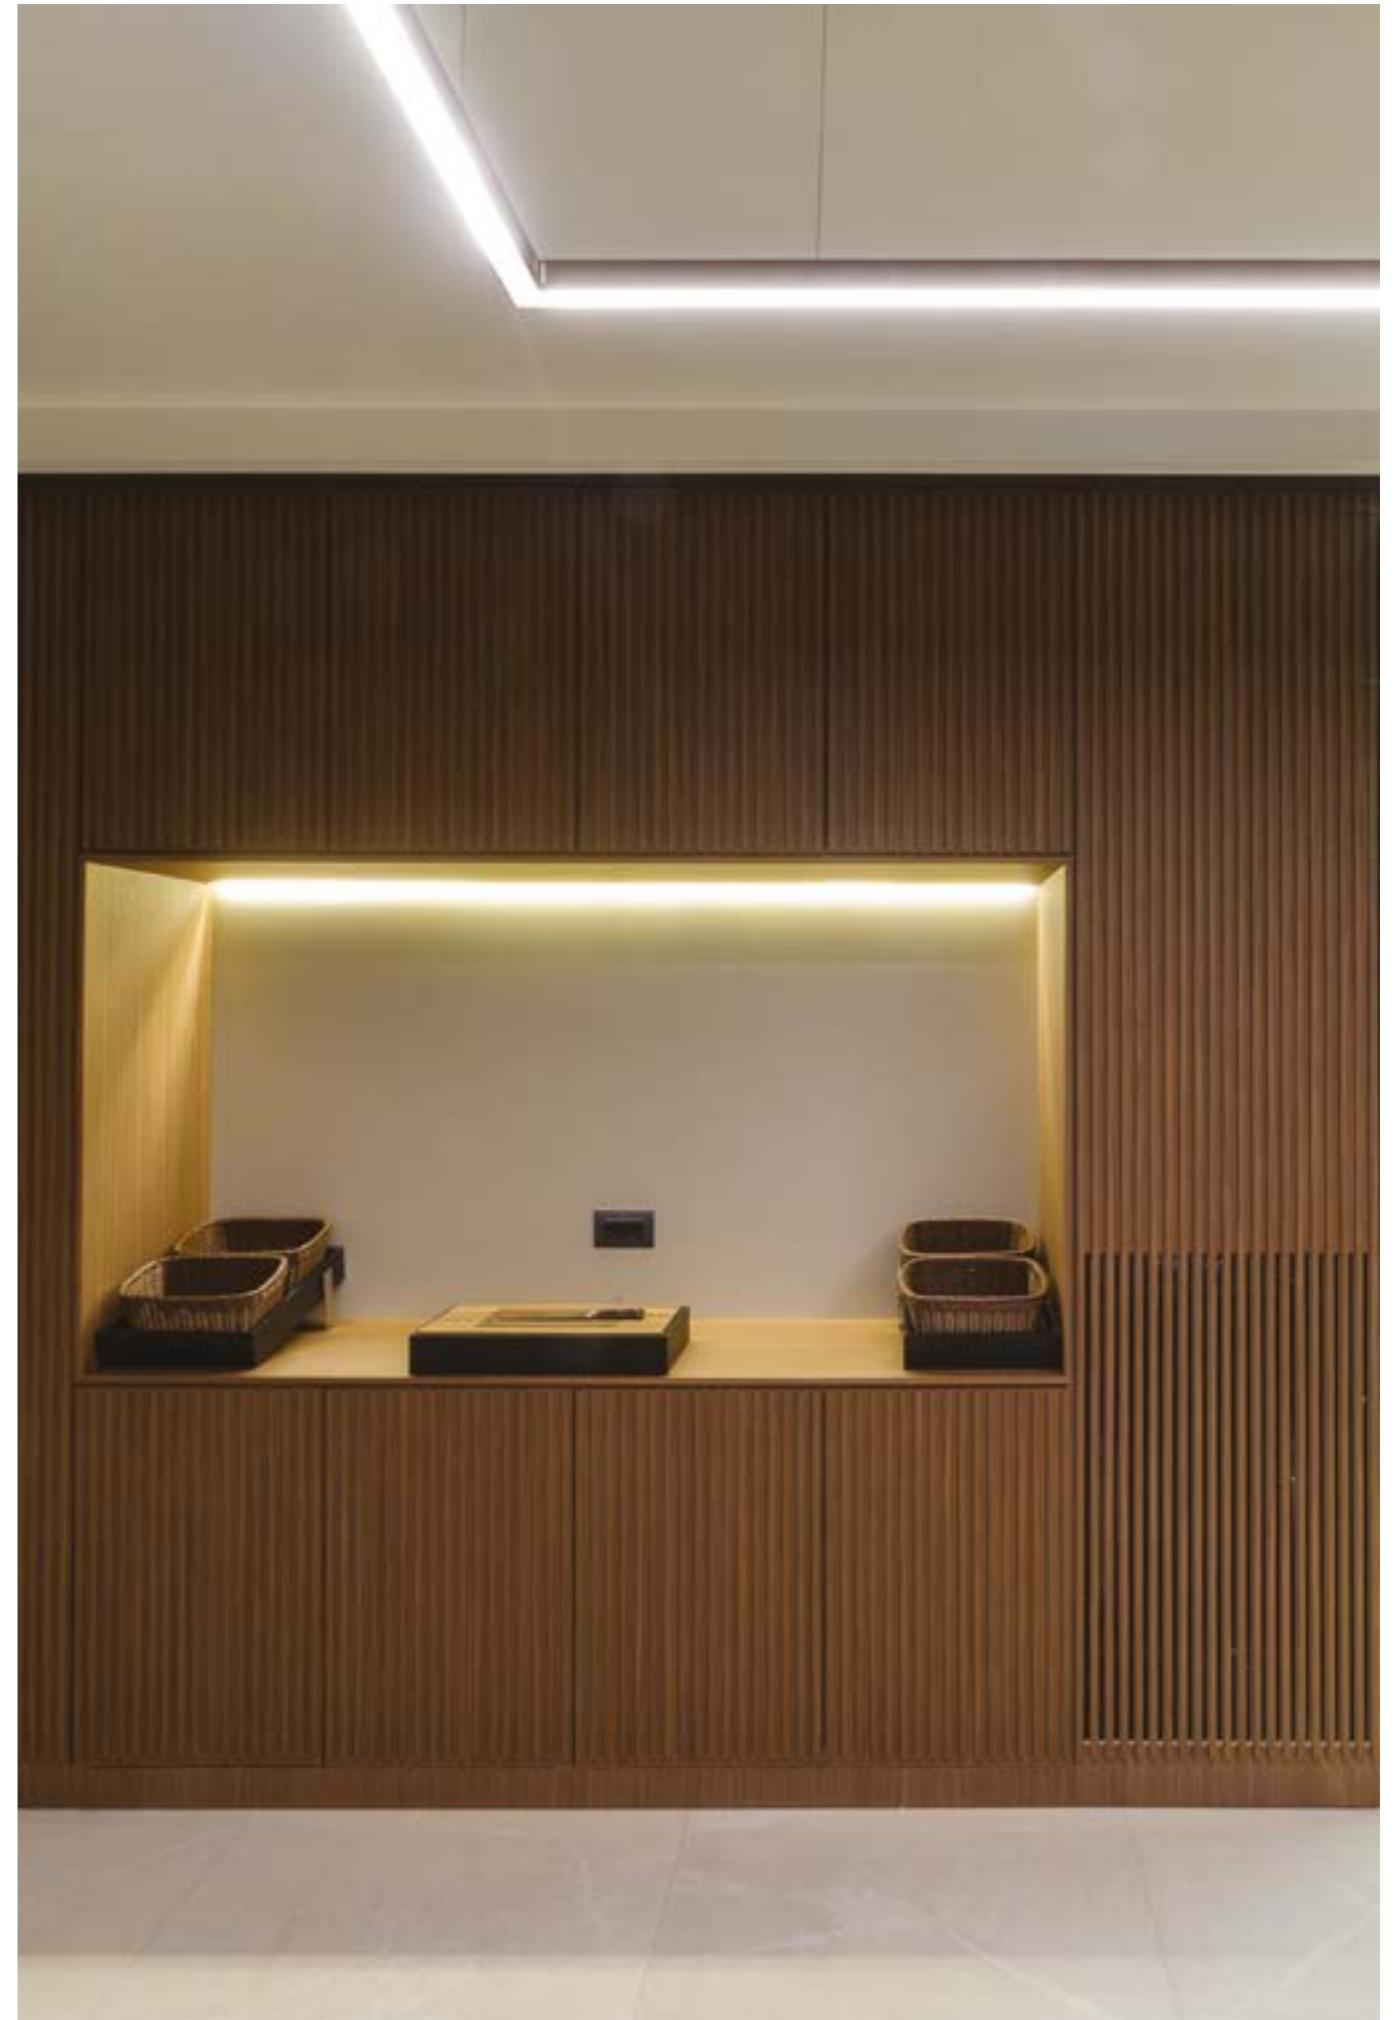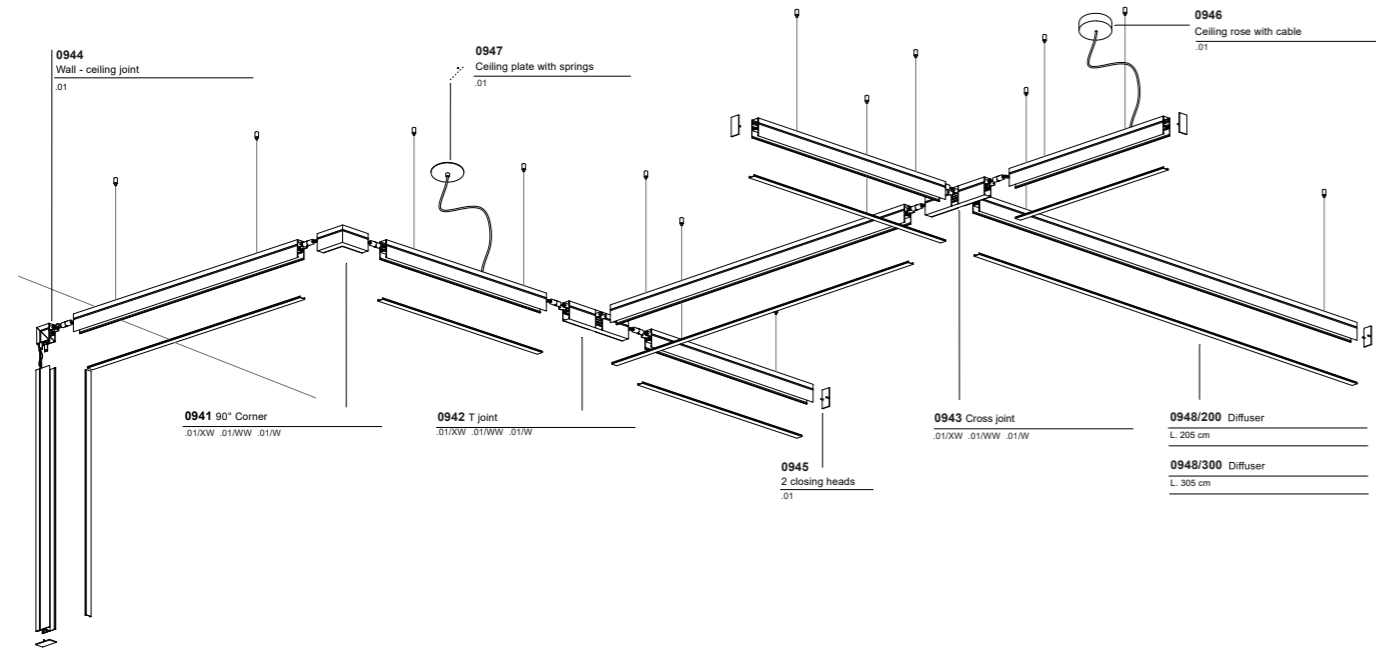


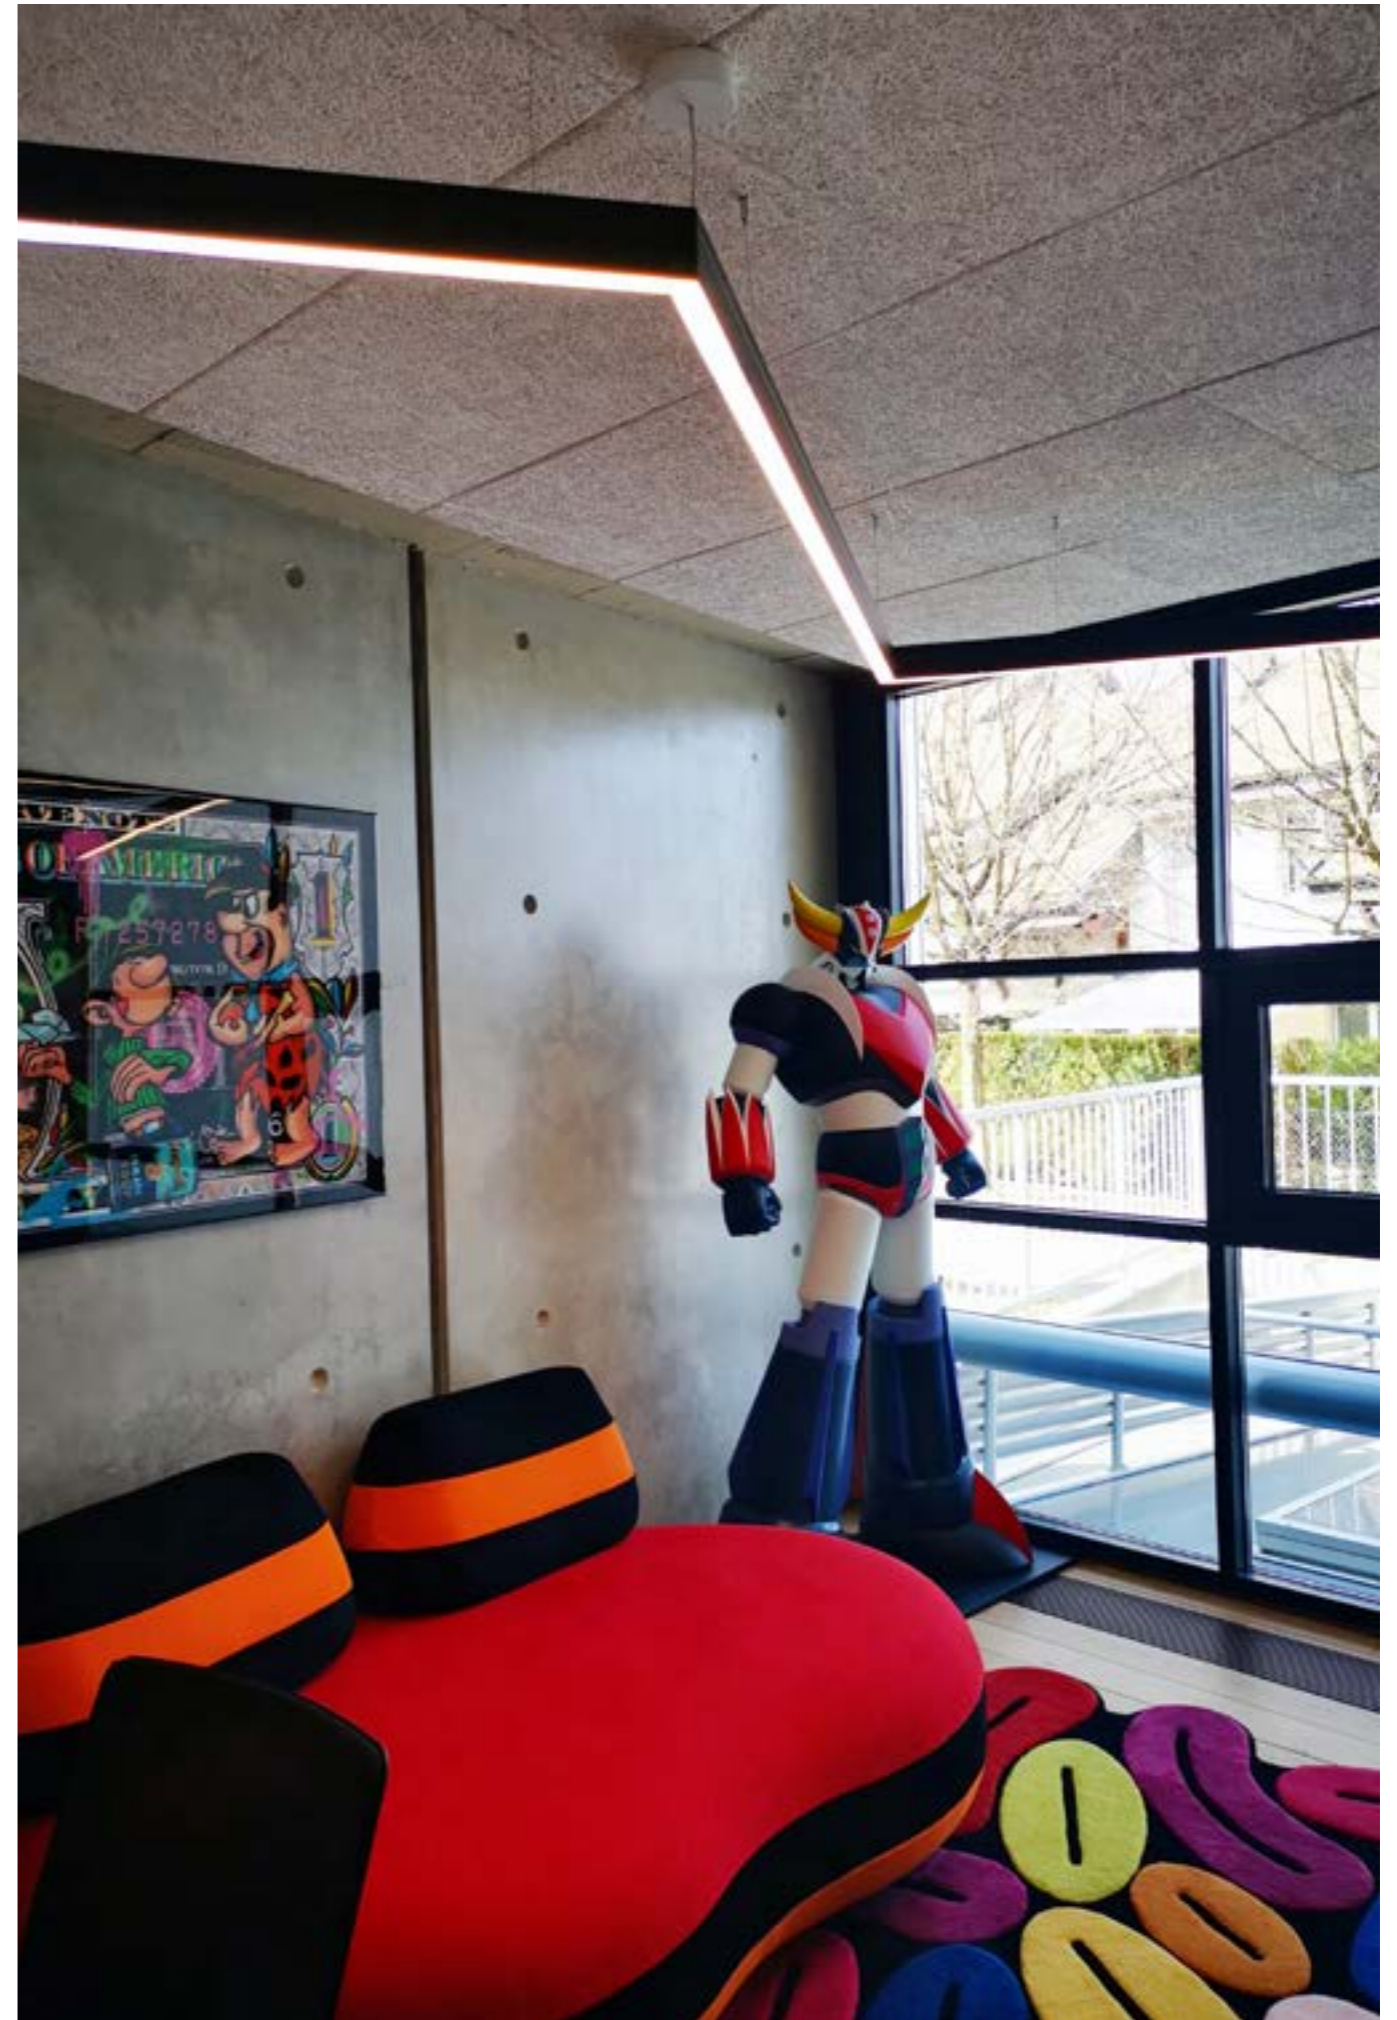

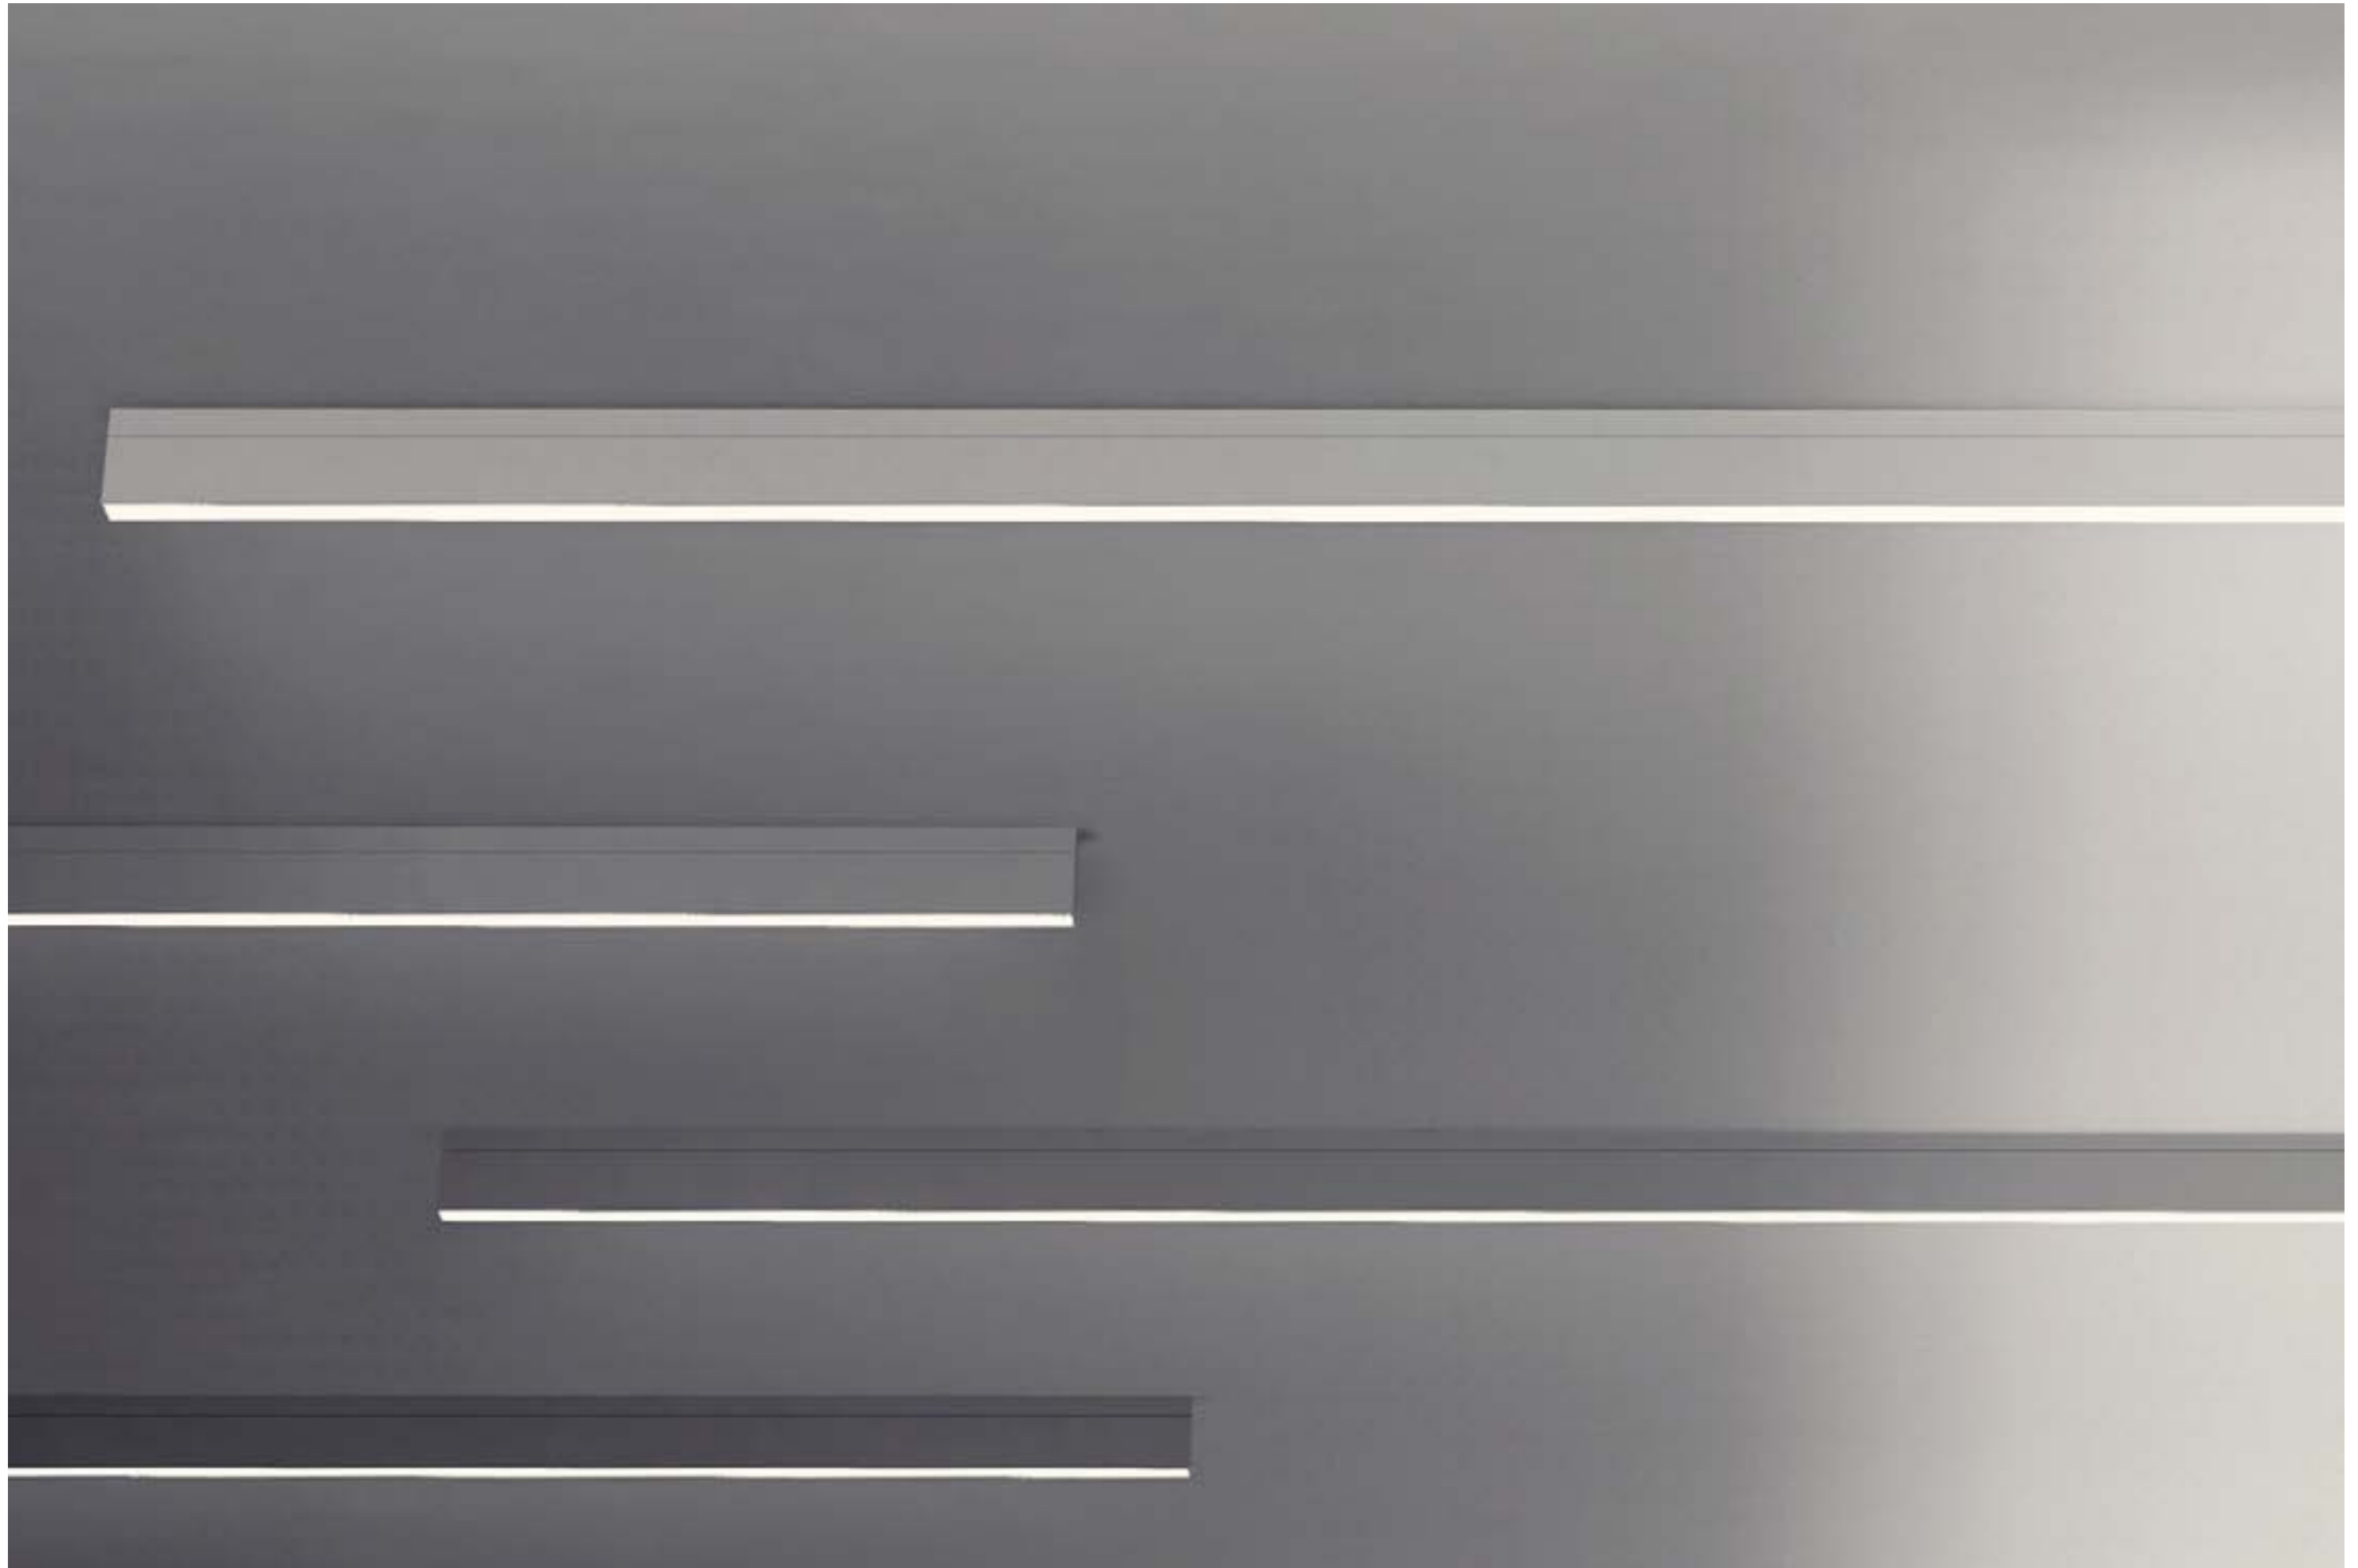




# RAIL




**4578** 1,10 Kg

<b>.01</b>	White		
<b>/W</b>	4000K	LED 13,5W CRI>90	1695lm
<b>/WW</b>	3000K	LED 13,5W CRI>90	1515lm
<b>/XW</b>	2700K	LED 13,5W CRI>90	1417lm



Dimmable on request



**4579** 1,50 Kg

<b>.01</b>	White		
<b>/W</b>	4000K	LED 27W CRI>90	3390lm
<b>/WW</b>	3000K	LED 27W CRI>90	3030lm
<b>/XW</b>	2700K	LED 27W CRI>90	2835lm




Dimmable on request

## FINISHES CODES



**.01** White

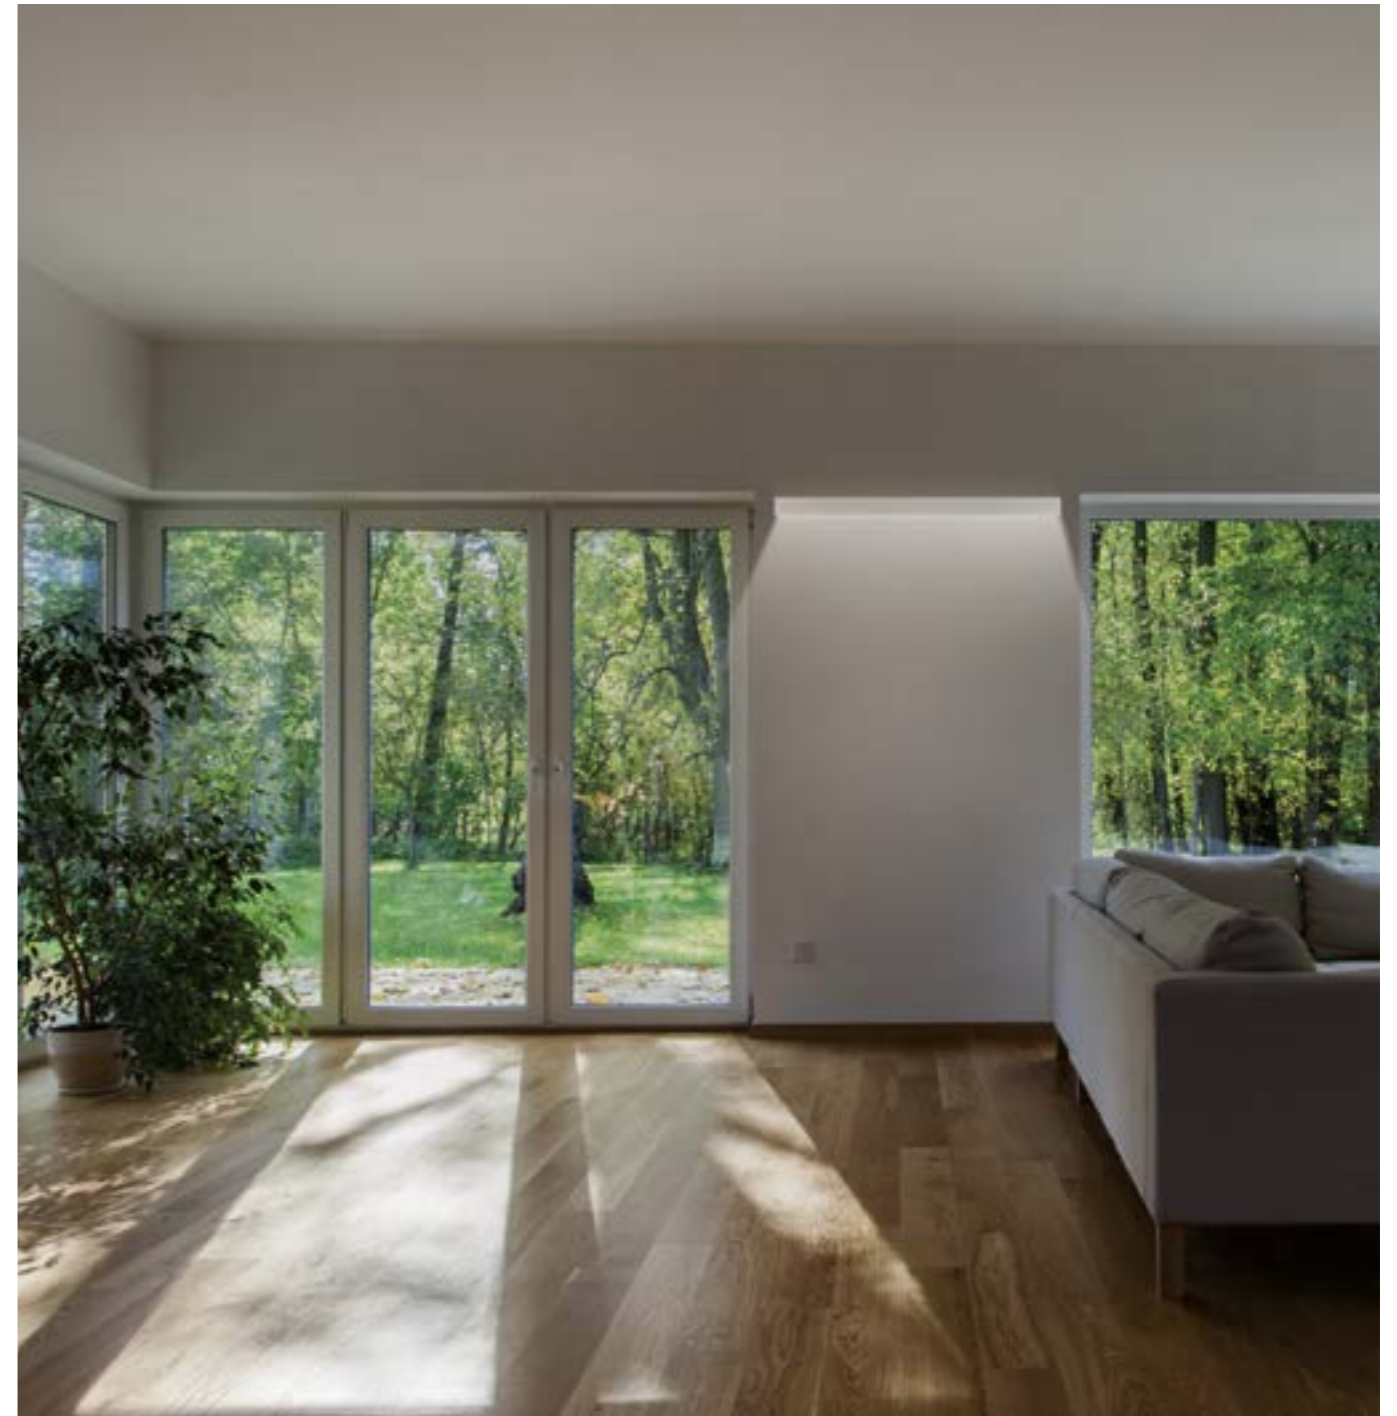

## CUSTOM SIZE

Table of available lengths on request.

cm	watt	2700K	lm	3000K	lm	4000K	lm
77	13,5W	4578.*XW	1417	4578.*WW	1515	4578.*W	1695
102	18W	A4578.*100/XW	1890	A4578.*100/WW	2020	A4578.*100/W	2260
126	22,5W	A4578.*125/XW	2362	A4578.*125/WW	2325	A4578.*120/W	2825
152	27W	4579.*XW	2835	4579.*WW	3030	4579.*W	3390
176	31,5W	A4578.*175/XW	3307	A4578.*170/WW	3535	A4578.*170/W	3955
202	36W	A4578.*200/XW	3780	A4578.*220/WW	4040	A4578.*220/W	4520
226	40,5W	A4578.*225/XW	4252	A4578.*230/WW	4545	A4578.*230/W	5085
252	45W	A4578.*250/XW	4725	A4578.*250/WW	5050	A4578.*250/W	5650
276	49,5W	A4578.*275/XW	5197	A4578.*270/WW	5555	A4578.*270/W	6215
302	54W	A4578.*300/XW	5670	A4578.*300/WW	6060	A4578.*300/W	6780


\* Finishes codes : .01 .02 .85.86 .87. 88








# RAIL




**5540** 1,10 Kg

- .01** White ■
- .02** Black ■
- .85** Painted silver finishing ■
- .86** Painted gold finishing ■
- .87** Painted copper finishing ■
- .88** Painted Bronze finishing ■

<b>/W</b>	4000K	LED 13,5W CRI>90	1695lm
<b>/WW</b>	3000K	LED 13,5W CRI>90	1515lm
<b>/XW</b>	2700K	LED 13,5W CRI>90	1417lm



Dimmable on request



**5541** 1,50 Kg

- .01** White ■
- .02** Black ■
- .85** Painted silver finishing ■
- .86** Painted gold finishing ■
- .87** Painted copper finishing ■
- .88** Painted Bronze finishing ■

<b>/W</b>	4000K	LED 13,5W CRI>90	3390lm
<b>/WW</b>	3000K	LED 13,5W CRI>90	3030lm
<b>/XW</b>	2700K	LED 13,5W CRI>90	2835lm



Dimmable on request



## FINISHES CODES



- .01** White
- .02** Black
- .85** Painted silver
- .86** Painted gold
- .87** Painted copper
- .88** Painted bronze

## CUSTOM SIZE

Table of available lengths on request.


cm	watt	2700K	lm	3000K	lm	4000K	lm
77	13,5W	5540.*XW	1417	5540.*WW	1515	5540.*W	1695
102	18W	A5540.*100/XW	1890	A5540.*100/WW	2020	A5540.*100/W	2260
127	22,5W	A5540.*125/XW	2362	A5540.*125/WW	2525	A5540.*120/W	2825
152	27W	5541.*XW	2835	5541.*WW	3030	5541.*W	3390
177	31,5W	A5540.*175/XW	3307	A5540.*170/WW	3535	A5540.*175/W	3955
202	36W	A5540.*200/XW	3780	A5540.*220/WW	4040	A5540.*200/W	4520
227	40,5W	A5540.*225/XW	4252	A5540.*230/WW	4545	A5540.*225/W	5085
252	45W	A5540.*250/XW	4725	A5540.*250/WW	5050	A5540.*250/W	5650
277	49,5W	A5540.*275/XW	5197	A5540.*270/WW	5555	A5540.*275/W	6215
302	54W	A5540.*300/XW	5670	A5540.*300/WW	6060	A5540.*300/W	6780

\* Finishes codes : .01 .02 .85.86 .87. 88





## RAIL SYSTEM

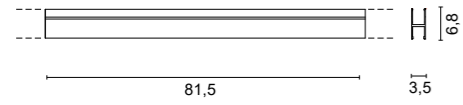


**5542** 1,10 Kg

**.01** White

<b>/W</b>	4000K	LED 14,4W	1808lm
<b>/WW</b>	3000K	LED 14,4W	1616lm
<b>/XW</b>	2700K	LED 14,4W	1512lm




New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request



**5543** 1,50 Kg

**.01** White

<b>/W</b>	4000K	LED 27W	3390lm
<b>/WW</b>	3000K	LED 27W	3030lm
<b>/XW</b>	2700K	LED 27W	2835lm




New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request

## FINISHES CODES



**.01** White

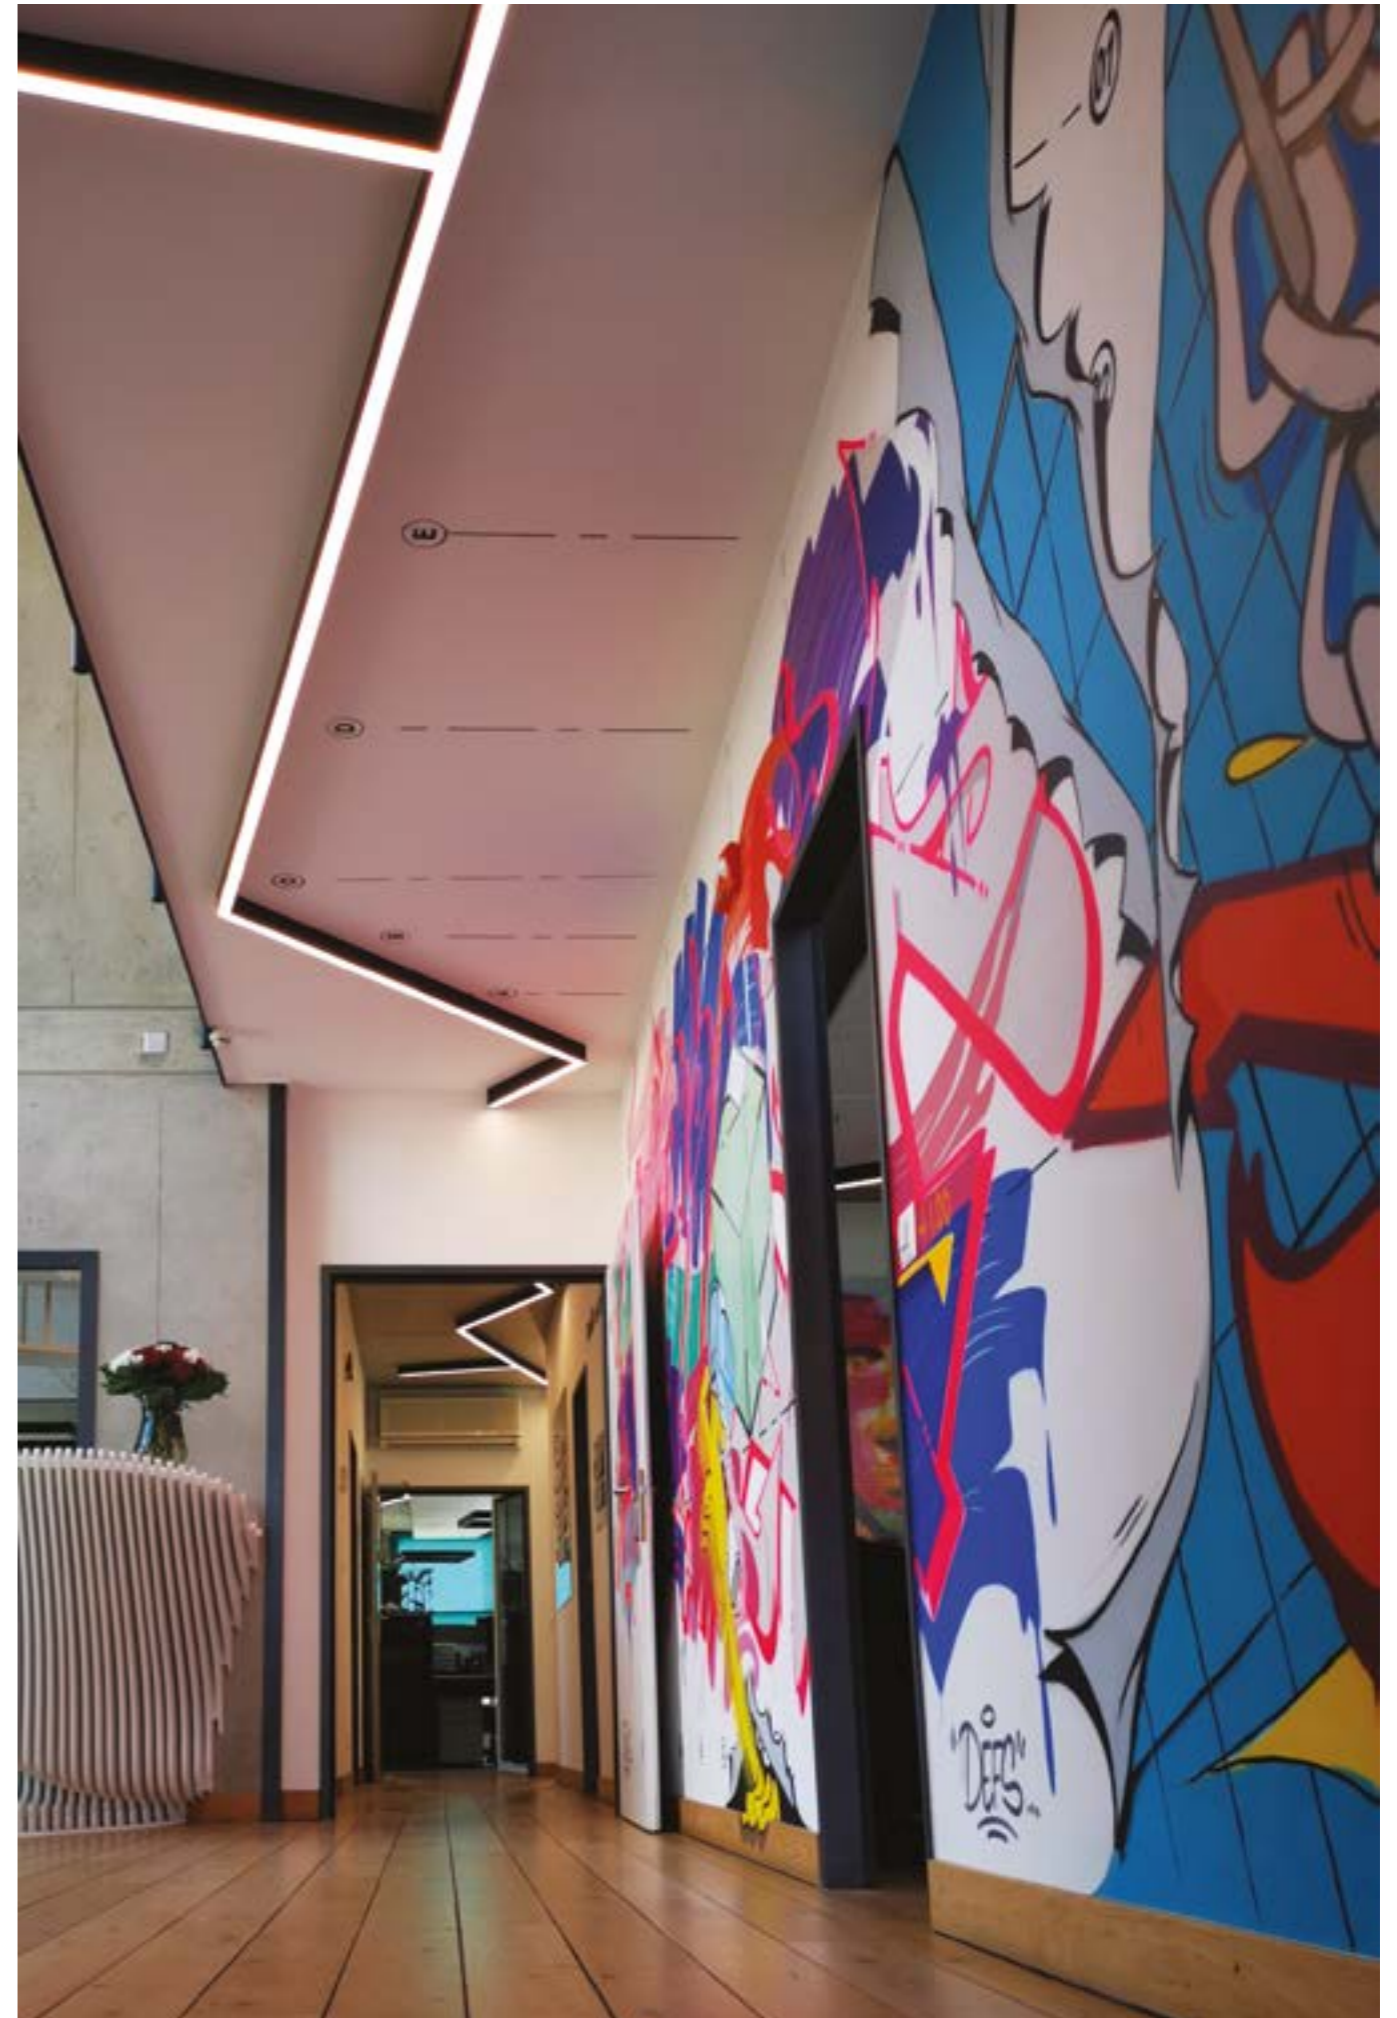




# RAIL SYSTEM




## ACCESSORIES



Element  
**0941**

90° Corner 0,40 Kg


.01	White		
/W	4000K	LED 3,6W	452lm
/WW	3000K	LED 3,6W	404lm
/XW	2700K	LED 3,6W	378lm



Element  
**0944**

Wall - Ceiling Joint 0,15 Kg

.01	White		
-----	-------	--	--



Element  
**0942**

T Joint 0,35 Kg


.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 5,4W	606lm
/XW	2700K	LED 5,4W	567lm



Element  
**0945**

2 end stoppers

.01	White		
-----	-------	--	--



Element  
**0943**

Cross Joint 0,35 Kg

.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 5,4W	606lm
/XW	2700K	LED 5,4W	567lm



Element  
**0948**

Satin methacrylate diffuser

.01	White		
-----	-------	--	--

/100	105 cm
/200	205 cm
/300	305 cm



## CUSTOM SIZE

Table of available lengths on request.



cm	watt	2700K	lm	3000K	lm	4000K	lm
61,5	10,8W	A5542.01/60/XW	1134	A5542.01/60/WW	1212	A5542.01/60/W	1356
71,5	12,6W	A5542.01/70/XW	1323	A5542.01/70/WW	1414	A5542.01/70/W	1582
81,5*	14,4W	5542.01/XW	1512	5542.01/WW	1616	5542.01/W	1808
91,5	16,2W	A5542.01/90/XW	1701	A5542.01/90/WW	1818	A5542.01/90/W	2034
101,5	18W	A5542.01/100/XW	1890	A5542.01/100/WW	2020	A5542.01/100/W	2260
111,5	19,8W	A5542.01/110/XW	2079	A5542.01/110/WW	2222	A5542.01/110/W	2486
121,5	21,6W	A5542.01/120/XW	2268	A5542.01/120/WW	2424	A5542.01/120/W	2712
131,5	23,4W	A5542.01/130/XW	2457	A5542.01/130/WW	2626	A5542.01/130/W	2938
141,5	25,2W	A5542.01/140/XW	2646	A5542.01/140/WW	2828	A5542.01/140/W	3164
151,5*	27W	5543.01/XW	2835	5543.01/WW	3030	5543.01/W	3390
161,5	28,8W	A5542.01/160/XW	3024	A5542.01/160/WW	3232	A5542.01/160/W	3616
171,5	30,6W	A5542.01/170/XW	3213	A5542.01/170/WW	3434	A5542.01/170/W	3842
181,5	32,4W	A5542.01/180/XW	3402	A5542.01/180/WW	3636	A5542.01/180/W	4068
191,5	34,2W	A5542.01/190/XW	3591	A5542.01/190/WW	3838	A5542.01/190/W	4294
201,5	36W	A5542.01/200/XW	3780	A5542.01/200/WW	4040	A5542.01/200/W	4520
211,5	37,8W	A5542.01/210/XW	3969	A5542.01/210/WW	4242	A5542.01/210/W	4746
221,5	39,6W	A5542.01/220/XW	4158	A5542.01/220/WW	4444	A5542.01/220/W	4972
231,5	41,4W	A5542.01/230/XW	4347	A5542.01/230/WW	4646	A5542.01/230/W	5198
241,5	43,2W	A5542.01/240/XW	4536	A5542.01/240/WW	4848	A5542.01/240/W	5424
251,5	45W	A5542.01/250/XW	4725	A5542.01/250/WW	5050	A5542.01/250/W	5650
261,5	46,8W	A5542.01/260/XW	4914	A5542.01/260/WW	5252	A5542.01/260/W	5876
271,5	48,6W	A5542.01/270/XW	5103	A5542.01/270/WW	5454	A5542.01/270/W	6102
281,5	50,4W	A5542.01/280/XW	5292	A5542.01/280/WW	5656	A5542.01/280/W	6328
291,5	52,2W	A5542.01/290/XW	5481	A5542.01/290/WW	5858	A5542.01/290/W	6554
301,5	54W	A5542.01/300/XW	5670	A5542.01/300/WW	6060	A5542.01/300/W	6780

\* Standard catalogue item


# RAIL SYSTEM



## CONFIGURATION EXAMPLE

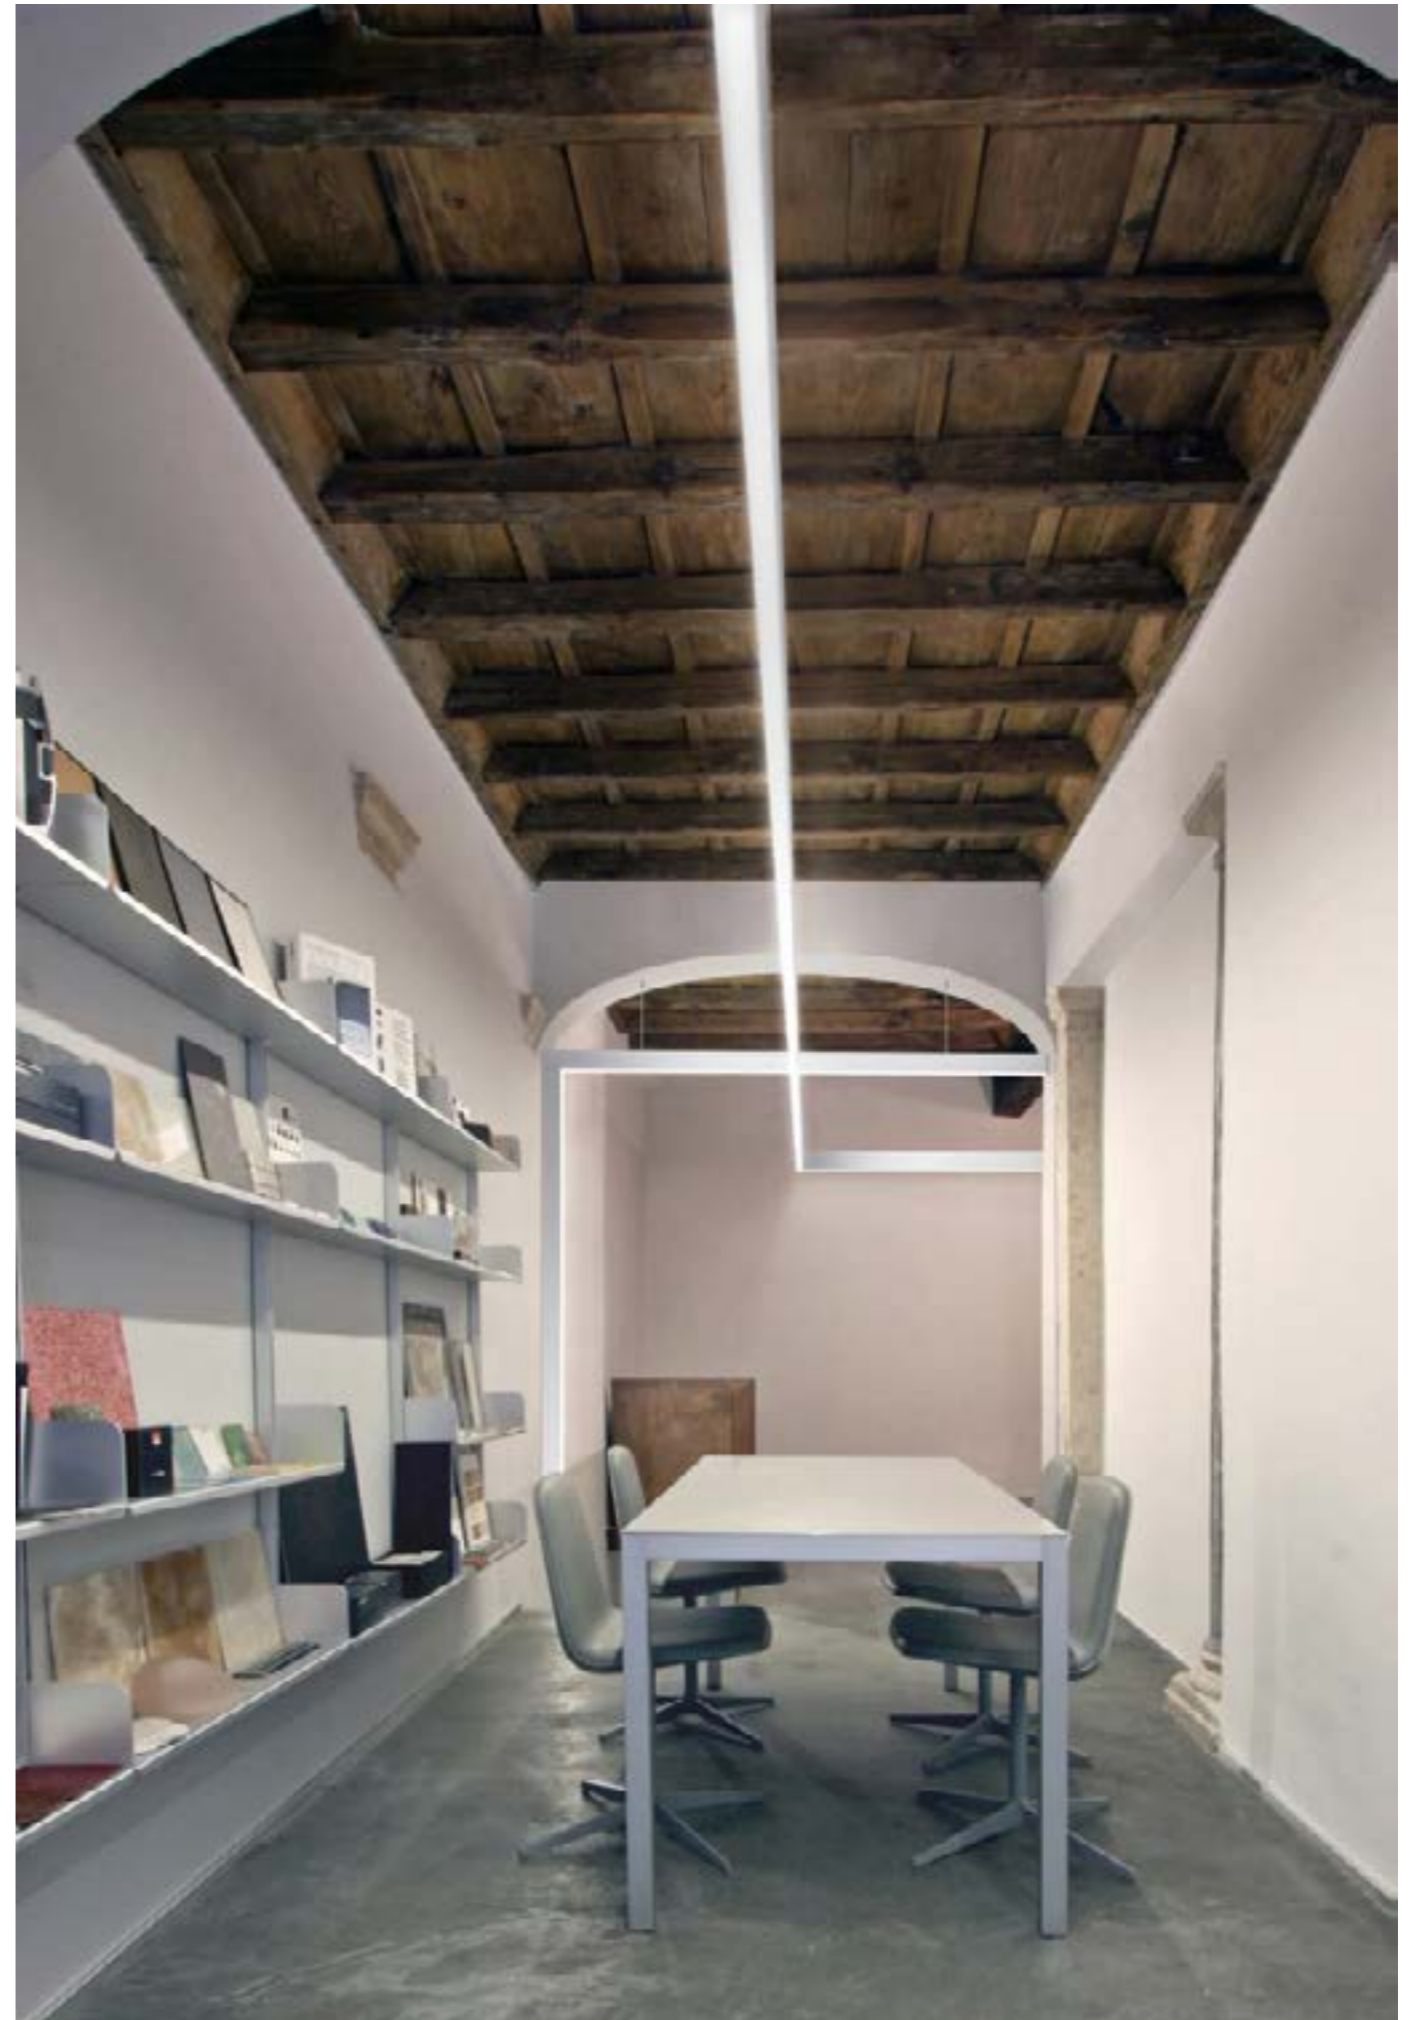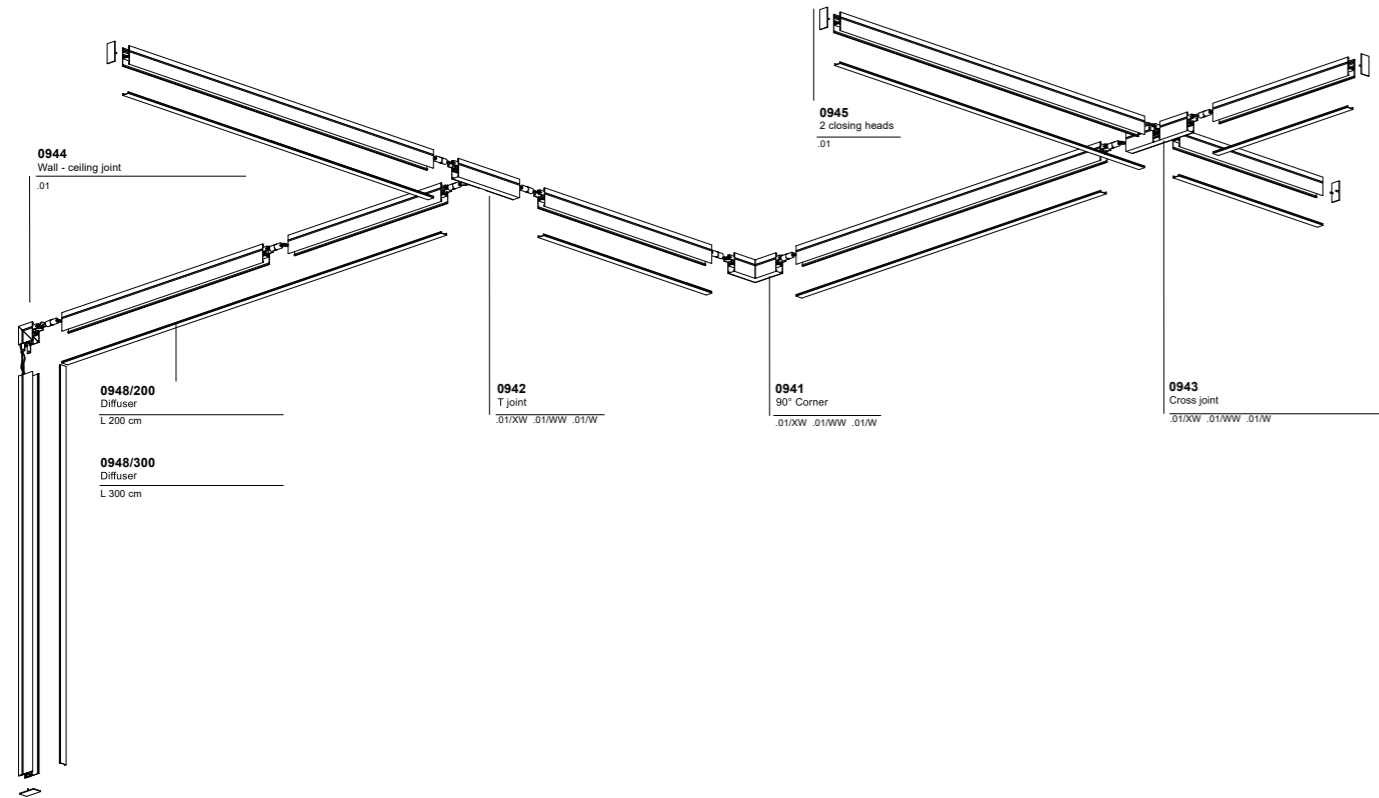


# RAIL SYSTEM




**4580** 1,10 Kg

<b>.01</b>	White		
<b>/W</b>	4000K	LED 14,4W	1808lm
<b>/WW</b>	3000K	LED 14,4W	1616lm
<b>/XW</b>	2700K	LED 14,4W	1512lm



New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request

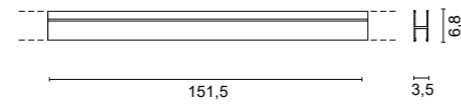


**4581** 1,50 Kg

<b>.01</b>	White		
<b>/W</b>	4000K	LED 27W	3390lm
<b>/WW</b>	3000K	LED 27W	3030lm
<b>/XW</b>	2700K	LED 27W	2835lm



New version with 18W/mt strip LED, 180 LED/mt CRI> 90  
Other finishes upon request

## ACCESSORIES



Element  
**0944**

Wall - Ceiling Joint 0,15 Kg

**.01** White



Element  
**0945**

2 end stoppers

**.01** White



Element  
**0948**

Satin methacrylate diffuser

**.01** White

- /100** 105 cm
- /200** 205 cm
- /300** 305 cm



Element  
**0949**

Polycarbonate screens

**.01** White

- /100** 105 cm
- /200** 205 cm
- /300** 305 cm

## FINISHES CODES



**.01** White



## CUSTOM SIZE

Table of available lengths on request.


cm	watt	2700K	lm	3000K	lm	4000K	lm
61,5	10,8W	A4580.01/60/XW	1134	A4580.01/60/WW	1212	A4580.01/60/W	1356
71,5	12,6W	A4580.01/70/XW	1323	A4580.01/70/WW	1414	A4580.01/70/W	1582
81,5*	14,4W	4580.01/XW	1512	4580.01/WW	1616	4580.01/W	1808
91,5	16,2W	A4580.01/90/XW	1701	A4580.01/90/WW	1818	A4580.01/90/W	2034
101,5	18W	A4580.01/100/XW	1890	A4580.01/100/WW	2020	A4580.01/100/W	2260
111,5	19,8W	A4580.01/110/XW	2079	A4580.01/110/WW	2222	A4580.01/110/W	2486
121,5	21,6W	A4580.01/120/XW	2268	A4580.01/120/WW	2424	A4580.01/120/W	2712
131,5	23,4W	A4580.01/130/XW	2457	A4580.01/130/WW	2626	A4580.01/130/W	2938
141,5	25,2W	A4580.01/140/XW	2646	A4580.01/140/WW	2828	A4580.01/140/W	3164
151,5*	27W	4581.01/XW	2835	4581.01/WW	3030	4581.01/W	3390
161,5	28,8W	A4580.01/160/XW	3024	A4580.01/160/WW	3232	A4580.01/160/W	3616
171,5	30,6W	A4580.01/170/XW	3213	A4580.01/170/WW	3434	A4580.01/170/W	3842
181,5	32,4W	A5542.01/180/XW	3402	A4580.01/180/WW	3636	A4580.01/180/W	4068
191,5	34,2W	A4580.01/190/XW	3591	A4580.01/190/WW	3838	A4580.01/190/W	4294
201,5	36W	A4580.01/200/XW	3780	A4580.01/200/WW	4040	A4580.01/200/W	4520
211,5	37,8W	A4580.01/210/XW	3969	A4580.01/210/WW	4242	A4580.01/210/W	4746
221,5	39,6W	A4580.01/220/XW	4158	A4580.01/220/WW	4444	A4580.01/220/W	4972
231,5	41,4W	A4580.01/230/XW	4347	A4580.01/230/WW	4646	A4580.01/230/W	5198
241,5	43,2W	A4580.01/240/XW	4536	A4580.01/240/WW	4848	A4580.01/240/W	5424
251,5	45W	A4580.01/250/XW	4725	A4580.01/250/WW	5050	A4580.01/250/W	5650
261,5	46,8W	A4580.01/260/XW	4914	A4580.01/260/WW	5252	A4580.01/260/W	5876
271,5	48,6W	A4580.01/270/XW	5103	A4580.01/270/WW	5454	A4580.01/270/W	6102
281,5	50,4W	A4580.01/280/XW	5292	A4580.01/280/WW	5656	A4580.01/280/W	6328
291,5	52,2W	A4580.01/290/XW	5481	A4580.01/290/WW	5858	A4580.01/290/W	6554
301,5	54W	A4580.01/300/XW	5670	A4580.01/300/WW	6060	A4580.01/300/W	6780

\* Standard catalogue item

# RAIL SYSTEM




## CONFIGURATION EXAMPLE

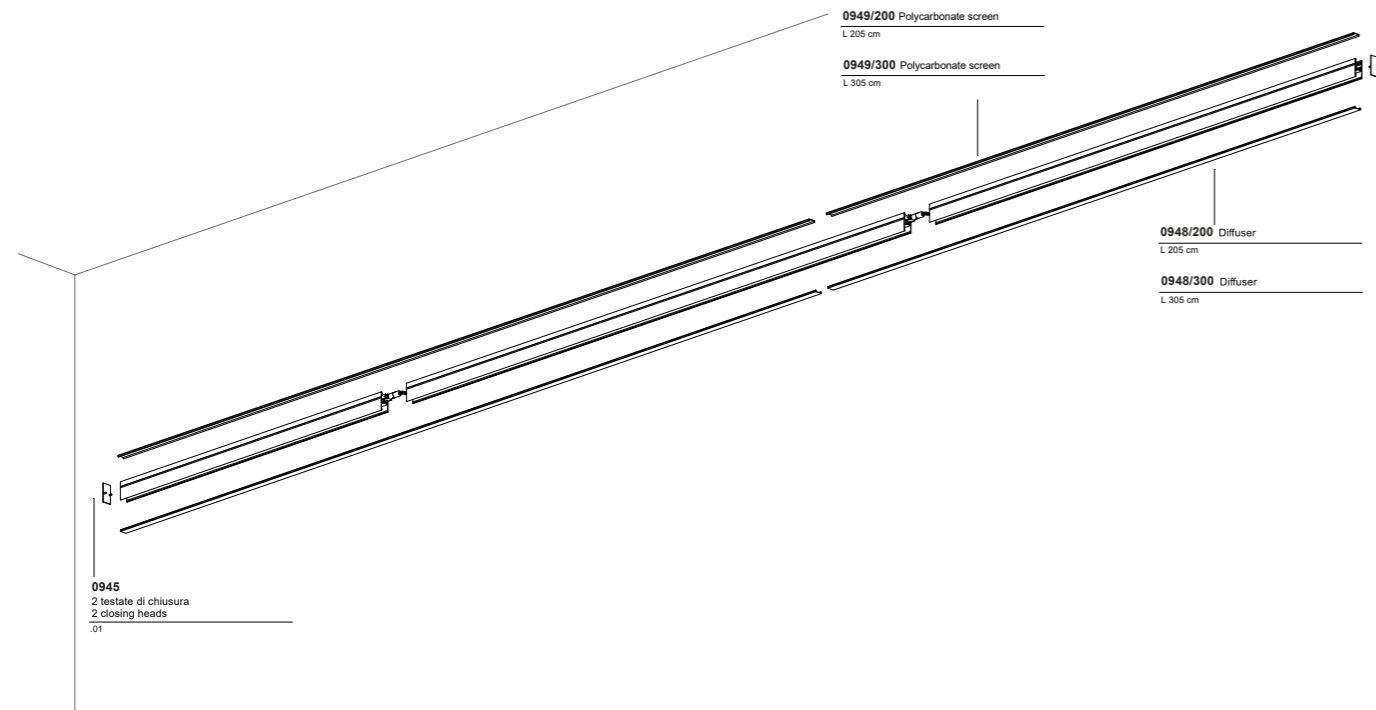



# RAIL SYSTEM




**6660** 1,10 Kg

**.01** White

<b>/W</b>	4000K	LED 24V 14,4W	1808lm
<b>/WW</b>	3000K	LED 24V 14,4W	1616lm
<b>/XW</b>	2700K	LED 24V 14,4W	1512lm




New version with 18W/mt strip LED, 180 LED/mt CRI > 90  
Other finishes upon request

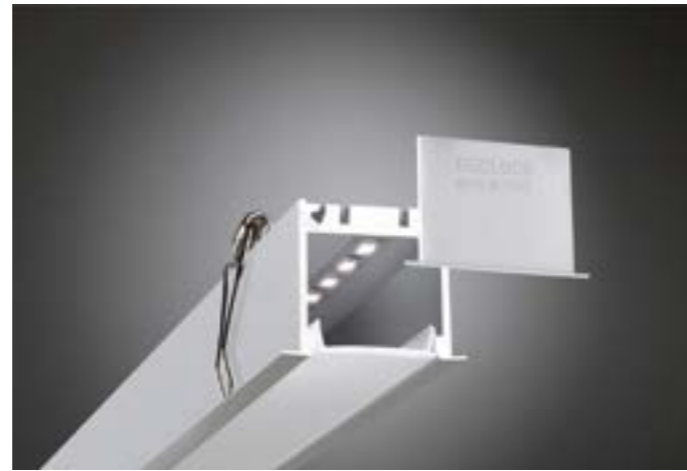

## FINISHES CODES




**.01** White

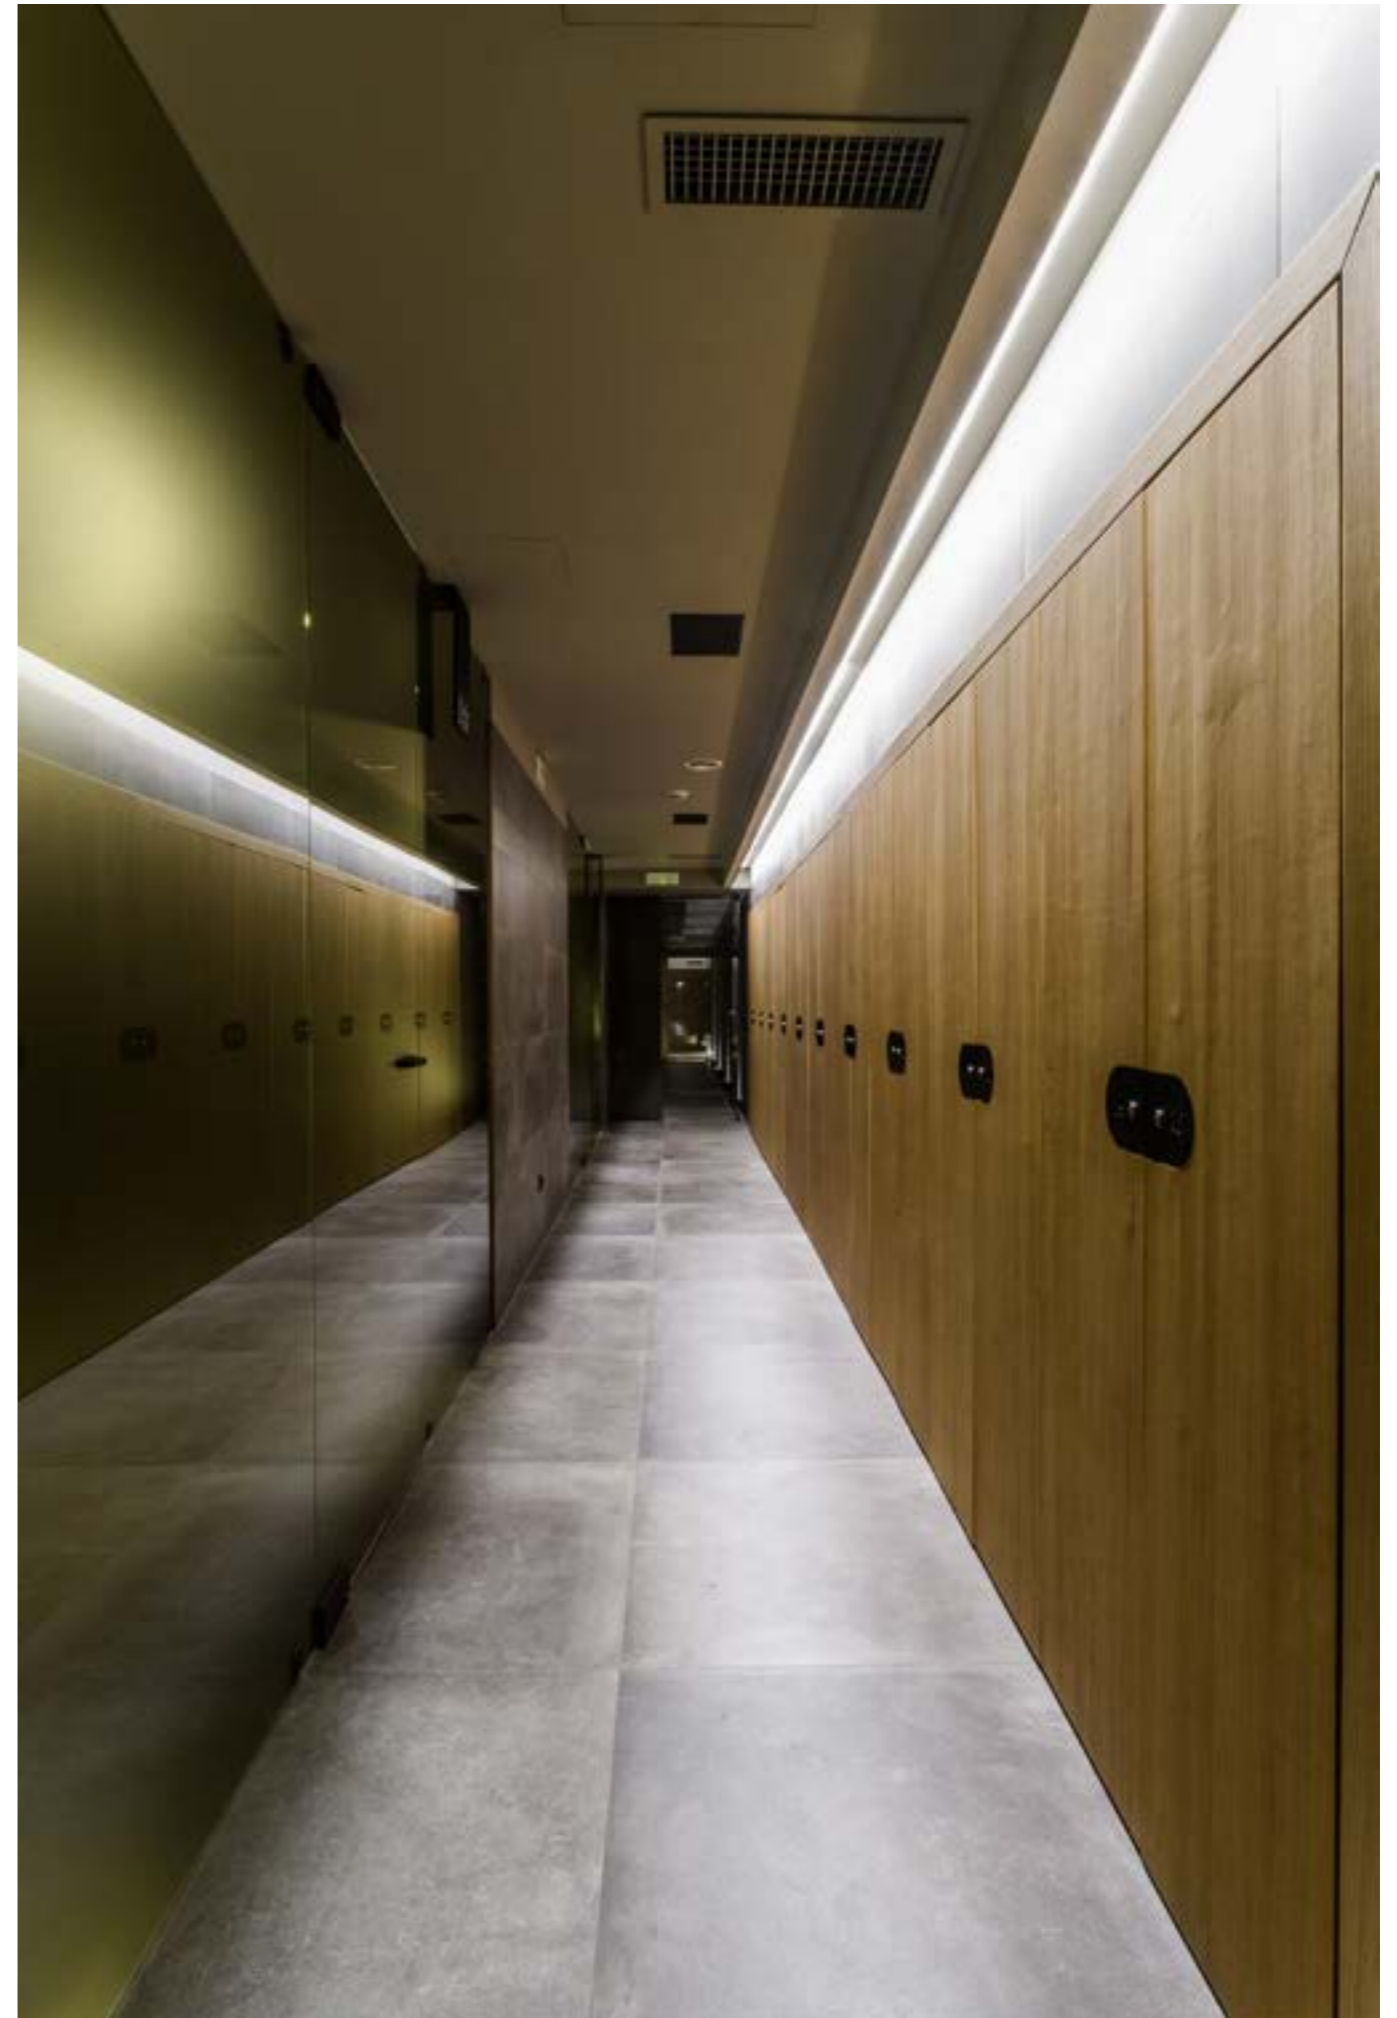

# RAIL SYSTEM

## ACCESSORIES

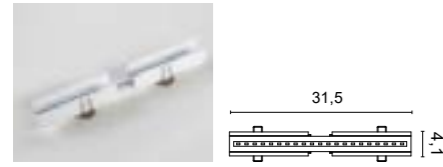

Element  
**0956**

Cross Joint 0,35 Kg


.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 3,6W	606lm
/XW	2700K	LED 3,6W	567lm



Element  
**0957**

90° Corner 0,40 Kg

.01	White		
/W	4000K	LED 3,6W	452lm
/WW	3000K	LED 3,6W	404lm
/XW	2700K	LED 3,6W	378lm

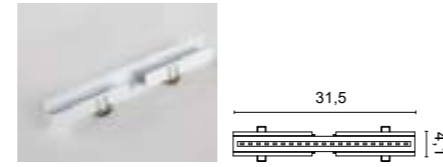

Element  
**0958**

T Joint 0,35 Kg


.01	White		
/W	4000K	LED 5,4W	678lm
/WW	3000K	LED 3,6W	606lm
/XW	2700K	LED 3,6W	567lm



Element  
**0948**

Satin methacrylate diffuser

.01	White	
/100	105 cm	
/200	205 cm	
/300	305 cm	



Element  
**0939**

2 end stoppers

.01	White	

## DRIVERS

### ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-25W	24V-75W	24V-60W	24V-100W	24V-150W

### DIMMABLE

Cod.	0110/DIM	0717/DIM60	0717/DIM60/V	0717/DIM100
	12/24V	24V-60W	24V-60W	24V-100W
		PUSH - DALI	1...10V	1...10V - PUSH - DALI

### LED EMERGENCY UNIT

Cod.	0115/EM
	Inverter + Battery + LED indicator

Only Parallel Connection



## CUSTOM SIZE

Table of available lengths on request.


cm	watt	2700K	lm	3000K	lm	4000K	lm
61,5	10,8W	A6660.01/60/XW	1134	A6660.01/60/WW	1212	A6660.01/60/W	1356
71,5	12,6W	A6660.01/70/XW	1323	A6660.01/70/WW	1414	A6660.01/70/W	1582
81,5*	14,4W	6660.01/XW	1512	6660.01/WW	1616	6660.01/W	1808
91,5	16,2W	A6660.01/90/XW	1701	A6660.01/90/WW	1818	A6660.01/90/W	2034
101,5	18W	A6660.01/100/XW	1890	A6660.01/100/WW	2020	A6660.01/100/W	2260
111,5	19,8W	A6660.01/110/XW	2079	A6660.01/110/WW	2222	A6660.01/110/W	2486
121,5	21,6W	A6660.01/120/XW	2268	A6660.01/120/WW	2424	A6660.01/120/W	2712
131,5	23,4W	A6660.01/130/XW	2457	A6660.01/130/WW	2626	A6660.01/130/W	2938
141,5	25,2W	A6660.01/140/XW	2646	A6660.01/140/WW	2828	A6660.01/140/W	3164
151,5*	27W	A6660.01/150/XW	2835	A6660.01/150/WW	3030	A6660.01/150/W	3390
161,5	28,8W	A6660.01/160/XW	3024	A6660.01/160/WW	3232	A6660.01/160/W	3616
171,5	30,6W	A6660.01/170/XW	3213	A6660.01/170/WW	3434	A6660.01/170/W	3842
181,5	32,4W	A6660.01/180/XW	3402	A6660.01/180/WW	3636	A6660.01/180/W	4068
191,5	34,2W	A6660.01/190/XW	3591	A6660.01/190/WW	3838	A6660.01/190/W	4294
201,5	36W	A6660.01/200/XW	3780	A6660.01/200/WW	4040	A6660.01/200/W	4520
211,5	37,8W	A6660.01/210/XW	3969	A6660.01/210/WW	4242	A6660.01/210/W	4746
221,5	39,6W	A6660.01/220/XW	4158	A6660.01/220/WW	4444	A6660.01/220/W	4972
231,5	41,4W	A6660.01/230/XW	4347	A6660.01/230/WW	4646	A6660.01/230/W	5198
241,5	43,2W	A6660.01/240/XW	4536	A6660.01/240/WW	4848	A6660.01/240/W	5424
251,5	45W	A6660.01/250/XW	4725	A6660.01/250/WW	5050	A6660.01/250/W	5650
261,5	46,8W	A6660.01/260/XW	4914	A6660.01/260/WW	5252	A6660.01/260/W	5876
271,5	48,6W	A6660.01/270/XW	5103	A6660.01/270/WW	5454	A6660.01/270/W	6102
281,5	50,4W	A6660.01/280/XW	5292	A6660.01/280/WW	5656	A6660.01/280/W	6328
291,5	52,2W	A6660.01/290/XW	5481	A6660.01/290/WW	5858	A6660.01/290/W	6554
301,5	54W	A6660.01/300/XW	5670	A6660.01/300/WW	6060	A6660.01/300/W	6780

\* Standard catalogue item

# RAIL SYSTEM



## CONFIGURATION EXAMPLE

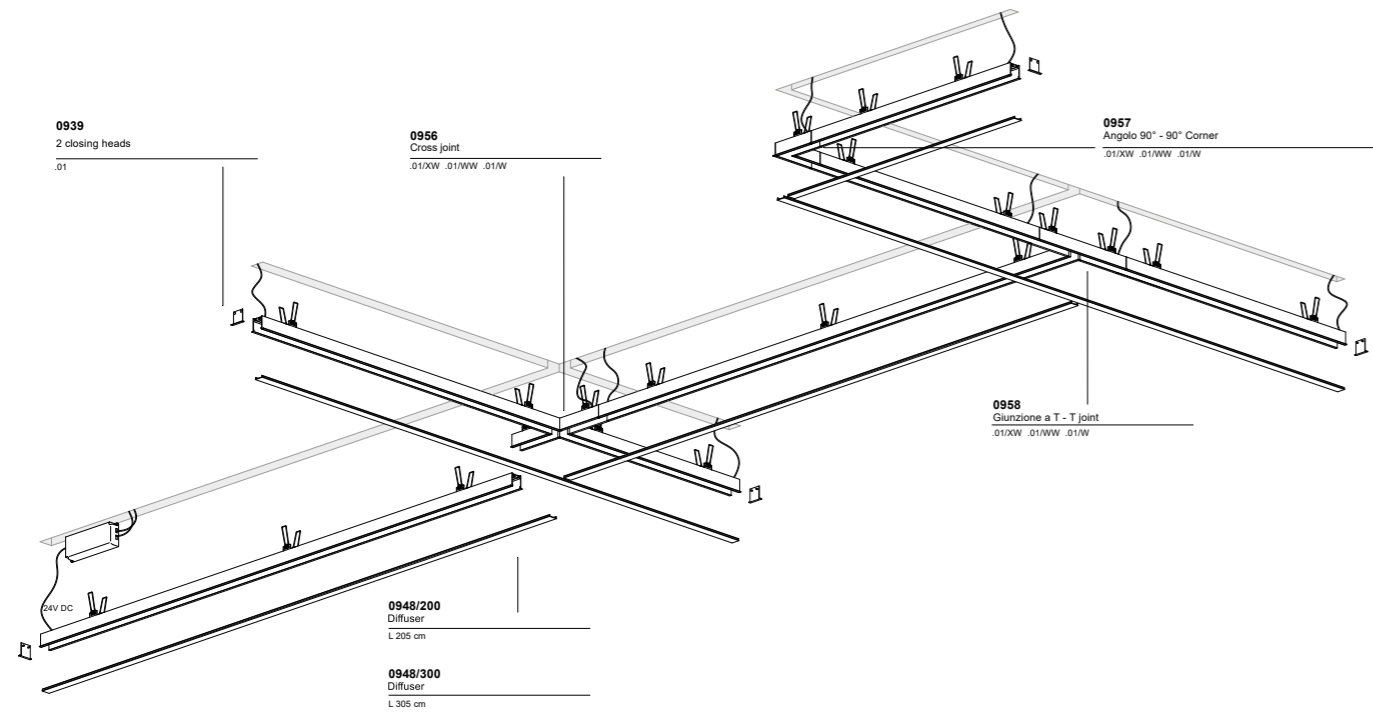

Configurations longer than 3 meters can be obtained by putting single fittings side by side in a row








INDOOR

# NEWTON

Design ABS Studio





## NEWTON SYSTEM



Lamp or suspension lamp system with direct light.

The product is made of aluminum and the led source is a retrofit led module, possibly diffused by an opal glass allowing an anti glaring effect.

The essential shape makes Newton suitable for spot lighting on small tables, bedside tables or installed in groups, to illuminate hotel and office reception desks or large tables.

The coaxial cable up to 10 meters long and various functional and decorative accessories allow you to create multiple compositions with Newton, to match any design requirement.

The ceiling roses with led drivers and accessories must be ordered separately according to the type of composition chosen.

The Newton collection is completed with the wall / ceiling version and the floor version.

*Système de lampe ou de suspension à lumière directe et ponctuelle.*

*Le produit est en aluminium où la source en retrait et éventuellement blindée par un verre opale garantit un agréable effet non éblouissant.*

*La forme essentielle fait de Newton un éclairage ponctuel sur de petites tables, des péninsules, des tables de chevet ou, disposées en groupes de plusieurs éléments, pour éclairer des bureaux d'accueil d'hôtels et de bureaux ou de grandes tables.*

*Le câble coaxial jusqu'à 10 mètres de long et toute une série d'accessoires fonctionnels et décoratifs vous permettent de créer de multiples compositions avec Newton, répondant à toutes les exigences de conception.*

*Les rosaces avec alimentations et accessoires sont à commander séparément selon le type de composition choisi.*

*La collection Newton est complétée par la version mur/plafond et la version sol.*

*Lampen- oder Pendelleuchtensystem mit direktem und punktuellm Licht.*

*Das Produkt besteht aus Aluminium, wobei die Quelle zurückgesetzt und möglicherweise durch ein Opalglas abgeschirmt ist, eine angenehme blendfreie Wirkung garantiert.*

*Durch die essentielle Form eignet sich Newton als Spotbeleuchtung auf kleinen Tischen, Halbinseln, Nachttischen oder, in Gruppen aus mehreren Elementen angeordnet, zur Beleuchtung von Hotel- und Bürorezeptionen oder großen Tischen.*


*Das bis zu 10 Meter lange Koaxialkabel und eine ganze Reihe funktionaler und dekorativer Accessoires ermöglichen es Ihnen, mit Newton vielfältige Kompositionen zu kreieren, die jedem Designwunsch gerecht werden.*

*Die Deckenrosetten mit Netzteilen und Zubehör müssen je nach gewählter Zusammenstellung separat bestellt werden.*

*Abgerundet wird die Newton-Kollektion durch die Wand-/Deckenversion und die Bodenversion.*



# NEWTON SYSTEM

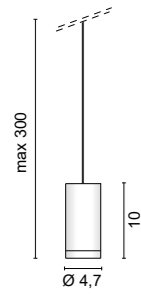

**1591**


0,50 Kg

- .02** Black ■
- .25** Satin gold ■
- .32** Nickel Mat ■

<b>/W</b>	4000K	LED 5,9W 17V 350mA	885lm
<b>/W</b>	4000K /ST Satin	LED 5,9W 17V 350mA	885lm
<b>/WW</b>	3000K	LED 5,9W 17V 350mA	836lm
<b>/WW</b>	3000K /ST Satin	LED 5,9W 17V 350mA	836lm
<b>/XW</b>	2700K	LED 5,9W 17V 350mA	800lm
<b>/XW</b>	2700K /ST Satin	LED 5,9W 17V 350mA	800lm



2 displacement component included  
On request beam angles: 24° or 58°

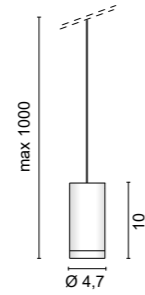

**1592**

0,70 Kg

- .02** Black ■
- .25** Satin gold ■
- .32** Nickel Mat ■

<b>/W</b>	4000K	LED 5,9W 17V 350mA	885lm
<b>/W</b>	4000K /ST Satin	LED 5,9W 17V 350mA	885lm
<b>/WW</b>	3000K	LED 5,9W 17V 350mA	836lm
<b>/WW</b>	3000K /ST Satin	LED 5,9W 17V 350mA	836lm
<b>/XW</b>	2700K	LED 5,9W 17V 350mA	800lm
<b>/XW</b>	2700K /ST Satin	LED 5,9W 17V 350mA	800lm



4 displacement component included  
On request beam angles: 24° or 58°



## FINISHES CODES




**.02** Black

**.25** Satin gold

**.32** Nickel Mat

## AVAILABLE OPTICS

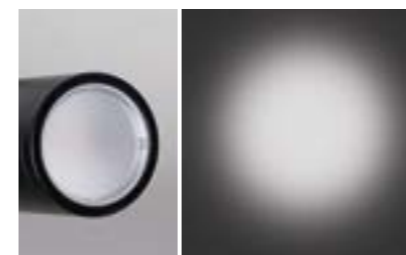


**/ST** Diffused light optic for general lighting

# NEWTON SYSTEM




## ACCESSORIES

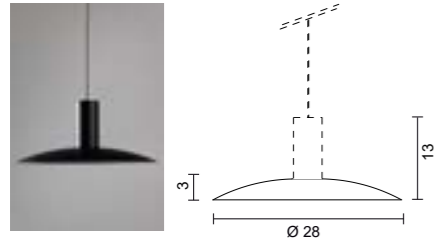


Element  
**0547**  
Screen in black painted metal 0,24 Kg

**.02** Black

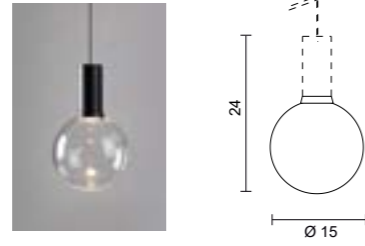

Element  
**0549**  
Transparent blown glass diffuser 0,35 Kg

**.02.00** Black  
**.25.00** Satin gold  
**.32.00** Nickel Mat

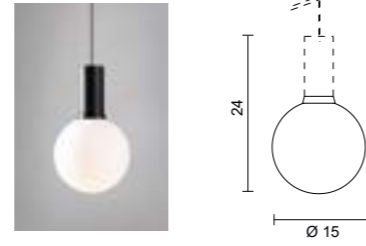

Element  
**0549**  
White blown glass diffuser 0,35 Kg

**.02.57** Black  
**.25.57** Satin gold  
**.32.57** Nickel Mat



Element  
**0274**  
Anti-glare screen Ø 4,7 cm H 3,8 cm

**.01** White  
**.02** Black



Element  
**0267**  
1 Louvres Ø 4,7 cm H 1 cm

**.01** White  
**.02** Black



Element  
**0612**  
1 Displacement element Ø 1,4 cm H 2,2 cm


**.01** White  
**.02** Black




Ceiling roses with converter for suspension systems p.376






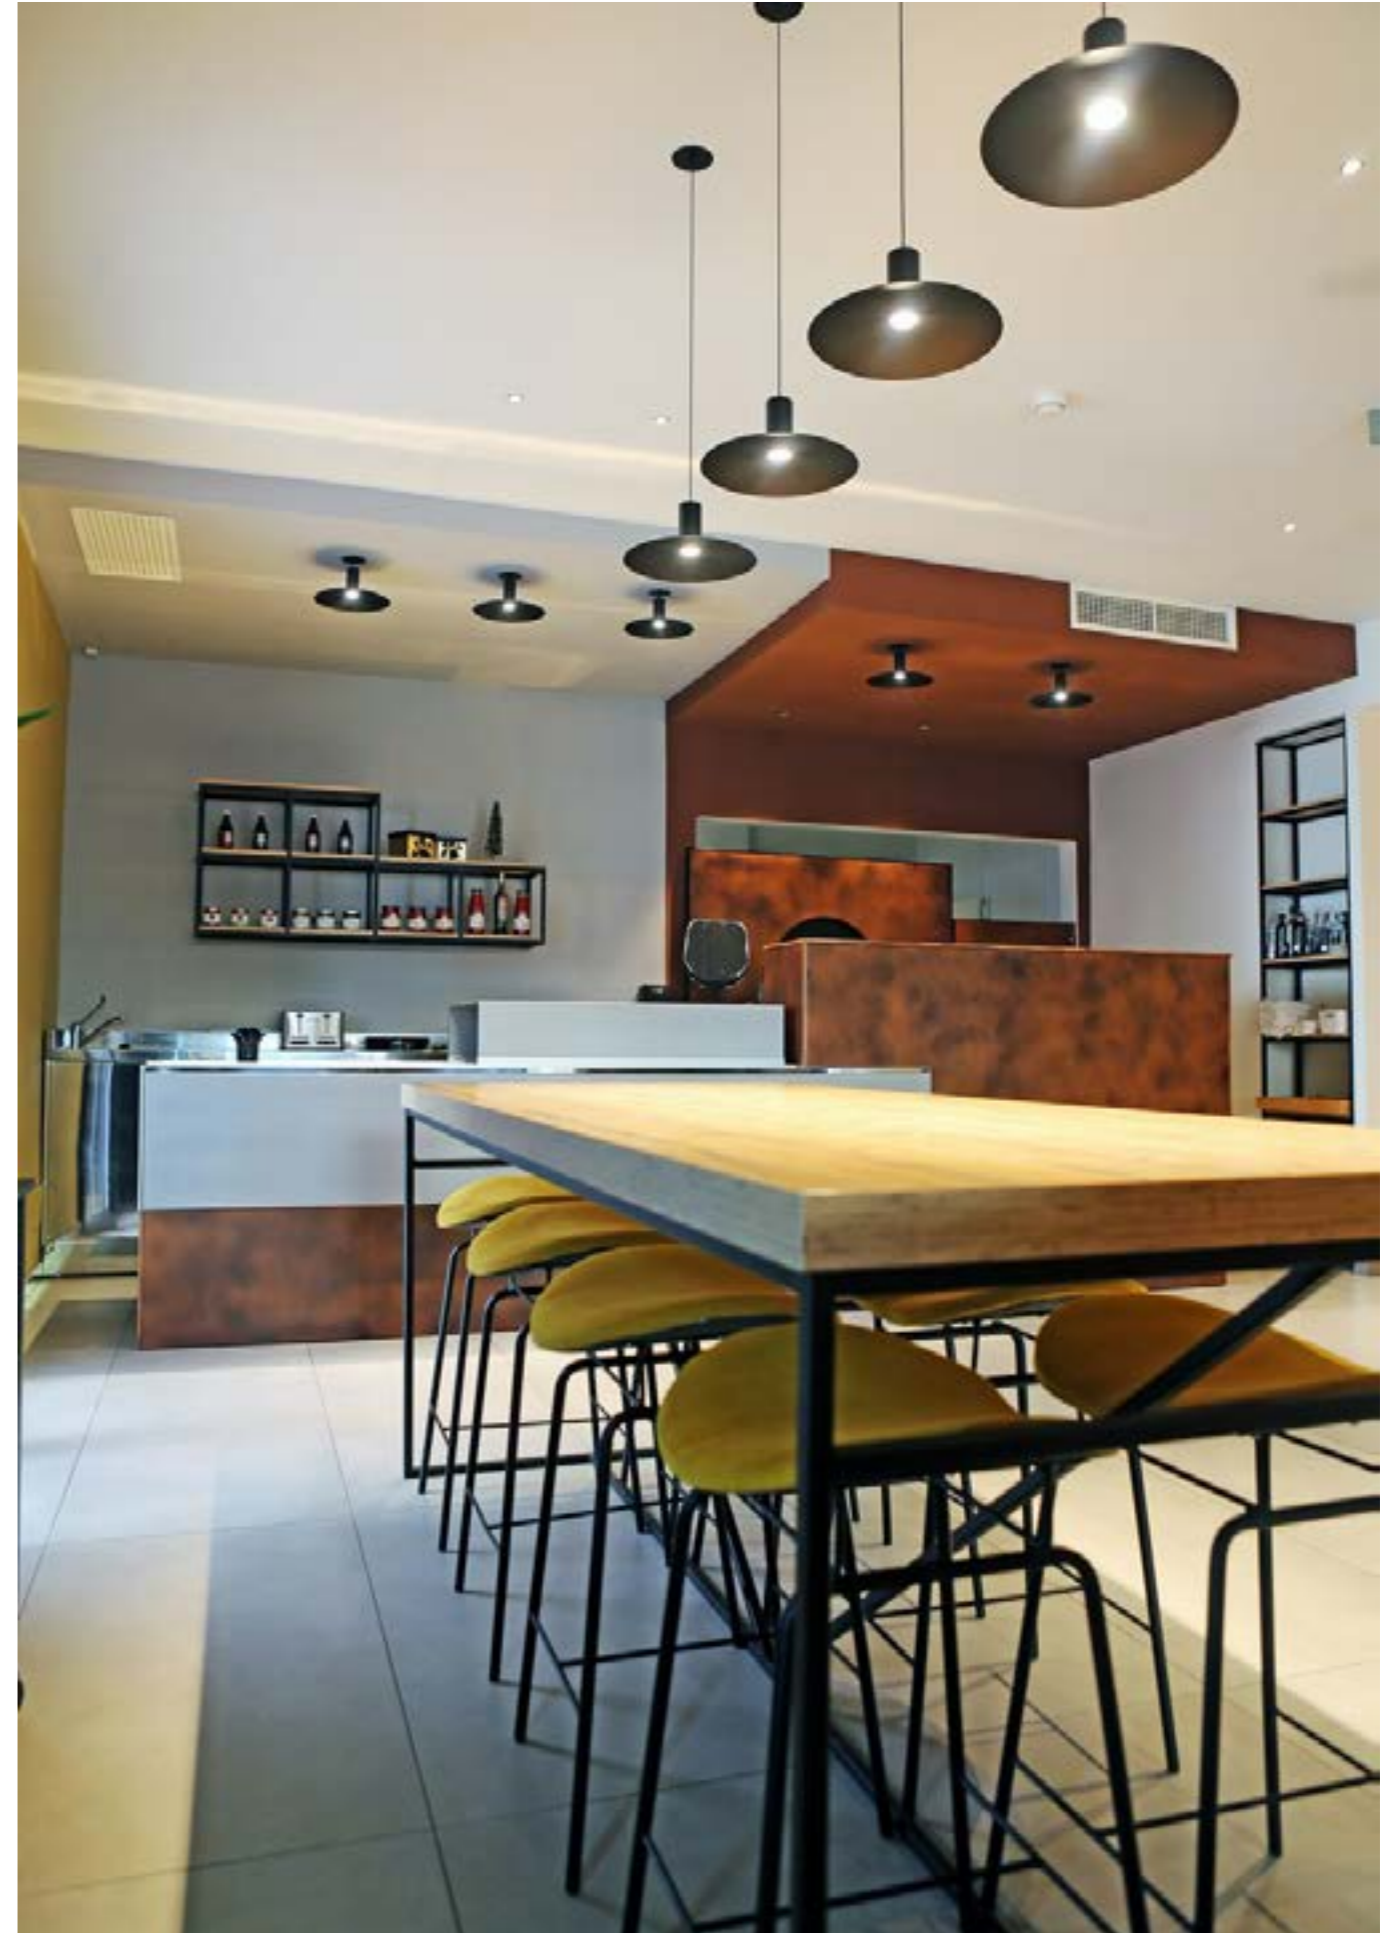

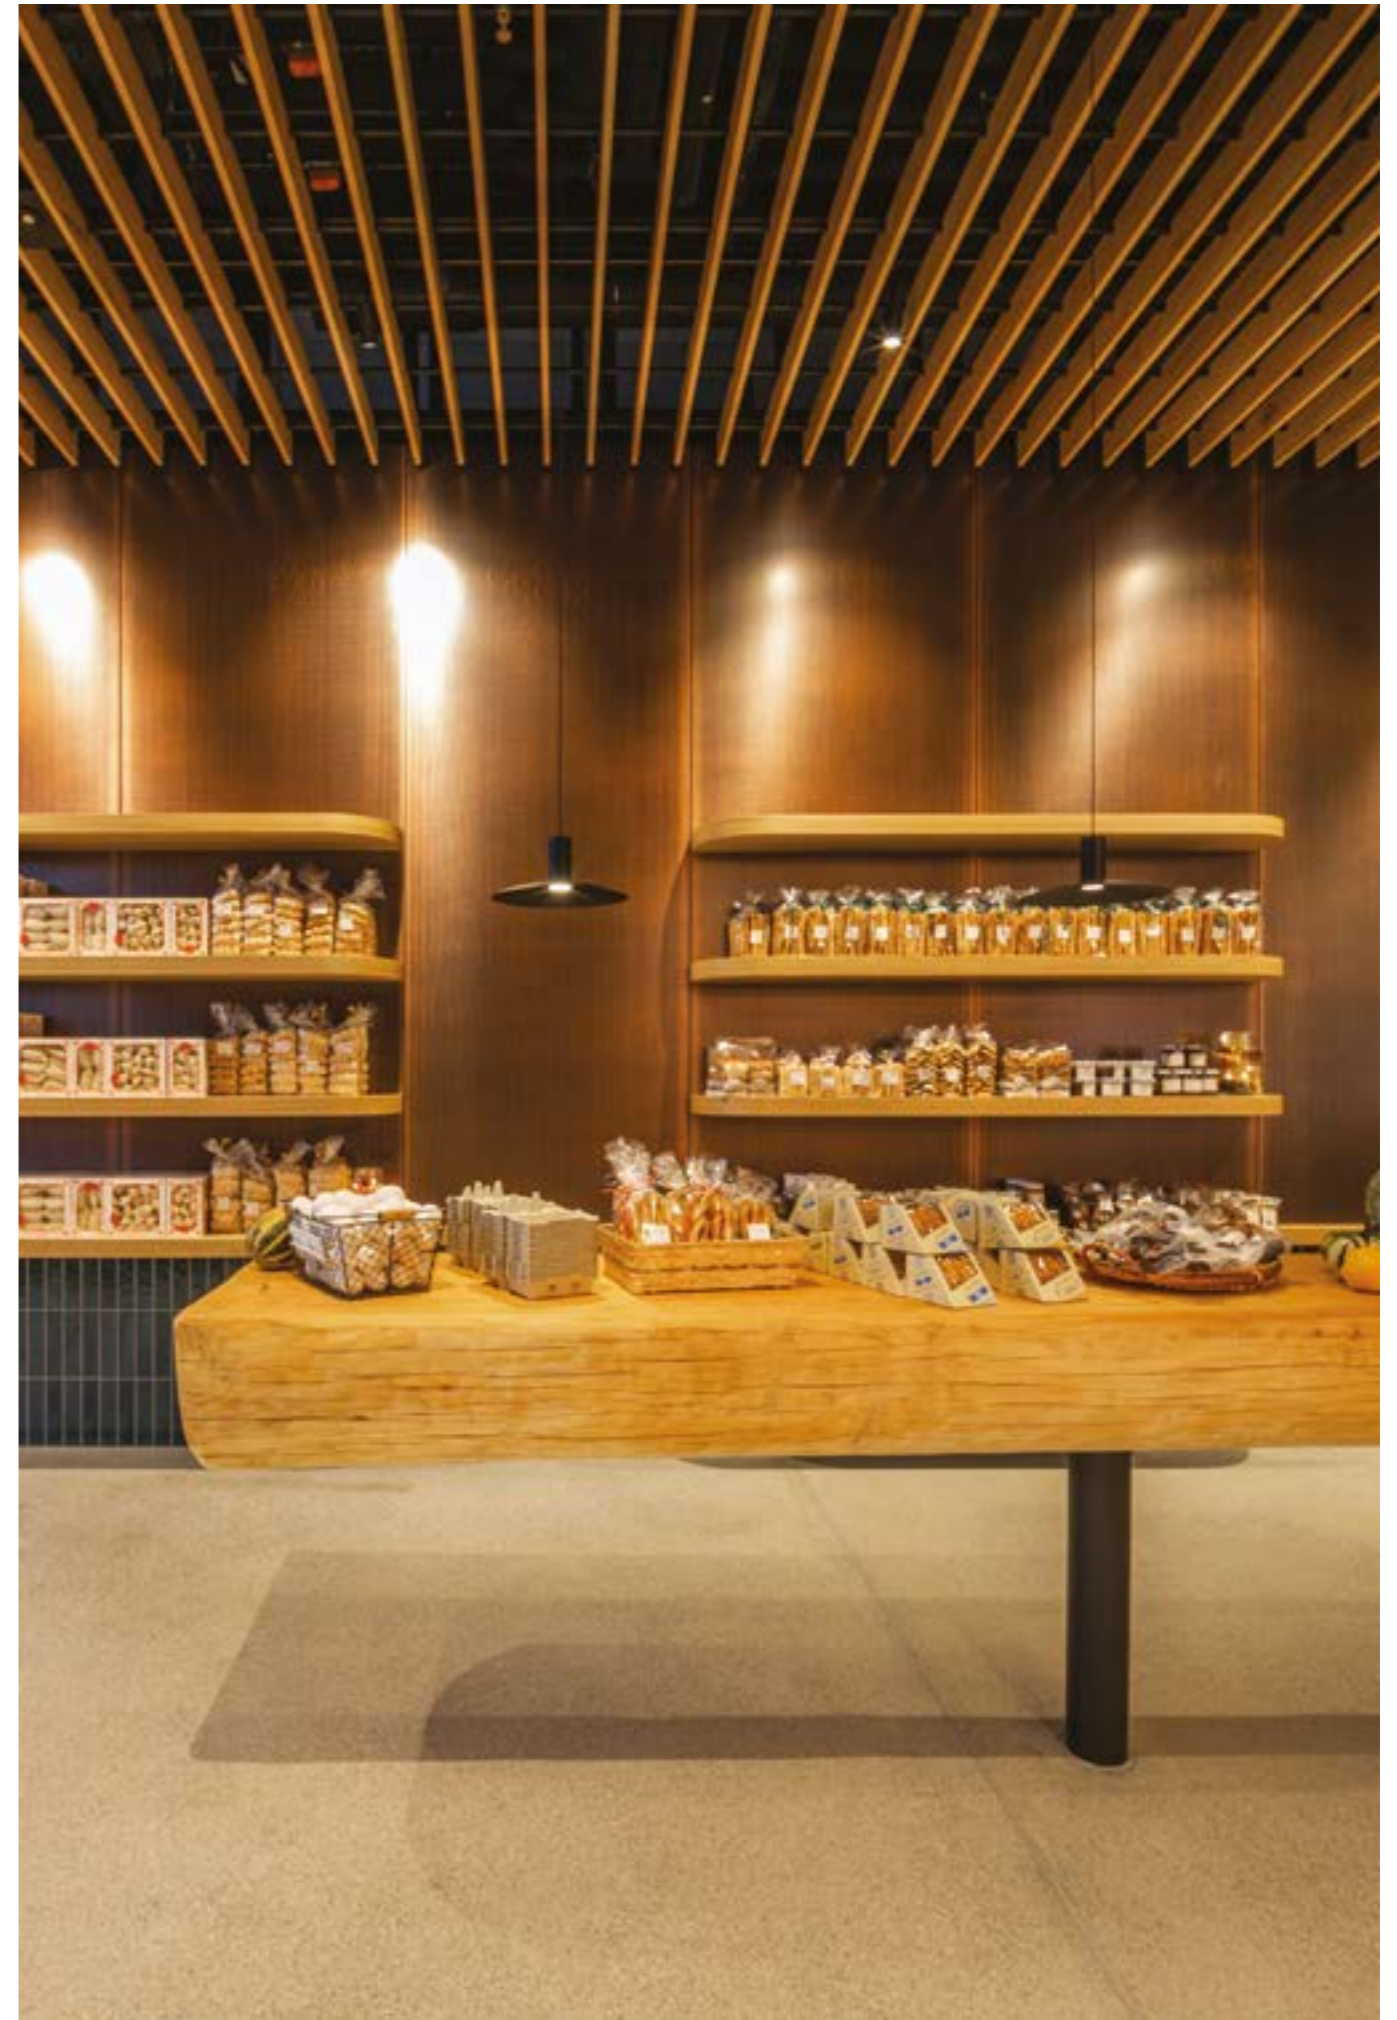




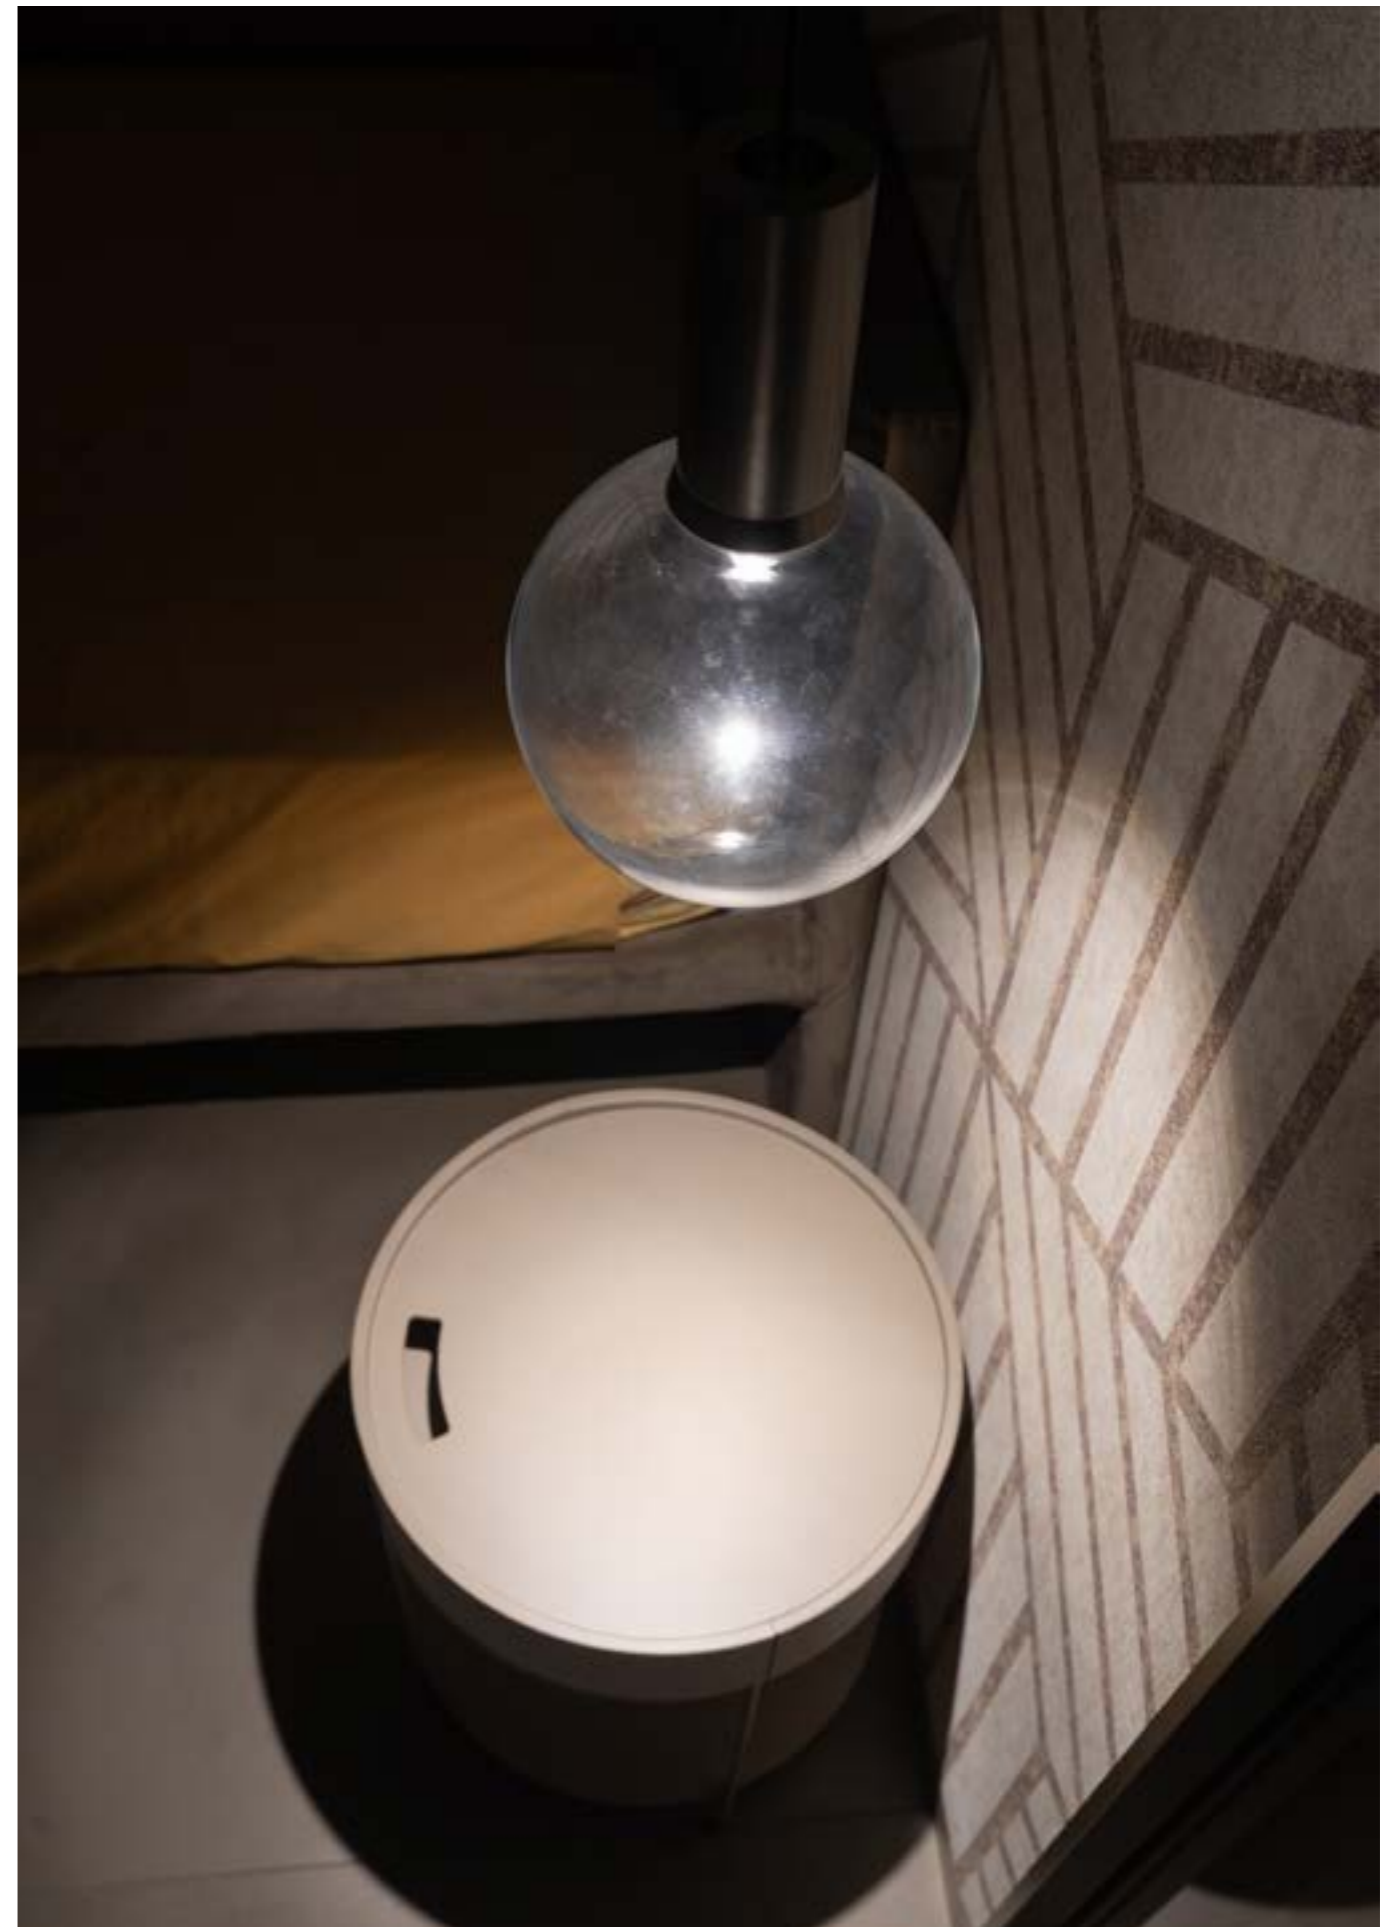




# NEWTON

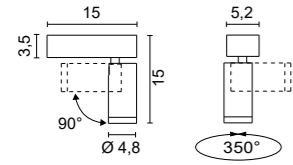

**4562** 0,60 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/24	/38	/58	LED 8,7W	1223lm
/W	4000K	/ST	Satin		LED 8,7W	1223lm
/WW	3000K	/24	/38	/58	LED 8,7W	1156lm
/WW	3000K	/ST	Satin		LED 8,7W	1156lm
/XW	2700K	/24	/38	/58	LED 8,7W	1106lm
/XW	2700K	/ST	Satin		LED 8,7W	1106lm

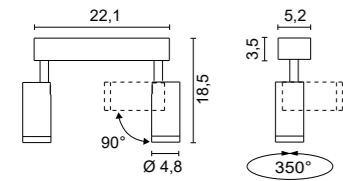

**4612** 1,25 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/24	/38	/58	LED 17,4W	2446lm
/W	4000K	/ST	Satin		LED 17,4W	2446lm
/WW	3000K	/24	/38	/58	LED 17,4W	2312lm
/WW	3000K	/ST	Satin		LED 17,4W	2312lm
/XW	2700K	/24	/38	/58	LED 17,4W	2212lm
/XW	2700K	/ST	Satin		LED 17,4W	2212lm



## FINISHES CODES



.01 White    .02 Black    .31 Chromed





AVAILABLE OPTICS




**/24** Narrow beam optic for accent lighting



**/38** Medium beam optic



**/58** Wide beam optic

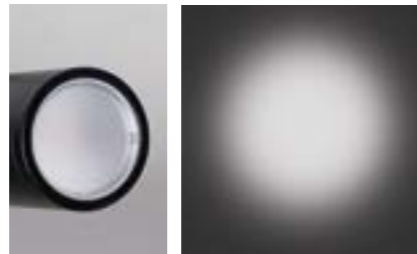

**/ST** Diffused light optic for general lighting

ACCESSORIES



Element  
**0274**

Anti-glare screen. Ø 4,7cm H 3,8cm

- .01** White
- .02** Black



Element  
**0267**


1 Louvres Ø 4,7cm H 1cm

- .01** White
- .02** Black






# NEWTON SLIM

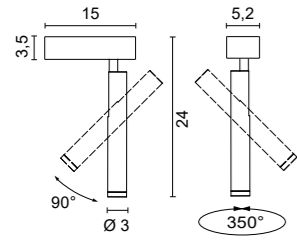

**4610** 0,60 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/35	/48	/63	LED 8,7W	1223lm
/W	4000K	/ST	Satin		LED 8,7W	1223lm
/WW	3000K	/35	/48	/63	LED 8,7W	1156lm
/WW	3000K	/ST	Satin		LED 8,7W	1156lm
/XW	2700K	/35	/48	/63	LED 8,7W	1106lm
/XW	2700K	/ST	Satin		LED 8,7W	1106lm

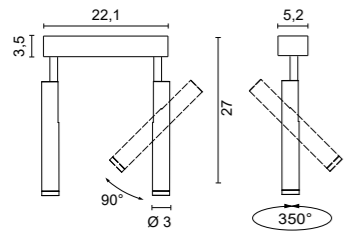

**4613** 1,25 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/35	/48	/63	LED 17,4W	2446lm
/W	4000K	/ST	Satin		LED 17,4W	2446lm
/WW	3000K	/35	/48	/63	LED 17,4W	2312lm
/WW	3000K	/ST	Satin		LED 17,4W	2312lm
/XW	2700K	/35	/48	/63	LED 17,4W	2212lm
/XW	2700K	/ST	Satin		LED 17,4W	2212lm



## FINISHES CODES



.01 White    .02 Black    .31 Chromed




## AVAILABLE OPTICS



/35 Narrow beam optic for accent lighting

/48 Medium beam optic

/63 Wide beam optic

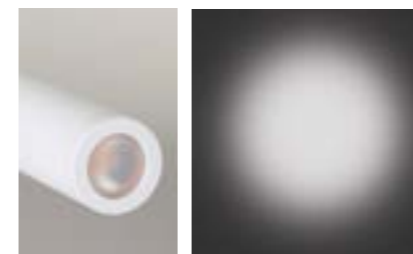

/ST Diffused light optic for general lighting

## ACCESSORIES



Element  
**0265**  
Sand blasted Pyrex glass diffuser    Ø 3,6cm H 20cm


- .01 White ferrule
- .02 Black ferrule

Element  
**0267/S**  
1 Louvres

- .01 White
- .02 Black




# NEWTON FLAT

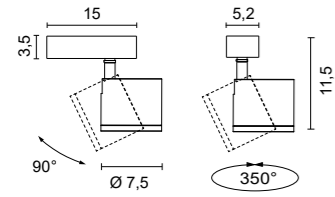

**4611** 0,60 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/13	/40	LED 8,7W	1223lm
/W	4000K	/ST	Satin	LED 8,7W	1223lm
/WW	3000K	/13	/40	LED 8,7W	1156lm
/WW	3000K	/ST	Satin	LED 8,7W	1156lm
/XW	2700K	/13	/40	LED 8,7W	1106lm
/XW	2700K	/ST	Satin	LED 8,7W	1106lm

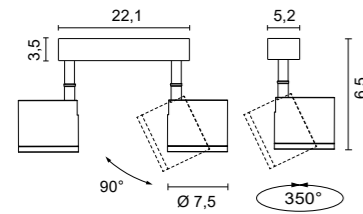

**4614** 1,25 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/13	/40	LED 17,4W	2446lm
/W	4000K	/ST	Satin	LED 17,4W	2446lm
/WW	3000K	/13	/40	LED 17,4W	2312lm
/WW	3000K	/ST	Satin	LED 17,4W	2312lm
/XW	2700K	/13	/40	LED 17,4W	2212lm
/XW	2700K	/ST	Satin	LED 17,4W	2212lm




## FINISHES CODES



.01 White    .02 Black    .31 Chromed

## AVAILABLE OPTICS

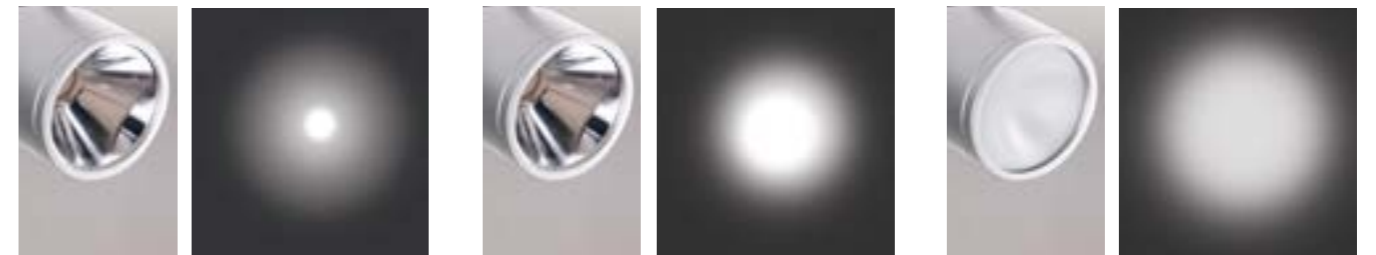

/13 Narrow beam optic for accent lighting

/40 Wide beam optic

/ST Diffused light optic for general lighting

## ACCESSORIES




Element  
**0264**


Decorative parabolic reflector.    Ø 10cm H 3,6cm

- .01 White
- .02 Black



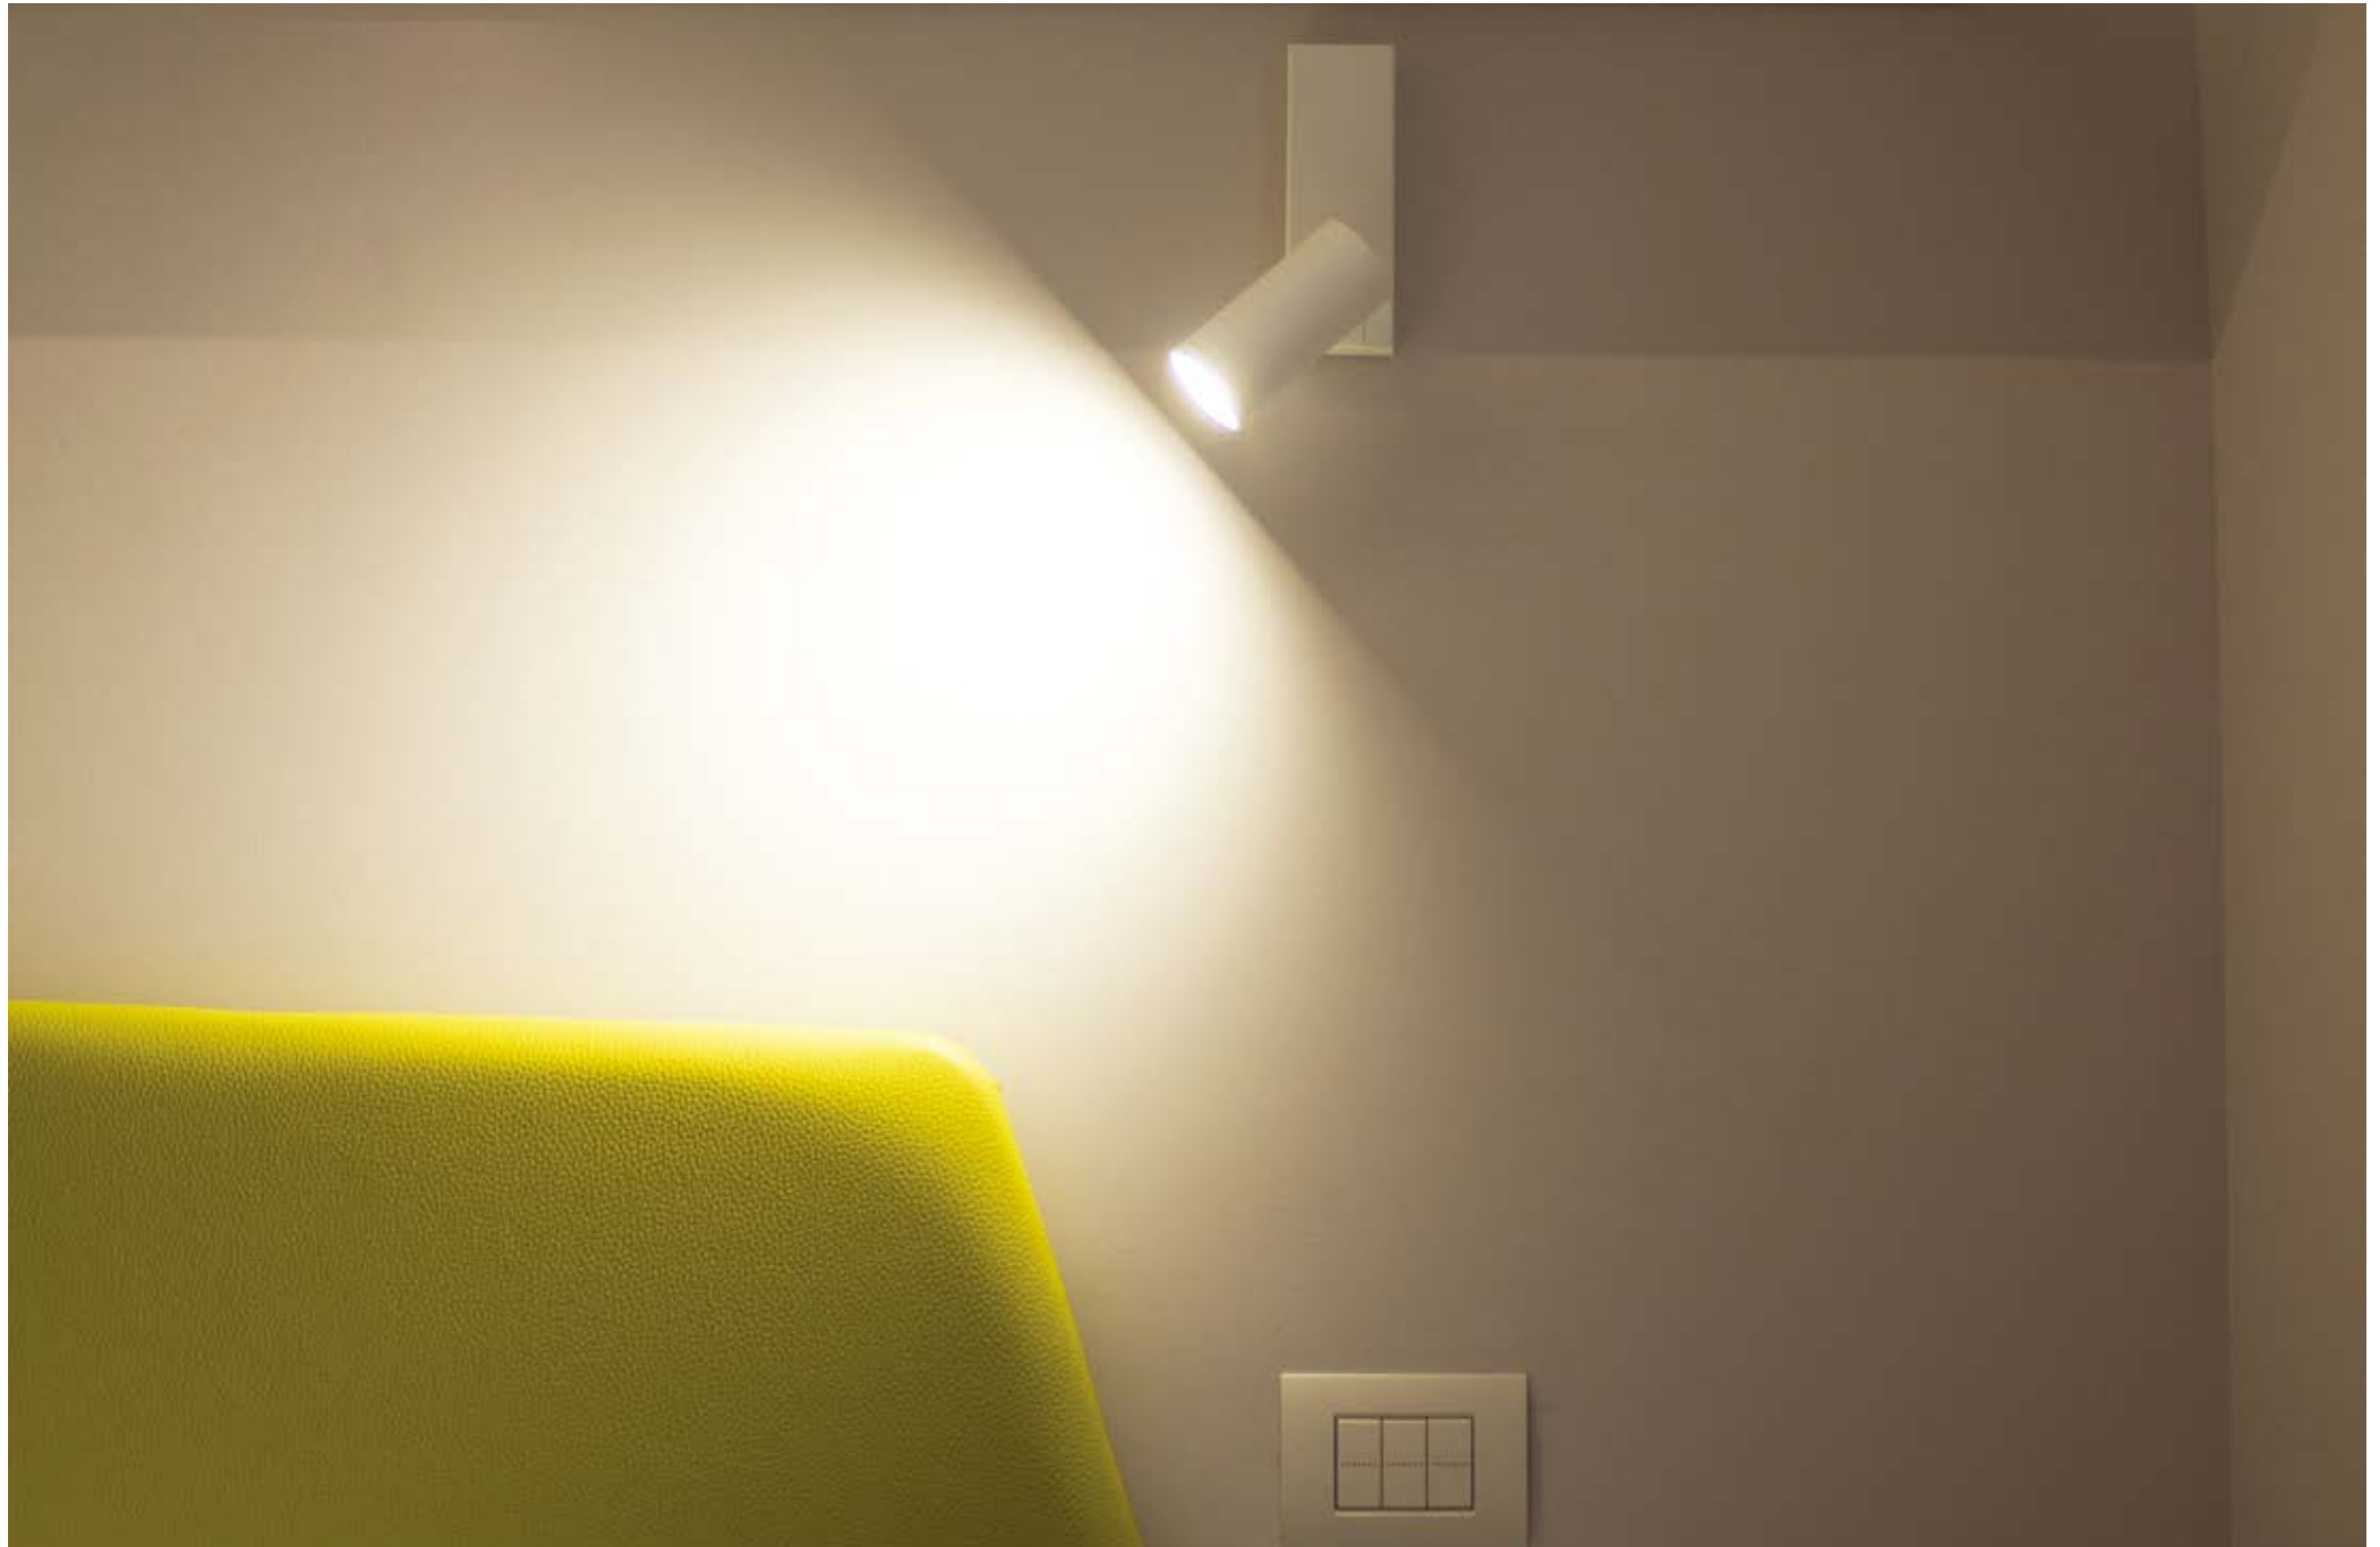

# NEWTON EASY

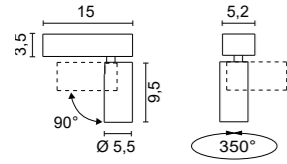


**4618** 0,50 Kg

- .01 White
- .02 Black

GU10 LED			
4000K	7W	630lm	(art.0094/WW)
3000K	7W	600lm	(art.0094/WW)
2700K	7W	580lm	(art.0094/XW)

4000K	7W	550lm	Dim (art.0104/WW)
3000K	7W	530lm	Dim (art.0104/WW)
2700K	7W	510lm	Dim (art.0104/XW)

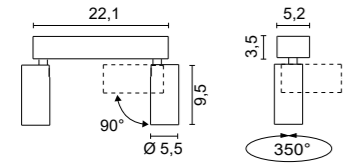

**4619** 0,80 Kg

- .01 White
- .02 Black

GU10 LED			
4000K	2X7W	630lm	(art.0094/WW)
3000K	2X7W	600lm	(art.0094/WW)
2700K	2X7W	580lm	(art.0094/XW)

4000K	2X7W	550lm	Dim (art.0104/WW)
3000K	2X7W	530lm	Dim (art.0104/WW)
2700K	2X7W	510lm	Dim (art.0104/XW)



## FINISHES CODES



.01 White

.02 Black



# NEWTON



## 6342

0,55 Kg

## 6344

0,60 Kg

<b>.01</b>	White	■
<b>.02</b>	Black	■

<b>.01</b>	White	■
<b>.02</b>	Black	■

<b>/W</b>	4000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
<b>/W</b>	4000K	/ST	Satin		LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
<b>/WW</b>	3000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/WW</b>	3000K	/ST	Satin		LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/24	/38	/58	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
<b>/XW</b>	2700K	/ST	Satin		LED 8,7W 17,5V 500mA	1340lm	1005lm (out)

<b>/W</b>	4000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
<b>/W</b>	4000K	/ST	Satin		LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
<b>/WW</b>	3000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/WW</b>	3000K	/ST	Satin		LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/24	/38	/58	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
<b>/XW</b>	2700K	/ST	Satin		LED 8,7W 17,5V 500mA	1340lm	1005lm (out)



## ACCESSORIES



### Element 0274

Anti-glare screen. Ø 4,7cm H 3,8cm

<b>.01</b>	White	■
<b>.02</b>	Black	■

### Element 0267

1 Louvres Ø 4,7cm H 1,0cm

<b>.01</b>	White	■
<b>.02</b>	Black	■

## FINISHES CODES



.01 White

.02 Black



## DRIVERS

### ON/OFF

Cod.	0147/COB 500m	0149/COB 500mA
<b>6342</b>	1-2	1
<b>6344</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
<b>6342</b>	1-2	1-3	1-3	1
<b>6344</b>	1-2	1-3	1-3	1

Only serial connection

### DIMMABLE DRIVERS WIRELESS CASAMBI

#### 0145/CASA

<b>6342</b>	1-3
<b>6344</b>	1-3

### LED EMERGENCY UNIT


#### 0115/EM INVERTER + BATTERY + LED INDICATOR

<b>6342</b>	1
<b>6344</b>	1

# NEWTON



## AVAILABLE OPTICS

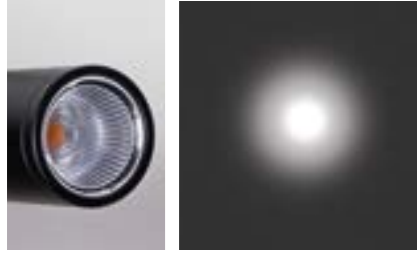

/24 Narrow beam optic for accent lighting




/38 Medium beam optic




/58 Wide beam optic



/ST Diffused light optic for general lighting

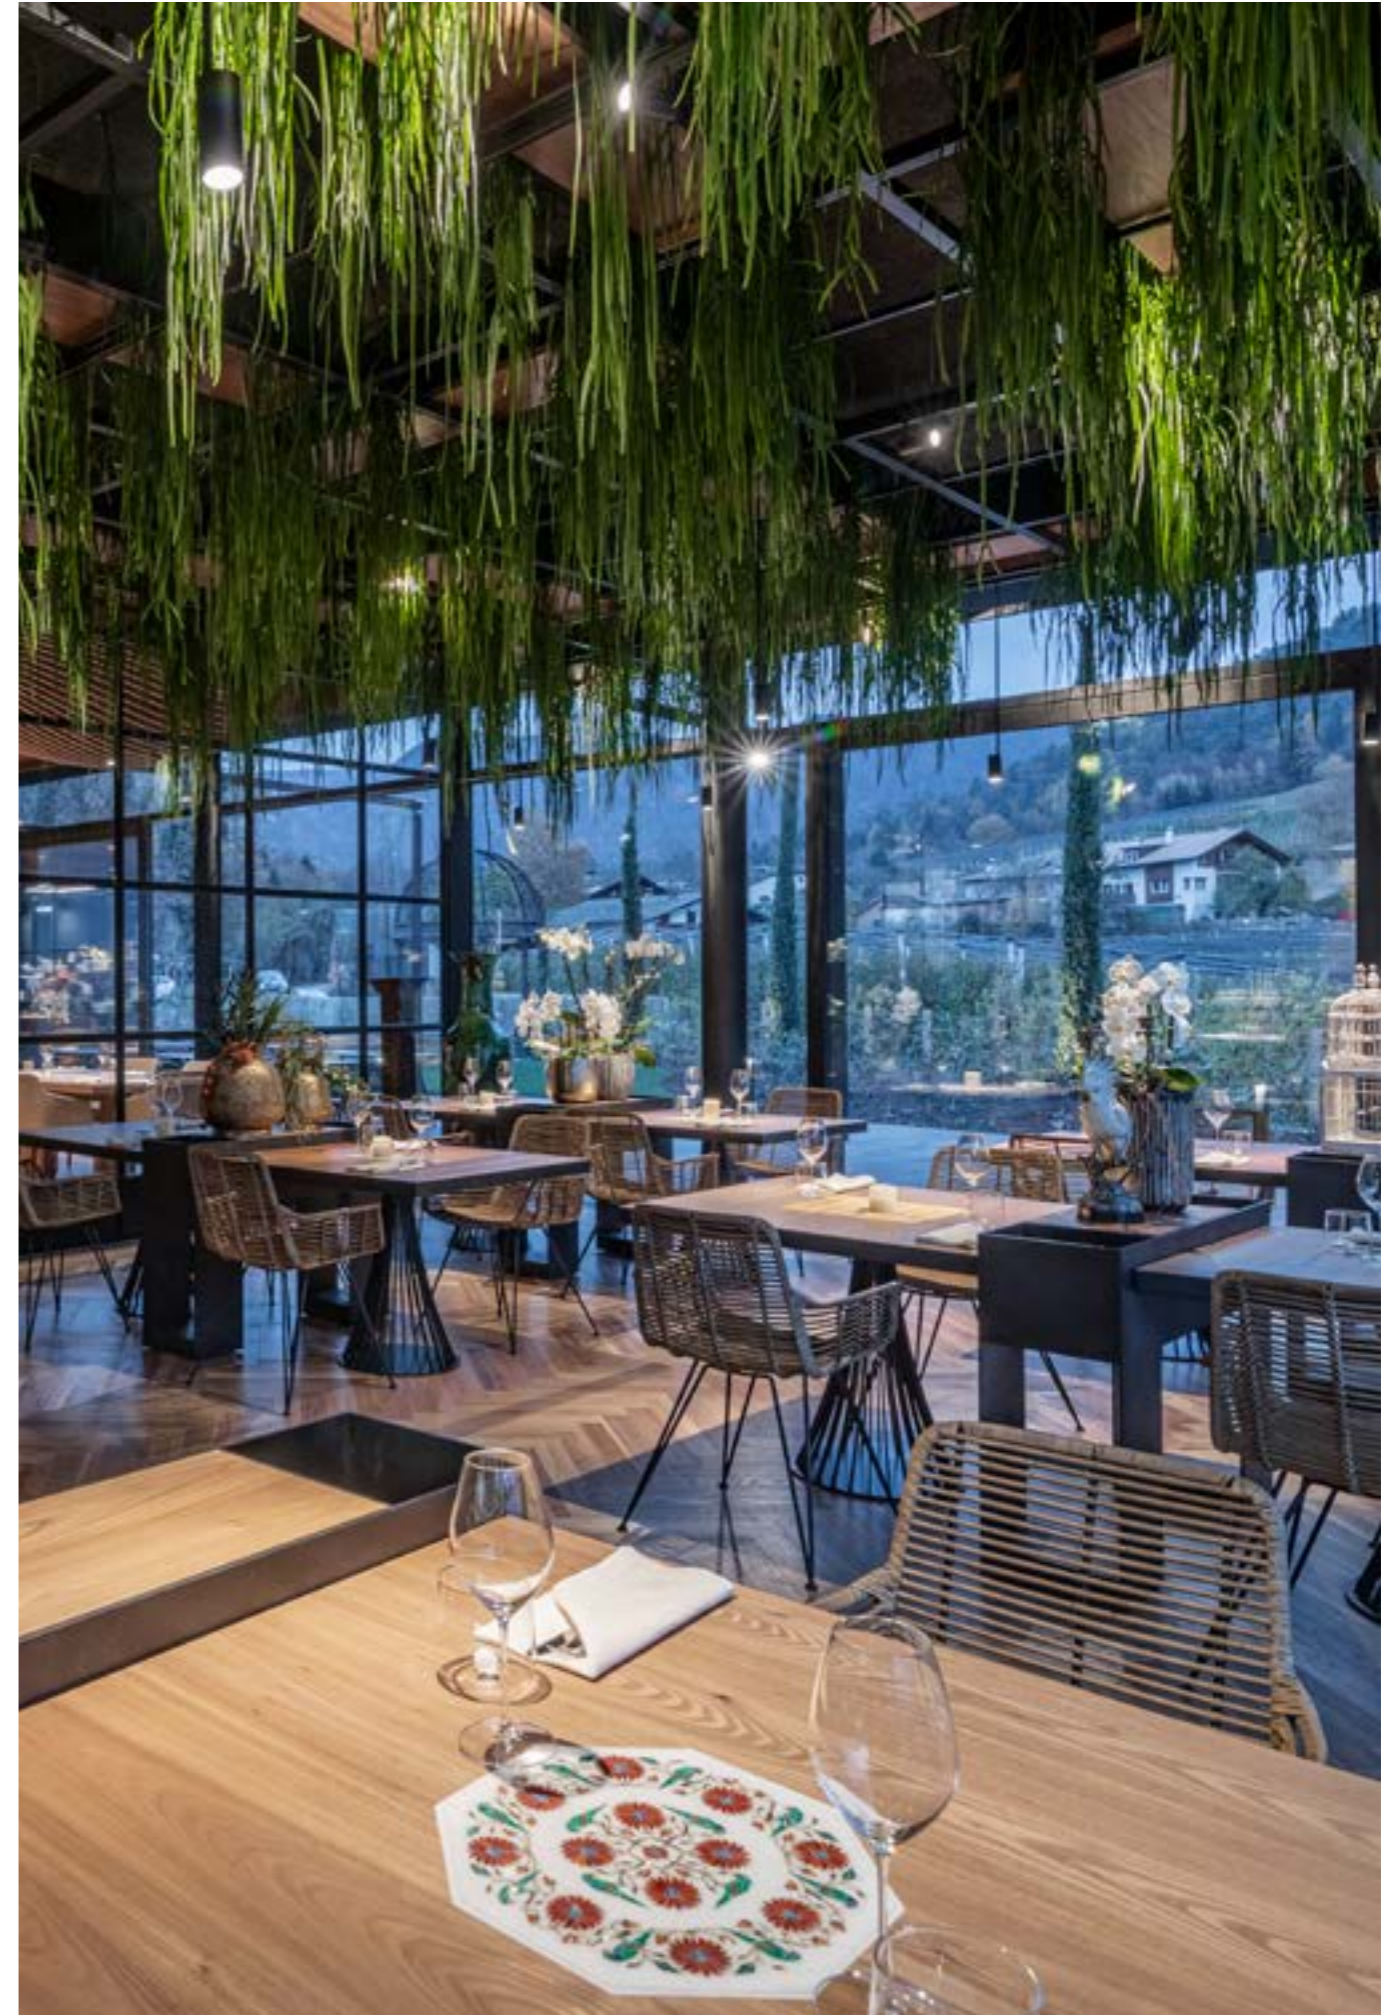

# NEWTON EASY 230V - GU10

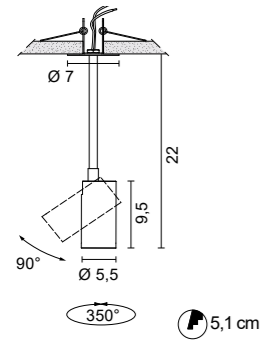

**6481** 0,40 Kg

- .01** White ■
- .02** Black ■
- .02.25** Black joint - Satin Gold body ■
- .02.32** Black joint - Nickel Mat body ■

7W GU10 LED (cod. 0094/..)  
7W GU10 LED DIM (cod. 0104/..)



## FINISHES CODES



- .01** White
- .02** Black
- .02.25** Black  
Satin gold
- .02.32** Black  
Nickel Mat

# NEWTON SLIM



## 6470

0,50 Kg

## 6471


0,70 Kg

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input type="checkbox"/>

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input type="checkbox"/>

<b>/W</b>	4000K	/25	/48	/63	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
<b>/W</b>	4000K	/ST	Satin		LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
<b>/WW</b>	3000K	/25	/48	/63	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/WW</b>	3000K	/ST	Satin		LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/25	/48	/63	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
<b>/XW</b>	2700K	/ST	Satin		LED 8,7W 17,5V 500mA	1340lm	1005lm (out)

<b>/W</b>	4000K	/25	/48	/63	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
<b>/W</b>	4000K	/ST	Satin		LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
<b>/WW</b>	3000K	/25	/48	/63	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/WW</b>	3000K	/ST	Satin		LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/25	/48	/63	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
<b>/XW</b>	2700K	/ST	Satin		LED 8,7W 17,5V 500mA	1340lm	1005lm (out)



## ACCESSORIES



Element

### 0265

Sand blasted Pyrex glass diffuser Ø 3,6cm H 20cm

<b>.01</b>	White ferrule	<input type="checkbox"/>
<b>.02</b>	Black ferrule	<input type="checkbox"/>

Element

### 0267/S

1 Louvres

<b>.01</b>	White	<input type="checkbox"/>
<b>.02</b>	Black	<input type="checkbox"/>

## FINISHES CODES



**.01** White

**.02** Black



## DRIVERS

### ON/OFF

Cod.	0147/COB 500m	0149/COB 500mA
<b>6470</b>	1-2	1
<b>6471</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
<b>6470</b>	1-2	1-3	1-3	1
<b>6471</b>	1-2	1-3	1-3	1

Only serial connection

### DIMMABLE DRIVERS WIRELESS CASAMBI

#### 0145/CASA

<b>6470</b>	1-3
<b>6471</b>	1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

<b>6470</b>	1
<b>6471</b>	1

# NEWTON SLIM




## AVAILABLE OPTICS




/35 Narrow beam optic for accent lighting



/48 Medium beam optic

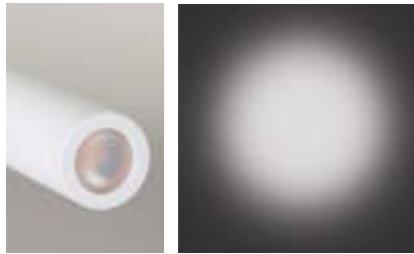

/ST Diffused light optic for general lighting


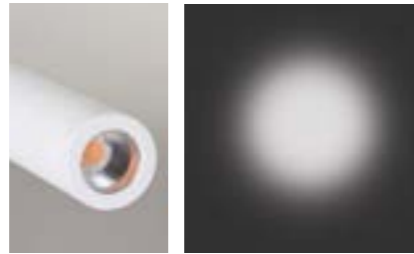


/63 Wide beam optic





# NEWTON FLAT

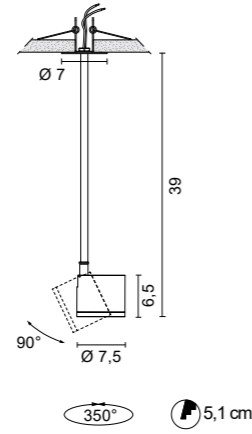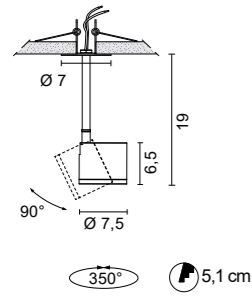

## 6468

0,60 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input type="checkbox"/>
/W	4000K /13 /40	LED 8,7W 17,5V 500mA 1466lm 1150lm (out)
/W	4000K /ST Satin	LED 8,7W 17,5V 500mA 1466lm 1099lm (out)
/WW	3000K /13 /40	LED 8,7W 17,5V 500mA 1424lm 1117lm (out)
/WW	3000K /ST Satin	LED 8,7W 17,5V 500mA 1424lm 1068lm (out)
/XW	2700K /13 /40	LED 8,7W 17,5V 500mA 1340lm 1051lm (out)
/XW	2700K /ST Satin	LED 8,7W 17,5V 500mA 1340lm 1005lm (out)



## 6469

0,70 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input type="checkbox"/>
/W	4000K /13 /40	LED 8,7W 17,5V 500mA 1466lm 1150lm (out)
/W	4000K /ST Satin	LED 8,7W 17,5V 500mA 1466lm 1099lm (out)
/WW	3000K /13 /40	LED 8,7W 17,5V 500mA 1424lm 1117lm (out)
/WW	3000K /ST Satin	LED 8,7W 17,5V 500mA 1424lm 1068lm (out)
/XW	2700K /13 /40	LED 8,7W 17,5V 500mA 1340lm 1051lm (out)
/XW	2700K /ST Satin	LED 8,7W 17,5V 500mA 1340lm 1005lm (out)



## ACCESSORIES



Element

## 0264

Decorative parabolic reflector.

.01	White	<input type="checkbox"/>
.02	Black	<input type="checkbox"/>

## FINISHES CODES



.01 White

.02 Black



## DRIVERS

### ON/OFF

Cod.	0147/COB 500m	0149/COB 500mA
6468	1-2	1
6469	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
6468	1-2	1-3	1-3	1
6469	1-2	1-3	1-3	1

Only serial connection

### DIMMABLE DRIVERS WIRELESS CASAMBI

#### 0145/CASA

6468	1-3
6469	1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

6468	1
6469	1

# NEWTON FLAT



## AVAILABLE OPTICS




/13 Narrow beam optic for accent lighting




/40 Wide beam optic



/ST Diffused light optic for general lighting

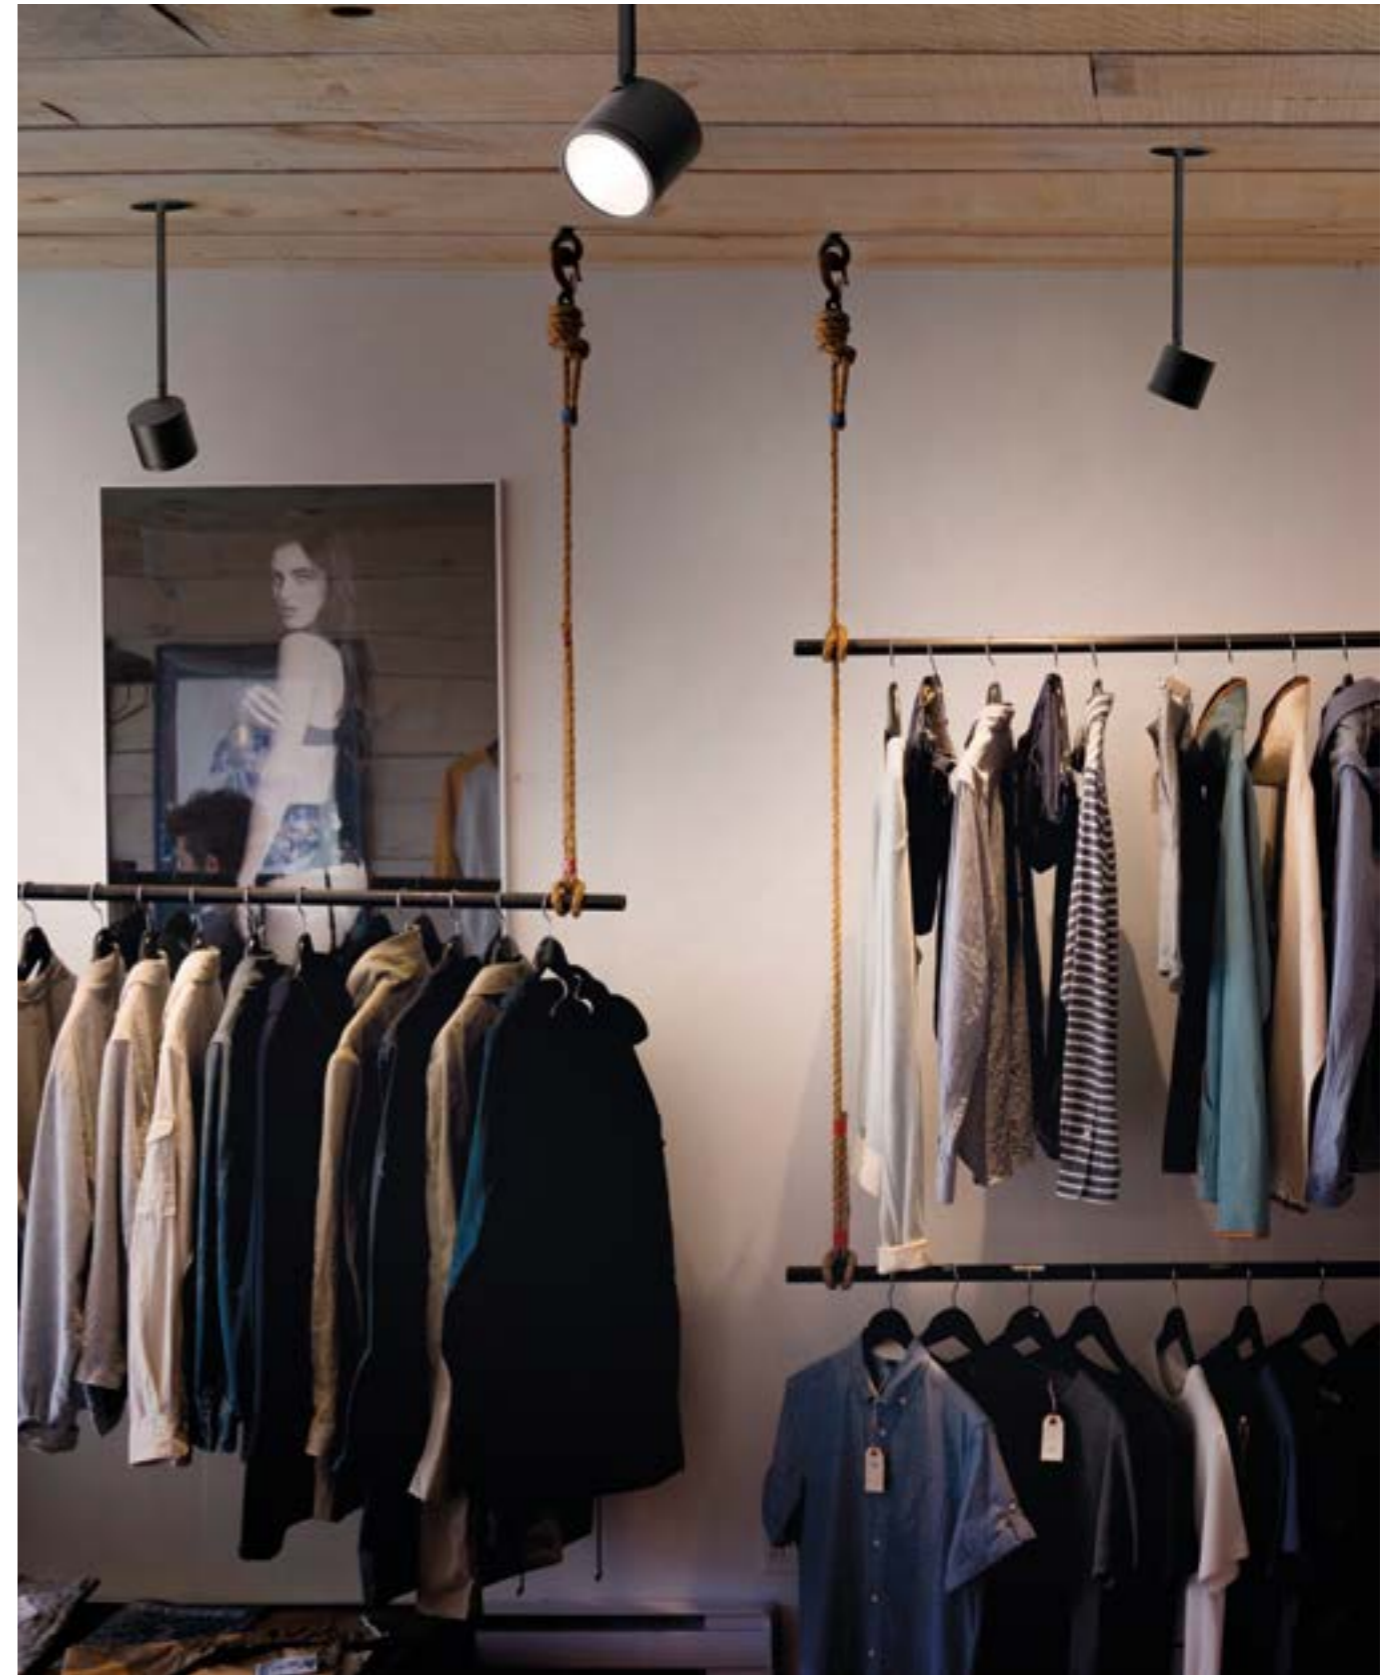

# NEWTON RECESSED

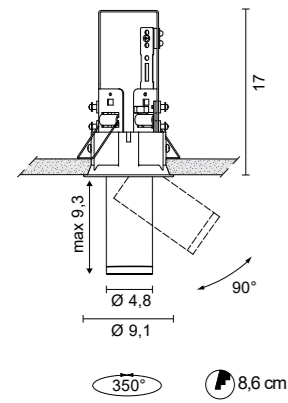

**6328**

0,80 Kg

- .01 White
- .02 Black

/W	4000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
/W	4000K	/ST	Satin		LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
/WW	3000K	/24	/38	/58	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
/WW	3000K	/ST	Satin		LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
/XW	2700K	/24	/38	/58	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
/XW	2700K	/ST	Satin		LED 8,7W 17,5V 500mA	1340lm	1005lm (out)



## ACCESSORIES



Element  
**0267**

1 Louvres Ø 4,7cm H 1,0cm

- .01 White
- .02 Black

Element  
**0274**

Anti-glare screen. Ø 4,7cm H 3,8cm

- .01 White
- .02 Black

## FINISHES CODES



.01 White .02 Black



## DRIVERS

### ON/OFF

Cod.	0147/COB 500m	0149/COB 500mA
<b>6328</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
<b>6328</b>	1-2	1-2	1-3	1-3

Only serial connection

### DIMMABLE DRIVERS WIRELESS CASAMBI

0145/CASA

**6328** 1-3

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR

**6328** 1

# NEWTON RECESSED



## AVAILABLE OPTICS



/24 Narrow beam optic for accent lighting




/38 Medium beam optic




/58 Wide beam optic



/ST Diffused light optic for general lighting

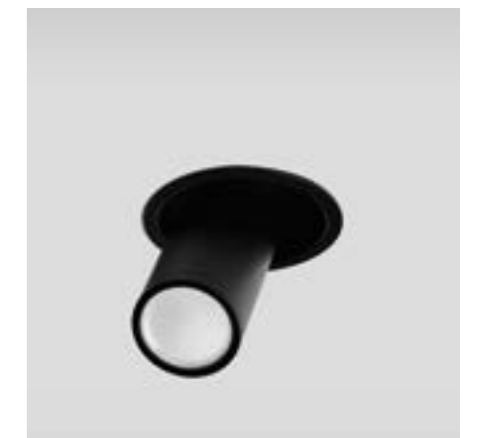

# NEWTON EASY RECESSED 230V - GU10

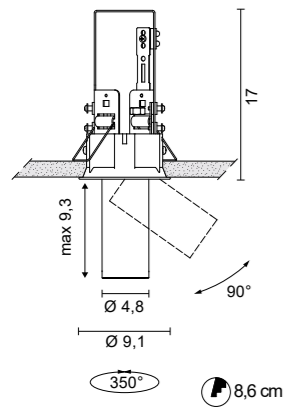

**6326** 0,80 Kg

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.02.25</b>	Black joint - Satin Gold body	
<b>.02.32</b>	Black joint - Nickel Mat body	

7W GU10 LED (cod. 0094/..)  
 7W GU10 LED DIM (cod. 0104/..)




## FINISHES CODES



**.01** White    **.02** Black    **.02.25** Black Satin gold    **.02.35** Black Nickel Mat




# NEWTON

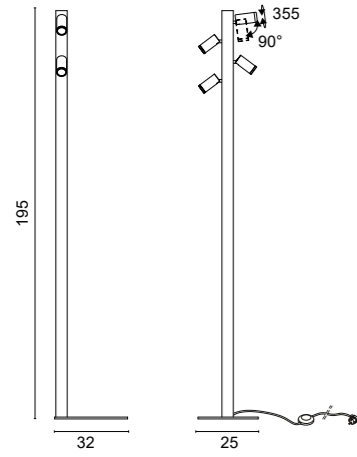

**3510** 9,50 Kg

- .01** White ■
- .02** Black ■

<b>/W</b>	4000K	/24	/38	/58	LED 34,8W	4892lm
<b>/W</b>	4000K	/ST	Satin		LED 34,8W	4892lm
<b>/WW</b>	3000K	/24	/38	/58	LED 34,8W	4624lm
<b>/WW</b>	3000K	/ST	Satin		LED 34,8W	4624lm
<b>/XW</b>	2700K	/24	/38	/58	LED 34,8W	4424lm
<b>/XW</b>	2700K	/ST	Satin		LED 34,8W	4424lm



ON - OFF switch

## FINISHES CODES



**.01** White

**.02** Black





AVAILABLE OPTICS



/24 Narrow beam optic for accent lighting



/38 Medium beam optic



/58 Wide beam optic



/ST Diffused light optic for general lighting







INDOOR

# STICK

Design ABS Studio



## STICK



Lamp or suspension lamp system characterized by a high direct and punctual luminous efficiency. The body is made with a brass tube and an aluminum heatsink. Available in three lengths and various finishes. The essential shape and size make Stick suitable for spot lighting on small tables, peninsulas, bedside tables or, arranged in groups of several elements, to illuminate hotel and office reception desks or large tables. The ceiling roses with power supplies and accessories must be ordered separately according to the type of composition chosen.

*Système de lampe ou de suspension caractérisé par un rendement lumineux direct et ponctuel élevé.*

*Le corps est composé d'un tube en laiton et d'un radiateur en aluminium. Disponible en trois longueurs et différentes finitions.*

*La forme et la taille essentielles font de Stick un éclairage ponctuel sur de petites tables, des péninsules, des tables de chevet ou, disposés en groupes de plusieurs éléments, pour éclairer des bureaux d'accueil d'hôtels et de bureaux ou de grandes tables.*

*Les rosaces avec alimentations et accessoires sont à commander séparément selon le type de composition choisi.*

*Lampen- oder Pendelleuchtensystem, das sich durch eine hohe direkte und punktuelle Lichtausbeute auszeichnet.*


*Das Gehäuse besteht aus einem Messingrohr und einem Aluminiumkühlkörper. Erhältlich in drei Längen und verschiedenen Ausführungen.*

*Durch die essentielle Form und Größe eignet sich Stick zur Spotbeleuchtung auf kleinen Tischen, Halbinseln, Nachttischen oder, in Gruppen aus mehreren Elementen angeordnet, zur Beleuchtung von Hotel- und Bürorezeptionen oder großen Tischen.*

*Die Deckenrosetten mit Netzteilen und Zubehör müssen je nach gewählter Zusammenstellung separat bestellt werden.*



# STICK

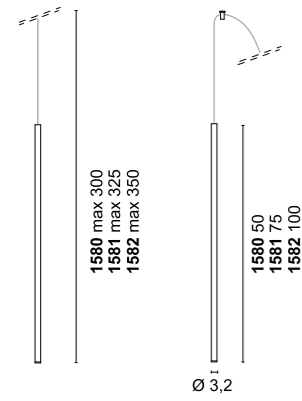

**1580** 0,90 Kg

- .01 White
- .02 Black
- .21 Shiny gold
- .25 Satin gold

/W	4000K /48	LED 5,9W 17V 350mA	885lm
/W	4000K /ST Satin	LED 5,9W 17V 350mA	885lm
/WW	3000K /48	LED 5,9W 17V 350mA	836lm
/WW	3000K /ST Satin	LED 5,9W 17V 350mA	836lm
/XW	2700K /48	LED 5,9W 17V 350mA	800lm
/XW	2700K /ST Satin	LED 5,9W 17V 350mA	800lm



2 displacement component included

**1582** 1,10 Kg

- .01 White
- .02 Black
- .21 Shiny gold
- .25 Satin gold

/W	4000K /48	LED 5,9W 17V 350mA	885lm
/W	4000K /ST Satin	LED 5,9W 17V 350mA	885lm
/WW	3000K /48	LED 5,9W 17V 350mA	836lm
/WW	3000K /ST Satin	LED 5,9W 17V 350mA	836lm
/XW	2700K /48	LED 5,9W 17V 350mA	800lm
/XW	2700K /ST Satin	LED 5,9W 17V 350mA	800lm



2 displacement component included

## FINISHES CODES



.01 White .02 Black .21 Shiny gold .25 Satin gold

**1581** 1,00 Kg

- .01 White
- .02 Black
- .21 Shiny gold
- .25 Satin gold

/W	4000K /48	LED 5,9W 17V 350mA	885lm
/W	4000K /ST Satin	LED 5,9W 17V 350mA	885lm
/WW	3000K /48	LED 5,9W 17V 350mA	836lm
/WW	3000K /ST Satin	LED 5,9W 17V 350mA	836lm
/XW	2700K /48	LED 5,9W 17V 350mA	800lm
/XW	2700K /ST Satin	LED 5,9W 17V 350mA	800lm



2 displacement component included

## ACCESSORIES

1 Displacement component Ø 1,4 cm H 2,2 cm

- .01 White
- .02 Black



Ceiling roses with converter for suspension systems p.374

## CEILING ROSES AND ACCESSORIES FOR LED SUSPENSION SYSTEMS WITH 350mA

### CEILING ROSE



Ceiling rose with driver  
1 lamps


**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0535**

Ø 9,5 cm H 10 cm

.01 White  
.02 Black  
.05 Red

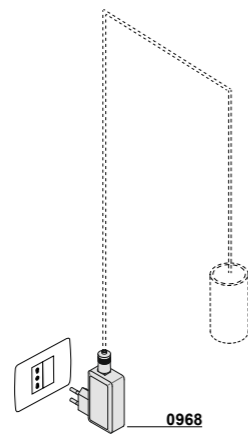

Plug in driver + Jack  
1 lamp

**IN** 50/60Hz 200-240V

**OUT** 350mA DC

**0968**

.02 Black



Ceiling rose with driver  
1 lamps


**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0967**

Ø 9,3 cm H 3 cm

.01 White  
.02 Black

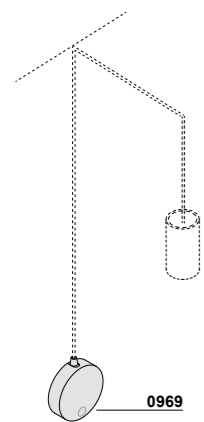

Ceiling rose with driver  
1 lamp


**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0969**

Ø 9,3 cm H 3 cm

.01 White  
.02 Black

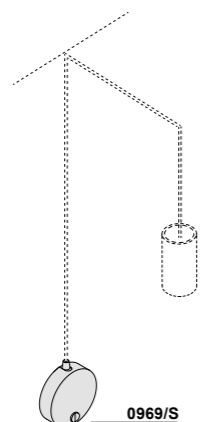

Ceiling rose with switch and driver  
1 lamp

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0969/S**


Ø 9,3 cm H 3 cm

.01 White  
.02 Black



## CEILING ROSES AND ACCESSORIES FOR LED SUSPENSION SYSTEMS WITH 350mA

### TRACK ADAPTER/SUSPENSION

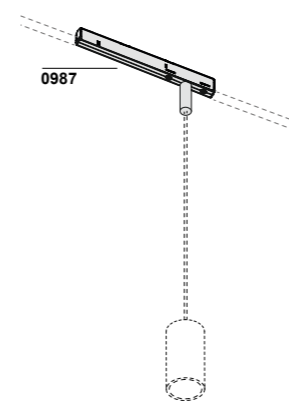


Adapter for 48V track  
1 lamp

**IN** 48V

**OUT** 350mA DC

**0987**

.01 White  
.02 Black

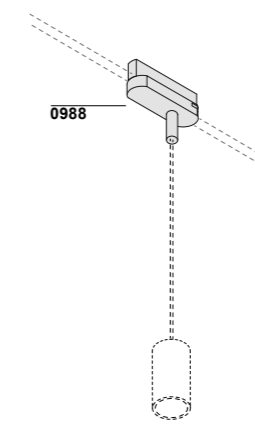

Adapter for 220-240V track  
1 lamp

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0988**

.01 White  
.02 Black



### RECESSED CEILING ROSE



Plasterboard ceiling rose with driver  
1 lamp

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0987**

Ø 9 cm H 4,5 cm 0,2 Kg

.01 White  
.02 Black

**/DIM** PUSH - 1... 10V  
**/DALI** DALI



Eureka ceiling rose without driver  
for plasterboard

**E1001**

Ø 3 cm H 4 cm


.01 White  
.02 Black



The supplied driver passes through the recessed hole of the Plasterboard ceiling rose **art. 0954**

## CEILING ROSES AND ACCESSORIES FOR LED SUSPENSION SYSTEMS WITH 350mA

### CEILING ROSE

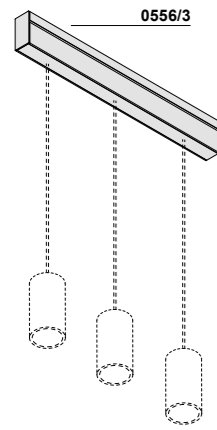


Ceiling rose with driver  
3 Lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0556/3** L 90 cm H 6,8 cm 1,20 Kg

.01 White  
.02 Black  
.05 Red

/DIM PUSH - 1... 10V  
/DALI DALI

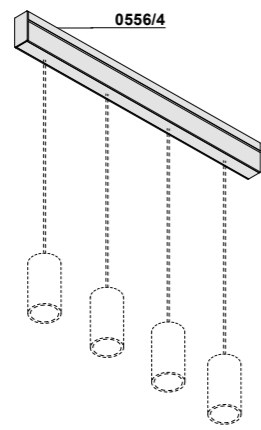


Ceiling rose with driver  
4 lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0556/4** L 120 cm H 6,8 cm 1,40 Kg

.01 White  
.02 Black  
.05 Red

/DIM PUSH - 1... 10V  
/DALI DALI

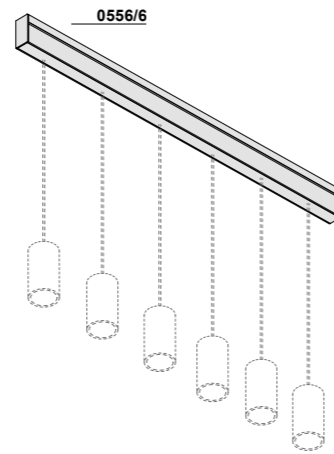


Ceiling rose with driver  
6 lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0556/6** L 180 cm H 6,8 cm 1,60 Kg

.01 White  
.02 Black  
.05 Red

/DIM PUSH - 1... 10V  
/DALI DALI

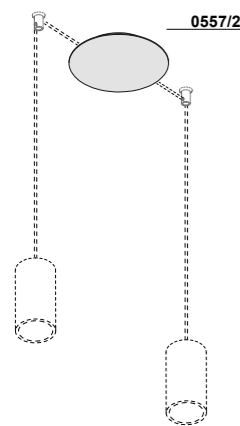


Ceiling rose with driver  
2 lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0557/2** Ø 27 cm H 3,0 cm 0,50 Kg

/DIM PUSH - 1... 10V  
/DALI DALI

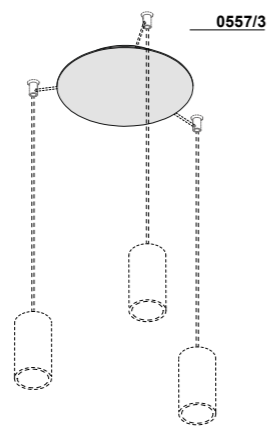


Ceiling rose with driver  
3 lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0557/3** Ø 38 cm H 4,0 cm 0,50 Kg

/DIM PUSH - 1... 10V  
/DALI DALI

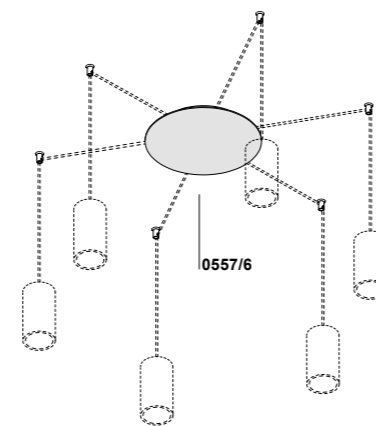

Ceiling rose with driver  
4-6 lamps

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC


**0557/6** Ø 38 cm H 4,0 cm 1,80 Kg

/DIM PUSH - 1... 10V  
/DALI DALI



## CEILING ROSES AND ACCESSORIES FOR LED SUSPENSION SYSTEMS WITH 350mA

### CEILING ROSE

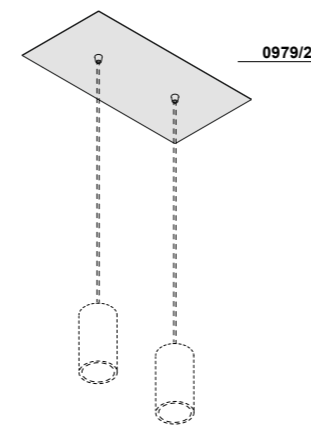


Ceiling rose with driver 2 lamps  
Dimmable upon request

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0979/2** 48x24cm H 3,0cm 2,00 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI

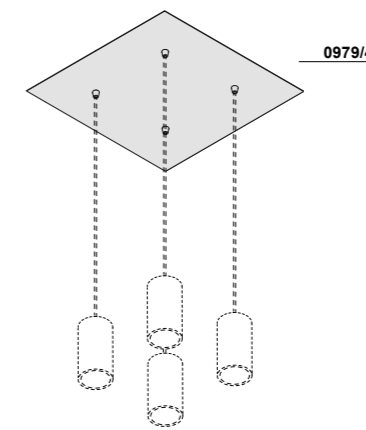


Ceiling rose with driver 4 lamps  
Dimmable upon request

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0979/4** 48x48cm H 3,0cm 3,80 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI

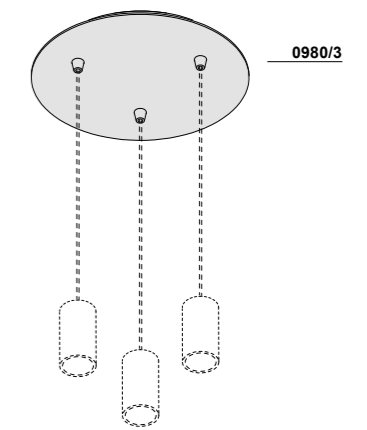


Ceiling rose with driver 3 lamps  
Dimmable upon request

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0980/3** Ø 35cm H 4,5cm 1,20 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI

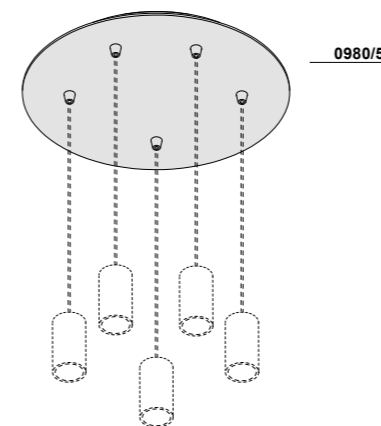

Canopy with driver 5 lamps  
Dimmable upon request

**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0980/5** Ø 45cm H 4,5cm 2,40 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI





INDOOR

# TULIPANO

Design LUX Studio





## TULIPANO



System of small pendant lamps providing direct light with aluminum body, molded metal diffusers, and 250 cm coaxial cable.

The systems are modular in various configurations by the chosen canopies. Versions are available both with ON / OFF switching or dimming the light.

The small size and minimal design, combined with the versatility of the compositions, make the Tulipano system suitable for use in different environments.

*Système de petites lampes suspendues fournissant une lumière directe avec un corps en aluminium, des diffuseurs en métal moulé et un câble coaxial de 250 cm.*

*Les systèmes sont modulables en différentes configurations grâce aux auvents choisis. Les versions sont disponibles avec une commutation ON/OFF ou une gradation de la lumière.*

*Les dimensions réduites et le design minimal, combinés à la polyvalence des compositions, rendent le système Tulipano adapté à une utilisation dans différents environnements.*


System von kleinen Pendelleuchten, die direktes Licht mit Aluminiumgehäuse, geformten Metaldiffusoren und 250 cm Koaxialkabel liefern.

Die Systeme sind modular in verschiedenen Konfigurationen durch die gewählten Schirme. Versionen sind sowohl mit ON / OFF-Schaltung oder Dimmen des Lichts zur Verfügung.

Die geringe Größe und das minimale Design, kombiniert mit der Vielseitigkeit der Kompositionen, machen das Tulipano System geeignet für den Einsatz in verschiedenen Umgebungen.




# TULIPANO

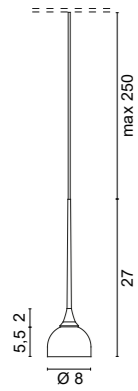

**1680** 0,15 Kg

- .02** Black / White inside ■
- .25** Satin gold / White inside ■


<b>/W</b>	4000K	LED 2W 350mA	on request
<b>/WW</b>	3000K	LED 2W 350mA	296lm
<b>/XW</b>	2700K	LED 2W 350mA	284lm

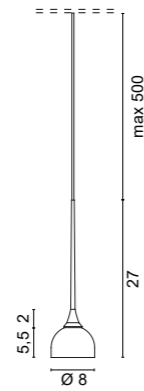

**1682** 0,25 Kg

- .02** Black / White inside ■
- .25** Satin gold / White inside ■


<b>/W</b>	4000K	LED 2W 350mA	on request
<b>/WW</b>	3000K	LED 2W 350mA	296lm
<b>/XW</b>	2700K	LED 2W 350mA	284lm

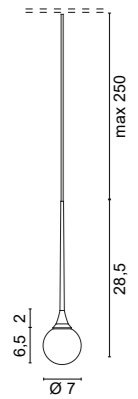

**1681** 0,20 Kg

- .02** Black ■
- .25** Satin gold ■

<b>/W</b>	4000K	LED 2W 350mA	on request
<b>/WW</b>	3000K	LED 2W 350mA	296lm
<b>/XW</b>	2700K	LED 2W 350mA	284lm

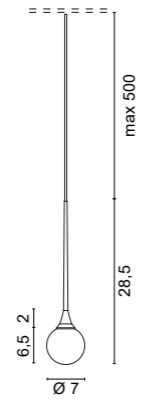


**1683** 0,30 Kg

- .02** Black ■
- .25** Satin gold ■

<b>/W</b>	4000K	LED 2W 350mA	on request
<b>/WW</b>	3000K	LED 2W 350mA	296lm
<b>/XW</b>	2700K	LED 2W 350mA	284lm



## FINISHES CODES




**.02** Black

**.25** Satin gold



Ceiling roses with converter for suspension systems p.388



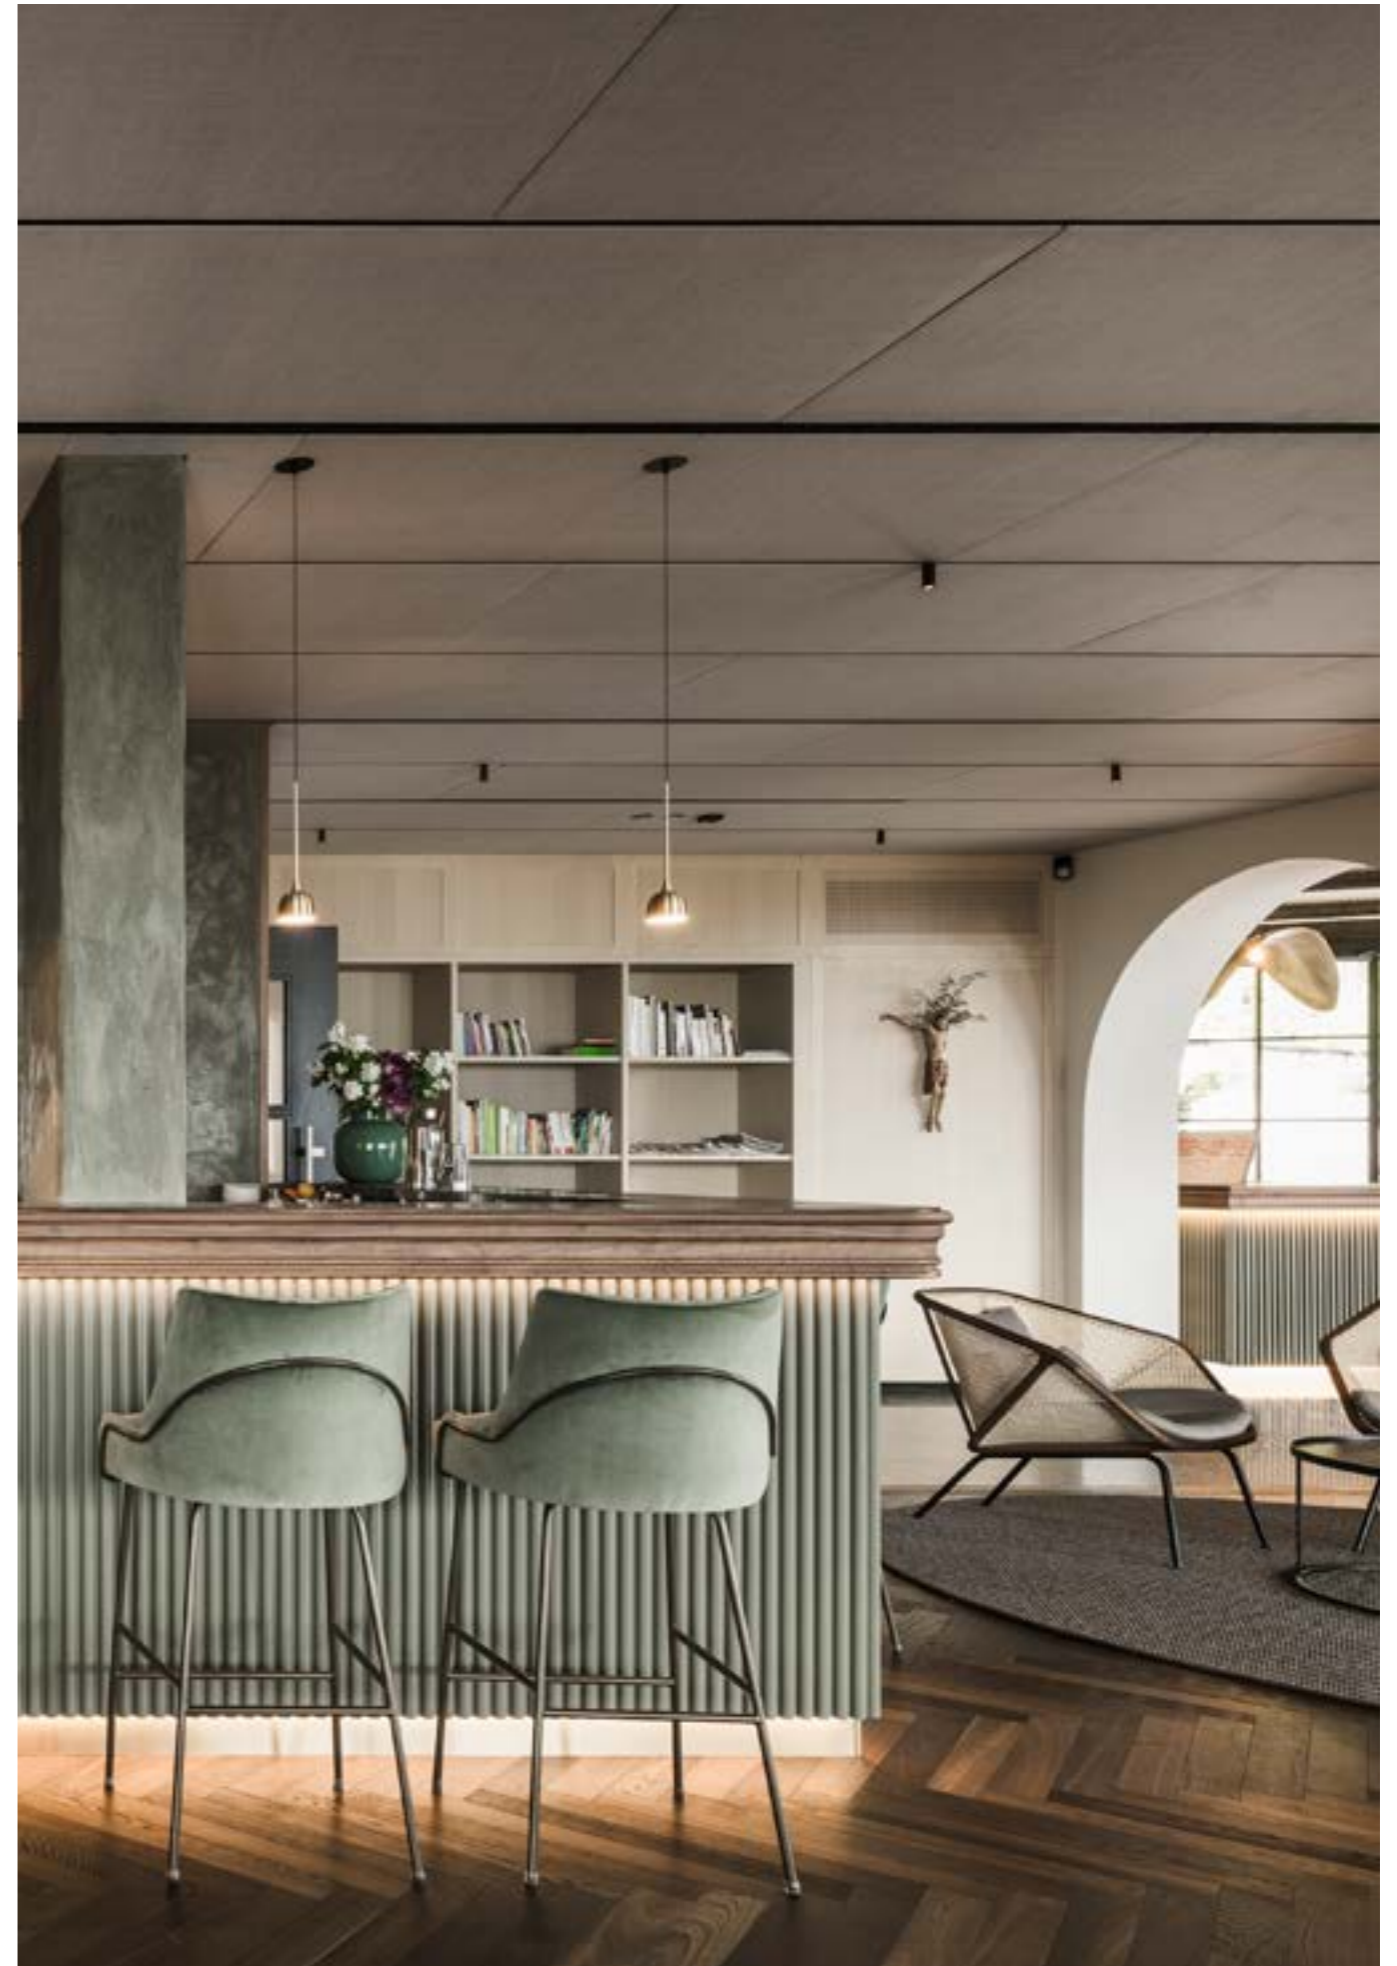



## CEILING ROSES AND ACCESSORIES FOR CASCADE COMPOSITIONS

### CEILING ROSE



Ceiling rose with driver without cable  
1 lamp

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/1** Ø 9,3 cm H 3 cm 0,13 Kg

.01 White  
.02 Black



Ceiling rose with driver without cable  
2 lamps

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/2** Ø 12,5 cm H 3 cm 0,20 Kg

.01 White  
.02 Black



Plasterboards Ceiling rose with driver  
1 lamp

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/R** Ø 9 cm 0,15 Kg

.01 White  
.02 Black




Ceiling rose with driver without cable  
4 lamps

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/4** Ø 20 cm H 3,5 cm 1,20 Kg

.01 White  
.02 Black

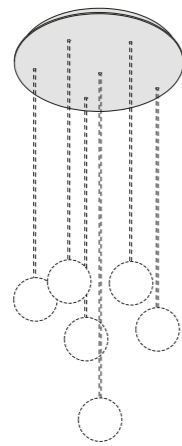


Ceiling rose with driver without cable  
6 lamps

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/6** Ø 27 cm H 3,5 cm 1,20

.01 White  
.02 Black

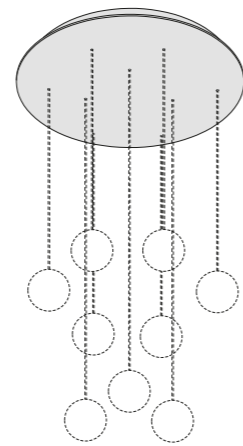

Ceiling rose with driver without cable  
9 lamps

**IN** 50/60Hz 220-240V

**OUT** 350mA DC

**0614/9** Ø 38 cm H 3,5 cm 2,40 Kg

.01 White  
.02 Black



## CEILING ROSES AND ACCESSORIES FOR CASCADE COMPOSITIONS


### ACCESSORIES

Metal Arch

**0302**


Metal arch for compositions with 2 lamps  
Ø 50cm H 1cm.

.02 Black

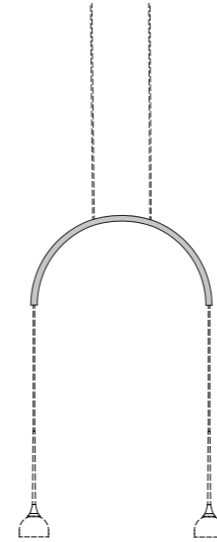

## CEILING ROSES AND ACCESSORIES FOR RADIAL COMPOSITIONS


### CEILING ROSE

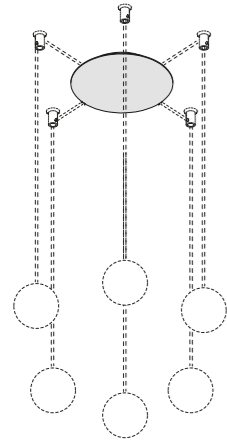

Ceiling rose with driver without cable  
3-6 lamps  
PUSH, DALI, 1...10V dimming on request  
**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0615/6**      Ø 27 cm H 3,5 cm   0,50 Kg

.01 White   
.02 Black

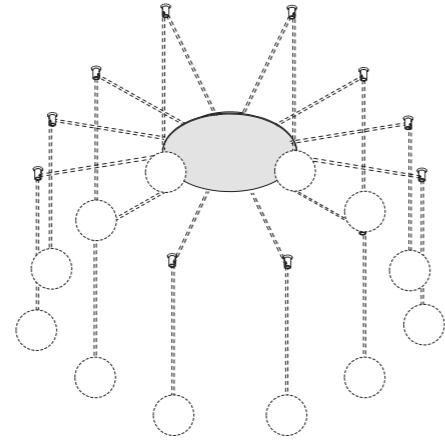

Ceiling rose with driver without cable  
7-12 lamps  
PUSH, DALI, 1...10V dimming on request  
**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0615/12**      Ø 38 cm H 4c m   1,80 Kg

.01 White   
.02 Black




### ACCESSORIES

Ring  
**0304**

Metal ring for compositions 3 to 6 lamps  
Ø 50 cm H 1 cm


.02 Black

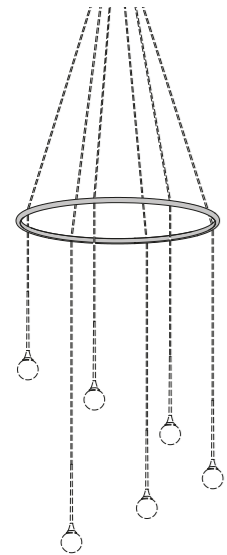

Element  
**0612**



1 Displacement element  
Ø 1,4 cm H 2,2 cm

.01 White   
.02 Black

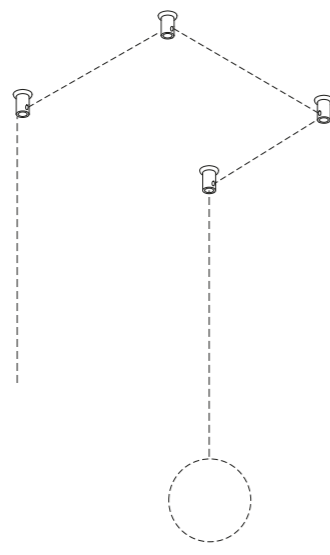

## CEILING ROSES AND ACCESSORIES FOR LINEAR COMPOSITIONS



### CEILING ROSE

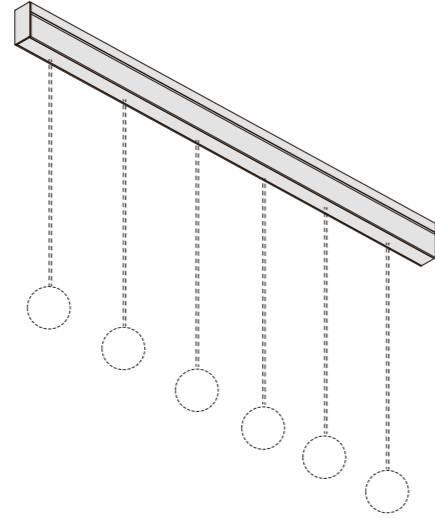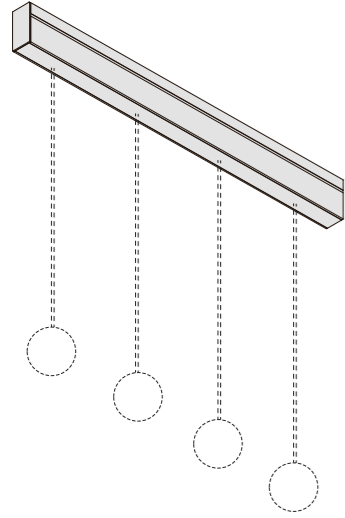

Ceiling rose with driver without cable  
4 lamps  
PUSH, DALI, 1...10V dimming on request  
**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0616/4** L 73 cm H 6,8 cm 1,10 Kg

.01 White   
.02 Black

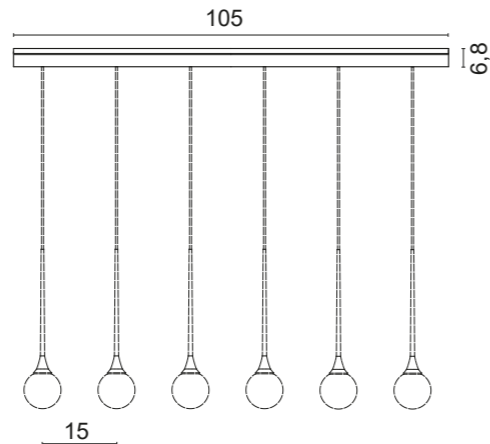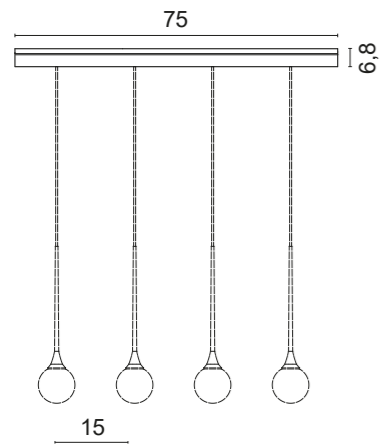

Ceiling rose with driver without cable  
6 lamps  
PUSH, DALI, 1...10V dimming on request  
**IN** 50/60Hz 220-240V  
**OUT** 350mA DC

**0616/6** L 105 cm H 6,8 cm 1,10 Kg



.01 White   
.02 Black



### ACCESSORIES

Kit  
**0305**

Connectors with wires

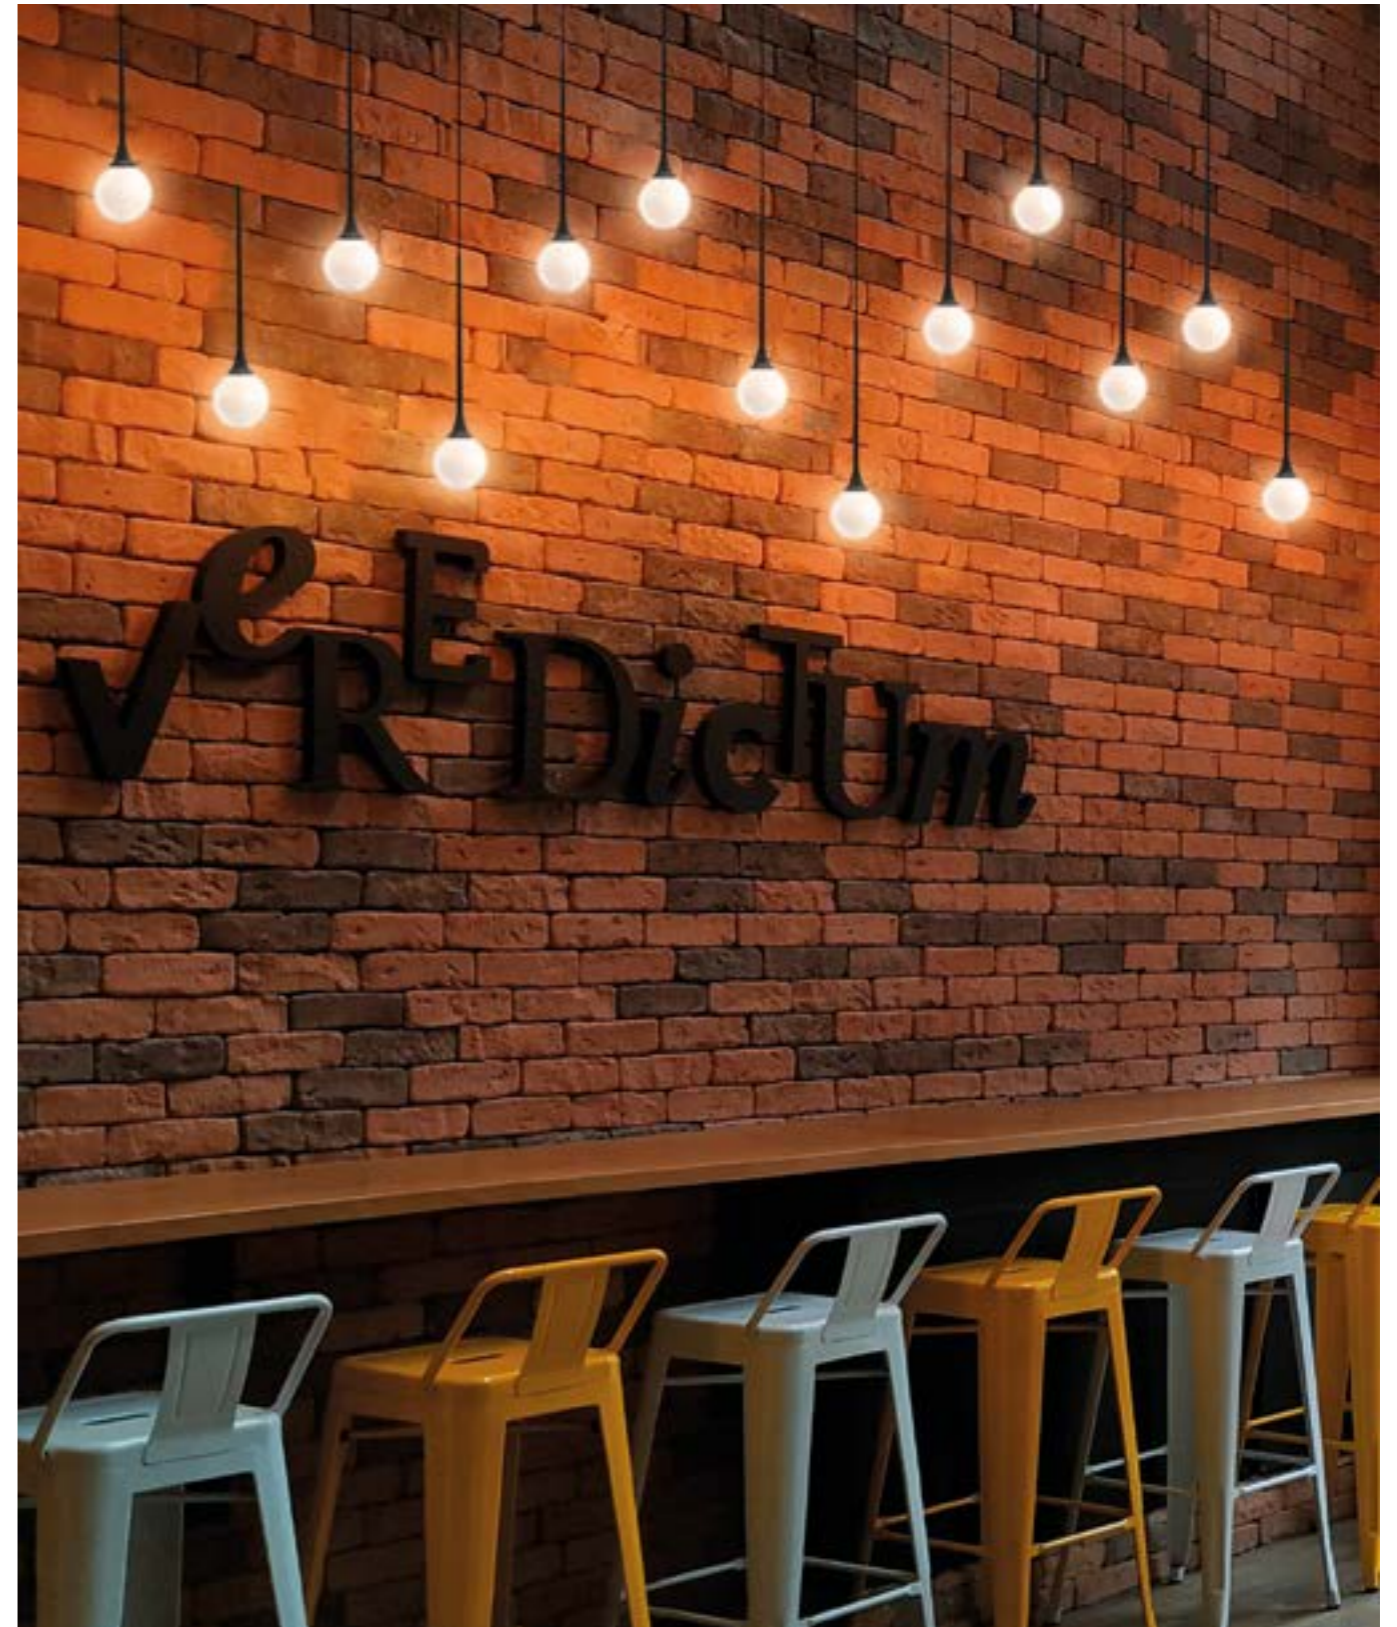



INDOOR

# VIRGOLA

Design LUX Studio



## VIRGOLA



Suspension and floor lamps with diffused light with aluminum body and opaline polycarbonate diffuser characterized by a large but slender arc.

The particularity of the luminous flux directed towards the inside of the arch guarantees good visual comfort and helps to enhance the lightness of the structure.

In the pendant version, the ceiling rose with the integrated driver must be ordered separately

*Lampes à suspension et lampadaires à lumière diffuse avec corps en aluminium et diffuseur en polycarbonate opalin caractérisé par un arc large mais élancé.*

*La particularité du flux lumineux dirigé vers l'intérieur de la voûte garantit un bon confort visuel et contribue à valoriser la légèreté de la structure.*

*Dans la version suspendue, la rosace avec l'alimentation doit être commandée séparément*

*Hänge und Stehleuchten mit diffusem Licht mit Aluminiumgehäuse und opalem Polycarbonat-Diffusor, der sich durch einen großen, aber schlanken Bogen auszeichnet.*


*Der besondere Lichtstrom, der auf die Innenseite des Bogens gerichtet ist, garantiert einen guten Sehkomfort und trägt dazu bei, die Leichtigkeit der Struktur zu verstärken.*

*Bei der Pendelversion muss die Rosette mit Netzteil separat bestellt werden*





# VIRGOLA

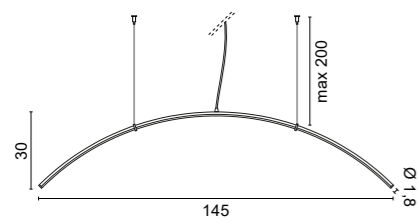


**1584** 0,45 Kg

- .01** White
- .02** Black
- .35** Painted Sand

<b>/W</b>	4000K	LED 24V 27W	3390lm
<b>/WW</b>	3000K	LED 24V 27W	3030lm
<b>/XW</b>	2700K	LED 24V 27W	2835lm



Ceiling roses with drivers are to be ordered separately

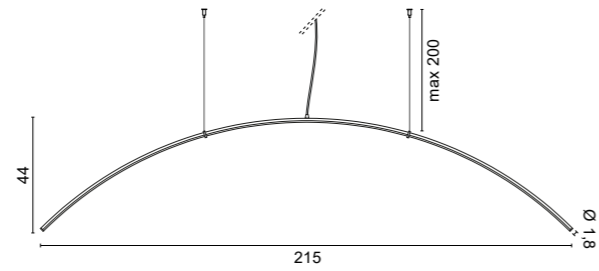

**1585** 0,70 Kg


- .01** White
- .02** Black
- .35** Painted Sand

<b>/W</b>	4000K	LED 24V 41,4W	5198lm
<b>/WW</b>	3000K	LED 24V 41,4W	4646lm
<b>/XW</b>	2700K	LED 24V 41,4W	4347lm




Ceiling roses with drivers are to be ordered separately

## FINISHES CODES

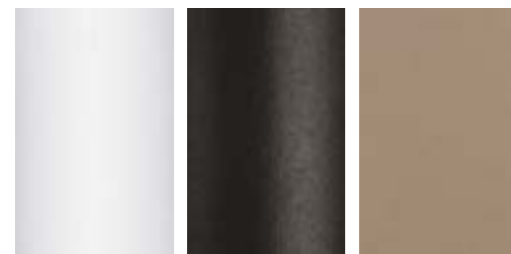


**.01** White    **.02** Black    **.35** Painted Sand

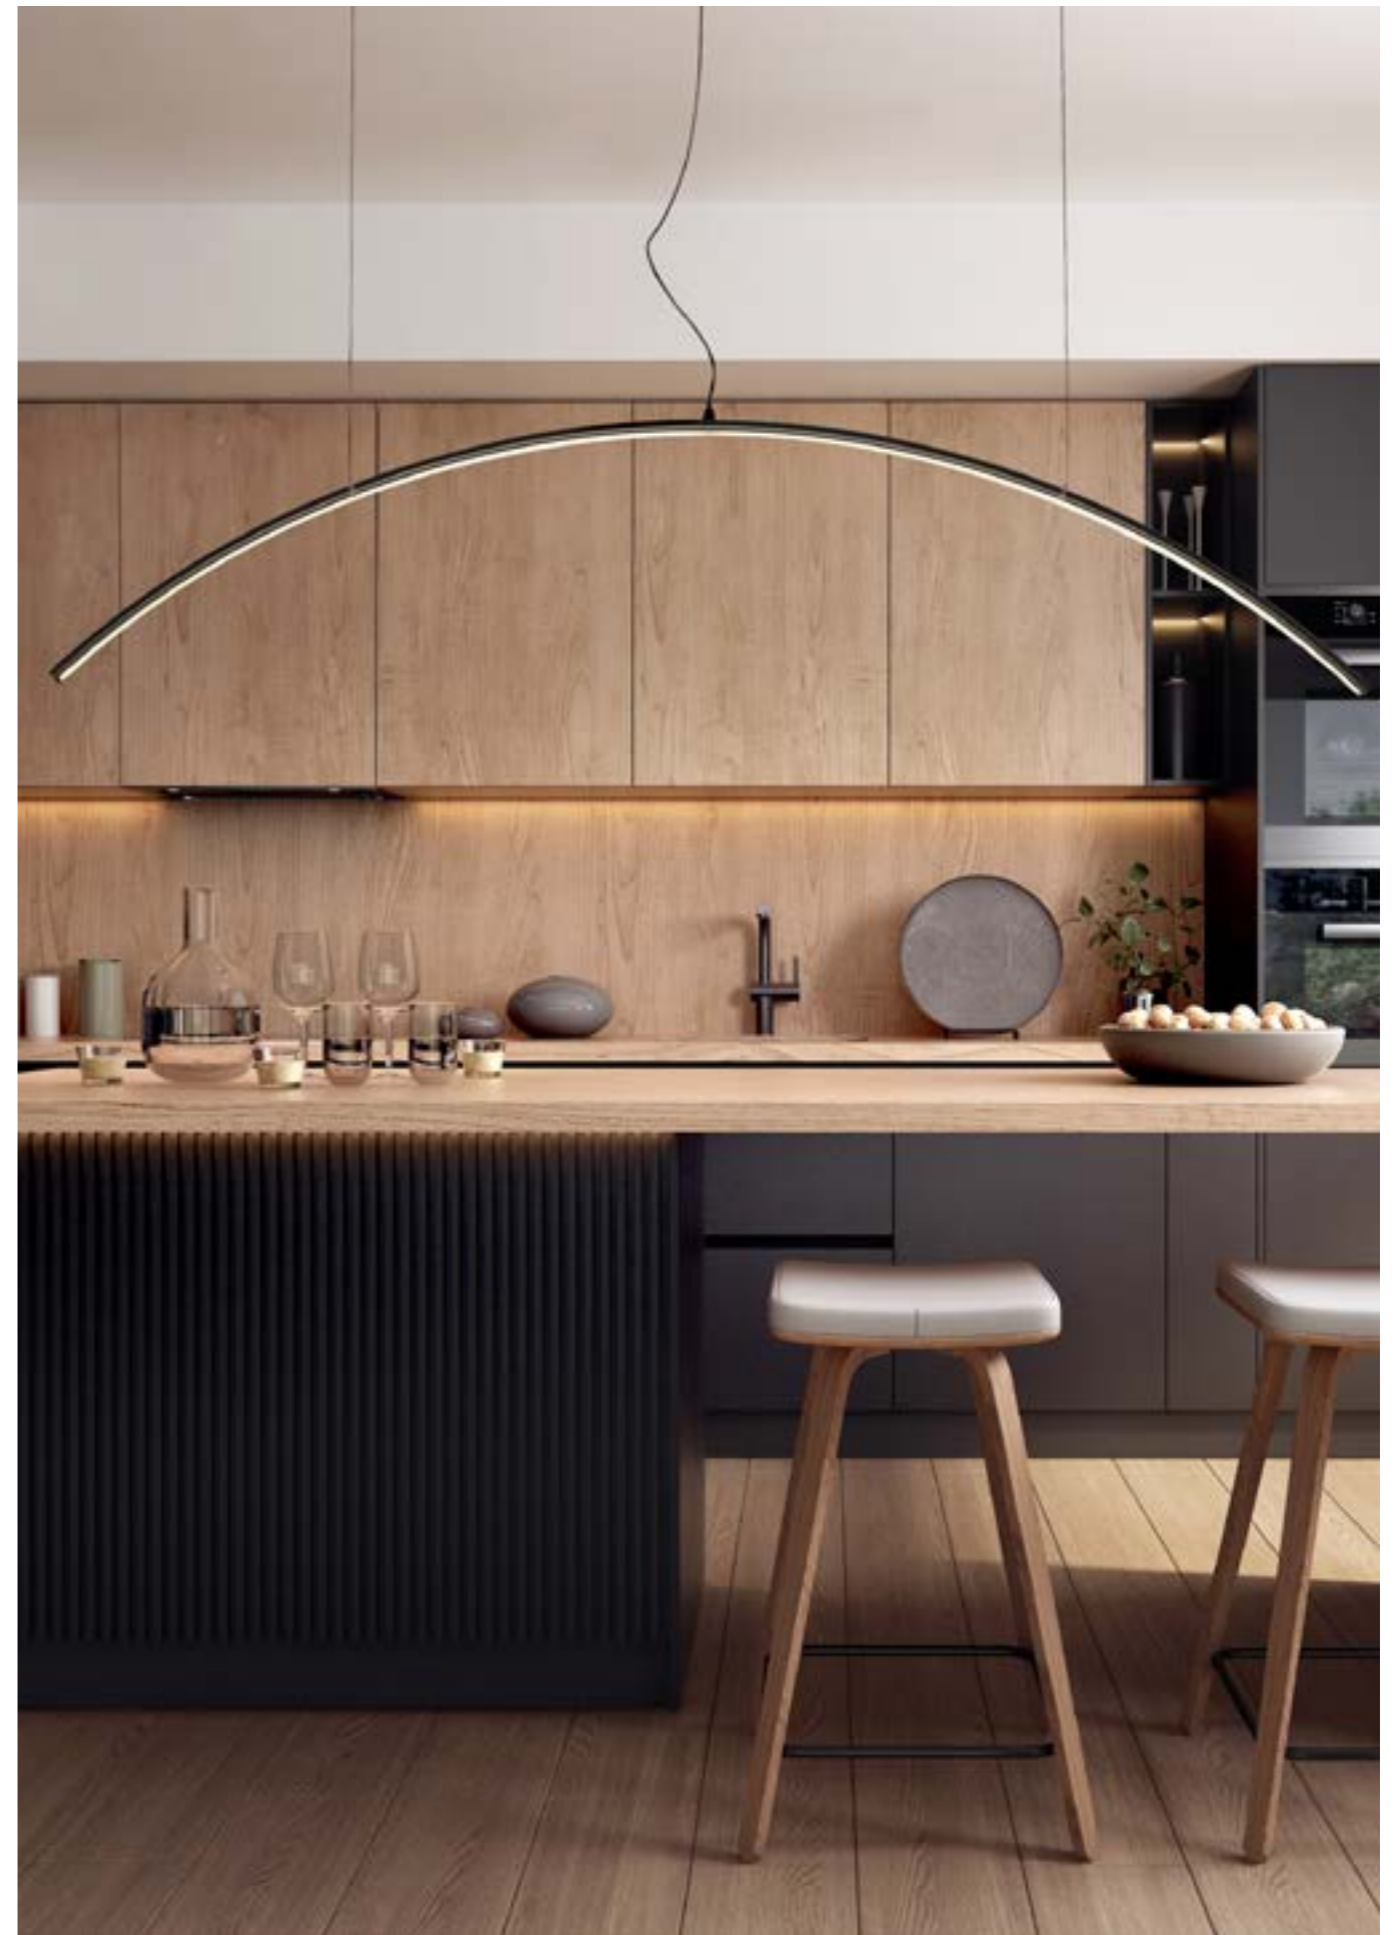

Ceiling roses with converter for suspension systems p.404


# VIRGOLA

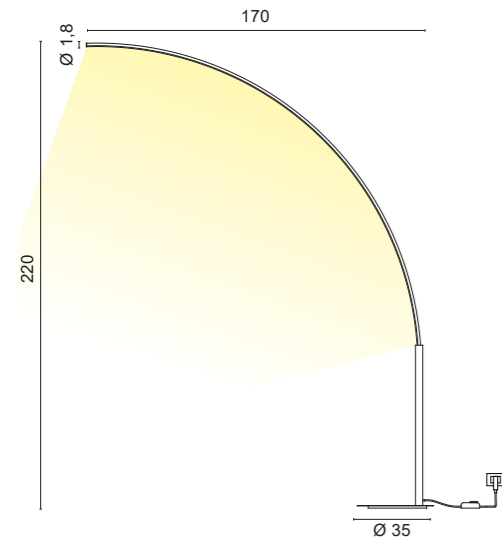

**3535** 7,00 Kg


<b>.01</b>	White	
<b>.02</b>	Black	
<b>.35</b>	Painted Sand	

<b>/W</b>	4000K	LED 33W	4048lm
<b>/WW</b>	3000K	LED 33W	3630lm
<b>/XW</b>	2700K	LED 33W	3432lm



With DIMMER on black cable


## FINISHES CODES

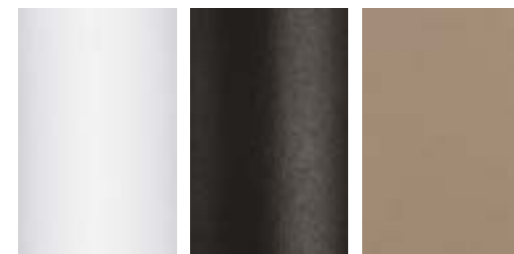

**.01** White    **.02** Black    **.35** Painted Sand




**CEILING ROSES SYSTEM 24V**  
VIRGOLA




Ceiling rose with **30W** driver 50/60Hz 220-230V

<b>0990/30</b>	0,50Kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black	<input checked="" type="checkbox"/>
<b>.23</b> Satin Aluminium	<input type="checkbox"/>




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0990/60</b>	0,70Kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black	<input checked="" type="checkbox"/>
<b>.85</b> Painted silver finishing	<input type="checkbox"/>
<b>.86</b> Painted gold finishing	<input type="checkbox"/>
<b>.87</b> Painted copper finishing	<input type="checkbox"/>
<b>.88</b> Painted bronze finishing	<input type="checkbox"/>
<b>/P</b> DIMMER	<input type="checkbox"/> PUSH MAX 60W
<b>/V</b> DIMMER	<input type="checkbox"/> 1...10V MAX 60W
<b>/D</b> DIMMER	<input type="checkbox"/> DALI MAX 60W




Ceiling rose with **150W** driver 50/60Hz 220-230V

<b>0990/150</b>	1,30Kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black	<input checked="" type="checkbox"/>
<b>.85</b> Painted silver finishing	<input type="checkbox"/>
<b>.86</b> Painted gold finishing	<input type="checkbox"/>
<b>.87</b> Painted copper finishing	<input type="checkbox"/>
<b>.88</b> Painted bronze finishing	<input type="checkbox"/>
<b>/P</b> DIMMER	<input type="checkbox"/> PUSH MAX 150W
<b>/V</b> DIMMER	<input type="checkbox"/> 1...10V MAX 150W
<b>/D</b> DIMMER	<input type="checkbox"/> DALI MAX 150W
<b>/T</b> DIMMER	<input type="checkbox"/> TRIAC MAX 150W




Ceiling rose with **60W** driver 50/60Hz 220-230V

<b>0993/60</b>	0,60Kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black with white base	<input checked="" type="checkbox"/>
<b>/P</b> DIMMER	<input type="checkbox"/> PUSH
<b>/V</b> DIMMER	<input type="checkbox"/> 1...10V
<b>/D</b> DIMMER	<input type="checkbox"/> DALI



Ceiling rose with **100W** driver 50/60Hz 220-230V

<b>0990/100</b>	1,30Kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black	<input checked="" type="checkbox"/>
<b>.85</b> Painted silver finishing	<input type="checkbox"/>
<b>.86</b> Painted gold finishing	<input type="checkbox"/>
<b>.87</b> Painted copper finishing	<input type="checkbox"/>
<b>.88</b> Painted bronze finishing	<input type="checkbox"/>
<b>/P</b> DIMMER	<input type="checkbox"/> PUSH MAX 100W
<b>/V</b> DIMMER	<input type="checkbox"/> 1...10V MAX 100W
<b>/D</b> DIMMER	<input type="checkbox"/> DALI MAX 100W
<b>/T</b> DIMMER	<input type="checkbox"/> TRIAC MAX 100W



Ceiling rose with **200W** driver 50/60Hz 220-230V

<b>0990/200</b>	2,00kg
<b>.01</b> White	<input type="checkbox"/>
<b>.02</b> Black	<input checked="" type="checkbox"/>
<b>.85</b> Painted silver finishing	<input type="checkbox"/>
<b>.86</b> Painted gold finishing	<input type="checkbox"/>
<b>.87</b> Painted copper finishing	<input type="checkbox"/>
<b>.88</b> Painted bronze finishing	<input type="checkbox"/>
<b>/P</b> DIMMER	<input type="checkbox"/> PUSH MAX 2x100W
<b>/V</b> DIMMER	<input type="checkbox"/> 1...10V MAX 2x100W
<b>/D</b> DIMMER	<input type="checkbox"/> DALI MAX 2x100W
<b>/T</b> DIMMER	<input type="checkbox"/> TRIAC MAX 2x100W





INDOOR

# SPIRITS

Design S. Cornelissen





## SPIRITS



Suspension lamp with indirect light with diffuser in turned aluminum sheet, metal stem, a closing disk of the base/dissipator in silkscreened methacrylate, and 250 cm black power cable.

The noteworthy positioning of the LEDs in the base generates unusual reflections and light beams.

The ceiling roses with led driver are to be ordered separately according to the type of composition chosen.

*Suspension à lumière indirecte avec diffuseur en tôle d'aluminium tournée, tige en métal, disque de fermeture de la base/dissipateur en méthacrylate sérigraphié et câble d'alimentation noir de 250 cm.*

*Le positionnement remarquable des LED dans la base génère des réflexions et des faisceaux lumineux inhabituels.*

*Les rosaces de plafond avec driver led sont à commander séparément en fonction du type de composition choisi.*


*Hängeleuchte mit indirektem Licht mit Diffusor aus gedrehtem Aluminiumblech, Metallstiel, einer Verschlusscheibe des Sockels/Dissipators aus Methacrylat mit Siebdruck und 250 cm schwarzem Stromkabel.*

*Die bemerkenswerte Positionierung der LEDs im Sockel erzeugt ungewöhnliche Reflektionen und Lichtstrahlen.*

*Die Deckenrosetten mit LED-Treiber sind je nach gewählter Zusammenstellung separat zu bestellen.*



# SPIRITS

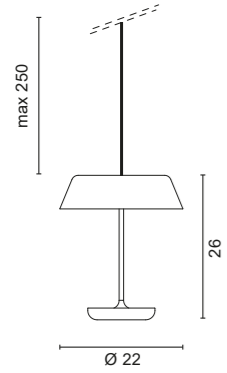

**1535** 1,00 Kg

- .01 White
- .01.30 Out white / In silver leaf
- .02.29 Out black / In gold leaf

/W	4000K	LED 51V 250mA 12,6W	2253lm
/WW	3000K	LED 51V 250mA 12,6W	2104lm
/XW	2700K	LED 51V 250mA 12,6W	1955lm




Only serial connection

## OPTIONAL

1 Displacement element Ø 1,7 cm H 2,2 cm  
**0605**

- .01 White
- .02 Black

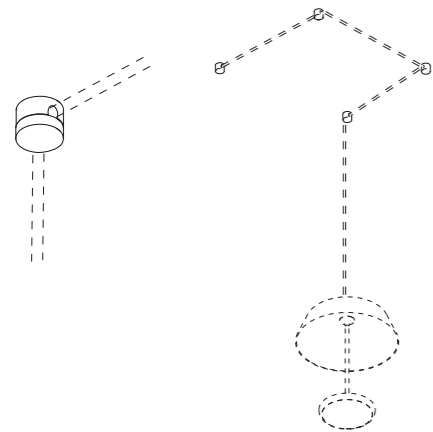

## FINISHES CODES




- .01 White
- .01.28 Out White In Silver leaf
- .02.29 Out Black In Gold leaf



Ceiling roses with converter for suspension systems p.412

## CEILING ROSES FOR SPIRITS COMPOSITIONS




Ceiling rose with converter  
1 Spirits

**IN** 50/60Hz 220-240V

**0951** 1,00 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI




Ceiling rose with converter  
2 Spirits

**IN** 50/60Hz 220-240V

**0952** 2,00 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI




Ceiling rose with converter  
4 Spirits

**IN** 50/60Hz 220-240V

**0953** 3,80 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI

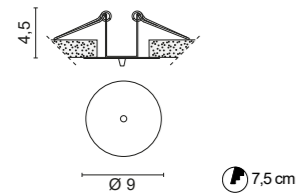


Plasterboard ceiling rose with converter  
1 Spirits

**IN** 50/60Hz 220-240V

**0954** 0,20 Kg

.01 White  
.02 Black

/DIM PUSH - 1... 10V  
/DALI DALI

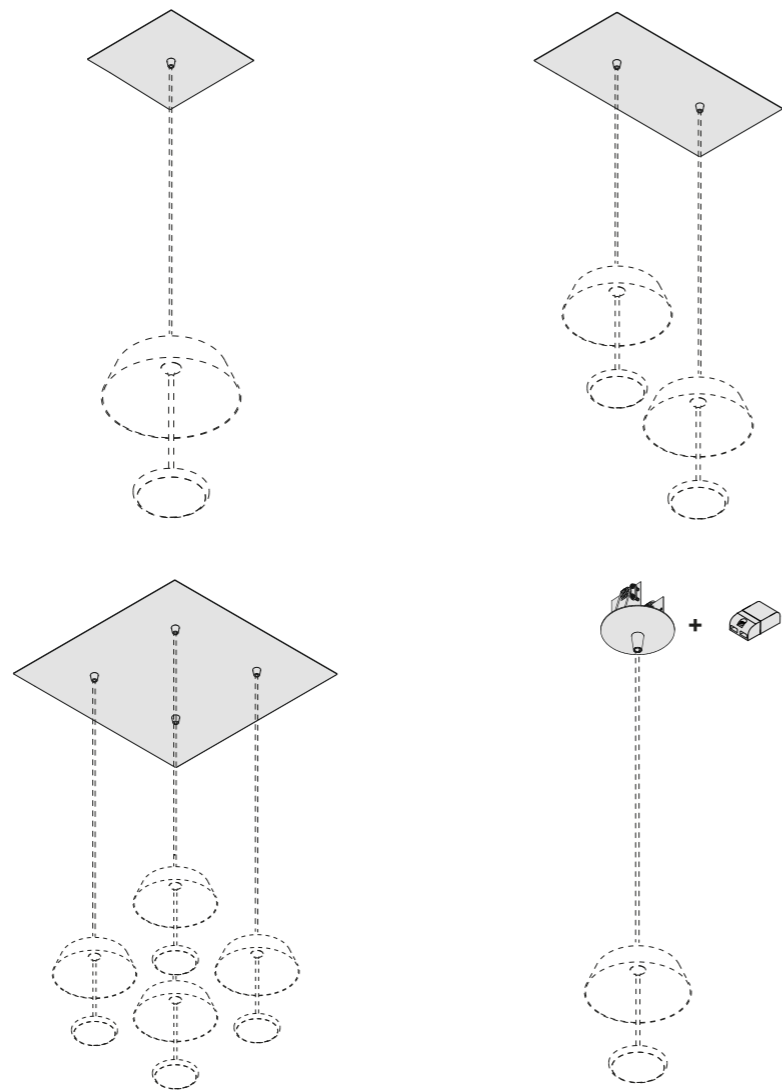



INDOOR

# RADAR

Design ABS Studio







## RADAR



Suspension lamp with lampshade in self-extinguishing PVC fabric.

Internal structure made with an aluminum profile and an opal polycarbonate diffuser.

Available in three sizes and different finishes.

The Radar collection is completed with the ceiling version

*Lampe à suspension avec abat-jour en tissu PVC auto-extinguible.*

*Structure interne réalisée avec un profil en aluminium et un diffuseur en polycarbonate opale.*

*Disponible en trois tailles et différentes finitions.*

*La collection Radar est complétée par la version plafonnier.*

*Pendelleuchte mit Lampenschirm aus selbstverlöschendem PVC-Gewebe.*


*Interne Struktur aus einem Aluminiumprofil und einem opalen Polycarbonat-Diffusor.*

*Erhältlich in drei Größen und verschiedenen Ausführungen.*

*Abgerundet wird die Radar-Kollektion durch die Deckenversion*



# RADAR

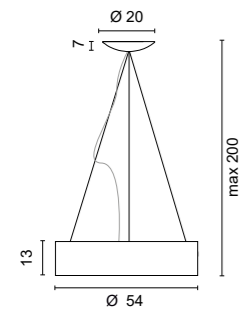


**1572** 1,80 Kg

- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

/W	4000K	LED 27W CRI>90	3390lm
/WW	3000K	LED 27W CRI>90	3030lm
/XW	2700K	LED 27W CRI>90	2835lm



Dimmable PUSH - 1... 10V - DALI on request




**1570** 2,50 Kg

- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

/W	4000K	LED 37,8W CRI>90	4746lm
/WW	3000K	LED 37,8W CRI>90	4242lm
/XW	2700K	LED 37,8W CRI>90	3969lm



Dimmable PUSH - 1... 10V - DALI on request

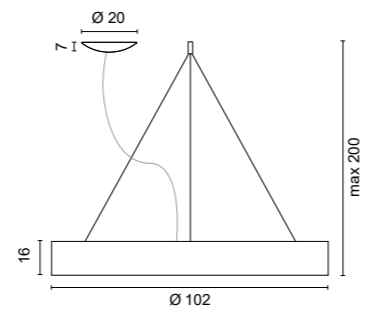

**1571** 3,00 Kg

- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

/W	4000K	LED 54W CRI>90	6780lm
/WW	3000K	LED 54W CRI>90	6060lm
/XW	2700K	LED 54W CRI>90	5670lm



Dimmable PUSH - 1... 10V - DALI on request

## OPTIONAL

Fixing element for 3 cables Ø 1,7 cm H 5,0 cm  
**0536 (only for Radar 1572)**

- .01 White
- .02 Black
- .25 Satin Gold
- .31 Chromed



## FINISHES CODES




- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold





# RADAR

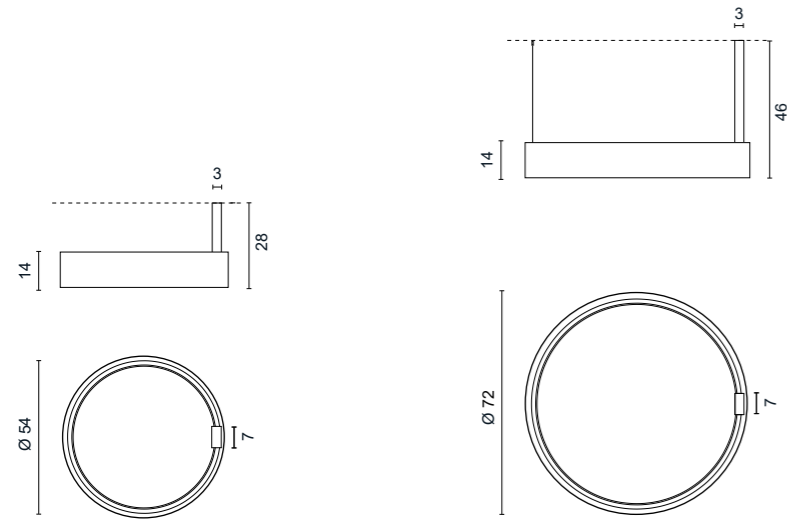

## 5607

1,80 Kg

- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

/W	4000K	LED 27W CRI>90	3390lm
/WW	3000K	LED 27W CRI>90	3030lm
/XW	2700K	LED 24V CRI>90	2835lm



Dimmable PUSH - 1... 10V - DALI on request

## 5608

3,70 Kg

- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

/W	4000K	LED 36W CRI>90	4520lm
/WW	3000K	LED 36W CRI>90	4040lm
/XW	2700K	LED 36W CRI>90	3780lm




Dimmable PUSH - 1... 10V - DALI on request

## FINISHES CODES



- .01 White
- .02.01 Out Black / In White
- .02.21 Out Black / In Shiny gold

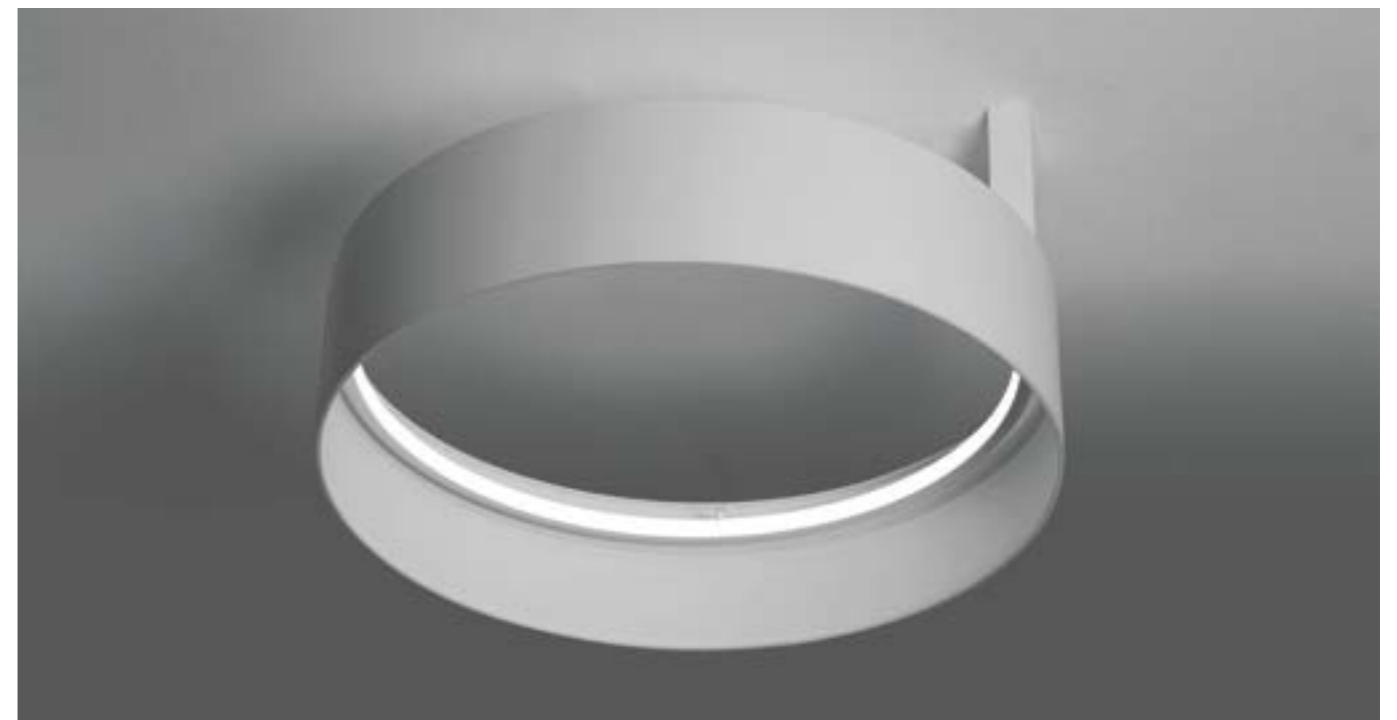



INDOOR

# GIOVE

Design ABS Studio



## GIOVE



Grand suspension or ceiling lamp providing direct light with turned aluminum structure and lamp holder with E27 fitting. Available in three different finishes, some very unique such as gold leaf.

The half-sphere shape and different E27 sources generate pleasant ambient light effects well suited to any type of environment, public or private, and any style, classic or modern.


*Grande suspension ou plafonnier à lumière directe avec structure en aluminium tourné et douille avec raccord E27. Disponible en trois finitions différentes, dont certaines très uniques comme la feuille d'or.*

*La forme en demi-sphère et les différentes sources E27 génèrent d'agréables effets de lumière ambiante qui s'adaptent à tout type d'environnement, public ou privé, et à tout style, classique ou moderne.*

*Große Hänge- oder Deckenleuchte für direktes Licht mit gedrehter Aluminiumstruktur und Lampenfassung mit E27-Anschluss. Erhältlich in drei verschiedenen Ausführungen, einige davon sehr einzigartig, wie z.B. Blattgold.*

*Die Halbkugelform und die verschiedenen E27-Leuchtmittel erzeugen ein angenehmes Umgebungslicht, das sich für jede Art von Umgebung, ob öffentlich oder privat, und jeden Stil, ob klassisch oder modern, eignet.*



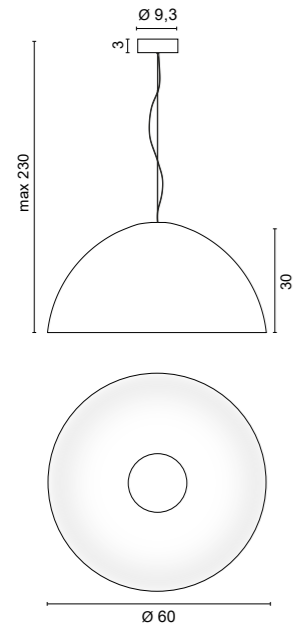

**1599** 3,50 Kg

- .01** White ■
- .02** Black ■
- .02.01** Out black / In white ■
- .02.29** Out black / gold leaf ■

Light source not included  
E27 LED 11W 1521lm **(art. 0106/ML/...)**



**OPTIONAL**

Displacement component Ø 1 cm H 3,5 cm


- .31** Cromed ■



**FINISHES CODES**



- .01** White
- .02** Black
- .02.01**  
Out black  
In white
- .02.29**  
Out Black  
In Gold leaf

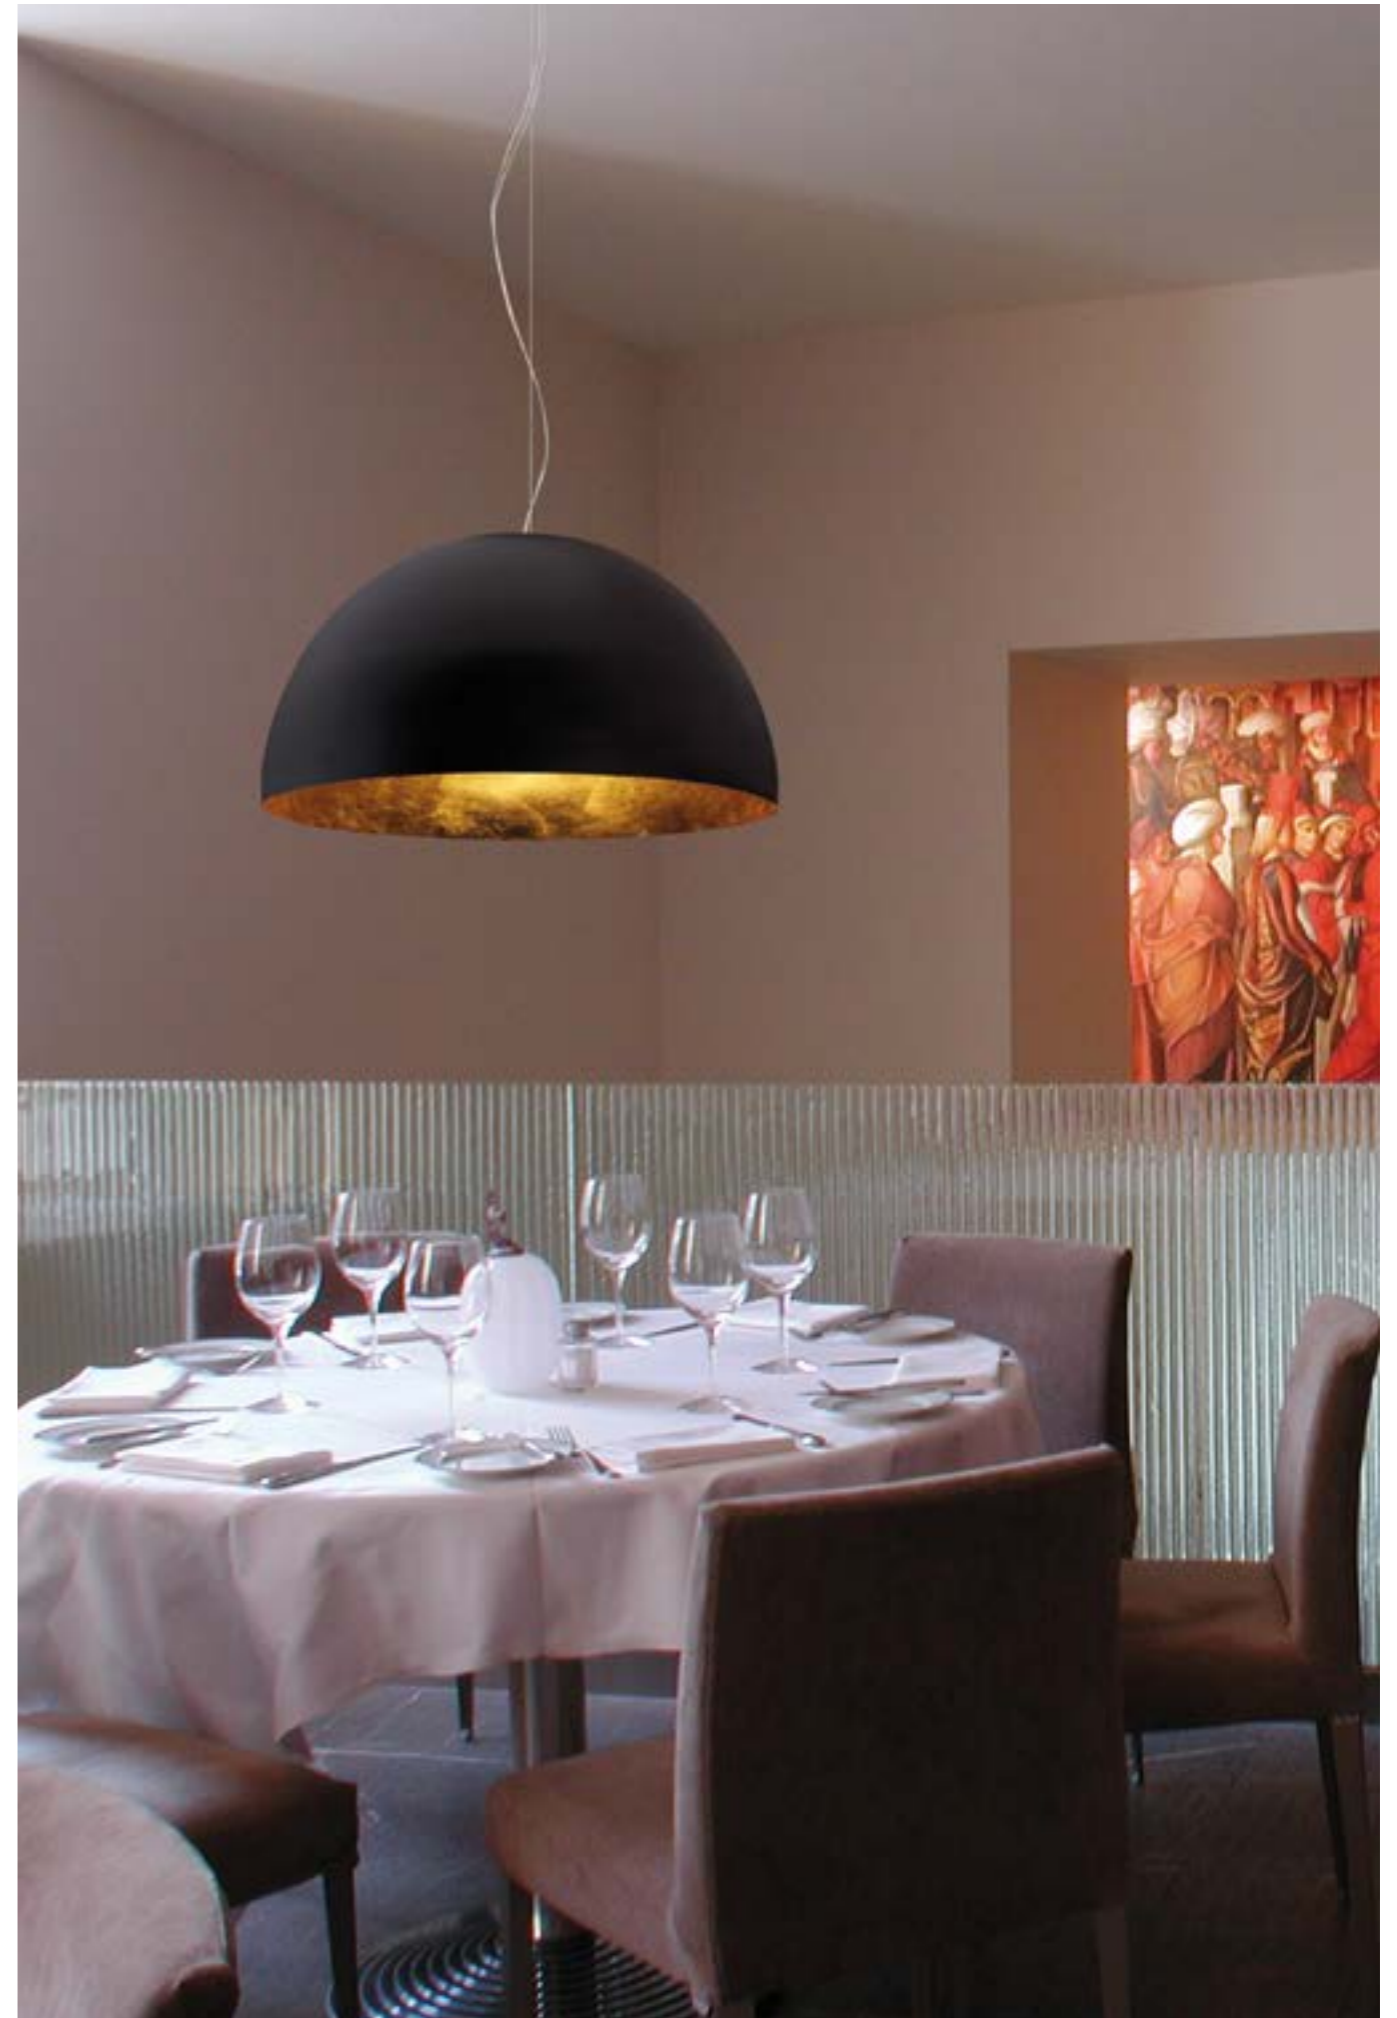







INDOOR

# AURORA

Design LUX Studio



## AURORA



Aurora family offers wall and ceiling lamps with indirect light, aluminum, and metal structures.

The light source with COB LED technology and separate driver guarantees a high luminous efficiency of more than 2300lm at 3000K with a consumption of only 13.8W.

The ability to direct and control the light emission allows you to make the most of the qualities of the LED source while avoiding annoying glare phenomena.

*La famille Aurora propose des appliques et des plafonniers à lumière indirecte, en aluminium et à structure métallique.*

*La source lumineuse dotée de la technologie LED COB et d'un driver séparé garantit une efficacité lumineuse élevée de plus de 2300lm à 3000K avec une consommation de seulement 13,8W.*

*La possibilité de diriger et de contrôler l'émission de lumière permet d'exploiter au mieux les qualités de la source LED tout en évitant les phénomènes d'éblouissement gênants.*


*Die Aurora-Familie bietet Wand- und Deckenleuchten mit indirektem Licht, Aluminium- und Metallstrukturen.*

*Die Lichtquelle mit COB-LED-Technologie und separatem Treiber garantiert eine hohe Lichtausbeute von mehr als 2300lm bei 3000K mit einem Verbrauch von nur 13,8W.*

*Die Möglichkeit, den Lichtaustritt zu lenken und zu kontrollieren, erlaubt es, die Qualitäten der LED-Quelle optimal zu nutzen und gleichzeitig störende Blendungserscheinungen zu vermeiden.*




# AURORA

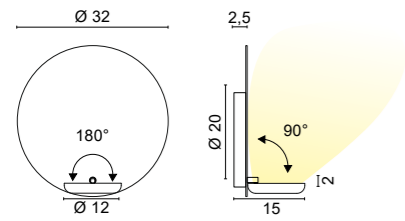

**4627** 1,50 Kg

<b>.01</b>	White	
<b>.02.29</b>	Black, Gold leaf	
<b>.25.01</b>	Satin gold, White	
<b>.32.01</b>	Nickel mat, White	

<b>/W</b>	4000K	LED 12,6W	2255lm
<b>/WW</b>	3000K	LED 12,6W	2104lm
<b>/XW</b>	2700K	LED 12,6W	1955lm

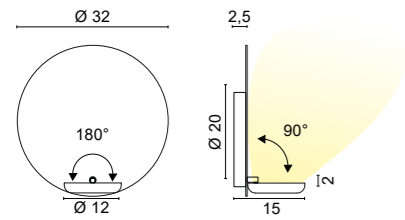


**4629** 1,50 Kg

<b>.01</b>	White	
<b>.02.29</b>	Black, Gold leaf	
<b>.25.01</b>	Satin gold, White	
<b>.32.01</b>	Nickel mat, White	

<b>/W</b>	4000K	LED 12,6W	2390lm
<b>/WW</b>	3000K	LED 12,6W	2253lm
<b>/XW</b>	2700K	LED 12,6W	2156lm



DALI dimming

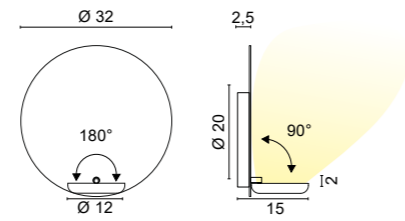

**4628** 1,50 Kg

<b>.01</b>	White	
<b>.02.29</b>	Black, Gold leaf	
<b>.25.01</b>	Satin gold, White	
<b>.32.01</b>	Nickel mat, White	

<b>/W</b>	4000K	LED 12,6W	2255lm
<b>/WW</b>	3000K	LED 12,6W	2104lm
<b>/XW</b>	2700K	LED 12,6W	1955lm



PUSH - 1...10V dimming



## FINISHES CODES



**.01** White    **.02.29** Black Gold Leaf    **.25.01** Gold Satin White    **.32.01** Nickel mat White





# AURORA

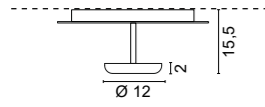

**5675** 1,50 Kg

**.01** White

<b>/W</b>	4000K	LED 12,6W	2255lm
<b>/WW</b>	3000K	LED 12,6W	2104lm
<b>/XW</b>	2700K	LED 12,6W	1955lm

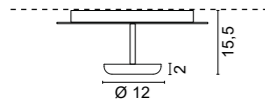

**5677** 1,50 Kg

**.01** White

<b>/W</b>	4000K	LED 12,6W	2255lm
<b>/WW</b>	3000K	LED 12,6W	2104lm
<b>/XW</b>	2700K	LED 12,6W	1955lm





DALI dimming

## FINISHES CODES



**.01** White

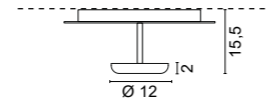


**5676** 1,50 Kg

**.01** White

<b>/W</b>	4000K	LED 12,6W	2255lm
<b>/WW</b>	3000K	LED 12,6W	2104lm
<b>/XW</b>	2700K	LED 12,6W	1955lm



PUSH - 1...10V dimming

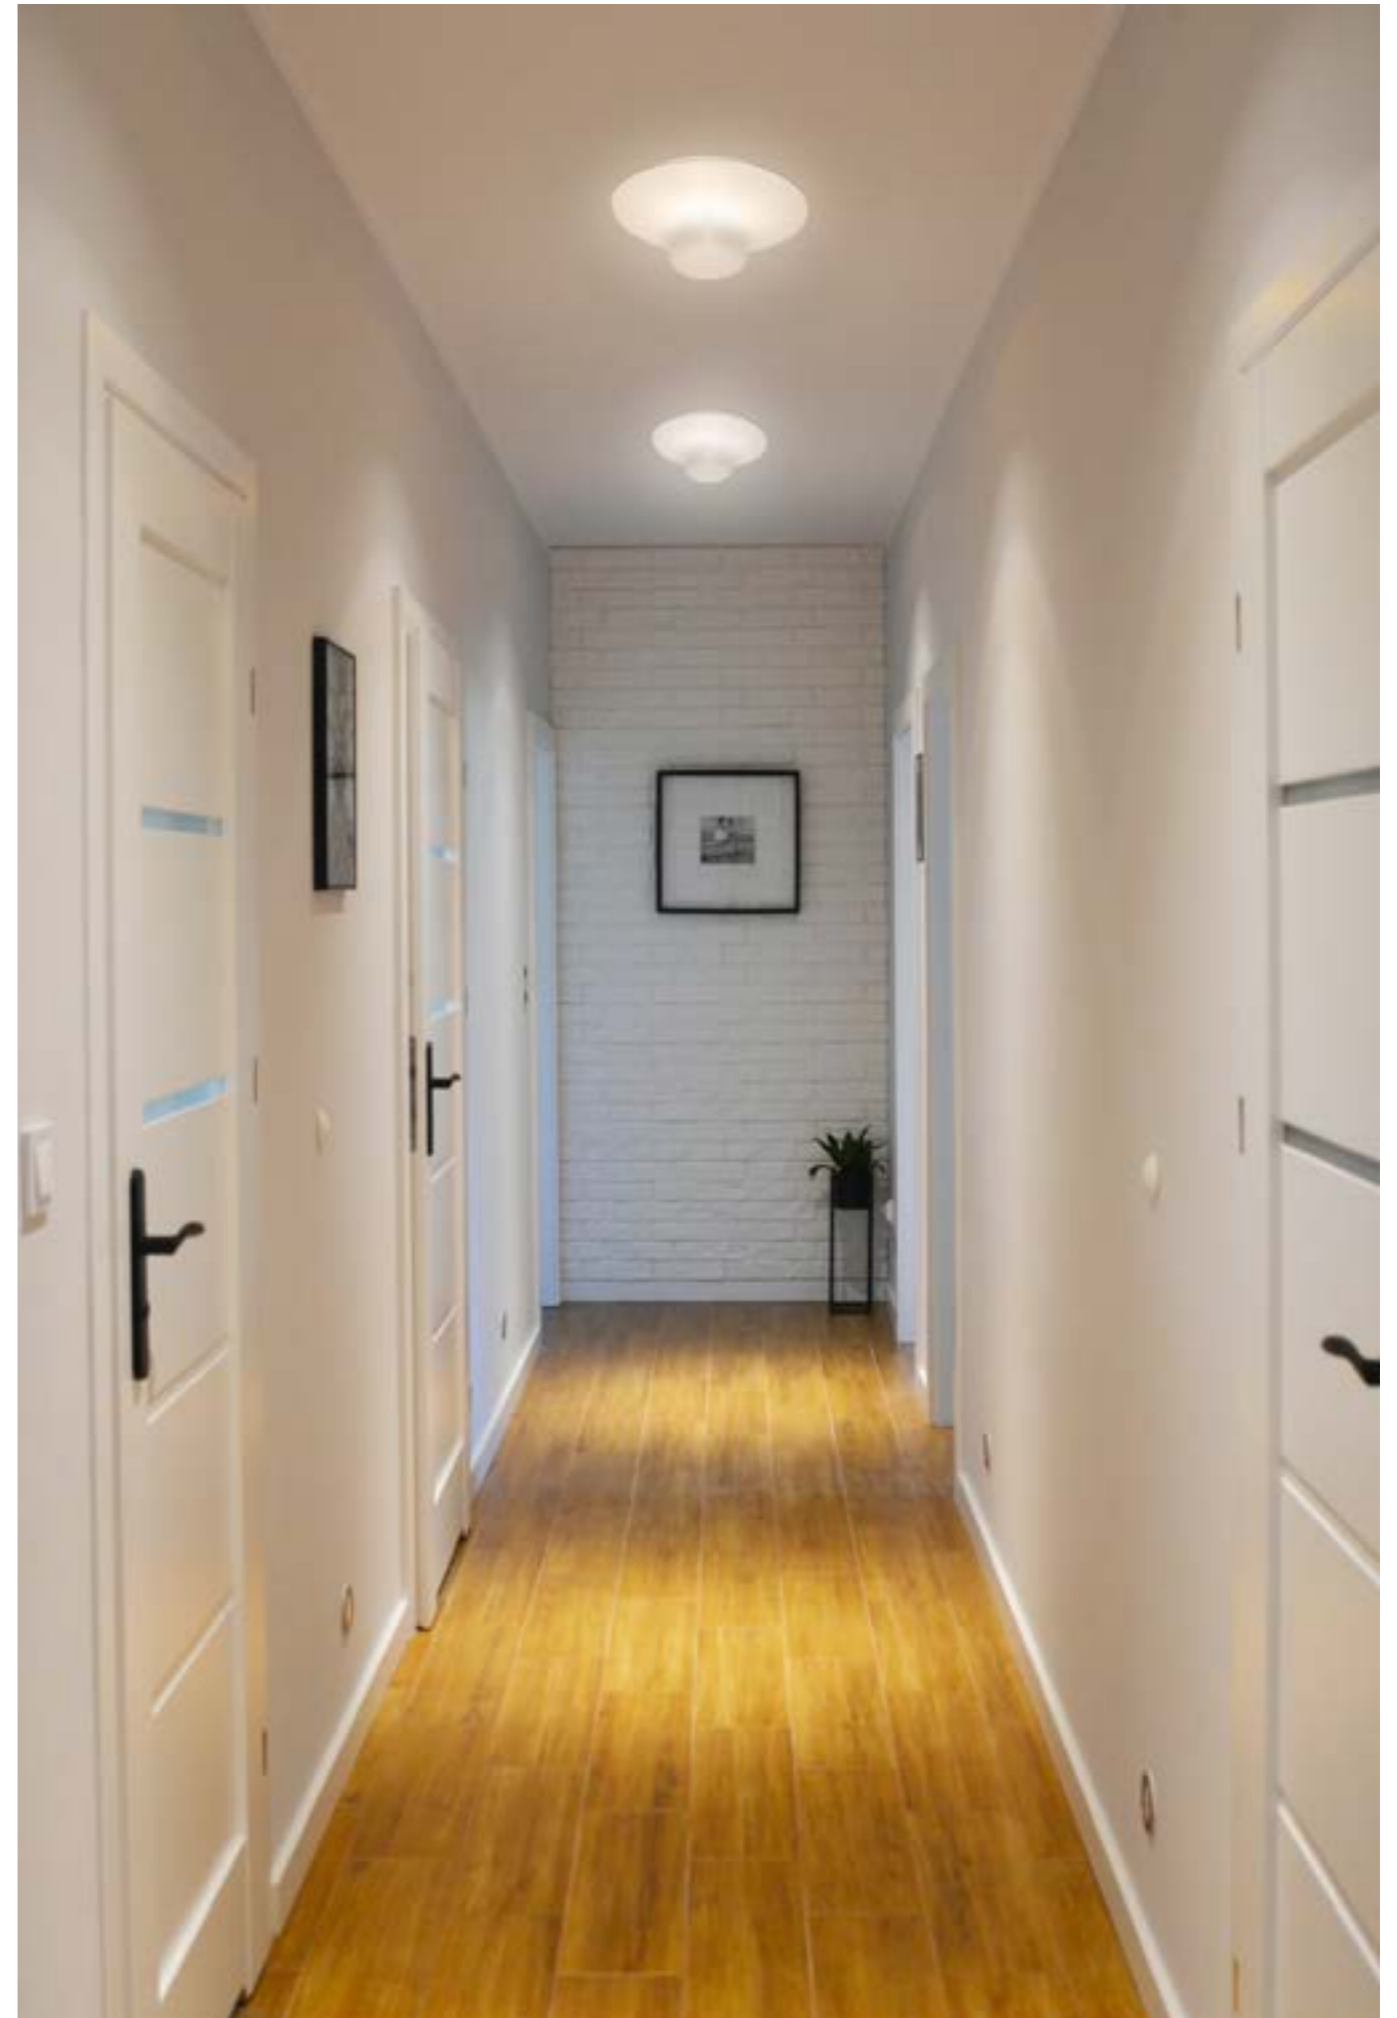

INDOOR

# MOONLIGHT

Design ABS Studio





## MOONLIGHT



Ceiling or Wall Lamps with radial light characterized by a front disc in MDF that can be painted with water-based or alternative paint.

Available in three sizes, meanwhile the smallest allows the mirror disc solution as well. Although feeding from a single supply point, connection between different fittings through the special kit to be ordered separately allows multiple compositions. Dimmable version on request.

*Plafonniers ou Appliques à lumière radiale caractérisés par un disque frontal en MDF pouvant être peint avec une peinture à l'eau ou autre choix.*

*Disponibile en trois dimension. Seulement la version petite est aussi disponible en miroir. A partir d'un seul point d'approvisionnement, il est possible de créer des compositions en croisant plusieurs éléments avec un kit spécial à commander séparément. Version dimmable sur demande.*


Decken- oder Wandleuchten mit radialem Licht zeichnet sich durch eine Frontscheibe aus MDF aus, die mit Farbe auf Wasserbasis oder alternativen Farben gestrichen werden kann.

Erhältlich in drei Größen, wobei die kleinste auch die Lösung mit Spiegelscheibe ermöglicht. Obwohl sie von einer einzigen Versorgungsstelle gespeist wird, ermöglicht die Verbindung zwischen verschiedenen Armaturen durch den separat zu bestellenden Speziatsatz) mehrere Kompositionen.



Arch. Laura Verdi, DEMO HOTEL  
Ph. Flavio Ricci

# MOONLIGHT




**4582** 2,75 Kg

- .01** White
- .14** Blackboard
- .29** Gold leaf
- .30** Silver Leaf
- .56** Mirror  4,00 Kg

<b>/W</b>	4000K	LED 15W	CRI>90	1840lm
<b>/WW</b>	3000K	LED 15W	CRI>90	1650lm
<b>/XW</b>	2700K	LED 15W	CRI>90	1560lm

**/DIM** 1... 10V dimming  1...10V

**/DALI** PUSH, DALI dimming  PUSH  DALI

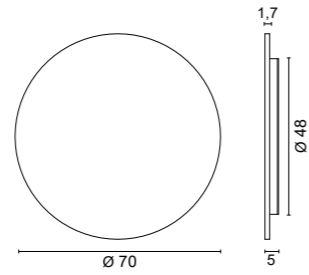

**4583** 5,00 Kg

- .01** White
- .14** Blackboard
- .29** Gold leaf
- .30** Silver Leaf
- .56** Mirror  7,85 Kg

<b>/W</b>	4000K	LED 24W	CRI>90	2944lm
<b>/WW</b>	3000K	LED 24W	CRI>90	2640lm
<b>/XW</b>	2700K	LED 24W	CRI>90	2496lm

**/DIM** 1... 10V dimming  1...10V

**/DALI** PUSH, DALI dimming  PUSH  DALI





## OPTIONAL


Kit for overlapping only for art.4582-4583

### 0963

- .01** White




## FINISHES CODES

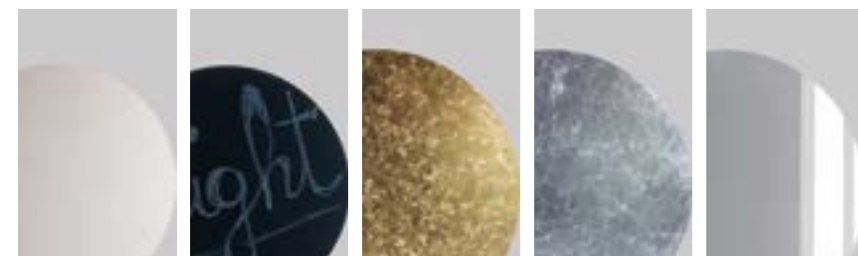

- .01** Raw White
  - .14** Blackboard
  - .29** Gold Leaf
  - .30** Silver Leaf
  - .56** Mirror
- To be painted **Wall mount only**



# MOONLIGHT

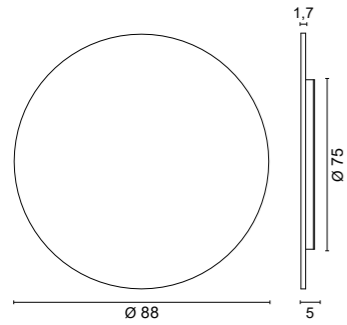

**4620** 9,00 Kg

<b>.01</b>	White	
<b>.14</b>	Blackboard	
<b>.29</b>	Gold leaf	
<b>.30</b>	Silver Leaf	

<b>/W</b>	4000K	LED 33W	CRI>90	4150lm
<b>/WW</b>	3000K	LED 33W	CRI>90	3700lm
<b>/XW</b>	2700K	LED 33W	CRI>90	3460lm


**/DIM** 1... 10V dimming

**/DALI** PUSH, DALI dimming


**Wall mount only**

**Art.4620** can be used in multiple installation as long it is positioned as a starting lamp on the wall

## FINISHES CODES

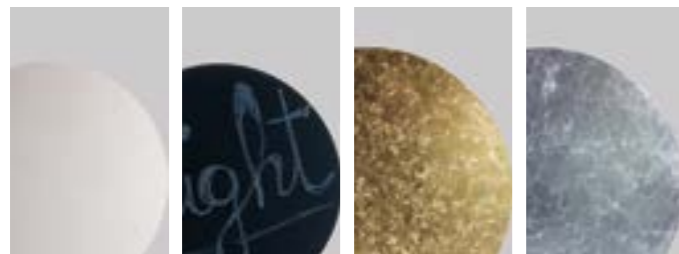

**.01** Raw White **.14** Blackboard **.29** Gold Leaf **.30** Silver Leaf  
To be painted

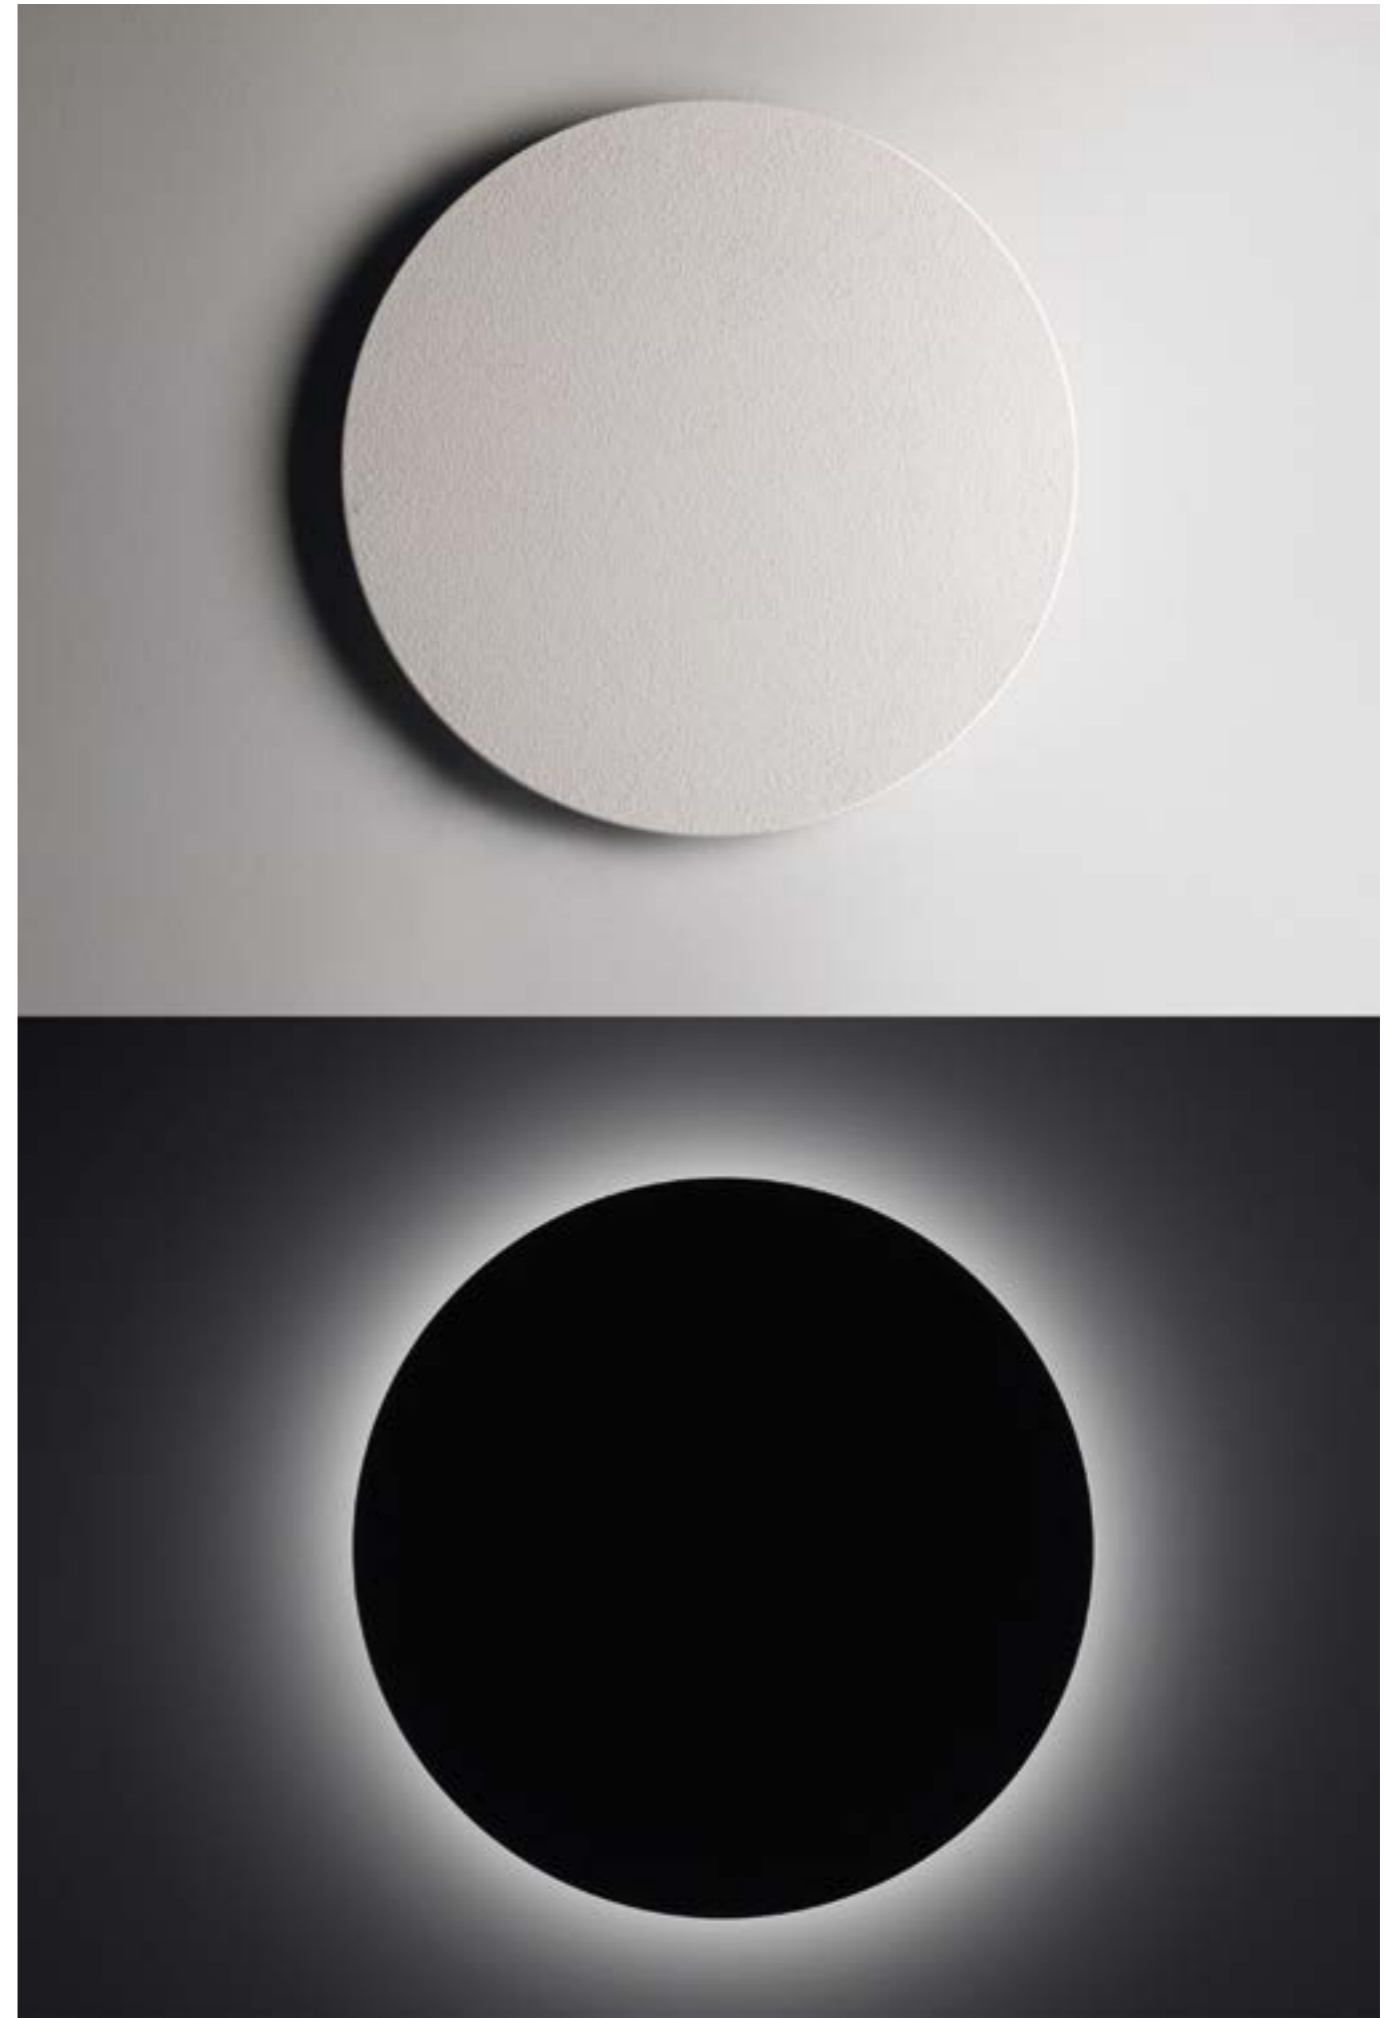





# MOONLIGHT




## OPTIONAL

Kit for overlapping only for art.4582-4583



**0963**

.01 White


1.32



Art.4620 can be used in multiple installation as long it is positioned as a starting lamp on the wall

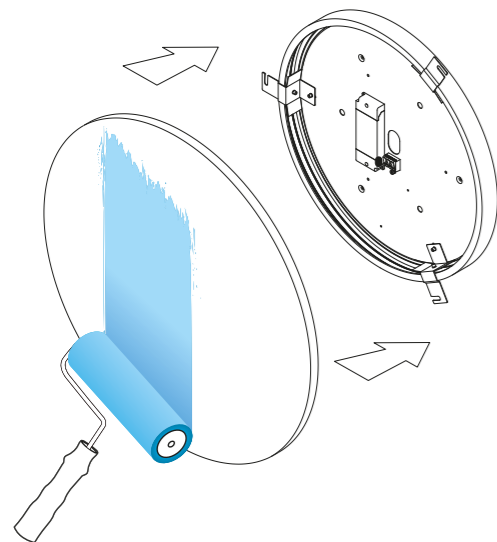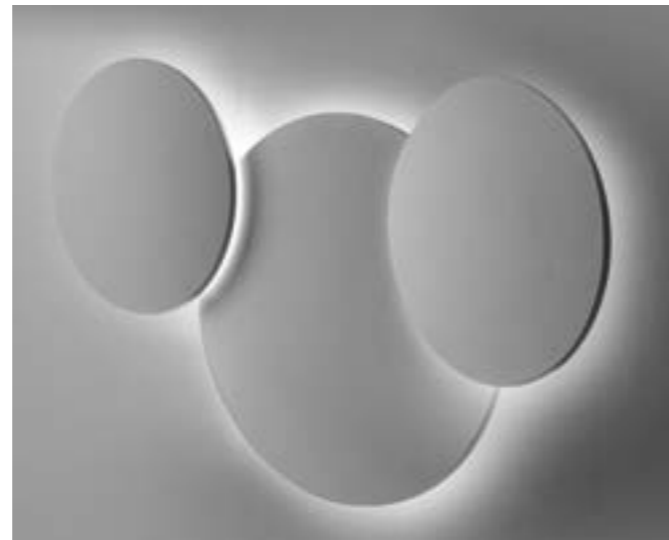

Example of single installation

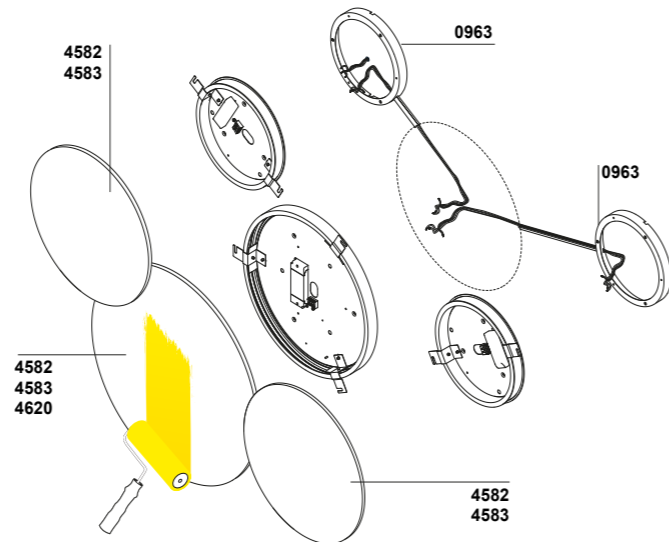

Example of multiple installation with spacers **0963**









INDOOR

# Q-LIGHT

Design ABS Studio



## Q-LIGHT



Ceiling or Wall Lamps with radial light characterized by a front screen in MDF that can be painted with water-based or alternative paint.


Available in three sizes, meanwhile the smallest allows the mirror disc solution as well. Although feeding from a single supply point, connection between different fittings through the special kit to be ordered separately (Art.0963) allows multiple compositions. Dimmable version on request.

*Plafonniers ou Appliques à lumière radiale caractérisés par un écran frontal en MDF pouvant être peint avec une peinture à l'eau ou autre choix.*


*Disponibile en trois dimension. Seulement la versión petite est aussi disponible en miroir. A partir d'un seul point d'approvisionnement, il est possible de créer des compositions en croisant plusieurs éléments avec un kit spécial à commander séparément (Art.0963). Version dimmable sur demande.*

Decken- oder Wandleuchten mit radialem Licht, gekennzeichnet durch eine Frontscheibe aus MDF, die mit Wasserbasis oder alternativer Farbe lackiert werden kann.

Erhältlich in drei Größen, die kleinste erlaubt mittlerweile auch die Spiegelscheibenlösung. Obwohl die Versorgung von einem einzigen Versorgungspunkt erfolgt, ermöglicht die Verbindung zwischen verschiedenen Armaturen durch das separat zu bestellende Spezialset (Art.0963) mehrere Zusammensetzungen. Dimmbare Ausführung auf Anfrage.

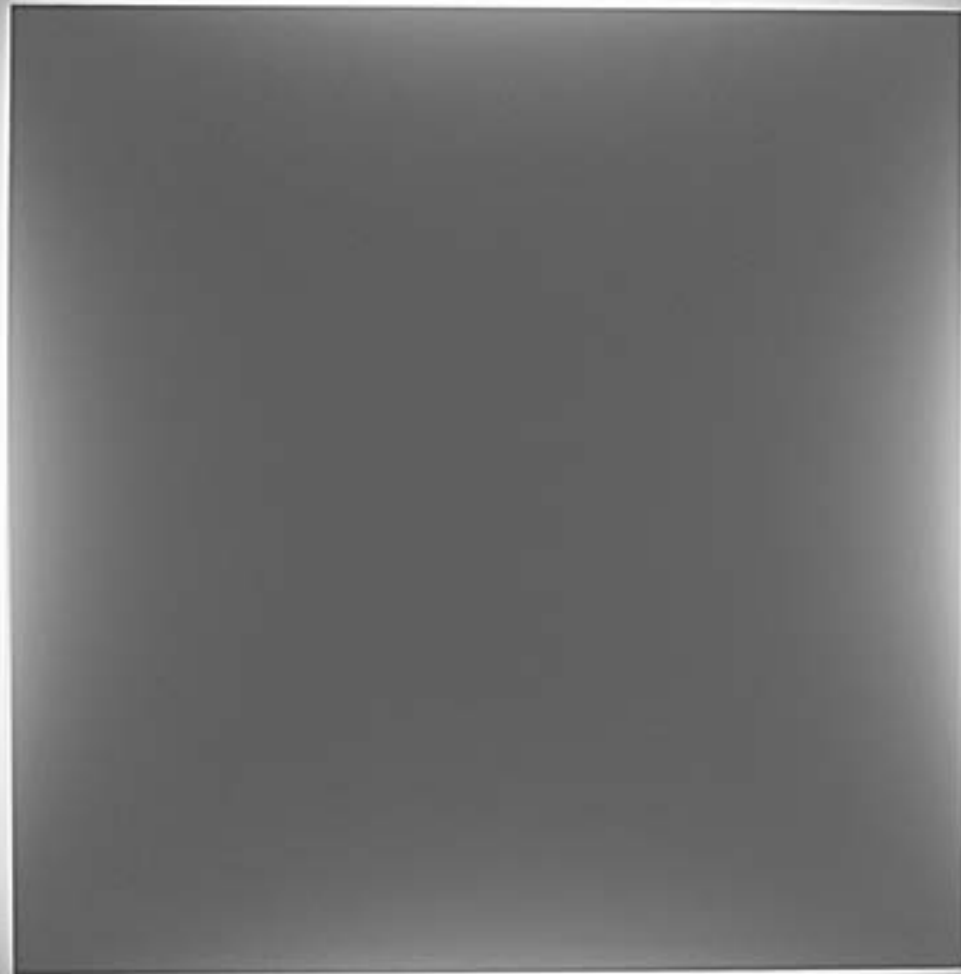

# Q-LIGHT

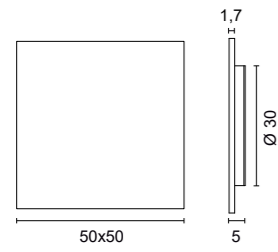

**4590** 4,50 Kg

- .01** Raw white ■
- .14** Blackboard ■
- .29** Gold leaf ■
- .30** Silver leaf ■
- .56** Mirror 5kg ■

<b>/W</b>	4000K	LED 15W CRI>90	1840lm
<b>/WW</b>	3000K	LED 15W CRI>90	1650lm
<b>/XW</b>	2700K	LED 15W CRI>90	1560lm

**/DIM** 1... 10V dimming 1...10V

**/DALI** PUSH, DALI dimming PUSH DALI





## OPTIONAL


Kit for overlapping only for art.4582-4583

**0963**


- .01** White ■



## FINISHES CODES

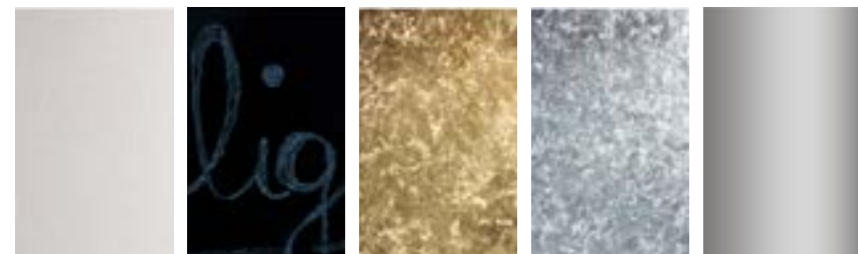

- .01** Raw White
  - .14** Blackboard
  - .29** Gold Leaf
  - .30** Silver Leaf
  - .56** Mirror **only art.4590**
- To be painted

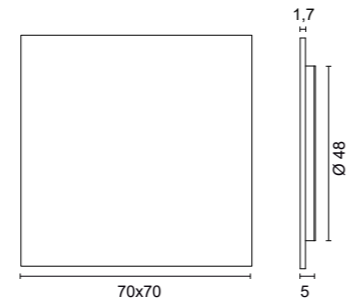

**4591** 7,50 Kg

- .01** Raw white ■
- .14** Blackboard ■
- .29** Gold leaf ■
- .30** Silver leaf ■

<b>/W</b>	4000K	LED 24W CRI>90	2944lm
<b>/WW</b>	3000K	LED 24W CRI>90	2640lm
<b>/XW</b>	2700K	LED 24W CRI>90	2496lm

**/DIM** 1... 10V dimming 1...10V

**/DALI** PUSH, DALI dimming PUSH DALI






## OPTIONAL

Kit for overlapping only for art.4582-4583



**0963**

.01 White


1.32




Ø 29

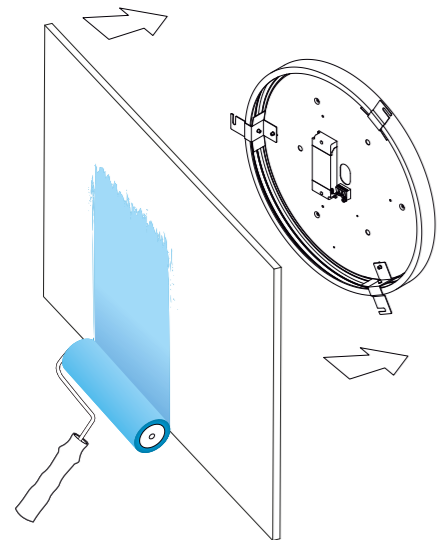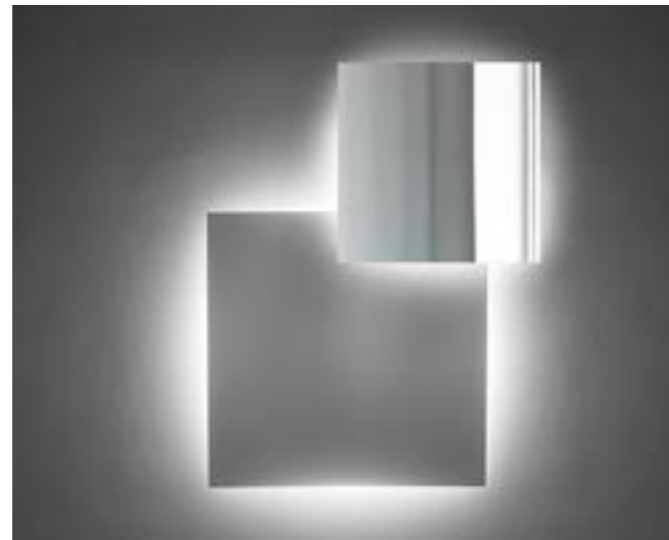

Example of single installation

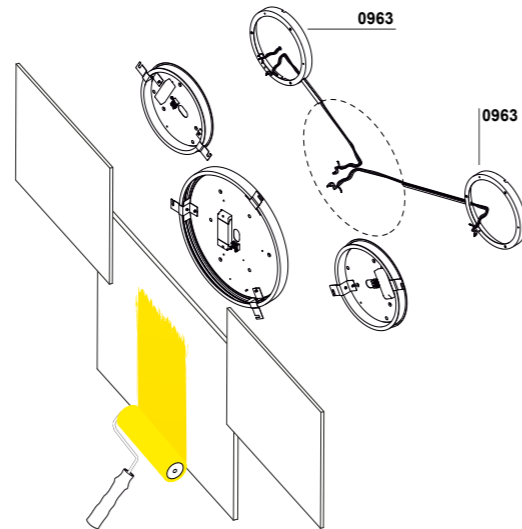

Example of multiple installation with spacers **0963**

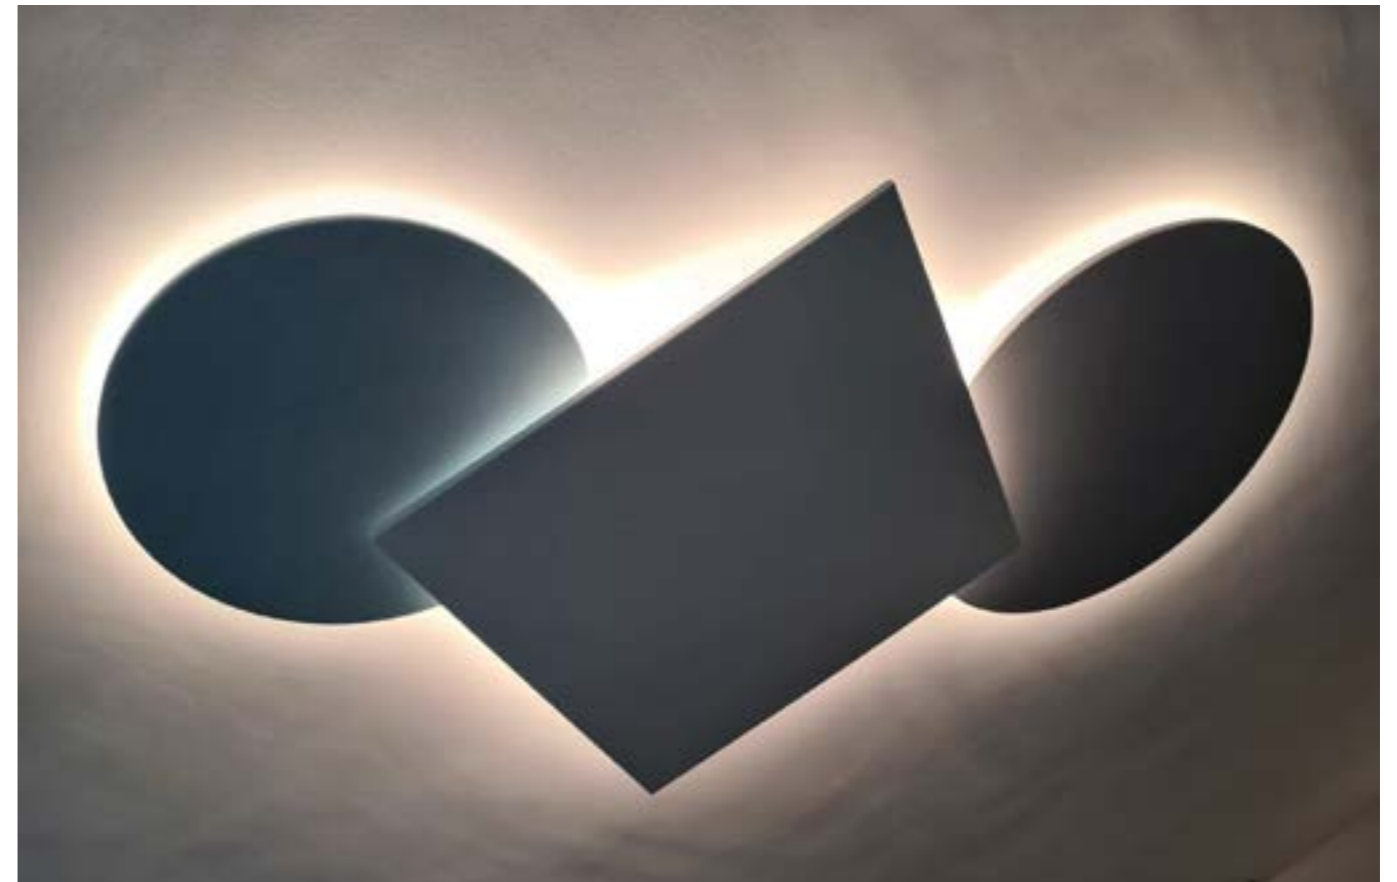



302

INDOOR

# ECLIPSE

Design ABS Studio





## ECLIPSE



Wall Lamps with radial light of easy installation available in two shapes with different finishes.

On request laser cut customization of the screen.


*Einfach zu installierende Radiallicht-Wandleuchte, erhältlich in zwei Formen mit unterschiedlichen Oberflächen. Auf Wunsch lasergeschnittene Anpassung des Bildschirms.*

*Appliques à lumière radiale d'installation facile disponibles en deux formes avec différentes finitions.*

*Sur demande, il est possible de personnaliser l'écran avec une découpe laser.*



# ECLIPSE TONDA

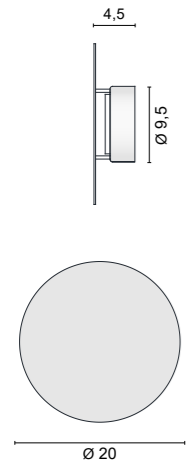

**4592** 0,45 Kg

.01	White	
.02	Black	
.25	Satin gold	
.28	Copper Leaf	
.29	Gold Leaf	
.32	Nickel mat	
.35	Sand	
.56	Mirror	

Light source not included

GX 53 LED

4000K	8W	700lm	(art. 0103/W)	
3000K	8W	680lm	(art. 0103/WW)	
2700K	8W	650lm	(art. 0103/XW)	



On request it is possible to customize the screen with lasering processes



## FINISHES CODES



.01 White .02 Black .25 Satin Gold .28 Copper Leaf .29 Gold Leaf .32 Nickel mat .35 Sand .56 Mirror



# ECLIPSE QUADRA



**4593**

0,45 Kg

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.35</b>	Sand	


Light source not included

GX 53 LED

4000K	8W	700lm	<b>(art. 0103/W)</b>	
3000K	8W	680lm	<b>(art. 0103/WW)</b>	
2700K	8W	650lm	<b>(art. 0103/XW)</b>	



## FINISHES CODES

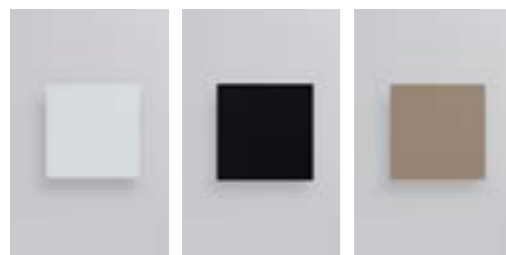

**.01** White

**.02** Black

**.35** Sand





INDOOR

# ECLIPSE IP

Design ABS Studio



## ECLIPSE IP



Outdoor wall lamp with grazing radial emission light.

The body is made of anodized and painted die-cast aluminum, the screen in opal methacrylate.

The front disc is in painted aluminum.

Eclipse IP is an outdoor lamp also designed to furnish with one delicate light that seems to caress the wall. It can be installed alone or in series to enrich a facade, a porch or a any exterior wall.

*Applique d'extérieur à lumière rasante à émission radiale.*

*Le corps est en aluminium moulé sous pression anodisé et peint, l'écran de méthacrylate opale.*

*Le disque avant est en aluminium peint.*

*Eclipse IP est une lampe d'extérieur également conçue pour meubler un lumière délicate qui semble caresser le mur. Il peut être installé seul ou en série pour enrichir une façade, un porche ou un n'importe quel mur extérieur.*


*Außenwandleuchte mit streifendem radialem Emissionslicht.*

*Der Korpus besteht aus eloxiertem und lackiertem Aluminium-Druckguss, der opale Methacrylatschirm. Die vordere*



*Scheibe ist aus lackiertem Aluminium.*

*Eclipse IP ist eine Außenleuchte, die auch dazu gedacht ist, mit einem zarten Licht zu dekorieren, das die Wand zu streicheln scheint.*

*Es kann allein oder in Reihe installiert werden, um eine Fassade, eine Veranda oder jede andere Außenwand zu bereichern.*

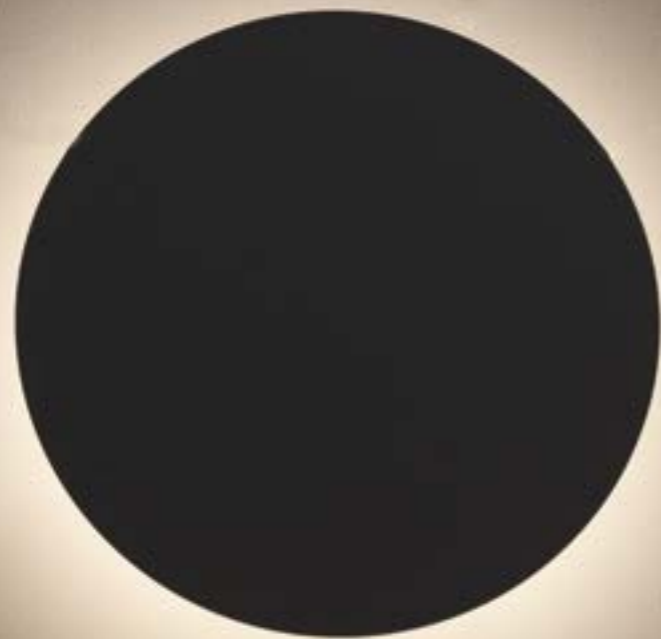


# ECLIPSE IP



<b>4625</b>		1,50 Kg
<b>.01</b>	White	
<b>.34</b>	Painted Corten	
<b>.39</b>	Painted Anthracite	
<b>/WW</b>	3000K LED 8,7W	670lm
	IP65	

## FINISHES CODES

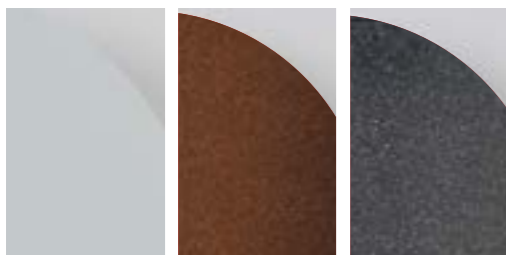

**.01** White    **.34** Painted corten    **.39** Painted Anthracite









INDOOR

# DIESIS

Design LUX Studio





## DIESIS




Ceiling and wall lamps with diffused and indirect light with aluminum body and opal polycarbonate diffuser. The high luminous flux makes DIESIS ideal for the general lighting of a room considering only one light point..

*Plafonniers et appliques à lumière diffuse et indirecte avec corps en aluminium et diffuseur en polycarbonate opale. Le flux lumineux élevé rend DIESIS idéal pour l'éclairage général d'une pièce en considérant un seul point lumineux.*

*Decken und Wandleuchten mit diffusem und indirektem Licht mit Aluminiumgehäuse und opalem Polycarbonat-Diffusor. Der hohe Lichtstrom macht DIESIS ideal für die Allgemeinbeleuchtung eines Raumes mit nur einem Lichtpunkt.*




# DIESIS

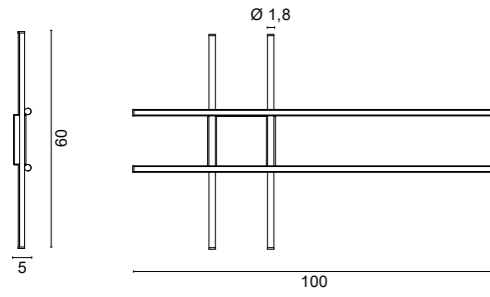



**4636** 1,50 Kg

- .01** White ■
- .02** Black ■
- .35** Painted Sand finishing ■

<b>/W</b>	4000K	LED 50,4W	6328lm
<b>/WW</b>	3000K	LED 50,4W	5656lm
<b>/XW</b>	2700K	LED 50,4W	5292lm




PUSH - 1... 10V - DALI dimming on request

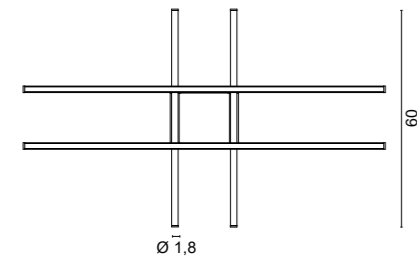

**5691** 1,50 Kg


- .01** White ■
- .02** Black ■
- .35** Painted Sand finishing ■

<b>/W</b>	4000K	LED 50,4W	6328lm
<b>/WW</b>	3000K	LED 50,4W	5656lm
<b>/XW</b>	2700K	LED 50,4W	5292lm




PUSH - 1... 10V - DALI dimming on request

## FINISHES CODES

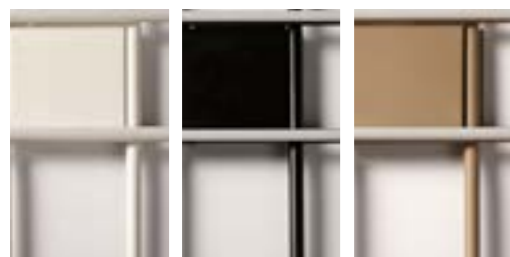

**.01** White    **.02** Black    **.35** Painted Sand



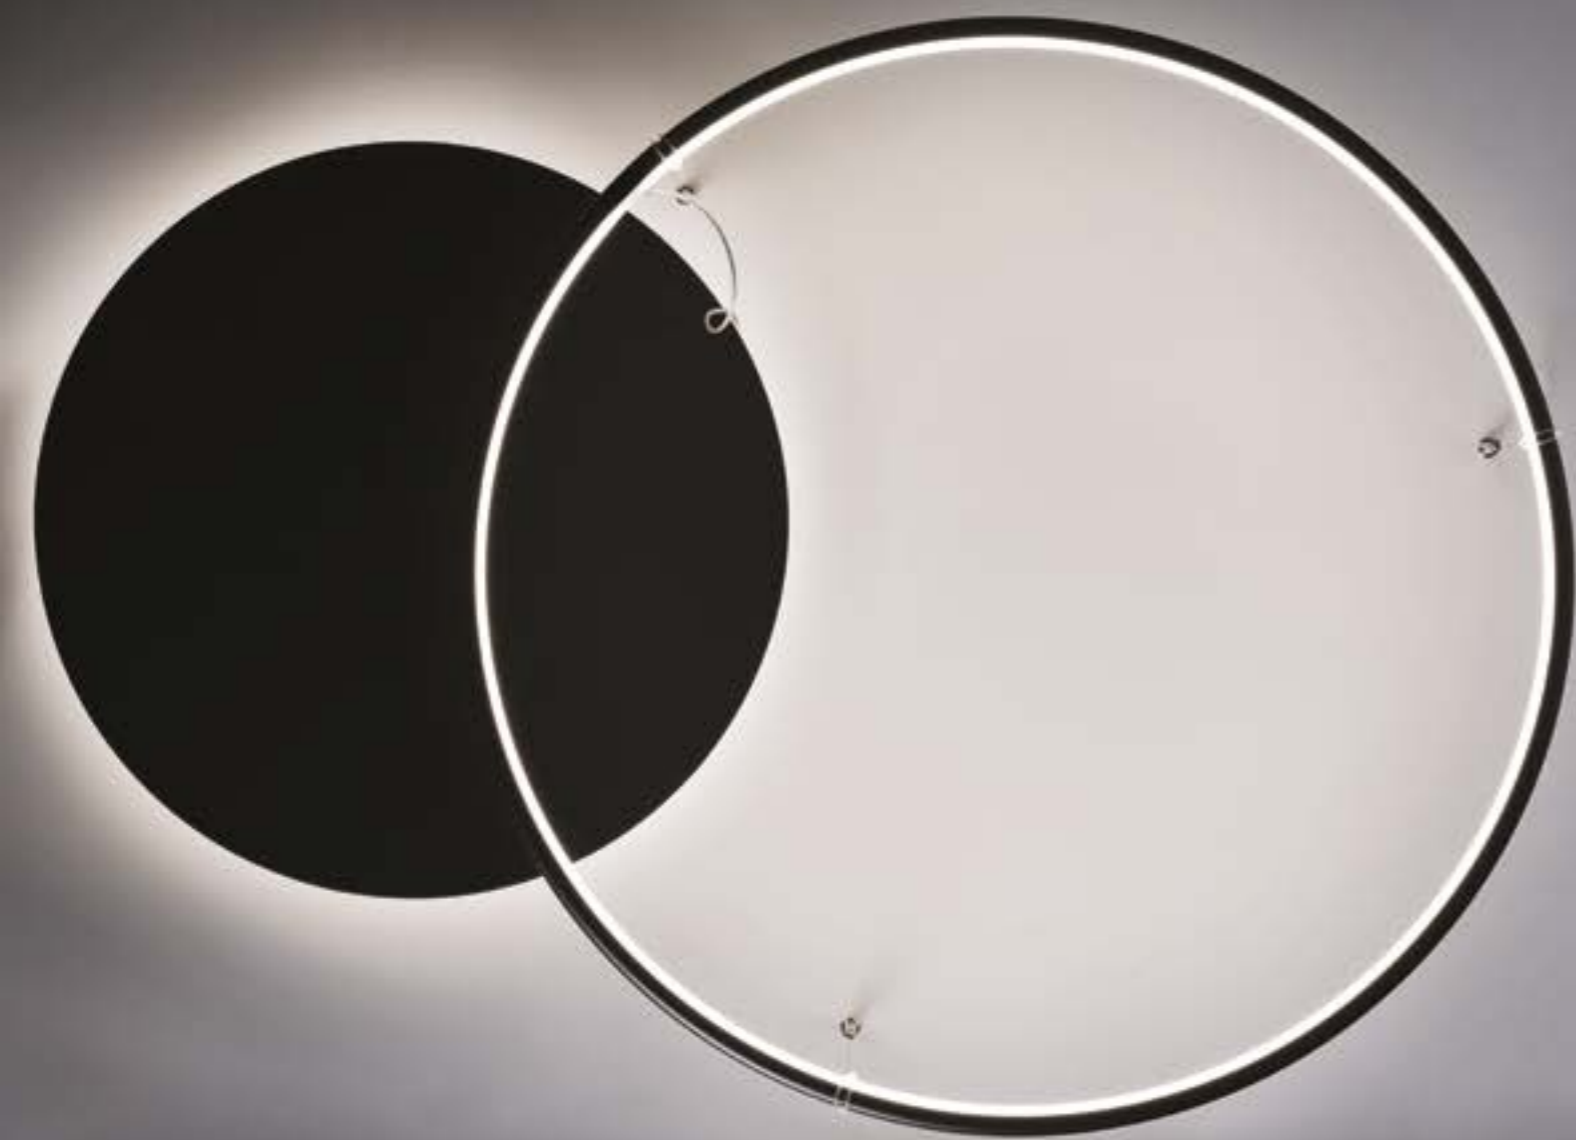

INDOOR

# FUSION

Design LUX Studio





## FUSION



Ceiling lamp characterized by two elements, one with radial light and the other with diffused light.

The particularity of these luminous flows guarantees perfect visual comfort and at the same time excellent illumination of the room where the lamp is placed.

The lamp has an aluminum body and a disc in raw MDF that can be painted or in a blackboard finish.

*Plafonnier caractérisé par deux éléments, l'un à lumière radiale et l'autre à lumière diffuse.*

*La particularité de ces flux lumineux garantit à la fois un parfait confort visuel et un excellent éclairage de la pièce où est placée la lampe.*

*La lampe a un corps en aluminium et un disque en MDF brut qui peut être peint ou en finition tableau noir.*


*Deckenleuchte, gekennzeichnet durch zwei Elemente, eines mit radialem Licht und das andere mit diffusem Licht.*

*Die Besonderheit dieser Lichtströme garantiert perfekten Sehkomfort und gleichzeitig eine hervorragende Ausleuchtung des Raumes, in dem die Lampe platziert ist.*

*Die Lampe hat einen Aluminiumkörper und eine Scheibe aus rohem MDF, die lackiert oder in Tafeloptik lackiert werden kann.*



# FUSION

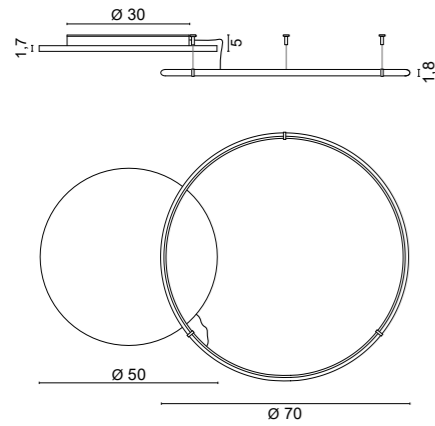

**5690** 3,40 Kg

### Disc finishes codes

- .01** White ■
- .14** Blackboard ■

### Ring finishes codes

- .01** White ■
- .02** Black ■
- .85** Painted Silver ■
- .86** Painted Gold ■
- .87** Painted Copper ■
- .88** Painted Bronze ■

<b>/W</b>	4000K	LED 52,8W	6586lm
<b>/WW</b>	3000K	LED 52,8W	5892lm
<b>/XW</b>	2700K	LED 52,8W	5529lm



DALI - PUSH - 1...10 - TRIAC dimming on request


## FINISHES CODES

### Disc finishes codes




**.01** White      **.14** Blackboard

### Ring finishes codes

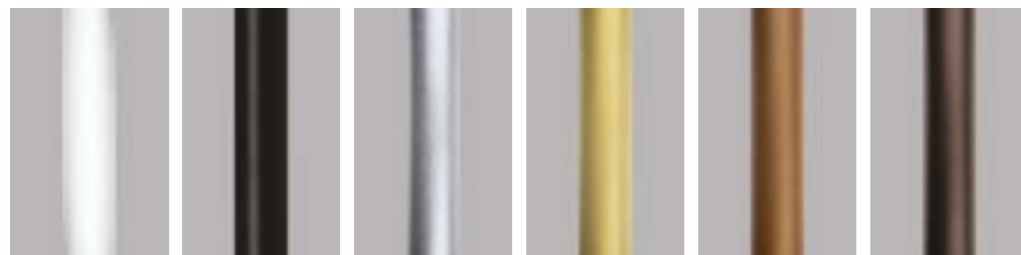

**.01** White      **.02** Black      **.85** Painted Silver      **.86** Painted Gold      **.87** Painted Copper      **.88** Painted Bronze

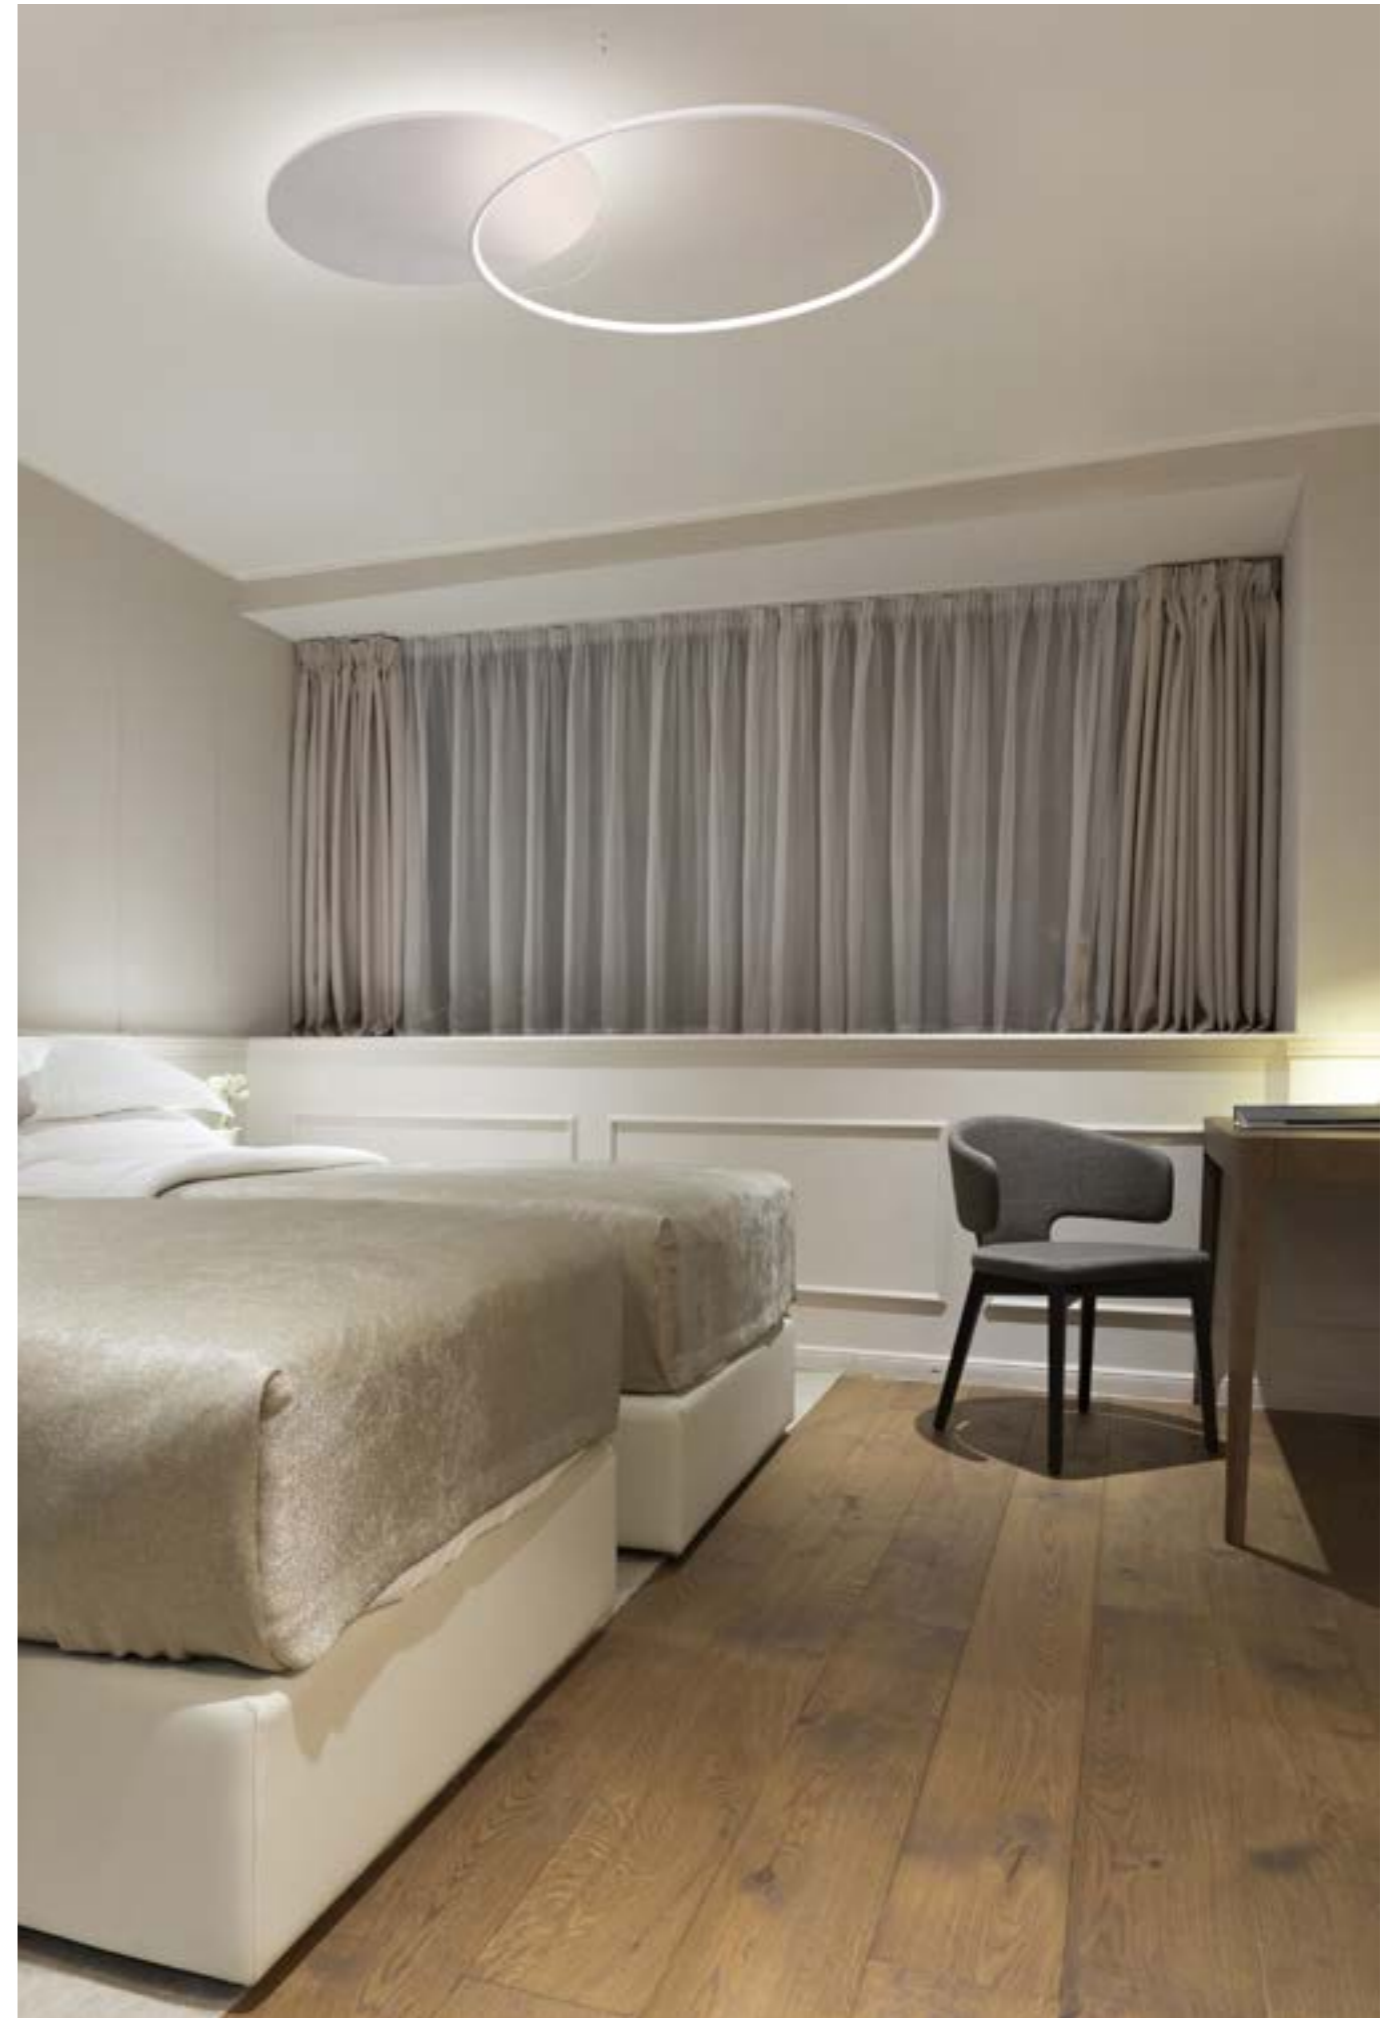

INDOOR

# BAGLIORI

Design Officinadiarchitettura&design



Wall lamps with diffused light, characterized by a 360 degree light emission, with a steel body, transparent methacrylate and aluminum closing caps.

The version with remote driver has an IP44 protection degree.

*Appliques à lumière diffuse, caractérisées par une émission lumineuse à 360 degrés, avec corps en acier, méthacrylate transparent et capuchons de fermeture en aluminium.*

*La version avec l'alimentation positionnée à distance bénéficie d'un indice de protection IP44.*



*Wandleuchten mit diffusem Licht, gekennzeichnet durch eine 360-Grad-Lichtemission, mit einem Stahlgehäuse, transparentem Methacrylat und Verschlusskappen aus Aluminium.*

*Die Variante mit Fernspeisung verfügt über die Schutzart IP44.*







# BAGLIORI

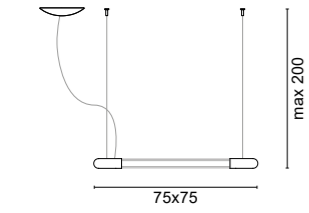

**1668** 4 Kg  
 .02 Black  
 /WW 3000K LED 55W 4170lm

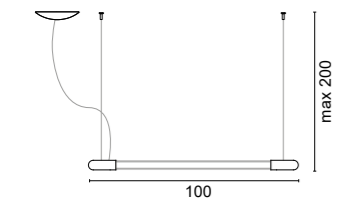

**1669** 4 Kg  
 .02 Black  
 /WW 3000K LED 55W 4170lm




## FINISHES CODES



.02 Black



# BAGLIORI

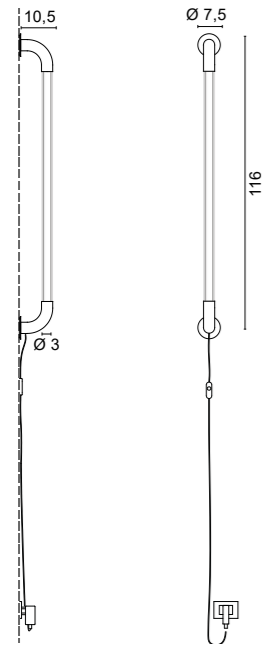

**4648** 1,3 Kg

**.02** Black

**/WW** 3000K LED 20W 1949lm




With PUSH DIMMER on black cable





## FINISHES CODES



**.02** Black

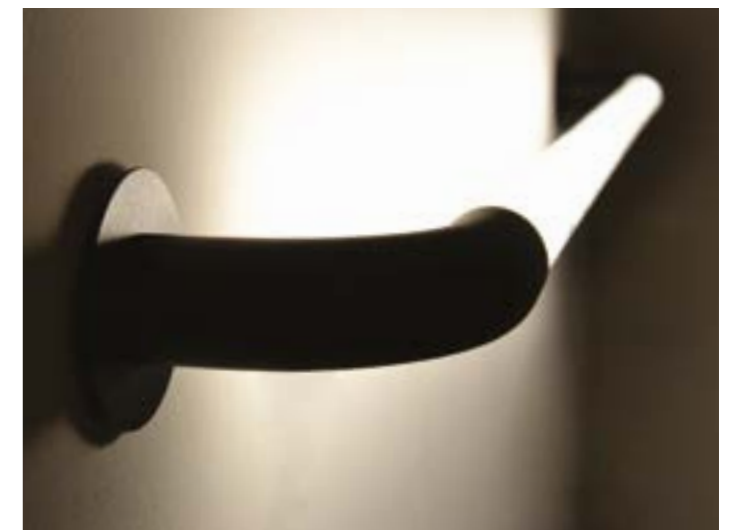



# BAGLIORI

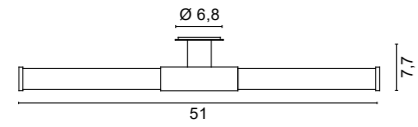

**4645** 0,55 Kg

- .01 White
- .02 Black
- .09 Orange
- .10 Light blue
- .33 Stainless Steel AISI 316L


/WW 3000K LED 8W 796lm

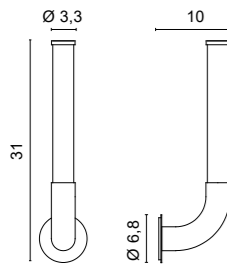

**4647** 0,40 Kg

- .01 White
- .02 Black
- .09 Orange
- .10 Light blue
- .33 Stainless Steel AISI 316L

/WW 3000K LED 8W 398lm



## DRIVERS


### ON/OFF

Cod. **0155**  
24V-13W

### DIMMABLE


Cod. **0717/DIM60** **0717/DIM60/V**  
24V-60W 24V-60W  
**PUSH - DALI** **1...10V**

## FINISHES CODES

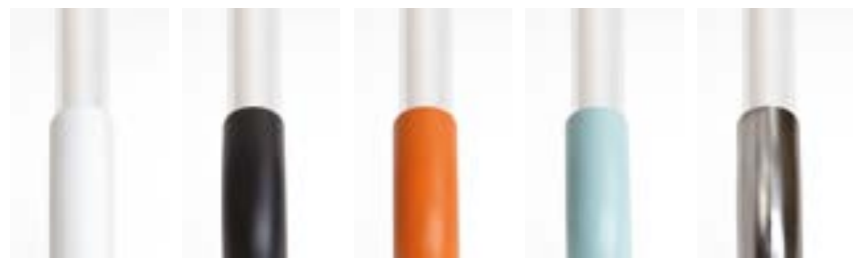

.01 White    .02 Black    .09 Orange    .10 Light blue    .33 Stainless Steel AISI 316L



# BAGLIORI

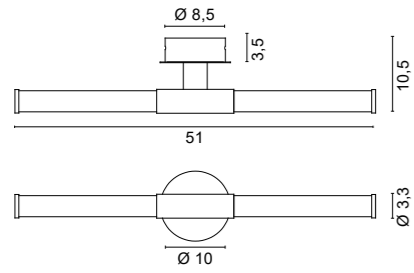

**4644** 0,75 Kg

- .01 White
- .02 Black
- .09 Orange
- .10 Light blue
- .33 Stainless Steel AISI 316L


/WW 3000K LED 8W 796lm

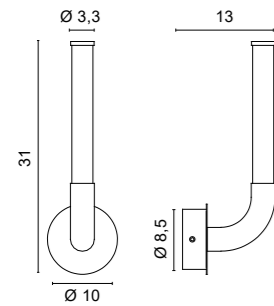

**4646** 0,60 Kg

- .01 White
- .02 Black
- .09 Orange
- .10 Light blue
- .33 Stainless Steel AISI 316L


/WW 3000K LED 4W 398lm



## FINISHES CODES



.01 White    .02 Black    .09 Orange    .10 Light blue    .33 Stainless Steel AISI 316L

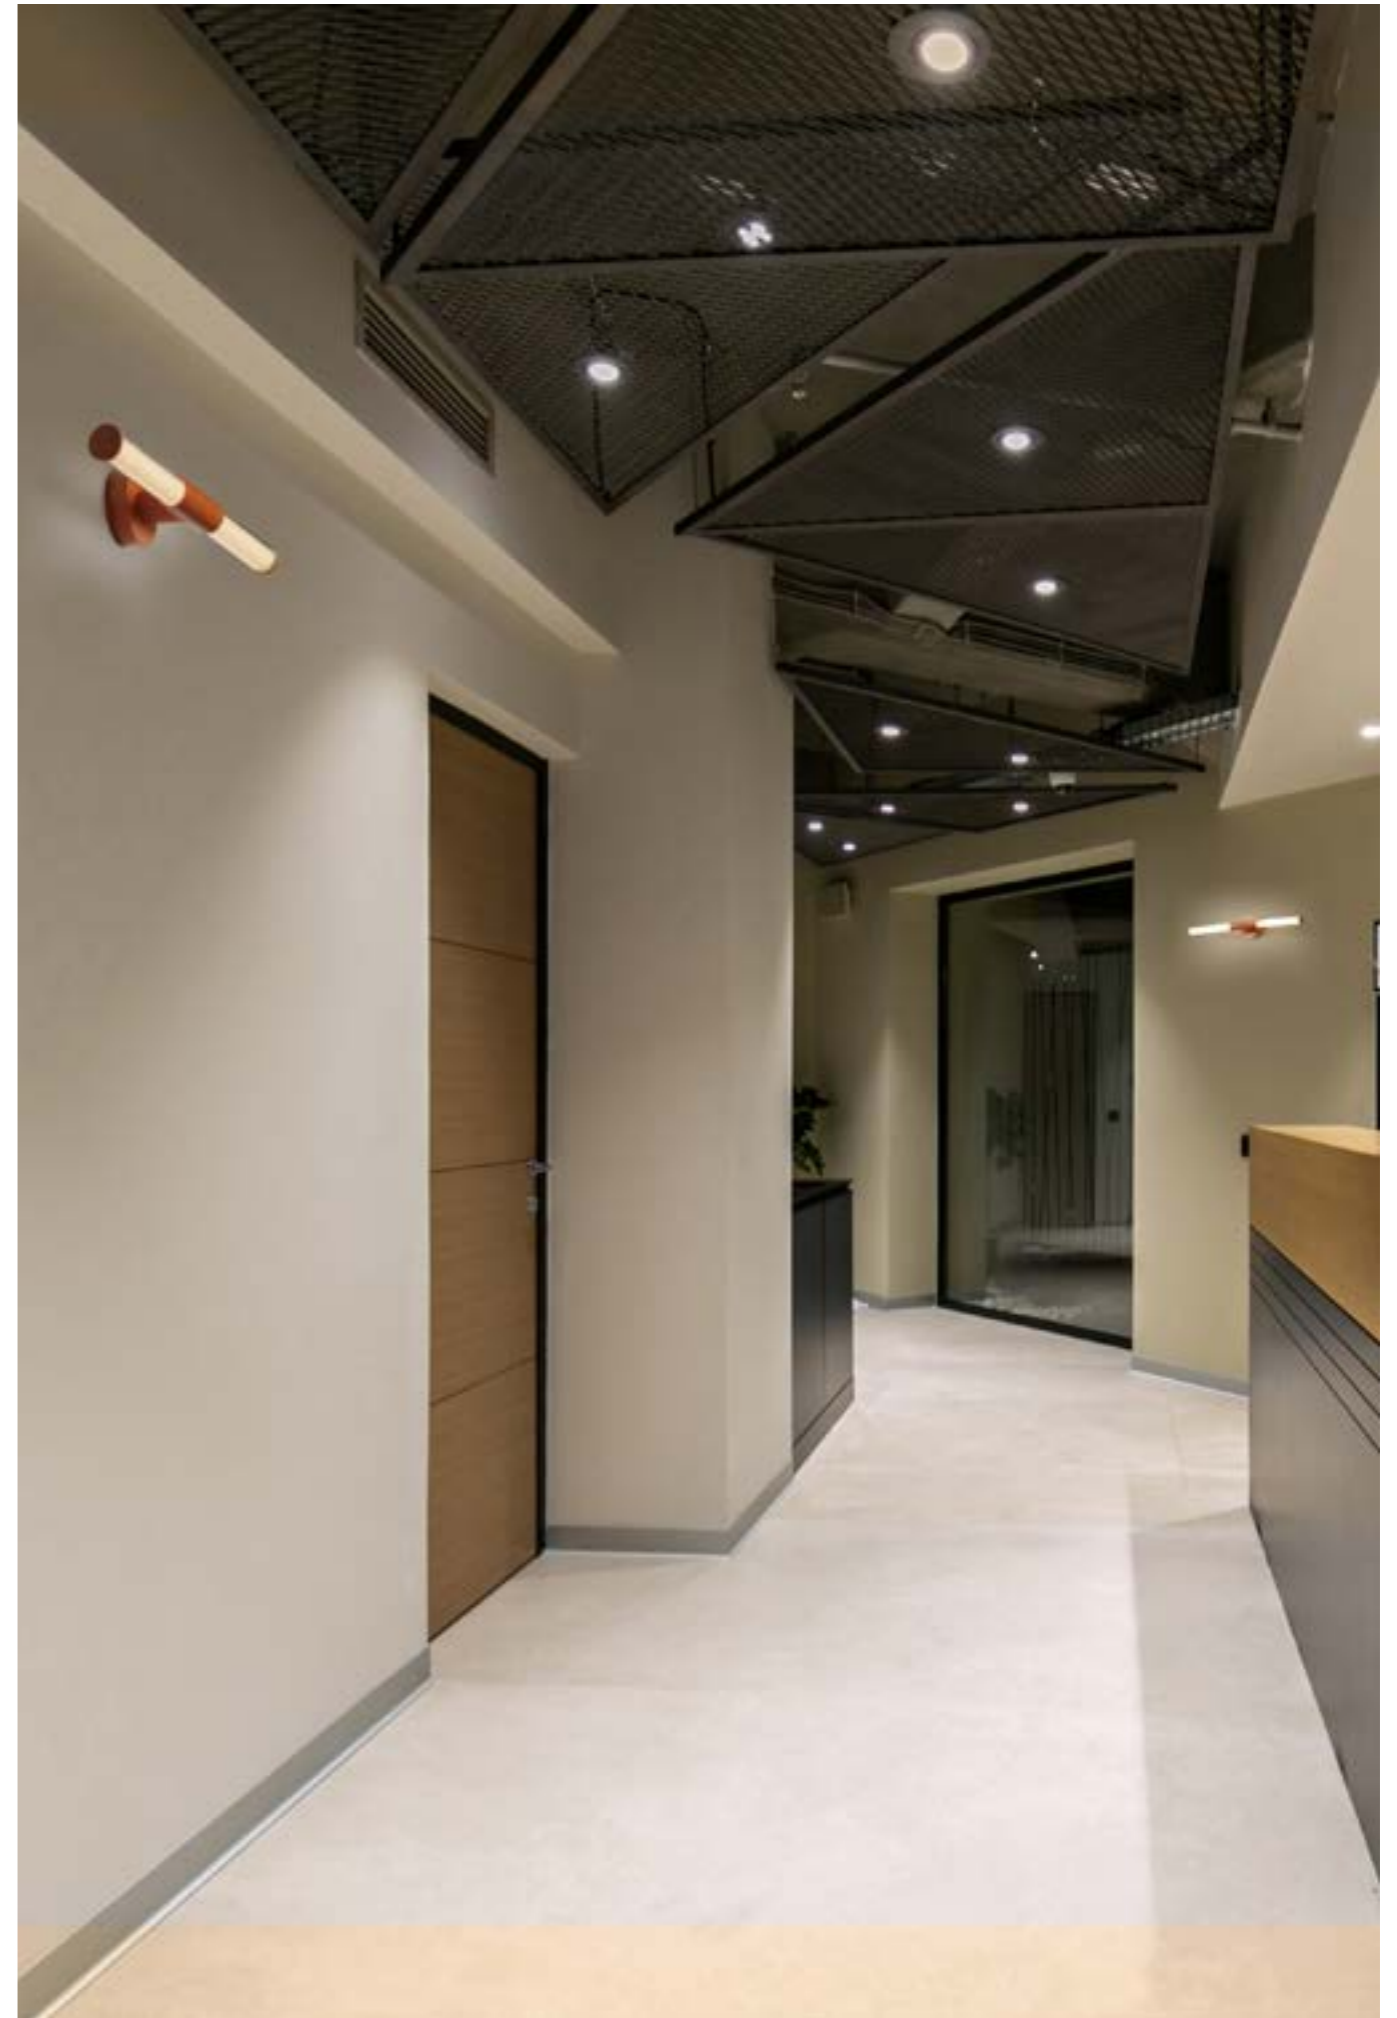



**INDOOR**

**CI**

Design S. Cornellisen



Wall lamps with different sizes for grazing light.

Positioning the circuits along the total length of the profile we obtain an extremely performing lamp.

The minimal design makes this lamp suitable for any type of environment, either classic or modern interiors.


*Appliques de différentes dimension avec une illumination rasante.*

*Le positionnement des circuits dans la longueur totale du luminaire font de Ci une lampe extrêmement performante.*

*La ligne essentielle et élégante donne un aspect qui s'adapte bien à tout type d'environnement, des intérieurs classiques aux intérieurs modernes.*

*Wandleuchten in verschiedenen Größen für Streiflicht. Durch die Anordnung der Stromkreise entlang der Gesamtlänge des Profils erhalten wir eine äußerst leistungsstarke Lampe.*



*Durch das minimalistische Design eignet sich diese Lampe für jede Art von Umgebung, sowohl für klassische als auch für moderne Innenräume.*



**4574** 1,70 Kg

- .01** White ■
- .02** Black ■
- .23** Satin Aluminium ■


<b>/W</b>	4000K	LED 12,5W	1930lm
<b>/WW</b>	3000K	LED 12,5W	1830lm



**4576** 3,00 Kg

- .01** White ■
- .02** Black ■
- .23** Satin Aluminium ■


<b>/W</b>	4000K	LED 37,5W	5790lm
<b>/WW</b>	3000K	LED 37,5W	5520lm



**4575** 2,00 Kg

- .01** White ■
- .02** Black ■
- .23** Satin Aluminium ■

<b>/W</b>	4000K	LED 25W	3860lm
<b>/WW</b>	3000K	LED 25W	3680lm




**4577** 3,90 Kg

- .01** White ■
- .02** Black ■
- .23** Satin Aluminium ■

<b>/W</b>	4000K	LED 50W	7720lm
<b>/WW</b>	3000K	LED 50W	7360lm



FINISHES CODES

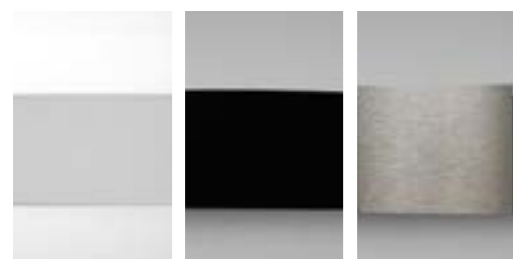

**.01** White    **.02** Black    **.23** Satin Aluminium



Project Studio Keyart Milano







**TINY - TRACK 24V**  
p. 518



**NEWTON MICRO**



**NEWTON MINI**



**SEGMENTO MINI**



**SEGMENTO DARK MINI**



**TRACK 48V**  
p. 528



**NEWTON**



**NEWTON SLIM**



**NEWTON FLAT**



**IRIS**



**IRIS**



**TRACK 48V RECESSED**  
p. 542



**SEGMENTO**



**SEGMENTO DARK**



**TRACK 48V SUSPENSION**  
p. 550



**NEWTON**



**PEVERA**



**STICK**

Electrified track systems powered by 48V and 24V.

- The 48V ceiling/wall or recessed versions are completed with the new indirect light suspension system.
- The EGOLUCE collection is also enriched by a brand new 24V system, TINY, characterized by its small size and microscopic magnetic insertion lighting fixtures.

*Systèmes de voie électrifiés alimentés par 48V et 24V.*

- Les versions plafonnier/mur ou encastré 48V sont complétées par le nouveau système de suspension à lumière indirecte.
- La collection EGOLUCE s'enrichit également d'un tout nouveau système 24V, TINY, caractérisé par sa petite taille et ses luminaires à insertion magnétique microscopique.

*Elektrifizierte Schienensysteme, die mit 48 V und 24 V, betrieben werden.*

- Die 48-V-Decken-/Wand- oder Einbauversionen werden mit dem neuen Aufhängungssystem für indirektes Licht vervollständigt.
- Die EGOLUCE-Kollektion wird auch durch ein brandneues 24-V-System, TINY, bereichert, das sich durch seine geringe Größe und mikroskopische magnetische Einsteckleuchten auszeichnet.



**INDOOR**

# TRACK

Design U.T. Egoluce






**INDOOR**


# **TINY - TRACK 24V**

Design U.T. EgoIuce





## TINY - TRACK 24V



New 24V magnetic track system of very small dimensions that adapts to any type of environment and solution, from classic to modern interiors.

The strength of this product lies precisely in the size and ease of configuration which makes it perfect for any type of application.

Tiny is offered in a black finish only.

The 24V binary system is to be completed with a series of accessories, to be ordered separately. Thanks to the various magnetic components, you can easily create different customized configurations to meet any need.

The 24V track requires a dedicated driver, to be ordered separately, and sized according to the lighting elements that you decide to use.

DALI dimming and other white light tones (2700K and 4000K) available on request.

*Nouveau système de rail magnétique 24V de très petites dimensions qui s'adapte à tout type d'environnement et de solution, des intérieurs classiques aux intérieurs modernes.*

*La force de ce produit réside précisément dans sa taille et sa facilité de configuration qui le rend parfait pour tout type d'application.*

*Tiny est proposé uniquement en finition noire.*

*Le système binaire 24V est à compléter par une série d'accessoires, à commander séparément. Grâce aux différents composants magnétiques, vous pouvez facilement créer différentes configurations personnalisées pour répondre à tous les besoins.*

*Le rail 24V nécessite une alimentation dédiée, à commander séparément, et dimensionnée en fonction des éléments d'éclairage que vous décidez d'utiliser. Gradation DALI et autres tons de lumière blanche (2700K et 4000K) disponibles sur demande.*

*Neues 24-V-Magnetschienensystem mit sehr kleinen Abmessungen, das sich an jede Art von Umgebung und Lösung anpasst, von klassischen bis zu modernen Innenräumen.*

*Die Stärke dieses Produkts liegt genau in der Größe und der einfachen Konfiguration, die es perfekt für jede Art von Anwendung macht.*



*Tiny wird nur in schwarzer Ausführung angeboten.*

*Das 24V-Binärsystem ist mit einer Reihe von separat zu bestellendem Zubehör zu vervollständigen. Dank der verschiedenen magnetischen Komponenten können Sie ganz einfach verschiedene individuelle Konfigurationen für jeden Bedarf erstellen.*

*Für die 24-V-Schiene ist ein separates Netzteil erforderlich, das separat bestellt und entsprechend den Beleuchtungselementen bemessen werden muss, die Sie verwenden möchten.*

*DALI-Dimmung und andere Weißlichttöne (2700K und 4000K) auf Anfrage erhältlich.*


## TINY - TRACK 24V



### 7399

.02 Black ■

Track 24V 30cm



### 7400

.02 Black ■

Track 24V 60cm



### 7401

.02 Black ■

Track 24V 1,20mt



### 7402

.02 Black ■

Track 24V 1,80mt



### 7403

.02 Black ■

Track 24V 2,40mt



24V low voltage electrified tracks for ceiling, wall, not cuttable.  
DALI dimming on request


## FINISHES CODES



.02 Black




# TINY - TRACK 24V



## CONFIGURATION EXAMPLE

Maximum length 10 mt, max 100W

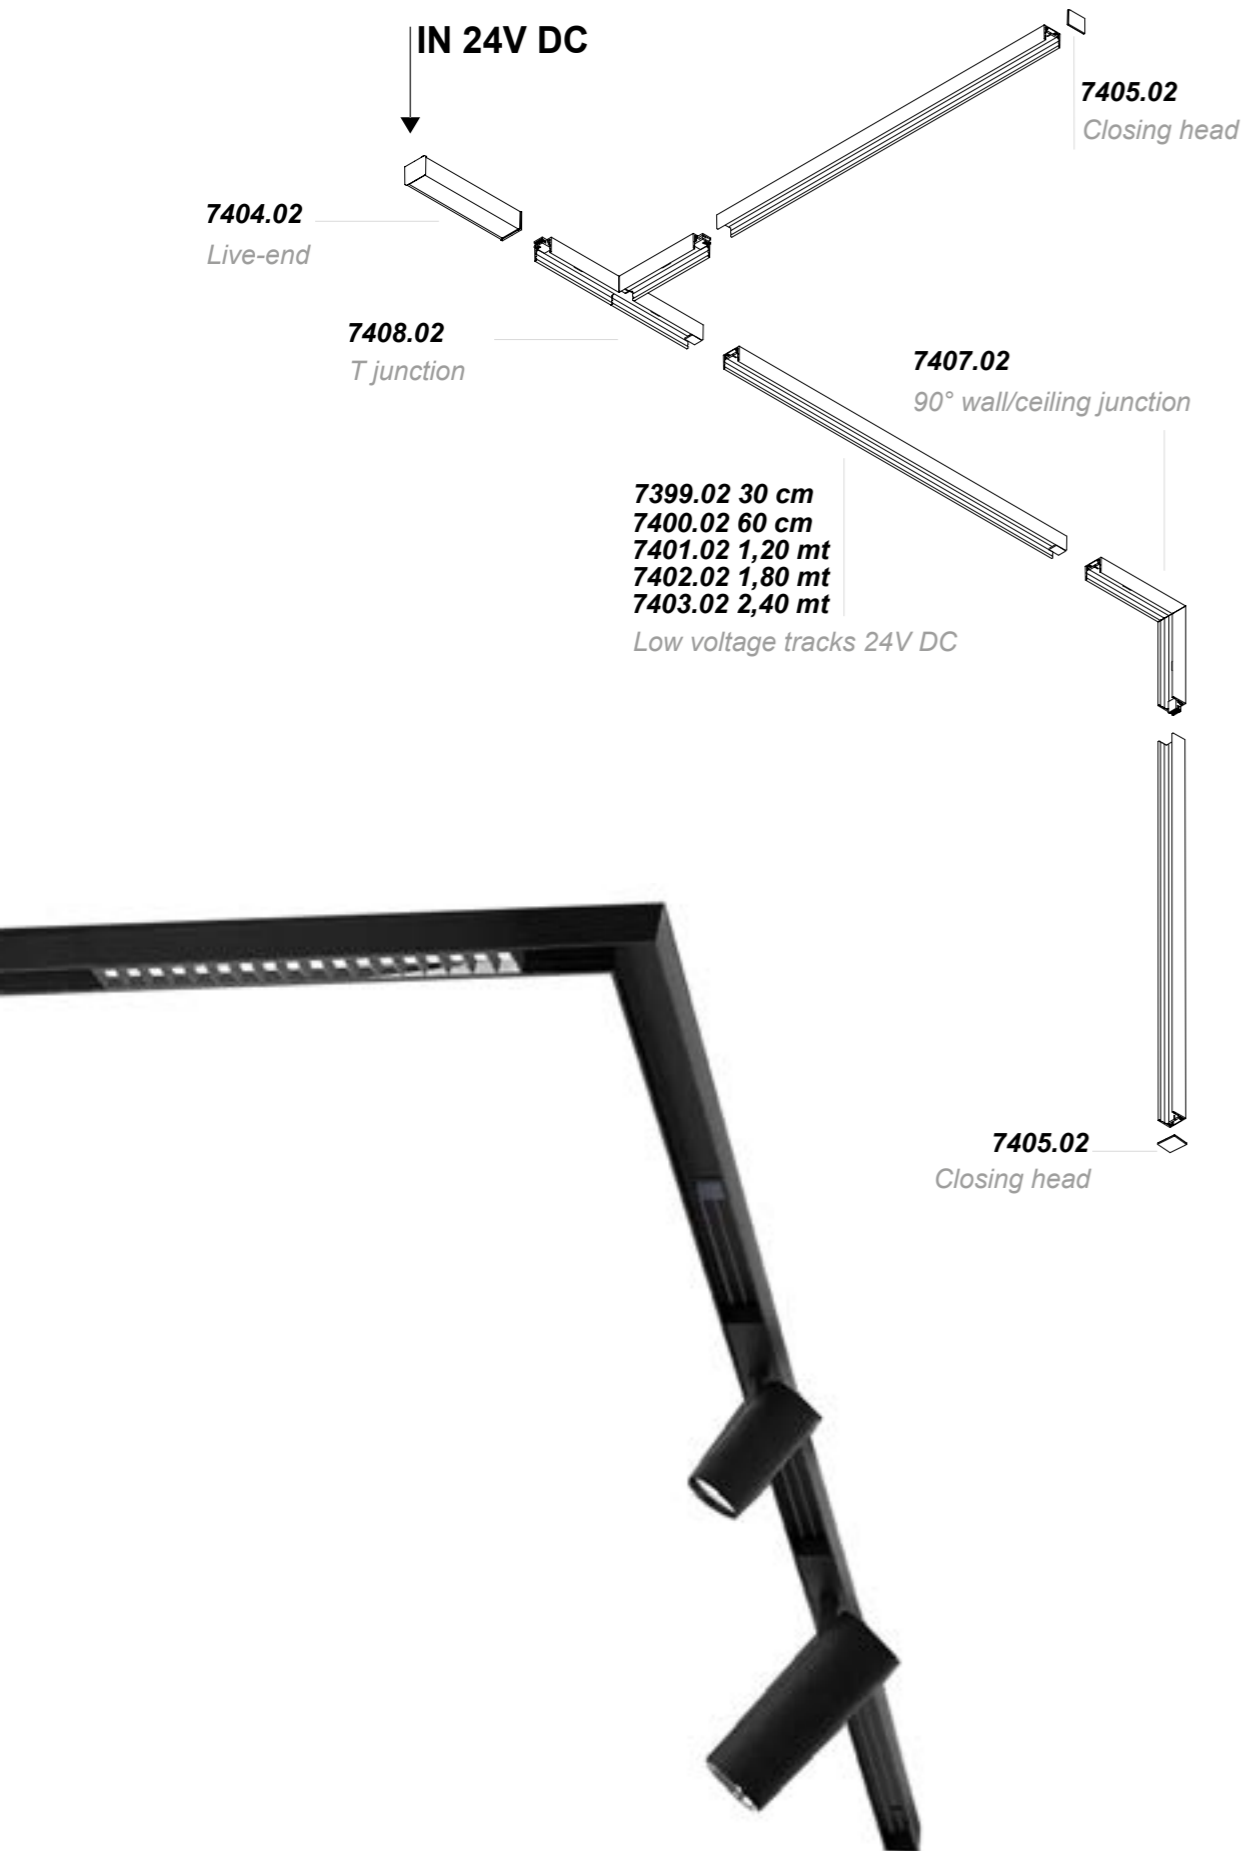

## ACCESSORIES

<p>Element <b>7404</b></p> <p>Live end power .02 Black ■</p>		<p>Element <b>7405</b></p> <p>Closing Head .02 Black ■</p>		<p>Element <b>7406</b></p> <p>Connection set .02 Black ■</p>	
<p>Element <b>7407</b></p> <p>90° junction ceiling /wall .02 Black ■</p>		<p>Element <b>7408</b></p> <p>T junction .02 Black ■</p>		<p>Element <b>7409</b></p> <p>X junction .02 Black ■</p>	
<p>Element <b>7410</b></p> <p>90° junction .02 Black ■</p>		<p>Element <b>7411</b></p> <p>Track cover 1mt .02 Black ■</p>			

## DRIVERS

### ON/OFF

**0156**  
IN: 220 - 240V  
OUT: 24V - 25W

1 - 6 (Newton micro - Segmento mini - Segmento mini dark)  
1 - 3 (Newton mini)

**SELV** 6 cm

**0160**  
IN: 220 - 240V  
OUT: 24V - 60W

1 - 12 (Newton micro - Segmento mini - Segmento mini dark)  
1 - 7 (Newton mini)

**SELV** 6,6 cm



**0157**  
IN: 220 - 240V  
OUT: 24V - 75W

1 - 18 (Newton micro - Segmento mini - Segmento mini dark)  
1 - 20 (Newton mini)

**SELV** 6,8 cm

**WARNING!**  
THE TRACK IS NOT SECTIONAL

# NEWTON MICRO / NEWTON MINI - TRACK 24V

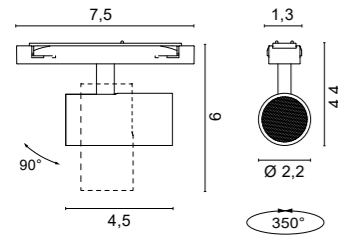


**6722** 0,04 Kg

.02 Black ■

/WW 3000K LED 4W 310lm




On request 2700K - 4000K

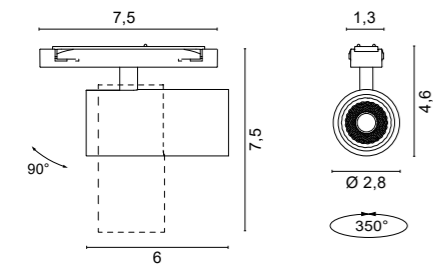

**6723** 0,06 Kg

.02 Black ■

/WW 3000K /25 /48 24V DC 7W 430lm



On request 2700K - 4000K



## DRIVERS

### ON/OFF

Cod.	0156	0157	0160	0162
	IN: 100 - 240V OUT: 24V 25W	IN: 220 - 240V OUT: 24V 75W	IN: 220 - 240V OUT: 24V 60W	IN: 220 - 240V OUT: 24V 150W
6722	3	10	6	20
6723	2	7	4	14



## FINISHES CODES



.02 Black




# SEGMENTO MINI / SEGMENTO DARK MINI - TRACK 24V

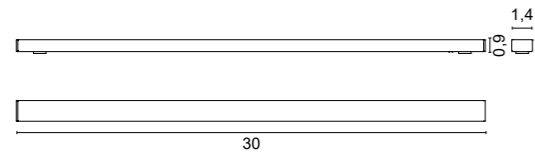

**6724** 0,03 Kg  
**.02** Black  
**/WW** 3000K LED 4W 290lm



On request 2700K - 4000K

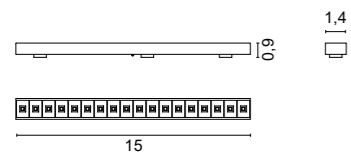

**6725** 0,02 Kg  
**.02** Black  
**/WW** 3000K LED 4W 120lm



On request 2700K - 4000K



## DRIVERS


### ON/OFF

Cod.	0156	0157	0160	0162
	<b>IN:</b> 100 - 240V	<b>IN:</b> 220 - 240V	<b>IN:</b> 220 - 240V	<b>IN:</b> 220 - 240V
	<b>OUT:</b> 24V 25W	<b>OUT:</b> 24V 75W	<b>OUT:</b> 24V 60W	<b>OUT:</b> 24V 150W
<b>6724</b>	3	10	6	20
<b>6725</b>	3	10	6	20

## FINISHES CODES



.02 Black

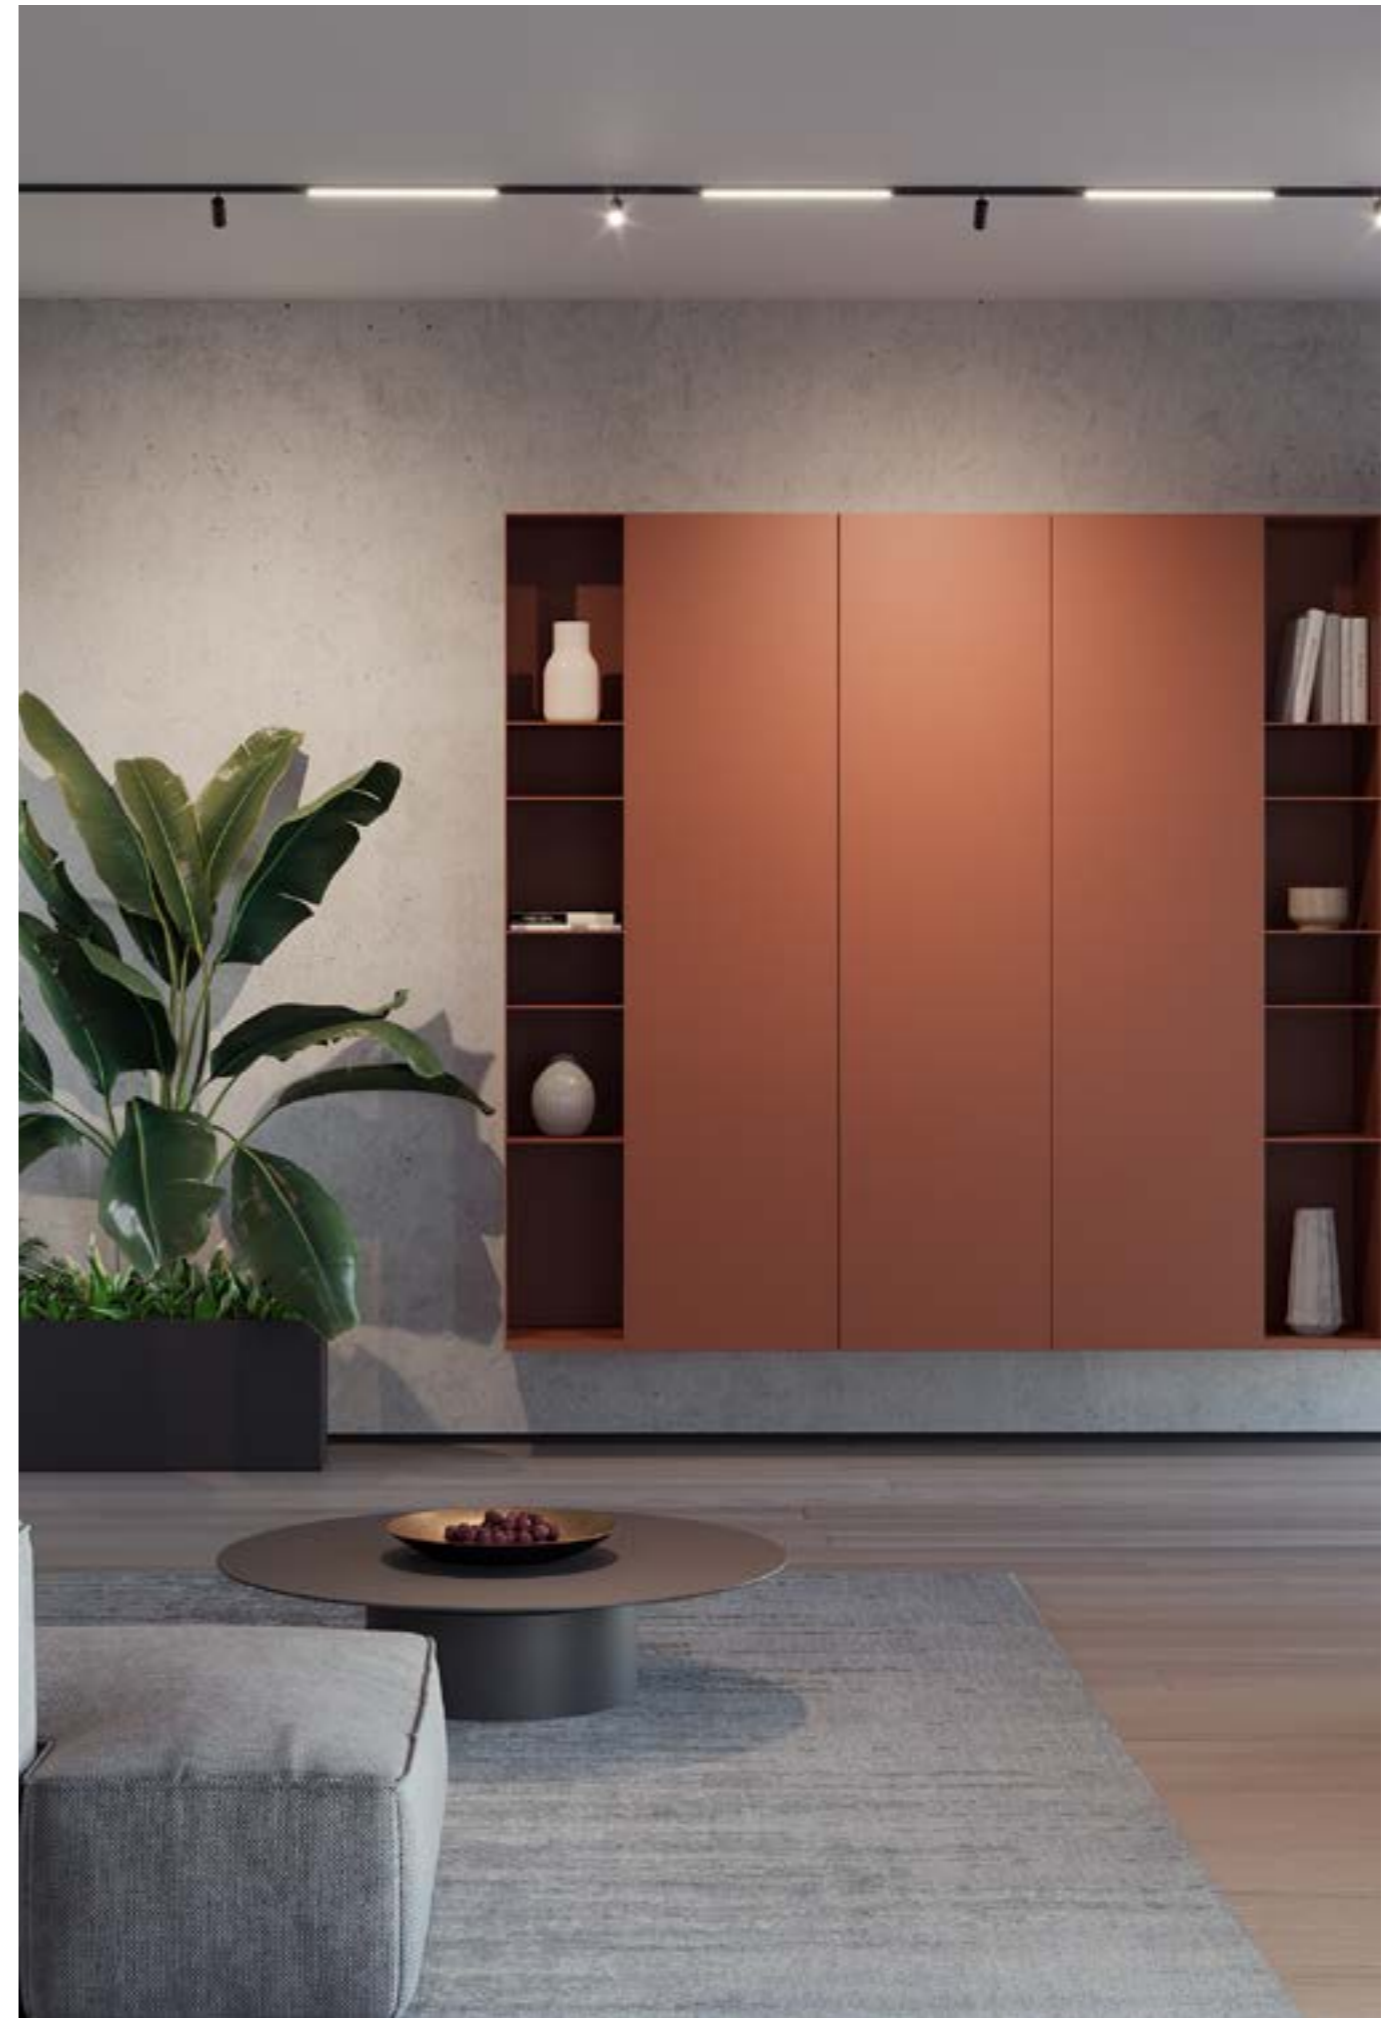







INDOOR

# TRACK 48V

Design U.T. Ego luce





## TRACK 48V



The 48V low voltage electrified tracks represent the technical evolution of mains voltage tracks. The advantages in choosing this type of track lie mainly in the small size which allows it to be used in any type of environment.

To this must be added the minimalist elegance of the bodies proposed by EGOLUCE, from the small adjustable projectors for accent light, to the linear bodies inserted in the profile for diffused lighting, up to technical or decorative suspensions.

The 48V track requires a dedicated driver, to be ordered separately, and sized according to the lighting elements selected.

*Les voies électrifiées basse tension 48V représentent l'évolution technique des voies tension secteur. Les avantages à choisir ce type de chenille résident principalement dans la petite taille qui permet de l'utiliser dans tout type d'environnement.*

*À cela, il faut ajouter l'élégance minimaliste des corps proposés par EGOLUCE, des petits projecteurs orientables pour la lumière d'accentuation, aux corps linéaires insérés dans le profil pour un éclairage diffus, jusqu'aux suspensions techniques ou décoratives.*



*Le rail 48V nécessite une alimentation dédiée, à commander séparément, et dimensionnée en fonction des éléments d'éclairage que vous décidez d'utiliser.*

*Die 48V-Niedervolt-Elektrogleise stellen die technische Weiterentwicklung der Netzspannungsgleise dar. Die Vorteile bei der Wahl dieses Schientyps liegen hauptsächlich in der geringen Größe, die den Einsatz in jeder Art von Umgebung ermöglicht.*

*Dazu muss die minimalistische Eleganz der von EGOLUCE vorgeschlagenen Körper hinzugefügt werden, von den kleinen verstellbaren Projektoren für Akzentlicht über die in das Profil eingesetzten linearen Körper für diffuses Licht bis hin zu technischen oder dekorativen Aufhängungen.*

*Für die 48-V-Schiene ist ein separates Netzteil erforderlich, das separat bestellt und entsprechend den Beleuchtungselementen bemessen werden muss, die Sie verwenden möchten.*


# TRACK 48V



**7341** 0,68 Kg

- .01** White ■
- .02** Black ■

Track 48V (20A) 1 mt



**7342** 1,37 Kg

- .01** White ■
- .02** Black ■

Track 48V (20A) 2 mt



**7343** 2,00 Kg

- .01** White ■
- .02** Black ■

Track 48V (20A) 3 mt



48V low voltage electrified tracks for *ceiling, wall, suspensions applications*

The two 48V conductors can transmit, upon request, also **DALI** signal, allowing for the light dynamic control


The continuity of the positive line between each element is important for a correct installation

## FINISHES CODES



**.01** White


**.02** Black

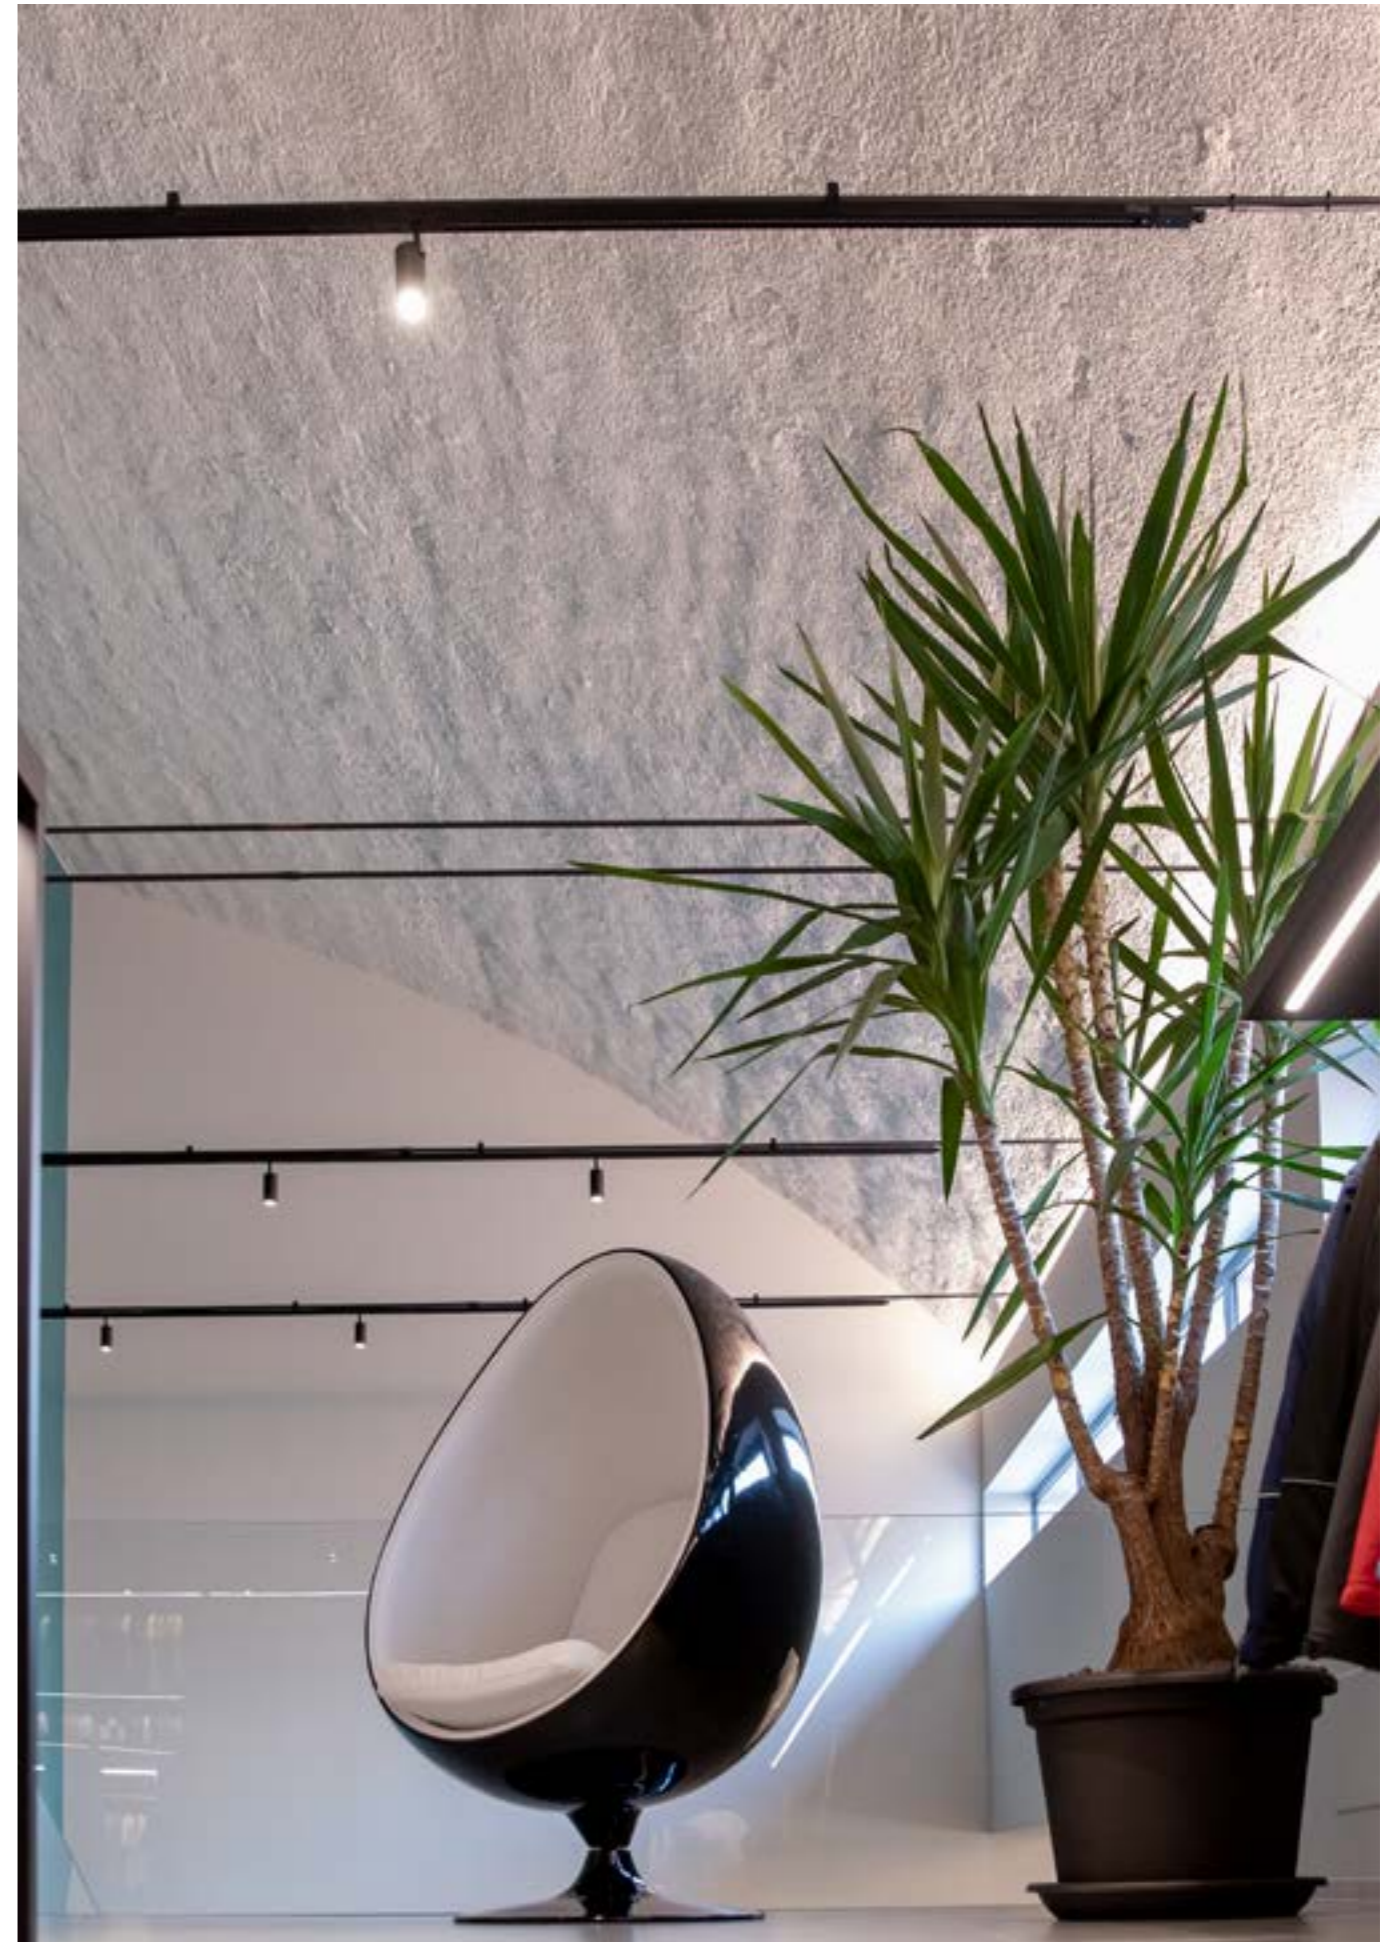

Ceiling roses with converter for suspension systems p.540



## CONFIGURATION EXAMPLE

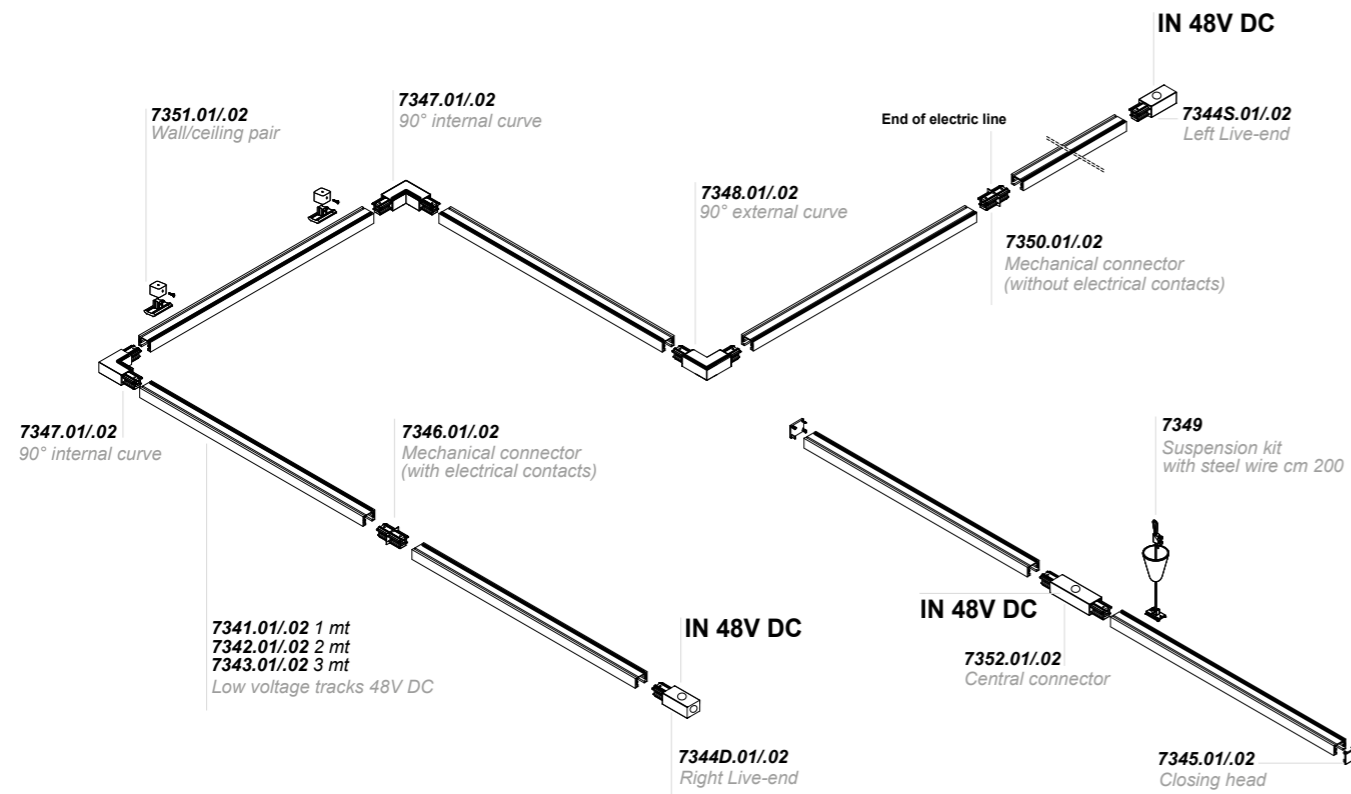

## ACCESSORIES


### Element 7344/S

Left Live-End

### 7344/D

Right Live-End


- .01 White
- .02 Black



### Element 7345

Closing Head


- .01 White
- .02 Black



### Element 7346

Mechanical connector  
(with electrical contacts)

- .01 White
- .02 Black




### Element 7347

90° internal curve

### 7348

90° external curve

- .01 White
- .02 Black



### Kit 7349

Suspension kit  
(cable 200 cm)


- .01 White
- .02 Black



### Element 7350

Mechanical connector  
(without electrical contacts)


- .01 White
- .02 Black



### Element 7351

Ceiling wall pair


- .01 White
- .02 Black



### Element 7352

Closing Head


- .01 White
- .02 Black



### Element 7355

Right T joint

- .01 White
- .02 Black



Left T joint


- .01 White
- .02 Black



### Element 7368

Ceiling wall pair

- .01 White
- .02 Black



**WARNING!**  
THE TRACK IS NOT SECTIONAL

## CEILING ROSES SYSTEM

Ceiling roses with driver for ceiling installation - Live end 7344S/D not included




The choice of the ceiling rose must be made by adding the load of the products used on the track. The latter is given by the sum of the absorption of the LED source and that of the adapter, approximately 3W.

### 0715/48

- .01 White
- .02 Black

Ceiling rose with driver  
IN: 220 - 240V  
OUT: 48V - 60W  
ON-OFF  
DIM1...10V


**PUSH** **1...10V**

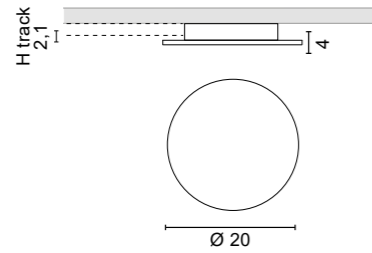

### 0716/48

- .01 White
- .02 Black

Ceiling rose with driver  
IN: 220 - 240V  
OUT: 48V - 60W  
ON-OFF

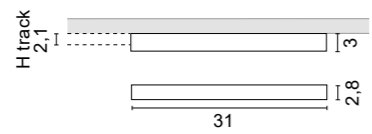

**0715/48**  
End track installation



**0716/48/2**  
Central installation between two tracks

### 0716/48/2

- .01 White
- .02 Black

Ceiling rose with driver  
IN: 220 - 240V  
OUT: 48V - 60W  
ON-OFF

## CEILING ROSES SYSTEM

Ceiling roses with driver for suspended installation




### 0992/150

1,30 Kg

- .01 White
- .02 Black

Ceiling rose 150W with driver  
IN: 220 - 240V  
OUT: 48V - 50W  
ON/OFF



## DRIVERS

### ON/OFF

#### 0160/48

IN: 220 - 240V  
OUT: 48V - 60W

**SELV**

7 cm

#### 0157/48

IN: 220 - 240V  
OUT: 48V - 70/72W

**SELV**

7 cm

**SELV**

8 cm

#### 0162/48

IN: 220 - 240V  
OUT: 48V - 150W

### DIMMER 48V

#### 0110/DIM

IN: 12/24/48V  
OUT: 12/24/48V Max 12A

Can be used as a slave (max 10).

**DALI** **PUSH** **1...10V**

4,4 cm

#### 0110/DIM/MINI

IN: 12/24/48V  
OUT: 12/24/48V Max 5A

**DALI** **PUSH** **1...10V**



2,8 cm


The track can be controlled with PUSH, DALI, 1...10V dimming using the dimmers **0110/DIM** or **0110/DIM/MINI**

These must be installed with the ballasts (**0160/48**, **0157/48**, **0162/48**) and allow to dim all the fixtures installed on the track together

DALI dimming of the single product on request





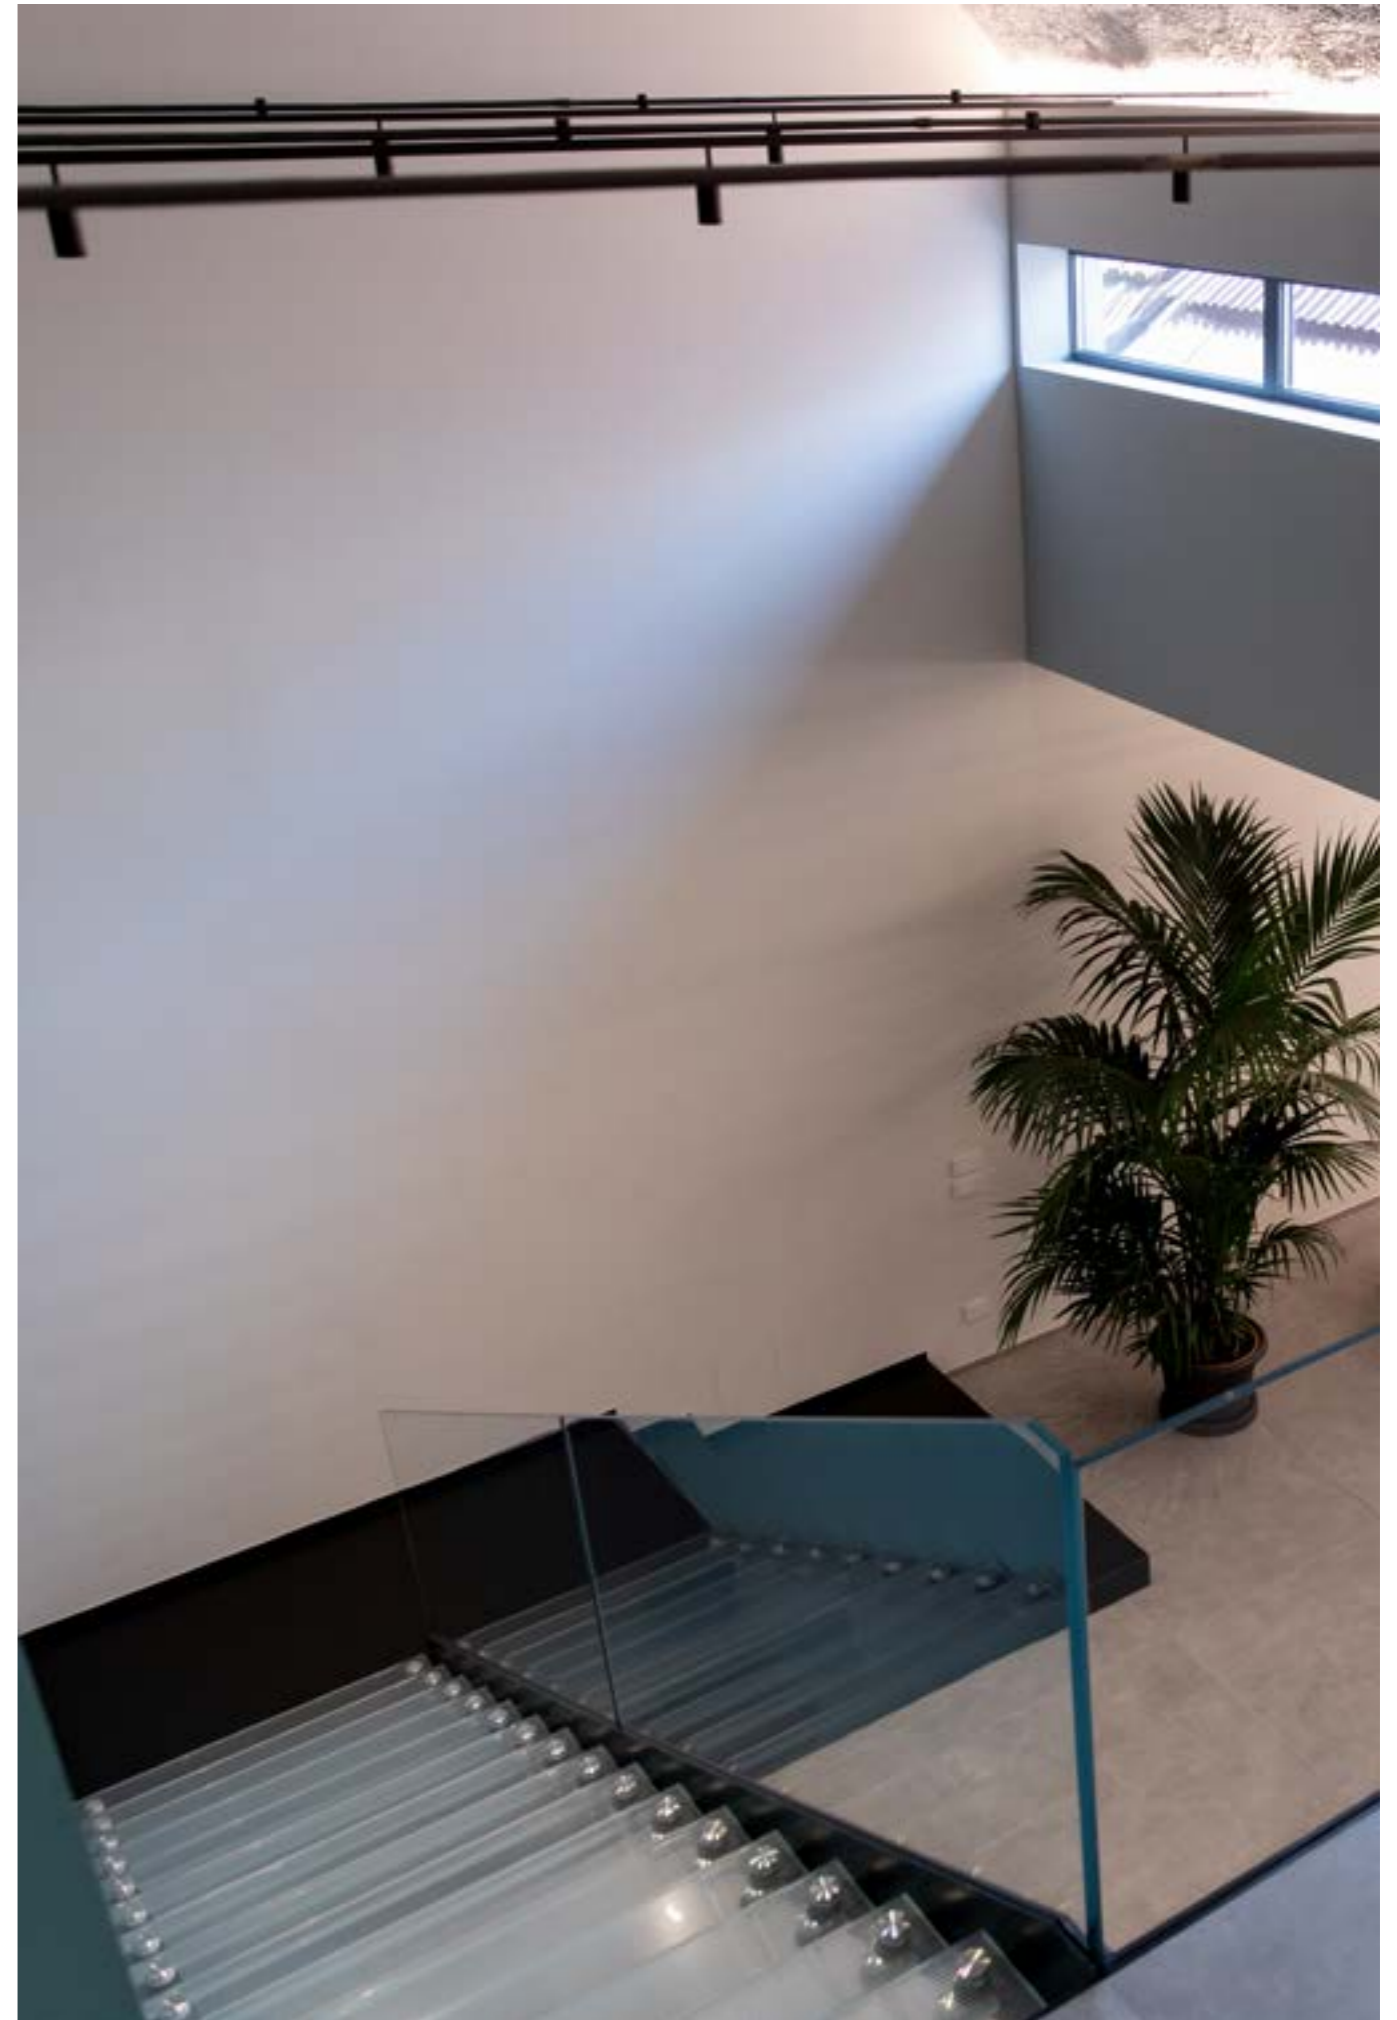





## TRACK 48V RECESSED

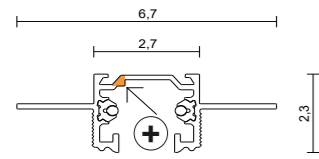

**7361** 0,68 Kg

- .01** White ■
- .02** Black ■


Track 48V (20A) 1 mt



**7362** 1,37 Kg

- .01** White ■
- .02** Black ■


Track 48V (20A) 2 mt



**7363** 2,00 Kg

- .01** White ■
- .02** Black ■

Track 48V (20A) 3 mt



48V low voltage electrified tracks for trimless recessed installation in false ceilings. The two 48V conductors can transmit, upon request, also **DALI** signal, allowing for the light dynamic control.

The continuity of the positive line between each element is important for a correct installation.


### FINISHES CODES




**.01** White

**.02** Black






# TRACK 48V RECESSED



## CONFIGURATION EXAMPLE

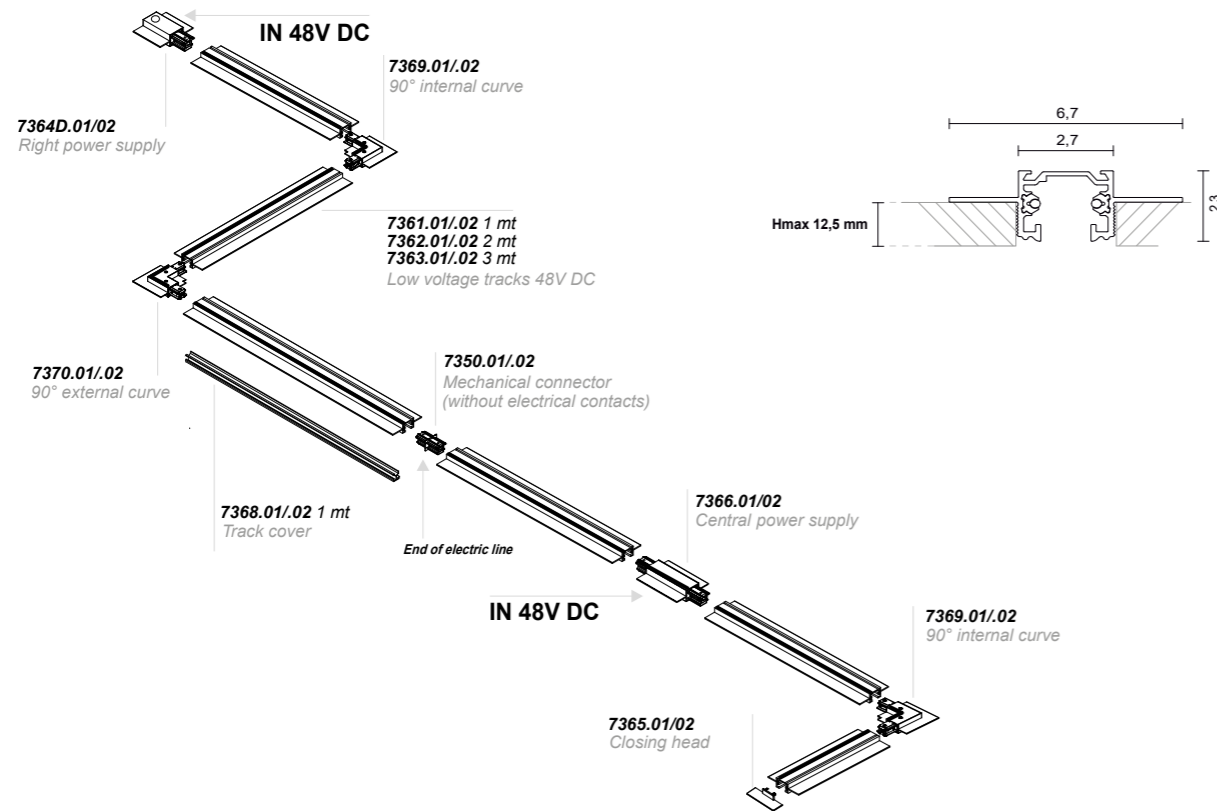

## ACCESSORIES


### Element 7364/S

Left Live-End

### 7364/D

Right Live-End


- .01 White
- .02 Black



### Element 7365

Closing Head


- .01 White
- .02 Black



### Element 7346

Mechanical connector (with electrical contacts)

- .01 White
- .02 Black




### Element 7369

90° internal curve

### 7370

90° external curve


- .01 White
- .02 Black

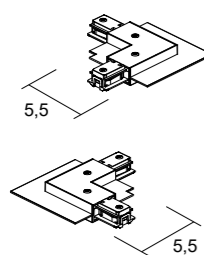

### Element 7350

Mechanical connector (without electrical contacts)


- .01 White
- .02 Black



### Element 7366

Central Connector


- .01 White
- .02 Black



### Element 7368

Ceiling wall pair

- .01 White
- .02 Black



## DRIVERS

### ON/OFF

#### 0160/48

IN: 220 - 240V  
OUT: 48V - 60W

SELV

7 cm

#### 0157/48

IN: 220 - 240V  
OUT: 48V - 70/72W

SELV

8 cm

SELV

7 cm

#### 0162/48

IN: 220 - 240V  
OUT: 48V - 150W

The choice of the ceiling rose and drivers must be made by adding the load of the indirect light to that of the products used on the track. The latter is given by the sum of the absorption of the LED source and that of the adapter, approximately 3W.

### DIMMER 48V

#### 0110/DIM

IN: 12/24/48V  
OUT: 12/24/48V Max 12A  
Can be used as a slave (max 10).

#### 0110/DIM/MINI

IN: 12/24/48V  
OUT: 12/24/48V Max 5A


4,4 cm

2,8 cm

The track can be controlled with **PUSH, DALI, 1...10V** dimming using the dimmers **0110/DIM or 0110/DIM/MINI**. These must be installed with the ballasts (**0160/48, 0157/48, 0162/48**) and allow to dim all the fixtures installed on the track together. **DALI** dimming of the single product on request.



# TRACK 48V SUSPENSION



**7421**

.02 Black ■



## 100cm

/100/W	4000K	48V 14,4W	1650lm
/100/WW	3000K	48V 14,4W	1551lm
/100/XW	2700K	48V 14,4W	1626lm

## 150cm

/150/W	4000K	48V 21,6W	2475lm
/150/WW	3000K	48V 21,6W	2339lm
/150/XW	2700K	48V 21,6W	2139lm

## 200cm

/200/W	4000K	48V 28,8W	3300lm
/200/WW	3000K	48V 28,8W	3102lm
/200/XW	2700K	48V 28,8W	2852lm


## 300cm

/300/W	4000K	48V 43,2W	4950lm
/300/WW	3000K	48V 43,2W	4653lm
/300/XW	2700K	48V 43,2W	4278lm



Low voltage 48Vdc suspended track complete with LED circuit and opal screen for homogeneous lighting of the ceiling with a 120° angle. The system is single-access, it provides for the simultaneous switching on of the indirect light and of the products installed on the track.

## CONFIGURATION EXAMPLE

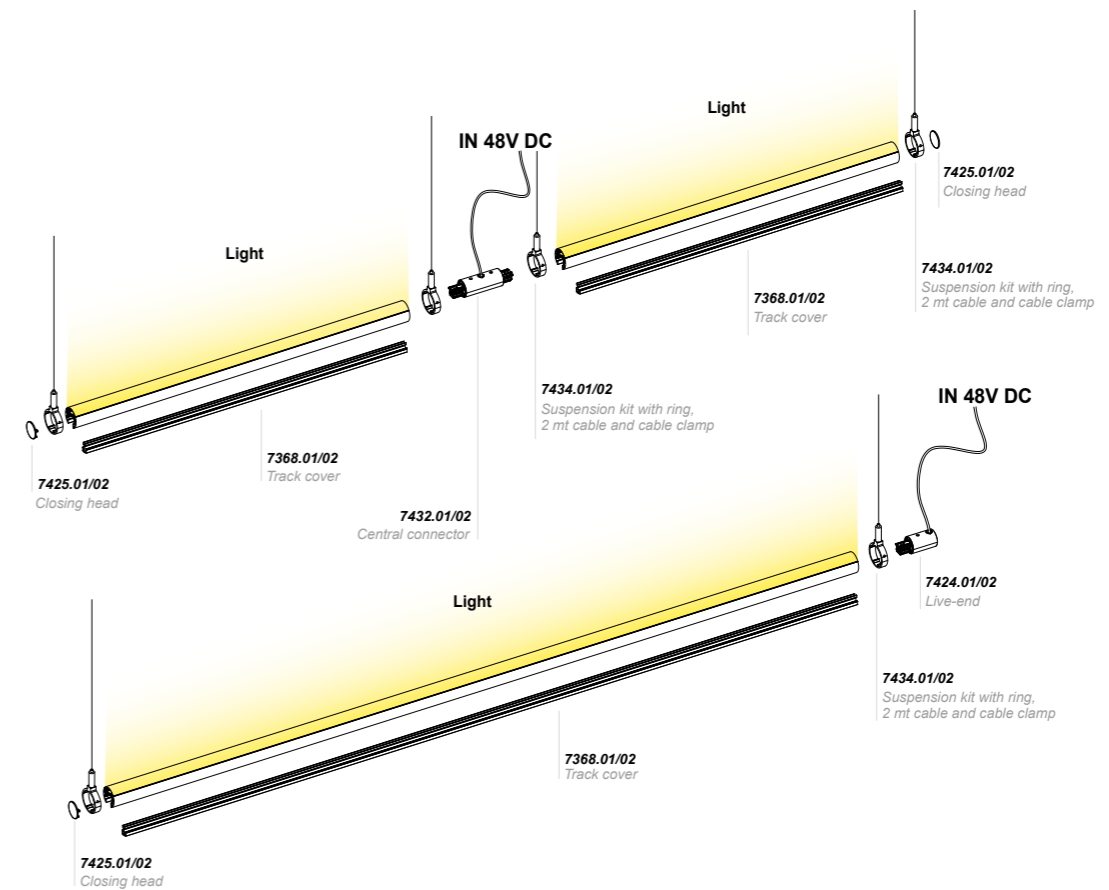

## ACCESSORIES

Element  
**7424/S**

Left Live-End

**7424/D**


Rigt Live-End

.02 Black ■

Element  
**7368**

Track cover 1mt


.02 Black ■



Element  
**7425**

Closing Head

.02 Black ■



Kit  
**7434**

Suspension kit with ring  
2mt cable  
cable lamp


.02 Black ■



Element  
**7432**

Central Connector

.02 Black ■

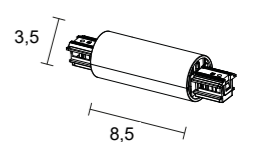


## FINISHES CODES



.02 Black

# CEILING ROSES SYSTEM

Ceiling roses with driver for suspended installation



**0992/150** 1,30 Kg

- .01** White
- .02** Black

Ceiling rose 150W with driver  
 IN: 220 - 240V  
 OUT: 48V - 50W  
 ON/OFF

The choice of the ceiling rose and drivers must be made by adding the load of the indirect light to that of the products used on the lower track.  
 The latter is given by the sum of the absorption of the LED source and that of the adapter, approximately 3W.

## DRIVERS

### ON/OFF

- |  |                     |              |
|--|---------------------|--------------|
| <p><b>0160/48</b><br/>                 IN: 220 - 240V<br/>                 OUT: 48V - 60W</p>    | <p> <b>SELV</b></p> | <p> 7 cm</p> |
| <p><b>0157/48</b><br/>                 IN: 220 - 240V<br/>                 OUT: 48V - 70/72W</p> |                     |              |

- |  |              |                                  |
|--|--------------|----------------------------------|
| <p> <b>SELV</b></p> <p><b>0162/48</b><br/>                 IN: 220 - 240V<br/>                 OUT: 48V - 150W</p> | <p> 7 cm</p> | <p> <b>SELV</b></p> <p> 8 cm</p> |
|--|--------------|----------------------------------|



### DIMMER 48V

- |   |   |   |   |
|---|---|---|---|
| <p><b>0110/DIM</b><br/>                 IN: 12/24/48V<br/>                 OUT: 12/24/48V Max 12A<br/>                 Can be used as a slave (max 10).</p> | <p> <b>DALI</b> <b>PUSH</b> <b>1...10V</b></p> <p> 4,4 cm</p> | <p><b>0110/DIM/MINI</b><br/>                 IN: 12/24/48V<br/>                 OUT: 12/24/48V Max 5A</p> | <p> <b>DALI</b> <b>PUSH</b> <b>1...10V</b></p> <p> 2,8 cm</p> |
|---|---|---|---|

The track can be controlled with PUSH, DALI, 1...10V dimming using the dimmers 0110/DIM or 0110/DIM/MINI. These must be installed with the ballasts (0160/48, 0157/48, 0162/48) and allow to dim all the fixtures installed on the track together. DALI dimming of the single product on request.




# NEWTON TRACK 48V



**6343** 0,40 Kg

- .01 White
- .02 Black


/W	4000K	/24	/38	/58	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin		48V DC 8,7W	1223lm
/WW	3000K	/24	/38	/58	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin		48V DC 8,7W	1156lm
/XW	2700K	/24	/38	/58	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin		48V DC 8,7W	1106lm

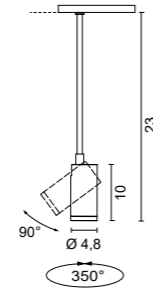

**6345** 0,50 Kg

- .01 White
- .02 Black

/W	4000K	/24	/38	/58	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin		48V DC 8,7W	1223lm
/WW	3000K	/24	/38	/58	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin		48V DC 8,7W	1156lm
/XW	2700K	/24	/38	/58	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin		48V DC 8,7W	1106lm

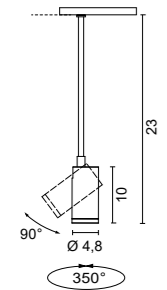

**6346** 0,60 Kg

- .01 White
- .02 Black

/W	4000K	/24	/38	/58	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin		48V DC 8,7W	1223lm
/WW	3000K	/24	/38	/58	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin		48V DC 8,7W	1156lm
/XW	2700K	/24	/38	/58	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin		48V DC 8,7W	1106lm



## ACCESSORIES



Element  
**0267**

1 Louvres

- .01 White
- .02 Black



Element  
**0274**

Anti-glare screen.

- .01 White
- .02 Black




## AVAILABLE OPTICS




**/24** Narrow beam optic for accent lighting



**/38** Medium beam optic


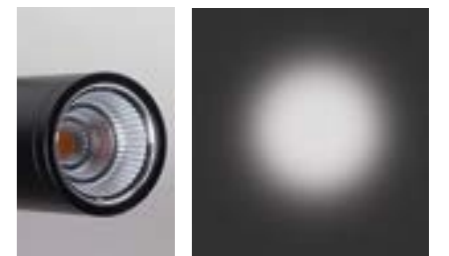


**/58** Wide beam optic

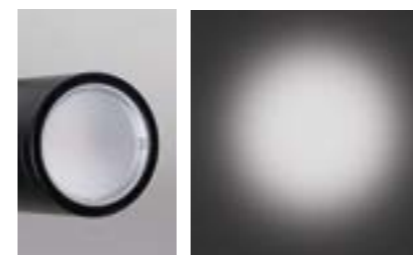

**/ST** Diffused light optic for general lighting

# NEWTON SLIM TRACK 48V

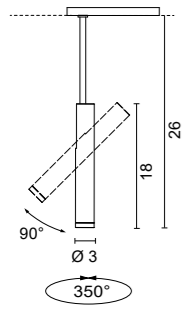

**6451** 0,50 Kg

- .01 White
- .02 Black

/W	4000K	/35	/48	/63	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin		48V DC 8,7W	1223lm
/WW	3000K	/35	/48	/63	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin		48V DC 8,7W	1156lm
/XW	2700K	/35	/48	/63	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin		48V DC 8,7W	1106lm



## ACCESSORIES



Element  
**0265**

Sand blasted Pyrex glass diffuser


- .01 White ferrule
- .02 Black ferrule



Element  
**0267/S**

1 Louvres

- .01 White
- .02 Black

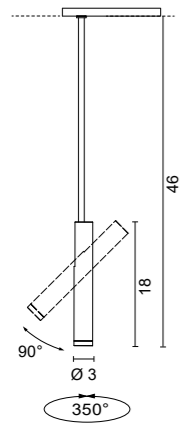

**6452** 0,60 Kg

- .01 White
- .02 Black

/W	4000K	/35	/48	/63	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin		48V DC 8,7W	1223lm
/WW	3000K	/35	/48	/63	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin		48V DC 8,7W	1156lm
/XW	2700K	/35	/48	/63	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin		48V DC 8,7W	1106lm




## AVAILABLE OPTICS




**/35** Narrow beam optic for accent lighting



**/48** Medium beam optic

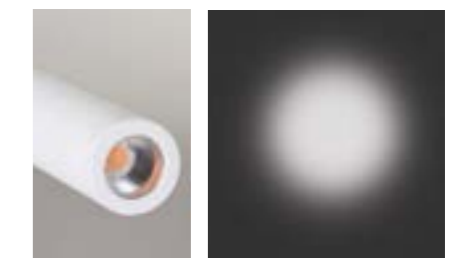



**/63** Wide beam optic

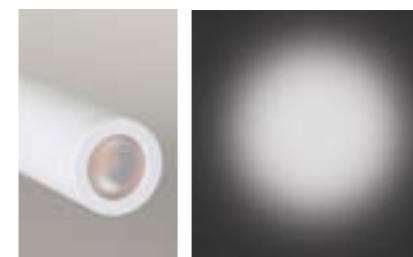

**/ST** Diffused light optic for general lighting




# NEWTON FLAT TRACK 48V



**6448** 0,50 Kg

- .01 White
- .02 Black


/W	4000K	/13	/40	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin	48V DC 8,7W	1223lm
/WW	3000K	/13	/40	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin	48V DC 8,7W	1156lm
/XW	2700K	/13	/40	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin	48V DC 8,7W	1106lm

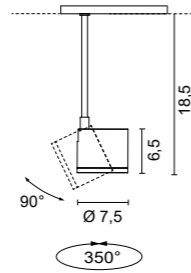

**6449** 0,60 Kg

- .01 White
- .02 Black

/W	4000K	/13	/40	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin	48V DC 8,7W	1223lm
/WW	3000K	/13	/40	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin	48V DC 8,7W	1156lm
/XW	2700K	/13	/40	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin	48V DC 8,7W	1106lm

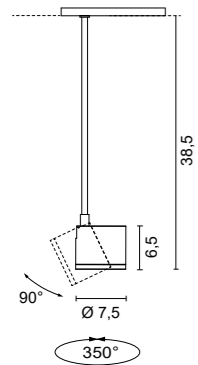

**6450** 0,70 Kg

- .01 White
- .02 Black

/W	4000K	/13	/40	48V DC 8,7W	1223lm
/W	4000K	/ST	Satin	48V DC 8,7W	1223lm
/WW	3000K	/13	/40	48V DC 8,7W	1156lm
/WW	3000K	/ST	Satin	48V DC 8,7W	1156lm
/XW	2700K	/13	/40	48V DC 8,7W	1106lm
/XW	2700K	/ST	Satin	48V DC 8,7W	1106lm



## ACCESSORIES




Element

**0264**

Decorative parabolic reflector. Ø 10cm H 3,6cm

- .01 White
- .02 Black

## AVAILABLE OPTICS

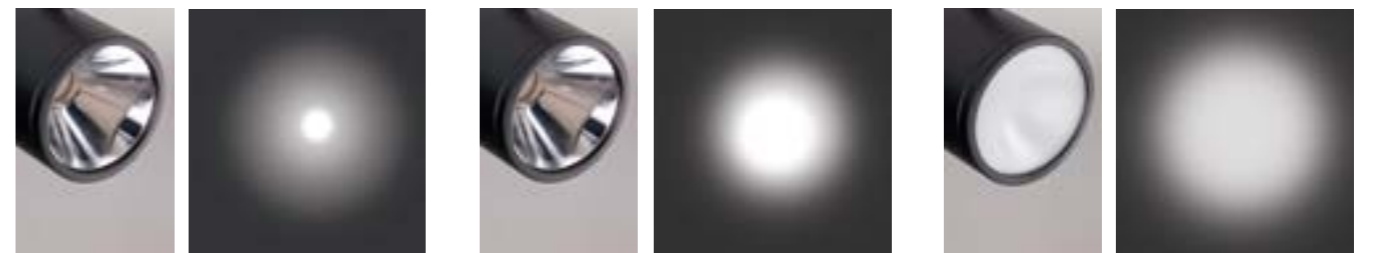


/13 Narrow beam optic for accent lighting

/40 Wide beam optic

/ST Diffused light optic for general lighting

# NEWTON TRACK 48V

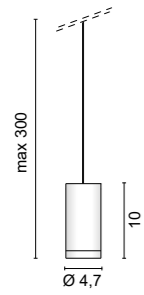

1591

0,50Kg

.02	Black	■
.25	Satin gold	■
.32	Nickel mat	■

/W	4000K		5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K		5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K		5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	5,9W 17V 350mA	969lm	746lm (out)



2 displacement component included  
Upon request beam angles: 24° o 58°



## FINISHES CODES




.02 Black

.25 Satin gold

.32 Nickel mat


## AVAILABLE OPTICS

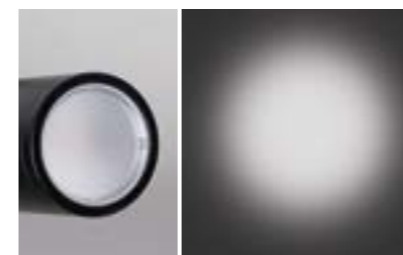

/ST Diffused light optic for general lighting

# NEWTON TRACK 48V


## ACCESSORIES

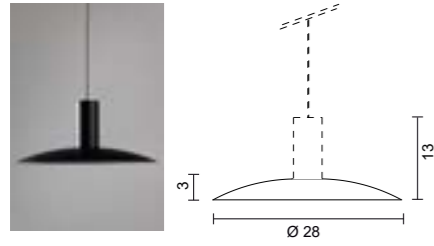

Element  
**0547**

Screen in black painted metal 0,24Kg


**.02** Black ■

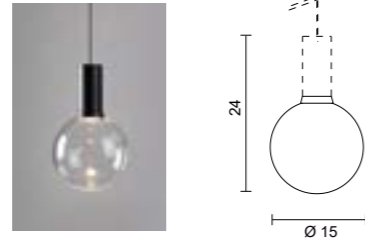

Element  
**0549**

Transparent blown glass diffuser 0,35Kg

**.02.00** Black ■  
**.25.00** Satin gold ■  
**.32.00** Nickel mat ■

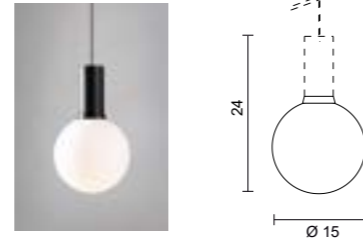

Element  
**0549**

White blown glass diffuser 0,35Kg

**.02.57** Black ■  
**.25.57** Satin gold ■  
**.32.57** Nickel mat ■



Element  
**0274**

Anti-glare screen. Ø 4,7cm H 3,8cm

**.01** White ■  
**.02** Black ■



Element  
**0267**

1 Louvres Ø 4,7cm H 1,0cm

**.01** White ■  
**.02** Black ■




Adapter  
**0987**

**.01** White ■  
**.02** Black ■



IN: 48V  
OUT: 350mA DC  
Adapter for 48V Track - 1 Lamp



Adapter 0987 to be ordered separately

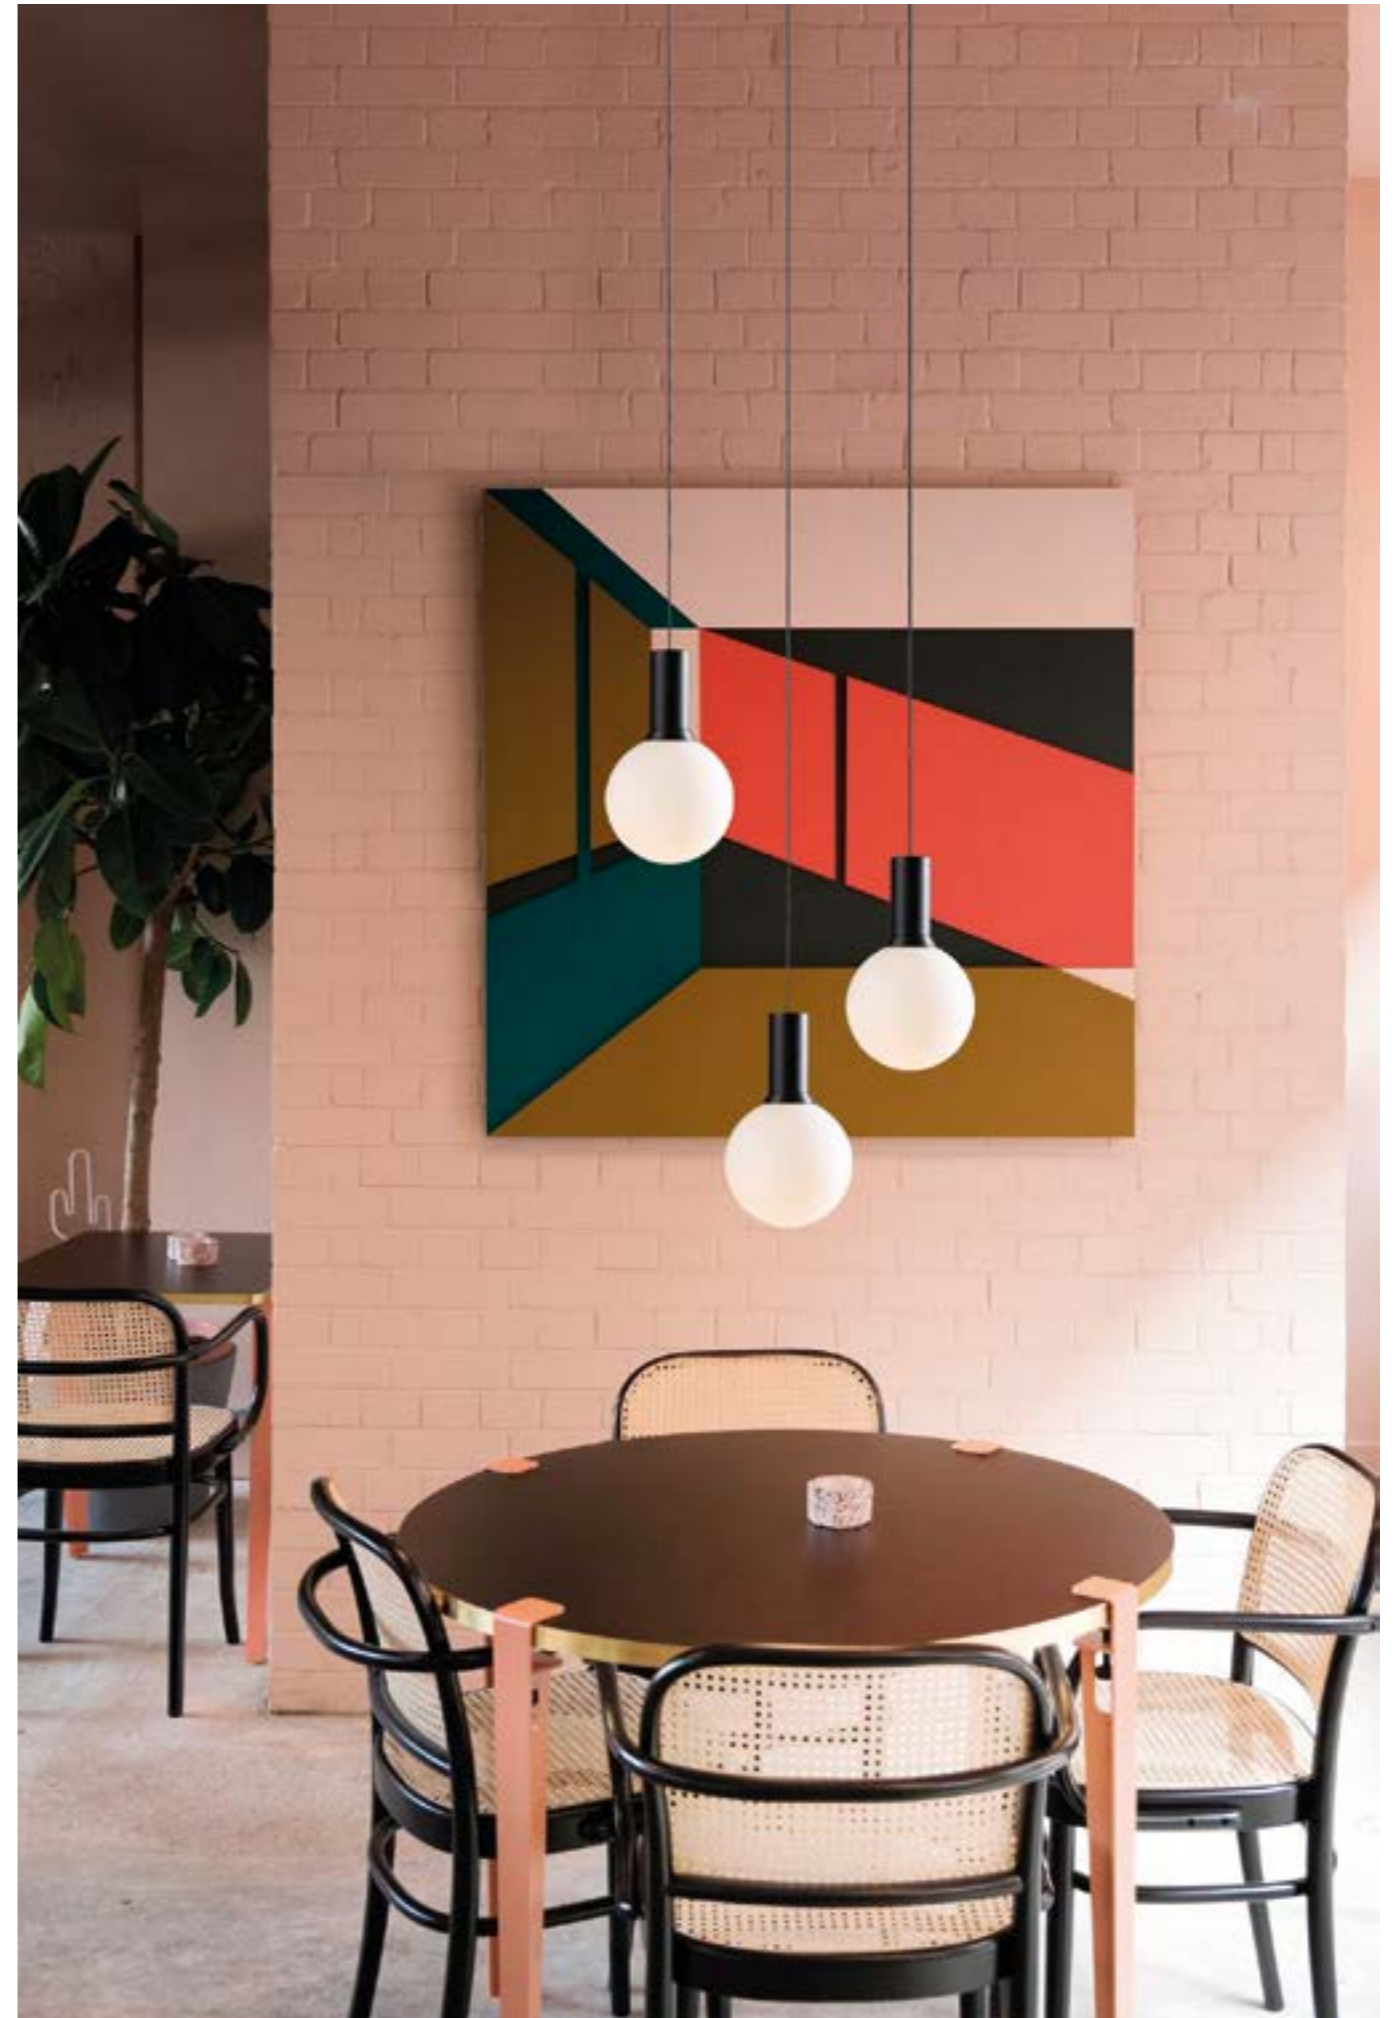


# SEGMENTO / SEGMENTO DARK TRACK 48V

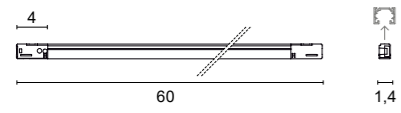

**6699** 0,35 Kg

- .01 White
- .02 Black


/WW	3000K	48V DC 12W	1292lm
/XW	2700K	48V DC 12W	1162lm

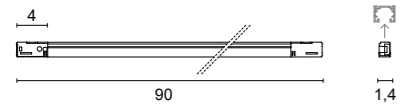

**6700** 0,50 Kg

- .01 White
- .02 Black

/WW	3000K	48V DC 19W	2068lm
/XW	2700K	48V DC 19W	1861lm

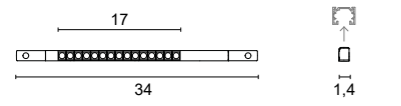



**6697** 0,10 Kg

- .02 Black

/WW	3000K	48V DC 17W	1650lm	1320lm (out)
/XW	2700K	48V DC 17W	1485lm	1188lm (out)




# IRIS TRACK 48V

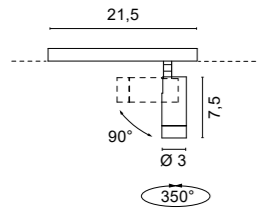

## 6704

0,20 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>
/W	4000K /25 /48 /63	48V DC 5,9W 1060lm 880lm (out)
/W	4000K /ST Satin	48V DC 5,9W 1060lm 816lm (out)
/WW	3000K /25 /48 /63	48V DC 5,9W 1030lm 855lm (out)
/WW	3000K /ST Satin	48V DC 5,9W 1030lm 793lm (out)
/XW	2700K /25 /48 /63	48V DC 5,9W 969lm 804lm (out)
/XW	2700K /ST Satin	48V DC 5,9W 969lm 746lm (out)

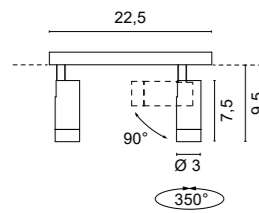

## 6717

0,30 Kg

.01	White	<input type="checkbox"/>
.02	Black	<input checked="" type="checkbox"/>
/W	4000K /25 /48 /63	48V DC 11,8W 2120lm 1760lm (out)
/W	4000K /ST Satin	48V DC 11,8W 2120lm 1632lm (out)
/WW	3000K /25 /48 /63	48V DC 11,8W 2060lm 1710lm (out)
/WW	3000K /ST Satin	48V DC 11,8W 2060lm 1586lm (out)
/XW	2700K /25 /48 /63	48V DC 11,8W 1938lm 1608lm (out)
/XW	2700K /ST Satin	48V DC 11,8W 1938lm 1492lm (out)



## FINISHES CODES



.01 White

.02 Black




## ACCESSORIES

Louvres  
**0267/S**

.01	White	<input type="checkbox"/>
.01	Black	<input checked="" type="checkbox"/>



# STICK TRACK 48V

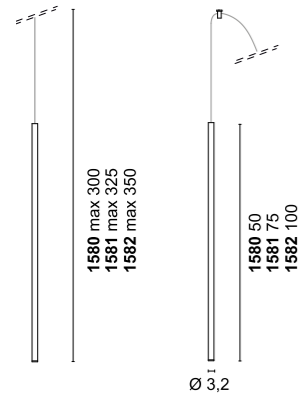

## 1580

0,90 Kg

.01	White	
.02	Black	
.21	Shiny gold	
.25	Satin gold	

/W	4000K	/48	5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/48	5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/48	5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	5,9W 17V 350mA	969lm	746lm (out)



2 displacement component included

## 1581

1,00 Kg

.01	White	
.02	Black	
.21	Shiny gold	
.25	Satin gold	

/W	4000K	/48	5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/48	5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/48	5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	5,9W 17V 350mA	969lm	746lm (out)



2 displacement component included

## FINISHES CODES



.01 White    .02 Black    .21 Shiny gold    .25 Satin gold

## 1582

1,10 Kg

.01	White	
.02	Black	
.21	Shiny gold	
.25	Satin gold	

/W	4000K	/48	5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/48	5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/48	5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	5,9W 17V 350mA	969lm	746lm (out)



2 displacement component included

## 0987

.01	White	
.02	Black	

IN: 48V  
OUT: 350mA DC  
Adapter for 48V Track - 1 Lamp



Adapter **0987** to be ordered separately





INDOOR

# LINEA

Design U.T. EgoIuce



## LINEA



IP40 linear modular system with diffused light for recessed installations with very small co-extruded methacrylate structure, anodized aluminum internal dissipator and injection molded methacrylate end caps. The small methacrylate border allows for simple installation that does not require costly shaving, grouting and plastering operations.

The single luminaires are made in various lengths from 12 to 302 cm with modularity every 10 cm (see table p.541). Available in three shades of light (2700K, 3000K, 4000K) and RGB versions.

Angled cuts are made upon request.

The formwork for masonry (only for the LINEA model), the corner profiles to facilitate installation on plasterboard, the drivers, the DALI, 1...10V or PUSH dimmers and the emergency groups are to be ordered separately.

*Système modulaire linéaire IP40 à lumière diffuse pour installations encastrées avec très petite structure en méthacrylate co-extrudé, dissipateur interne en aluminium anodisé et embouts en méthacrylate moulé par injection. La petite bordure en méthacrylate permet une installation simple qui ne nécessite pas d'opérations coûteuses de rasage, de jointoiement et de plâtrage.*

*Les luminaires simples sont fabriqués en différentes longueurs de 12 à 302 cm avec une modularité tous les 10 cm (voir tableau p.541). Disponible en trois nuances de lumière (2700K, 3000K, 4000K) et en versions RVB.*

*Les coupes en biais sont réalisées sur demande.*

*Le coffrage pour maçonnerie (uniquement pour le modèle LINEA), les profilés d'angle pour faciliter la pose sur plaque de plâtre, les alimentations, les variateurs DALI, 1...10V ou PUSH et les groupes de secours sont à commander séparément.*

*Lineare LED Einbauleuchten-system mit 'minitrim'. Der kleine Rahmen aus Methacrylat ermöglicht eine einfache und billige Installation ohne Gipsfertigung.*

*Profil aus satiniertem Methacrylat weiß und Kühlkörper aus Aluminium eloxiert. Die einzelnen Elemente sind in verschiedenen Längen verfügbar: von 12 bis 302 cm. mit Modularität je 10 cm (siehe Tabelle s.541).*

*Erhältlich in drei Lichtfarben (2700, 3000 oder 4000K) oder RGB.*

*Auf Anfrage vorbereiten wir Sonderausführungen mit eckeschnitt oder mit anderer Lichtfarbe.*

*Separat zu bestellen: Konverter, dimmer DALI/1...10V/PUSH, Notbeleuchtung, Einbaudose (nur für LINEA).*

*LINEA – Breite 2,7 cm.*



*Die Standardversion ist mit flexible LED Leisten 15W/m - 1700Lm/m (4000K) versehen.*

*LINEA – Breite 5,4 cm.*

*Die Standardversion ist mit flexible LED Leisten 18W/m - 2000Lm/m (4000K) versehen.*



# LINEA - LINEA RGB

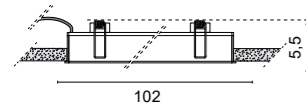



**6615** 0,50 Kg

.01 White

/W	4000K	LED 24V 15W	1840lm
/WW	3000K	LED 24V 15W	1650lm
/XW	2700K	LED 24V 15W	1560lm



ETL version available upon request

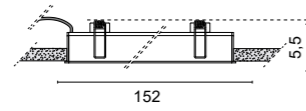



**6616** 1,50 Kg

.01 White

/W	4000K	LED 24V 22,5W	2760lm
/WW	3000K	LED 24V 22,5W	2475lm
/XW	2700K	LED 24V 22,5W	2340lm



ETL version available upon request

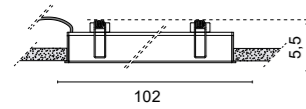



**6617** 0,50 Kg

.01 White

LED 24V 14,4W



ETL version available upon request

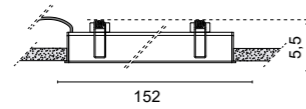


**6618** 1,50 Kg

.01 White

LED 24V 21,6W




ETL version available upon request

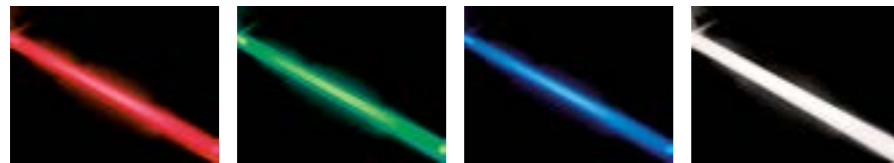

## FINISHES CODES



.01 White

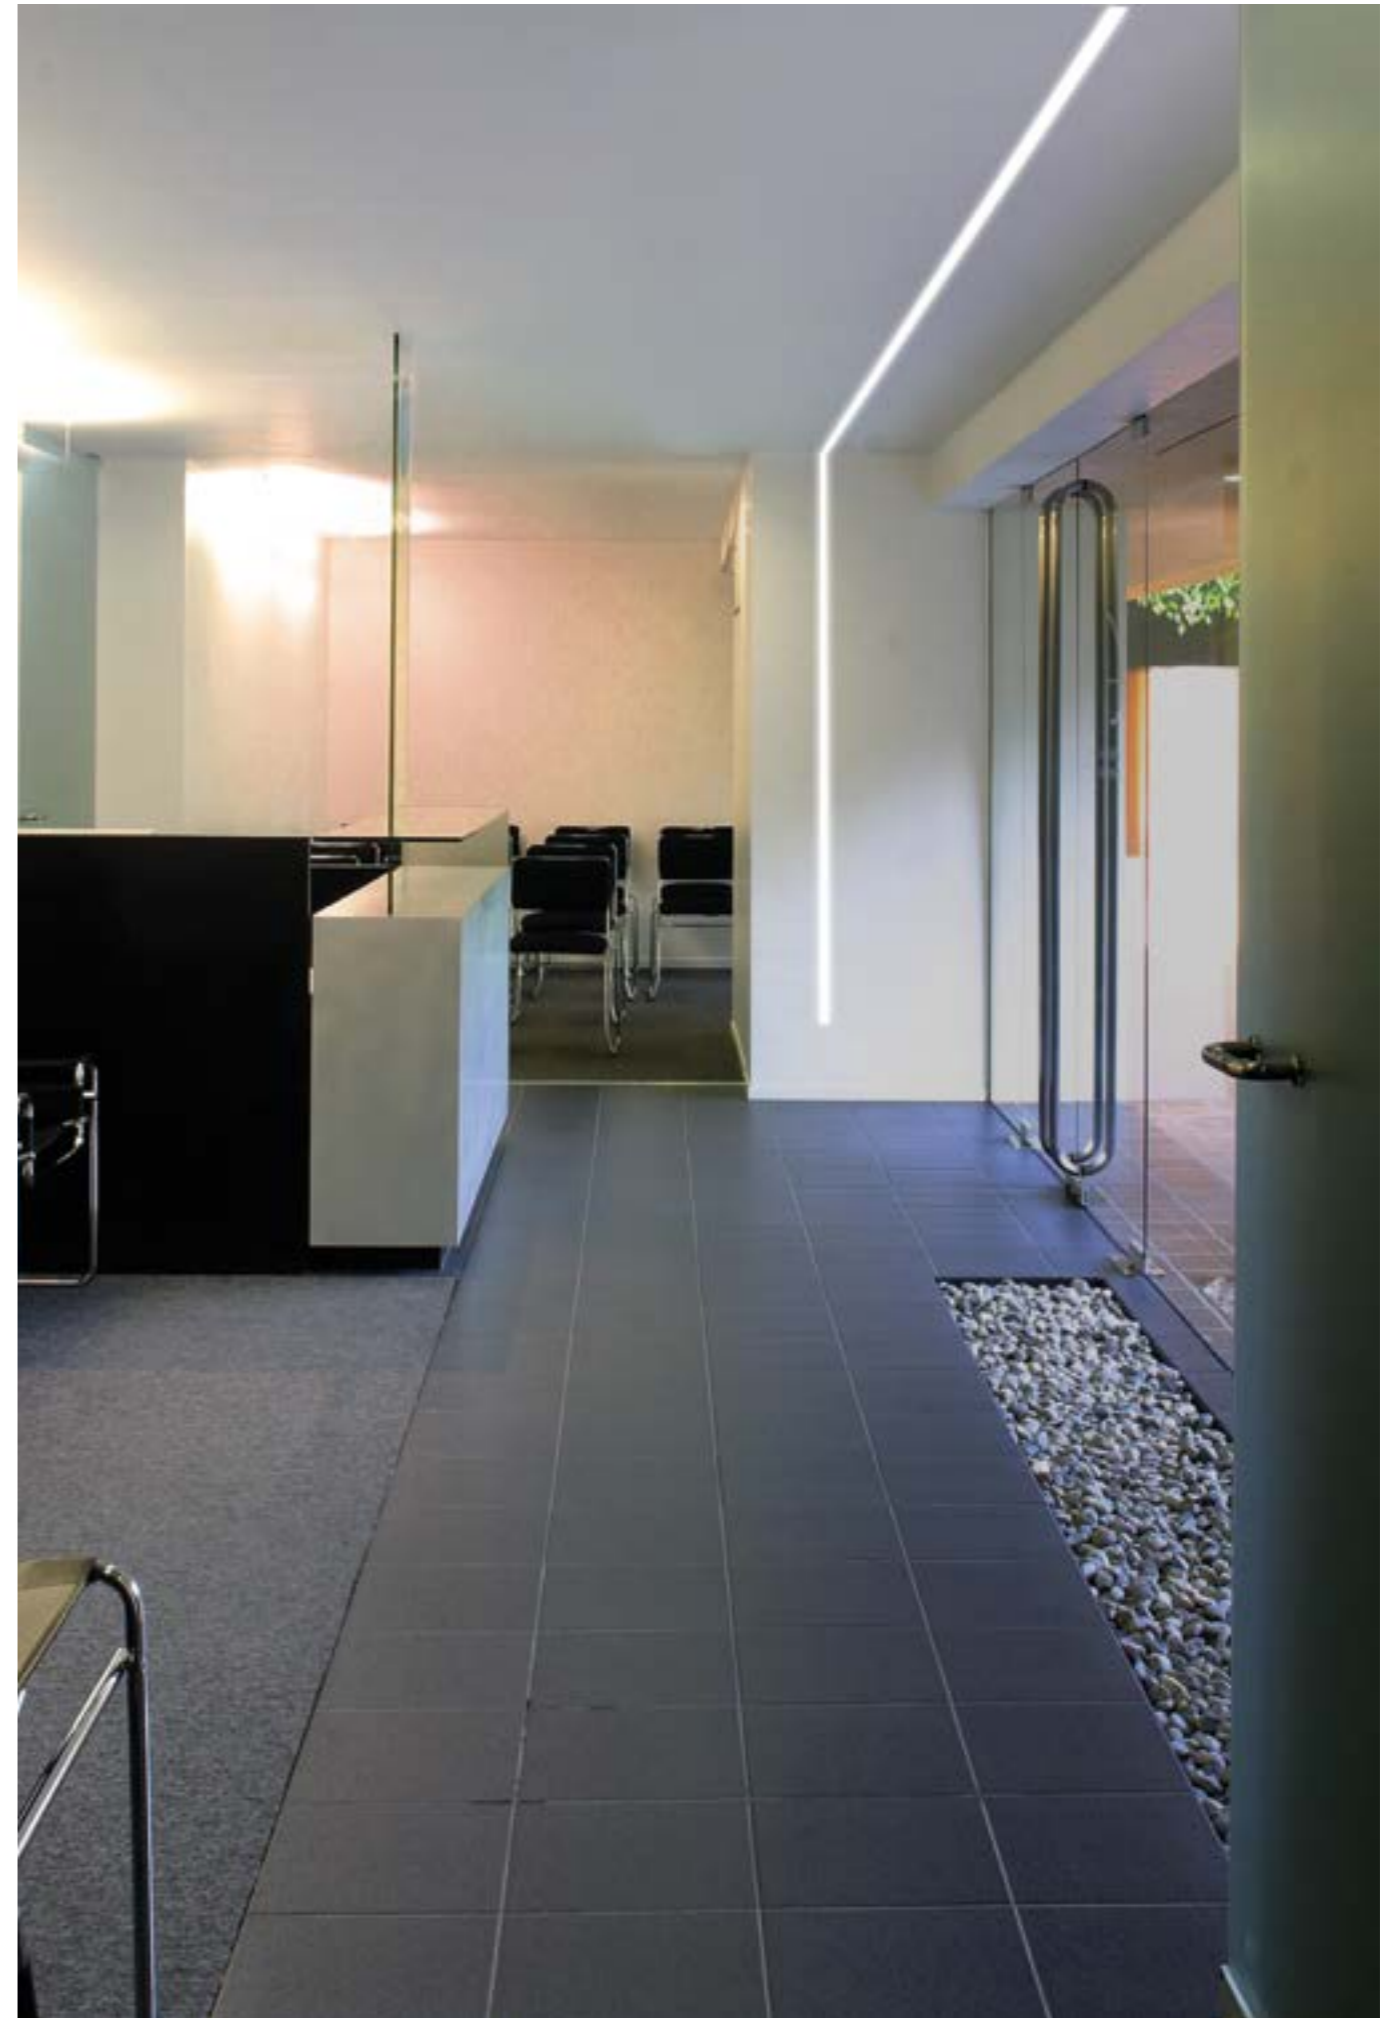

# LINEA - LINEA RGB




## ACCESSORIES

### Kit 0210

Wallbox for concrete



0210/100 101,8 cm  
0210/150 151,8 cm  
0210/200 201,8 cm  
0210/300 301,8 cm

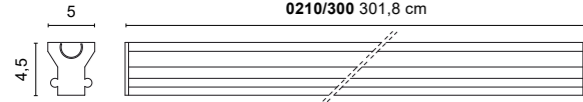

/100	101,8 cm	6x105x5 cm
/150	151,8 cm	6x155x5 cm
/200	201,8 cm	6x205x5 cm
/300	301,8 cm	6x305x5 cm

### Kit 0242

Optional L shaped profile to ease installation into plasterboard



/100	100 cm
/200	200 cm
/300	300 cm

## DRIVERS

### ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-25W	24V-75W	24V-60W	24V-100W	24V-150W

### DIMMABLE

Cod.	0110/DIM	0717/DIM60/V	0717/DIM60	0717/DIM100
	12/24V	24V-60W 1...10V	24V-60W PUSH DALI	24V-100W 1...10V - PUSH DALI

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR

Only Parallel Connection

### DRIVER RGB

0164	0167
120W	22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

#### 0164/CASA

120W

IN 230V - OUT 3 X 24V

### SENSOR & CABLE RGB

#### 0163

IR Sensor

#### 0165

IR Remote controller

#### 0166

Sync Cable



## CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.

cm	watt	cm	2700K	lm	3000K	lm	4000K	lm	RGB
12	1,5W	11,5x2,2	A6615.01/10/XW	156	A6615.01/10/WW	165	A6615.01/10/W	184	A6615.01/10RGB
22	3W	21,5x2,2	A6615.01/20/XW	312	A6615.01/20/WW	330	A6615.01/20/W	368	A6615.01/20RGB
32	4,5W	31,5x2,2	A6615.01/30/XW	468	A6615.01/30/WW	495	A6615.01/30/W	552	A6615.01/30RGB
42	6W	41,5x2,2	A6615.01/40/XW	624	A6615.01/40/WW	660	A6615.01/40/W	736	A6615.01/40RGB
52	7,5W	51,5x2,2	A6615.01/50/XW	780	A6615.01/50/WW	895	A6615.01/50/W	920	A6615.01/50RGB
62	9W	61,5x2,2	A6615.01/60/XW	936	A6615.01/60/WW	990	A6615.01/60/W	1104	A6615.01/60RGB
72	10,5W	71,5x2,2	A6615.01/70/XW	1092	A6615.01/70/WW	1155	A6615.01/70/W	1288	A6615.01/70RGB
82	12W	81,5x2,2	A6615.01/80/XW	1248	A6615.01/80/WW	1320	A6615.01/80/W	1472	A6615.01/80RGB
92	13,5W	91,5x2,2	A6615.01/90/XW	1404	A6615.01/90/WW	1485	A6615.01/90/W	1656	A6615.01/90RGB
102	15W	101,5x2,2	6615.01/XW	1560	6615.01/WW	1650	6615.01/W	1840	6618.01
112	16,5W	111,5x2,2	A6615.01/110/XW	1716	A6615.01/110/WW	1815	A6615.01/110/W	2024	A6615.01/110RGB
122	18W	121,5x2,2	A6615.01/120/XW	1872	A6615.01/120/WW	1980	A6615.01/120/W	2208	A6615.01/120RGB
132	19,5W	131,5x2,2	A6615.01/130/XW	2028	A6615.01/130/WW	2145	A6615.01/130/W	2392	A6615.01/130RGB
142	21W	141,5x2,2	A6615.01/140/XW	2184	A6615.01/140/WW	2310	A6615.01/140/W	2576	A6615.01/140RGB
152	22,5W	151,5x2,2	6616.01/XW	2340	6616.01/WW	2475	6616.01/W	2760	6618.01
162	24W	161,5x2,2	A6615.01/160/XW	2496	A6615.01/160/WW	2640	A6615.01/160/W	2944	A6615.01/160RGB
172	25,5W	171,5x2,2	A6615.01/170/XW	2652	A6615.01/170/WW	2805	A6615.01/170/W	3128	A6615.01/170RGB
182	27W	181,5x2,2	A6615.01/180/XW	2808	A6615.01/180/WW	2970	A6615.01/180/W	3312	A6615.01/180RGB
192	28,5W	191,5x2,2	A6615.01/190/XW	2964	A6615.01/190/WW	3135	A6615.01/190/W	3496	A6615.01/190RGB
202	30W	201,5x2,2	A6615.01/200/XW	3120	A6615.01/200/WW	3300	A6615.01/200/W	3680	A6615.01/200RGB
212	31,5W	211,5x2,2	A6615.01/210/XW	3276	A6615.01/210/WW	3465	A6615.01/210/W	3864	A6615.01/210RGB
222	33W	221,5x2,2	A6615.01/220/XW	3432	A6615.01/220/WW	3630	A6615.01/220/W	4048	A6615.01/220RGB
232	34,5W	231,5x2,2	A6615.01/230/XW	3588	A6615.01/230/WW	3795	A6615.01/230/W	4232	A6615.01/230RGB
242	36W	241,5x2,2	A6615.01/240/XW	3744	A6615.01/240/WW	3960	A6615.01/240/W	4416	A6615.01/240RGB
252	37,5W	251,5x2,2	A6615.01/250/XW	3900	A6615.01/250/WW	4125	A6615.01/250/W	4600	A6615.01/250RGB
262	39W	261,5x2,2	A6615.01/260/XW	4056	A6615.01/260/WW	4290	A6615.01/260/W	4784	A6615.01/260RGB
272	40,5W	271,5x2,2	A6615.01/270/XW	4212	A6615.01/270/WW	4455	A6615.01/270/W	4968	A6615.01/270RGB
282	42W	281,5x2,2	A6615.01/280/XW	4368	A6615.01/280/WW	4620	A6615.01/280/W	5152	A6615.01/280RGB
292	43,5W	291,5x2,2	A6615.01/290/XW	4524	A6615.01/290/WW	4785	A6615.01/290/W	5336	A6615.01/290RGB
302	45W	301,5x2,2	A6615.01/300/XW	4680	A6615.01/300/WW	4950	A6615.01/300/W	5520	A6615.01/300RGB


Attention : without closing heads -1 cm



CONFIGURATION EXAMPLE

Configurations longer than 3 meters can be obtained by putting single fittings side by side in a row, the cutout length can be calculated with the formula here under:


Examples  2,2x L cm

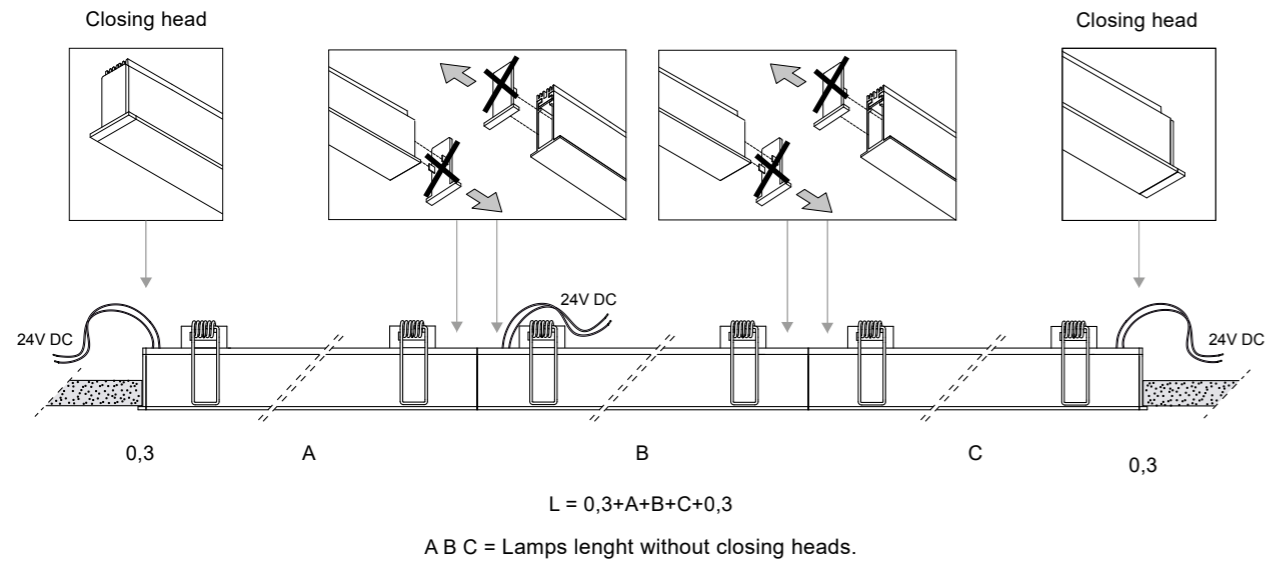

90° angled options are available upon request



# LINEA MAXI - LINEA MAXI RGB

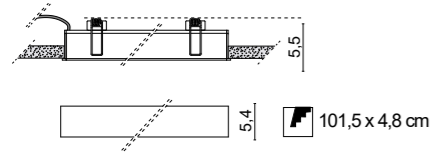


**6655** 1,00 Kg

.01 White

/W	4000K	LED 24V 18W	2260lm
/WW	3000K	LED 24V 18W	2020lm
/XW	2700K	LED 24V 18W	1890lm



ETL version available upon request

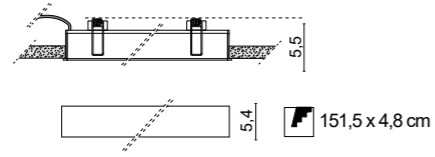


**6656** 1,50 Kg

.01 White

/W	4000K	LED 24V 27W	3390lm
/WW	3000K	LED 24V 27W	3030lm
/XW	2700K	LED 24V 27W	2835lm



ETL version available upon request

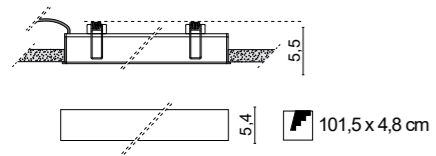


**6657** 1,00 Kg

.01 White

LED 24V 14,4W



ETL version available upon request

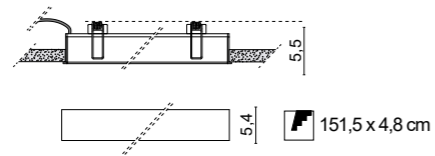


**6658** 1,50 Kg

.01 White

LED 24V 21,6W




ETL version available upon request

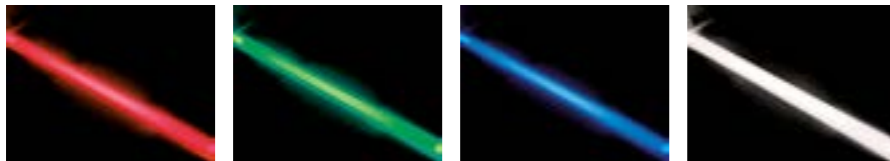

## FINISHES CODES



.01 White

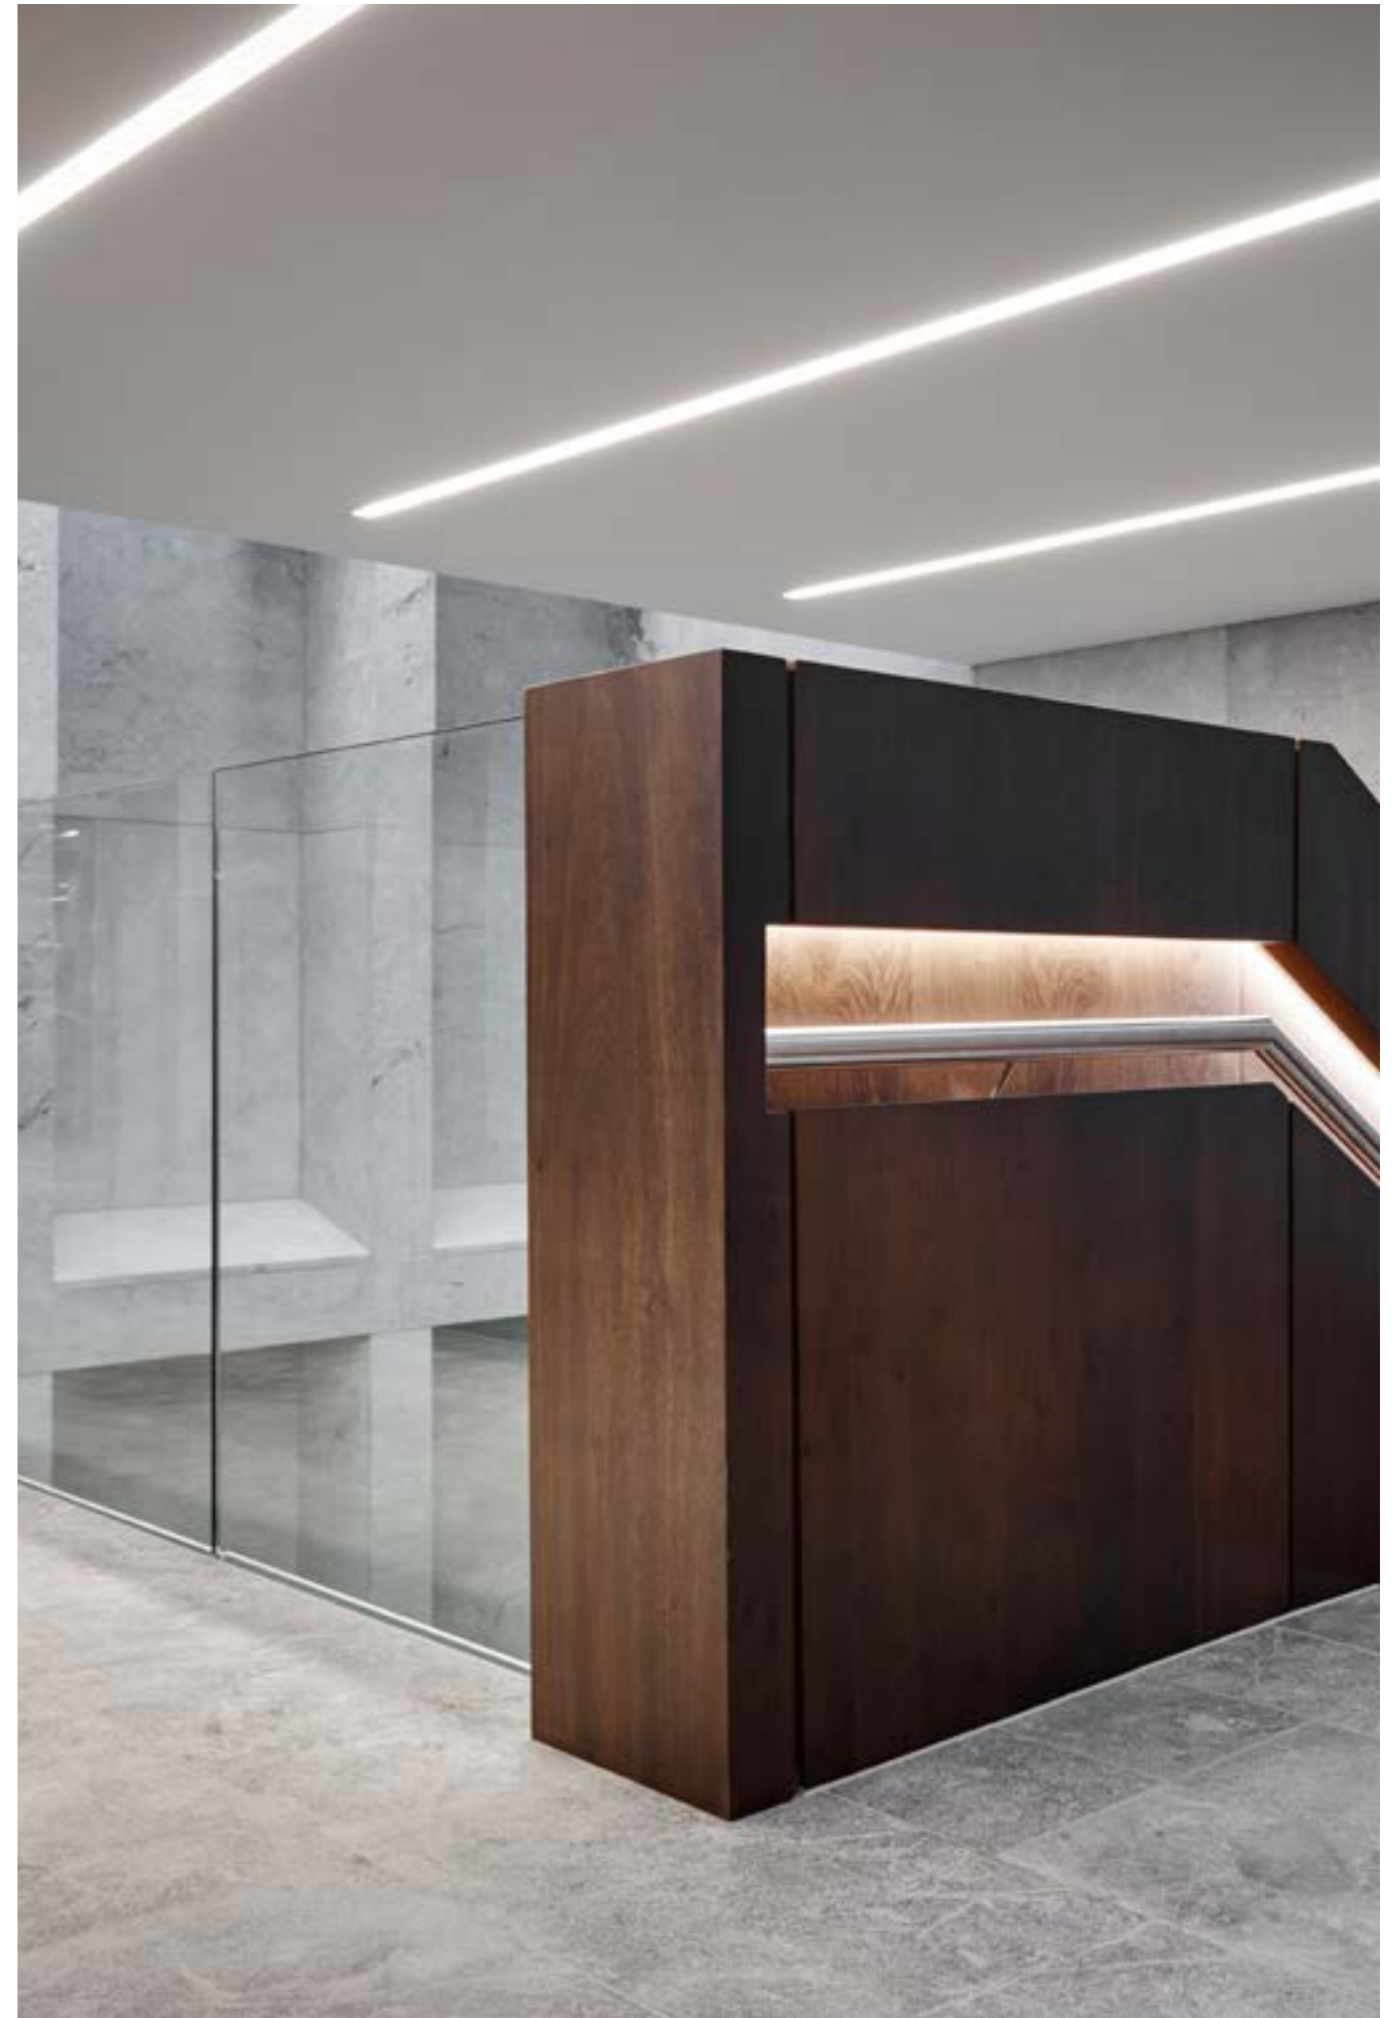

# LINEA MAXI - LINEA MAXI RGB



## ACCESSORIES

### Kit 0242

Optional L shaped profile to ease installation into plasterboard.



- /100 100 cm
- /200 200 cm
- /300 300 cm

## DRIVERS

### ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-25W	24V-75W	24V-60W	24V-100W	24V-150W

### DIMMABLE

Cod.	0110/DIM	0717/DIM60/V	0717/DIM60	0717/DIM100
	12/24V	24V-60W 1...10V	24V-60W PUSH DALI	24V-100W 1...10V - PUSH DALI

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

Only Parallel Connection

### DRIVER RGB

0164	0167
120W	22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

#### 0164/CASA

120W

IN 230V - OUT 3 X 24V

### SENSOR & CABLE RGB

#### 0163

IR Sensor

#### 0165

IR Remote controller

#### 0166

Sync Cable



## CUSTOM SIZE

Table of available lengths. Measures are referred to complete fixtures including closing heads.

cm	watt	cm	2700K	lm	3000K	lm	4000K	lm	RGB
12	1,8W	11,5x4,8	A6655.01/10/XW	189	A6655.01/10/WW	202	A6655.01/10/W	226	A6655.01/10RGB
22	3,6W	21,5x4,8	A6655.01/20/XW	378	A6655.01/20/WW	404	A6655.01/20/W	452	A6655.01/20RGB
32	5,4W	31,5x4,8	A6655.01/30/XW	567	A6655.01/30/WW	606	A6655.01/30/W	678	A6655.01/30RGB
42	7,2W	41,5x4,8	A6655.01/40/XW	756	A6655.01/40/WW	808	A6655.01/40/W	904	A6655.01/40RGB
52	9W	51,5x4,8	A6655.01/50/XW	945	A6655.01/50/WW	1010	A6655.01/50/W	1130	A6655.01/50RGB
62	10,8W	61,5x4,8	A6655.01/60/XW	1134	A6655.01/60/WW	1212	A6655.01/60/W	1356	A6655.01/60RGB
72	12,6W	71,5x4,8	A6655.01/70/XW	1323	A6655.01/70/WW	1414	A6655.01/70/W	1582	A6655.01/70RGB
82	14,4W	81,5x4,8	A6655.01/80/XW	1512	A6655.01/80/WW	1616	A6655.01/80/W	1808	A6655.01/80RGB
92	16,2W	91,5x4,8	A6655.01/90/XW	1701	A6655.01/90/WW	1818	A6655.01/90/W	2034	A6655.01/90RGB
102	18W	101,5x4,8	6655.01/XW	1890	6655.01/WW	2020	6655.01/W	2260	6657.01
112	19,8W	111,5x4,8	A6655.01/110/XW	2079	A6655.01/110/WW	2222	A6655.01/110/W	2486	A6655.01/110RGB
122	21,6W	121,5x4,8	A6655.01/120/XW	2268	A6655.01/120/WW	2424	A6655.01/120/W	2712	A6655.01/120RGB
132	23,4W	131,5x4,8	A6655.01/130/XW	2457	A6655.01/130/WW	2626	A6655.01/130/W	2938	A6655.01/130RGB
142	25,2W	141,5x4,8	A6655.01/140/XW	2646	A6655.01/140/WW	2828	A6655.01/140/W	3164	A6655.01/140RGB
152	27W	151,5x4,8	6656.01/XW	2835	6656.01/WW	3030	6656.01/W	3390	6658.01
162	28,8W	161,5x4,8	A6655.01/160/XW	3024	A6655.01/160/WW	3232	A6655.01/160/W	3616	A6655.01/160RGB
172	30,6W	171,5x4,8	A6655.01/170/XW	3213	A6655.01/170/WW	3434	A6655.01/170/W	3842	A6655.01/170RGB
182	32,4W	181,5x4,8	A6655.01/180/XW	3402	A6655.01/180/WW	3636	A6655.01/180/W	4068	A6655.01/180RGB
192	34,2W	191,5x4,8	A6655.01/190/XW	3591	A6655.01/190/WW	3838	A6655.01/190/W	4294	A6655.01/190RGB
202	36W	201,5x4,8	A6655.01/200/XW	3780	A6655.01/200/WW	4040	A6655.01/200/W	4520	A6655.01/200RGB
212	37,8W	211,5x4,8	A6655.01/210/XW	3969	A6655.01/210/WW	4242	A6655.01/210/W	4746	A6655.01/210RGB
222	39,6W	221,5x4,8	A6655.01/220/XW	4158	A6655.01/220/WW	4444	A6655.01/220/W	4972	A6655.01/220RGB
232	41,4W	231,5x4,8	A6655.01/230/XW	4347	A6655.01/230/WW	4646	A6655.01/230/W	5198	A6655.01/230RGB
242	43,2W	241,5x4,8	A6655.01/240/XW	4536	A6655.01/240/WW	4848	A6655.01/240/W	5424	A6655.01/240RGB
252	45W	251,5x4,8	A6655.01/250/XW	4725	A6655.01/250/WW	5050	A6655.01/250/W	5650	A6655.01/250RGB
262	46,8W	261,5x4,8	A6655.01/260/XW	4914	A6655.01/260/WW	5252	A6655.01/260/W	5876	A6655.01/260RGB
272	48,6W	271,5x4,8	A6655.01/270/XW	5103	A6655.01/270/WW	5454	A6655.01/270/W	6102	A6655.01/270RGB
282	50,4W	281,5x4,8	A6655.01/280/XW	5292	A6655.01/280/WW	5656	A6655.01/280/W	6328	A6655.01/280RGB
292	52,2W	291,5x4,8	A6655.01/290/XW	5481	A6655.01/290/WW	5858	A6655.01/290/W	6554	A6655.01/290RGB
302	54W	301,5x4,8	A6655.01/300/XW	5670	A6655.01/300/WW	6060	A6655.01/300/W	6780	A6655.01/300RGB

Attention : without closing heads -1 cm


# LINEA MAXI



## CONFIGURATION EXAMPLE

Configurations longer than 3 meters can be obtained by putting single fittings side by side in a row, the cutout length can be calculated with the formula here under:

Examples  $4,8 \times L$  cm

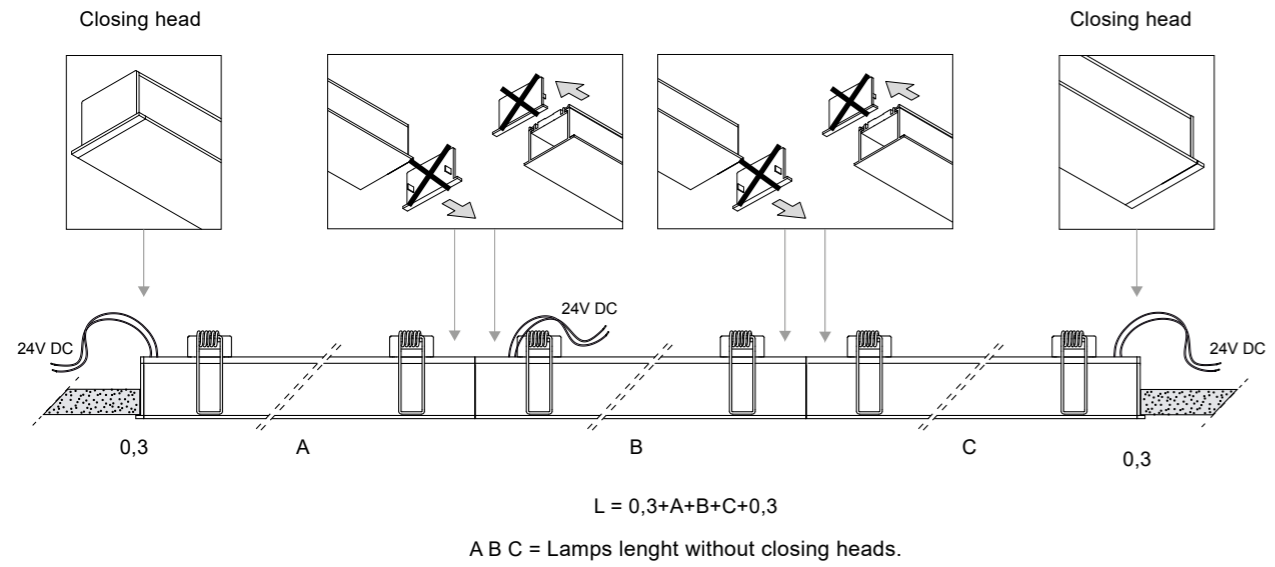

90° angled options are available upon request





INDOOR

# STAR

Design U.T. EgoLuce







## STAR



Recessed mini trim spotlights for accent or diffused light with integrated high performance COB LED source available in 4 sizes.

The spotlights Star are available with 2700K (XW), 3000K (WW) and 4000K (W) COB LEDs with CRI>80 and reflector with different optics beams. The front glass lens can be transparent or satin (/ST). On request CRI>90.

Dimmable drivers with PUSH, 1...10V, DALI or phase-cut control and control units for emergency lighting are also available. Possibility of operation at 24V with art. 0226

*Spots encastrés mini trim pour lumière d'accentuation ou diffuse avec source LED COB haute performance intégrée disponible en 4 tailles.*

*Les projecteurs Star sont disponibles avec des LED COB 2700K (XW), 3000K (WW) et 4000K (W) avec CRI>80 et un réflecteur avec différentes ouvertures optiques. La lentille en verre avant peut être transparente ou satinée (/ST). Sur demande CRI>90.*

*Des alimentations graduables avec commande PUSH, 1...10V, DALI ou à coupure de phase et des unités de commande pour l'éclairage de secours sont également disponibles. Possibilité de fonctionnement en 24V avec art. 0226*


*Mini-Einbaustrahler für Akzent- oder Streulicht mit integrierter Hochleistungs-COB-LED-Quelle, erhältlich in 4 Größen.*

*Die Strahler Star sind mit 2700K (XW), 3000K (WW) und 4000K (W) COB-LEDs mit CRI>80 und Reflektor mit unterschiedlichen Lichtkegeln erhältlich. Die vordere Glasscheibe kann transparent oder satiniert (/ST) sein. Auf Anfrage CRI>90. Die einfache Linie passt sich jeder Art von Umgebung an, von klassischen bis zu modernen Innenräumen.*

*Ebenfalls erhältlich sind dimmbare Netzteile mit PUSH-, 1...10V-, DALI- oder Phasenanschnittsteuer- und Steu- ergeräten für die Notbeleuchtung. Möglic- hkeit des Betriebs bei 24V mit Kunst. 0226*



# STAR ZERO



**6689**

0,30 Kg

- .01** White
- .02** Black

<b>/W</b>	4000K	/25 /48 /63	LED 5,9W 17V 350mA	1060lm	880lm (out)
<b>/W</b>	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
<b>/WW</b>	3000K	/25 /48 /63	LED 5,9W 17V 350mA	1030lm	855lm (out)
<b>/WW</b>	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
<b>/XW</b>	2700K	/25 /48 /63	LED 5,9W 17V 350mA	969lm	804lm (out)
<b>/XW</b>	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



IP65 upon request

## DRIVERS

### ON/OFF

Cod.	0136/15	0125	0128
	350mA	350m	350mA
<b>6689</b>	1-2	1	1-2

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI	0733/DIM
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI	PHASE CUT
<b>6689</b>	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

#### 0145/CASA

**6689** 1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

**6689** 1

## FINISHES CODES




**.01** White



**.02** Black

**.01/ST** Satin



**0136/15**

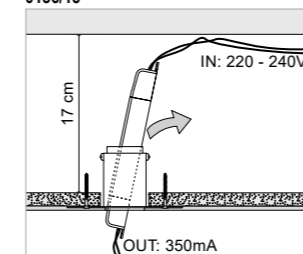

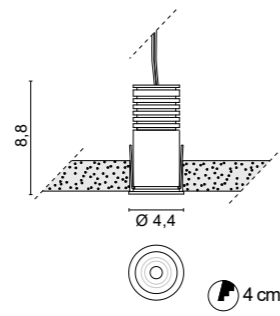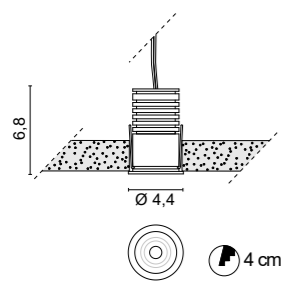

**6690**

0,14 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat

/W	4000K	/18 /40 /60	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/18 /40 /60	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/18 /40 /60	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



IP 54 upon request

**6691**

0,16 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat

/W	4000K	/18 /40 /60	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/18 /40 /60	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/18 /40 /60	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)




IP 54 upon request


FINISHES CODES



.01 White .02 Black .25 Satin Gold .32 Nickel mat .01/ST Satin

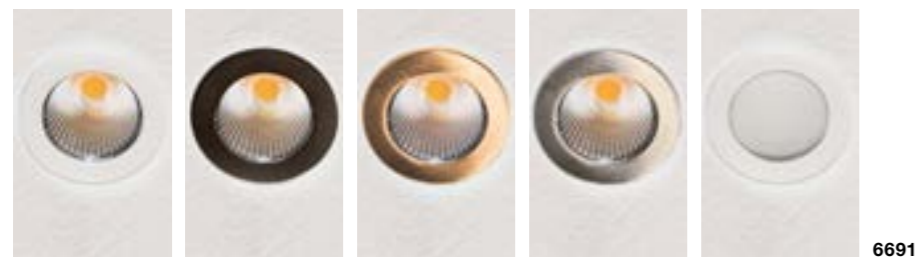

.01 White .02 Black .25 Satin Gold .32 Nickel mat .01/ST Satin

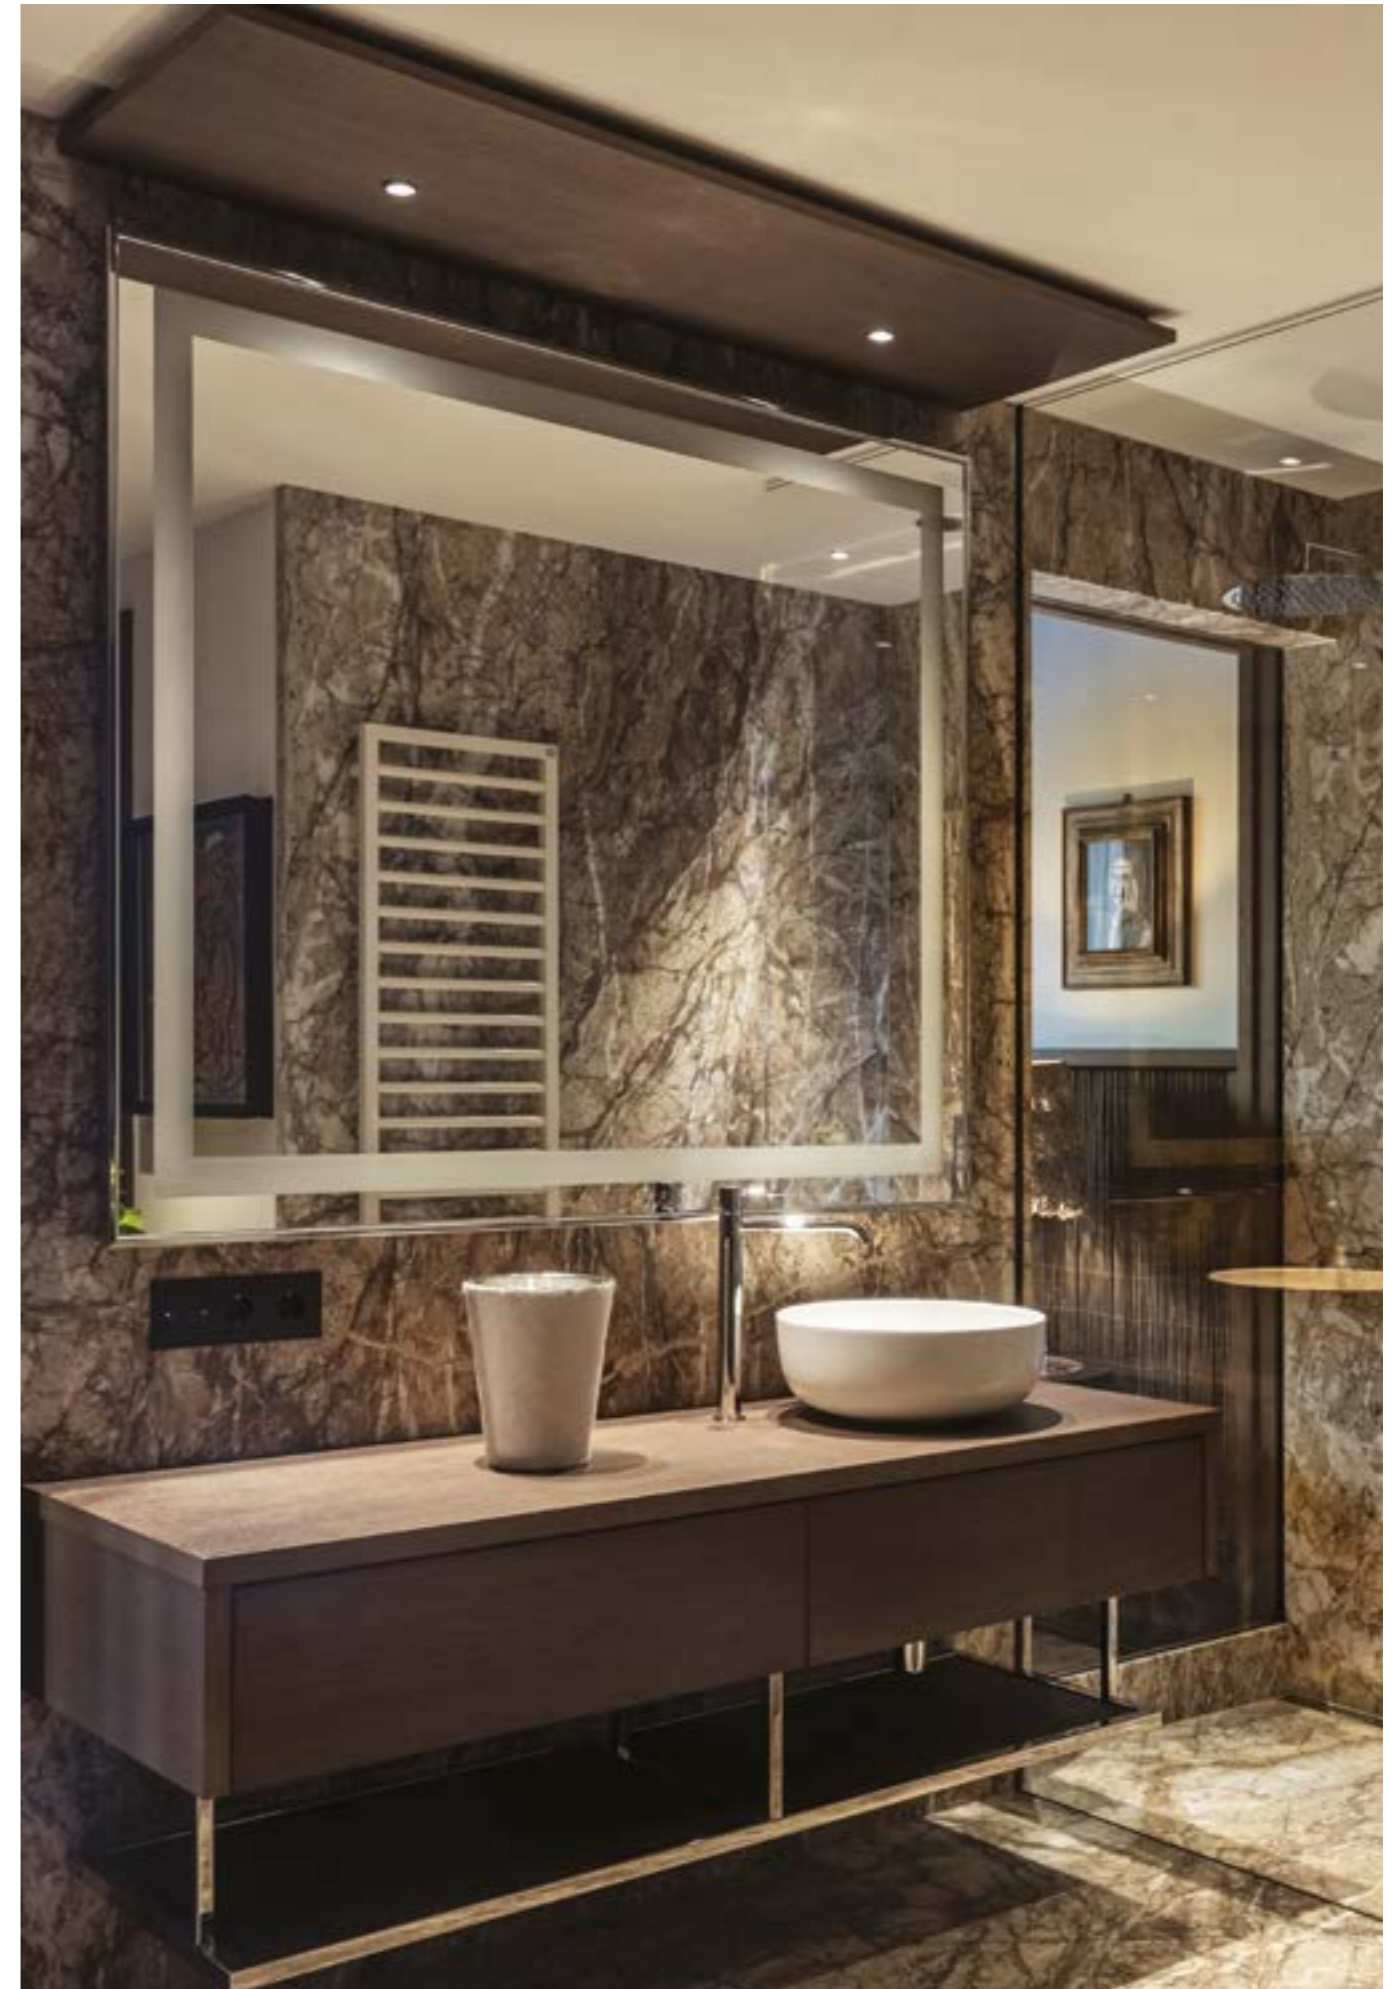



# STAR



## ACCESSORIES

Trimless recessed installation in plasterboard  
**0206**

- .01 White
- .02 Black

Round wall box for installation in plasterboard false ceiling

Brick installation  
**0225**

Recessed box for brick mounting

Installation in concrete  
**0223**

Recessed box for concrete mounting

Trimless recessed installation in plasterboard  
**0207**


- .01 White
- .02 Black

Square wall box for installation in plasterboard false ceiling

Brick installation  
**0224/C**


Perforated plaster kit

0125

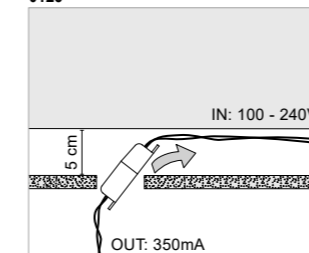


Installation without wall box

0136/15 - 0128

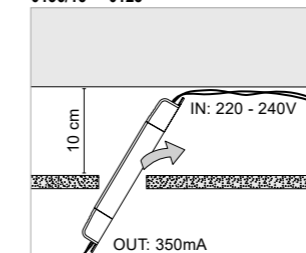

Installation without wall box

0136/15

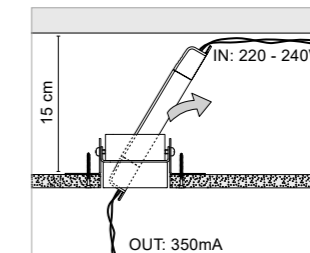

Installation without wall box 0206 - 0207

## DRIVERS

### ON/OFF

Cod.	0136/15 350mA	0125 350m	0128 350mA
6690	1-2	1	1-2
6691	1-2	1	1-2

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
6690	1-2	1-3	1-3	1
6691	1-2	1-3	1-3	1

Only serial connection



### CASAMBI

0145/CASA	
6690	1-3
6691	1-3

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6690	1
6691	1

# STAR

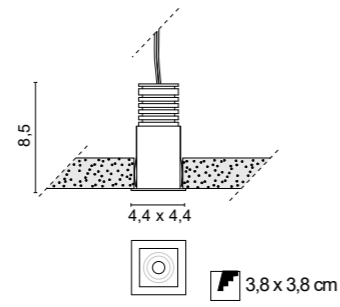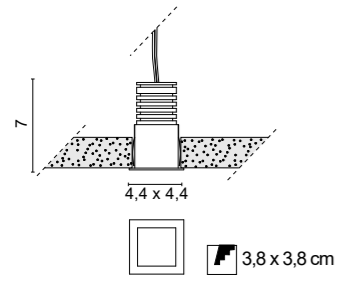

## 6695

0,15 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat

/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## 6696

0,18 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat


/W	4000K	/18 /40 /60	LED 5,9W 17V 350mA	1060lm	880lm (out)
/WW	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/18 /40 /60	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/18 /40 /60	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## FINISHES CODES



.01 White    .02 Black    .25 Satin Gold    .32 Nickel mat    .02/ST Satin

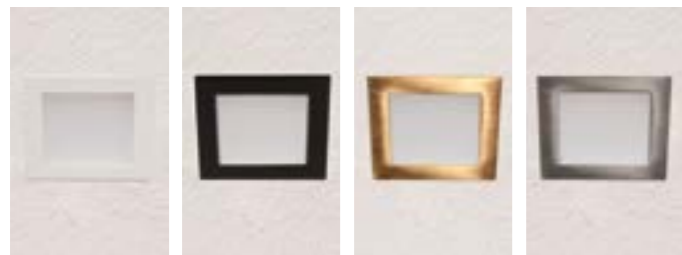

.01 White    .02 Black    .25 Satin Gold    .32 Nickel mat



Project Studio Keyart Milano



Project Studio Keyart Milano

# STAR



## ACCESSORIES

Brick installation  
**0225**

Recessed box for brick mounting


Installation in concrete  
**0223**

Recessed box for concrete mounting

Brick installation  
**0224/Q**


Perforated plaster kit

**0125**



Installation without wall box

**0136/15 - 0128**

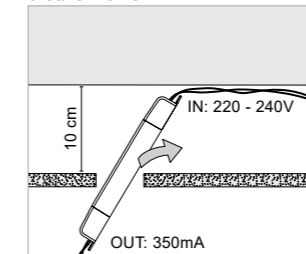

Installation without wall box

## DRIVERS

### ON/OFF

Cod.	0136/15 350mA	0125 350mA	0128 350mA
6695	1-2	1	1-2
6696	1-2	1	1-2

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
6695	1-2	1-3	1-3	1
6696	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

#### 0145/CASA


6695 1-3  
6696 1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

6695 1  
6696 1

# STAR IP - STAR RGB

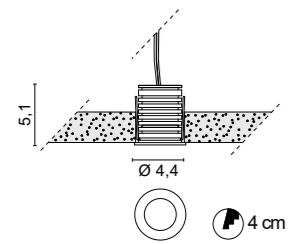


**6692** 0,12 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	LED 2,4W 16,3V 150mA	477lm	367lm (out)
/WW	3000K	LED 2,4W 16,3V 150mA	463lm	356lm (out)
/XW	2700K	LED 2,4W 16,3V 150mA	435lm	335lm (out)



Only serial connection

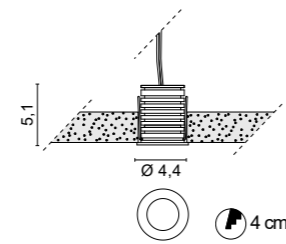

**6693** 0,14 Kg

- .01 White
- .02 Black
- .31 Chromed

LED 3 x 250mA



## ACCESSORIES

Trimless recessed installation in plasterboard

### 0206

- .01 White
- .01 Black

Round wall box for installation in plasterboard false ceiling

Brick installation

### 0225

Recessed box for brick mounting

Installation in concrete

### 0223

Recessed box for concrete mounting

Trimless recessed installation in plasterboard

### 0207

- .01 White
- .01 Black


Square wall box for installation in plasterboard false ceiling

Brick installation

### 0224/C

Perforated plaster kit

## FINISHES CODES

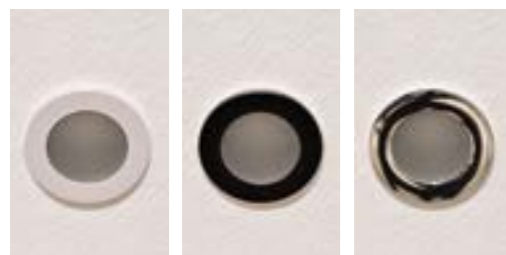

.01 White    .02 Black    .31 Chromed



Project Studio Keyart Milano

## DRIVERS

### ON/OFF

Cod. 0151/150  
150mA

6692 1-2

Only serial connection

### DRIVER RGB

0164 120W    0167 22W

IN 230V - OUT 3 X 24V

### CONVERTER RGB CASAMBI

0168  
IN 24V - OUT 3 X 250mA 1-5 Star RGB

### DRIVER RGB CASAMBI

0164/CASA 120W

IN 230V - OUT 3 X 24V



### SENSOR & CABLE RGB

0163  
IR Sensor

0165  
IR Remote controller

0166  
Sync Cable

# STAR MAXI

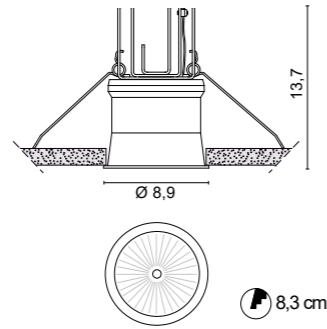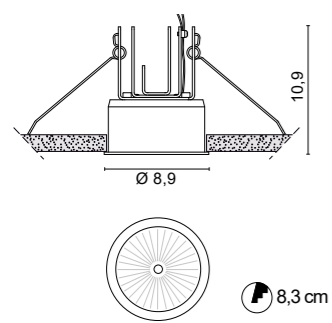

## 6705

0,40 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat

/W	4000K	/12 /40	LED 18,8W 37,5V 500mA	2733lm	2213lm (out)
/W	4000K	/ST Satin	LED 18,8W 37,5V 500mA	2733lm	2104lm (out)
/WW	3000K	/12 /40	LED 18,8W 37,5V 500mA	2655lm	2150lm (out)
/WW	3000K	/ST Satin	LED 18,8W 37,5V 500mA	2655lm	2044lm (out)
/XW	2700K	/12 /40	LED 18,8W 37,5V 500mA	2499lm	2024lm (out)
/XW	2700K	/ST Satin	LED 18,8W 37,5V 500mA	2499lm	1924lm (out)



Visible part IP54 on request

## 6706

0,40 Kg

- .01 White
- .02 Black

/W	4000K	/12 /40	LED 18,8W 37,5V 500mA	2733lm	2213lm (out)
/W	4000K	/ST Satin	LED 18,8W 37,5V 500mA	2733lm	2104lm (out)
/WW	3000K	/12 /40	LED 18,8W 37,5V 500mA	2655lm	2150lm (out)
/WW	3000K	/ST Satin	LED 18,8W 37,5V 500mA	2655lm	2044lm (out)
/XW	2700K	/12 /40	LED 18,8W 37,5V 500mA	2499lm	2024lm (out)
/XW	2700K	/ST Satin	LED 18,8W 37,5V 500mA	2499lm	1924lm (out)




Visible part IP54 on request

## FINISHES CODES



6706

- .01 White
- .02 Black
- .01/ST Satin

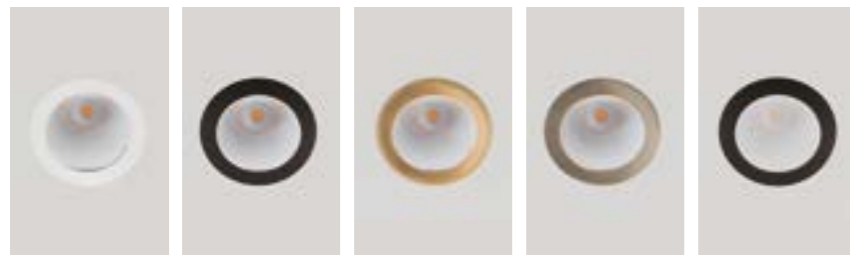

6705

- .01 White
- .02 Black
- .25 Satin Gold
- .32 Nickel mat
- .02/ST Satin



Project Studio Keyart Milano

## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA
6705	1
6706	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6705	1	1	1
6706	1	1	1

Only serial connection

### CASAMBI



0145/CASA	
6705	1
6706	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6705	1
6706	1



# STAR MAXI

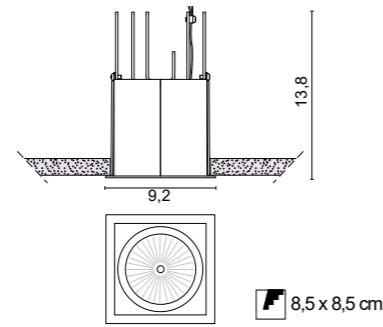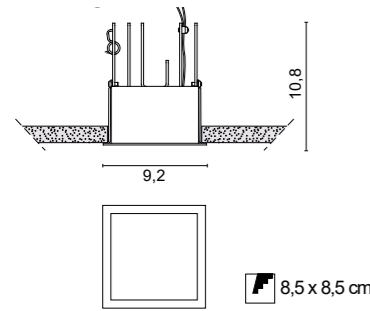

## 6707

0,40 Kg

- .01 White ■
- .02 Black ■
- .25 Satin gold ■
- .32 Nickel mat ■

<b>/W</b>	4000K	/ST	Satin	LED 18,8W 37,5V 500mA	2733lm	2104lm (out)
<b>/WW</b>	3000K	/ST	Satin	LED 18,8W 37,5V 500mA	2655lm	2044lm (out)
<b>/XW</b>	2700K	/ST	Satin	LED 18,8W 37,5V 500mA	2499lm	1924lm (out)



## 6708


0,50 Kg

- .01 White ■
- .02 Black ■

<b>/W</b>	4000K	/12 /40	LED 18,8W 37,5V 500mA	2733lm	2213lm (out)
<b>/W</b>	4000K	/ST Satin	LED 18,8W 37,5V 500mA	2733lm	2104lm (out)
<b>/WW</b>	3000K	/12 /40	LED 18,8W 37,5V 500mA	2655lm	2150lm (out)
<b>/WW</b>	3000K	/ST Satin	LED 18,8W 37,5V 500mA	2655lm	2044lm (out)
<b>/XW</b>	2700K	/12 /40	LED 18,8W 37,5V 500mA	2499lm	2024lm (out)
<b>/XW</b>	2700K	/ST Satin	LED 18,8W 37,5V 500mA	2499lm	1924lm (out)




## FINISHES CODES

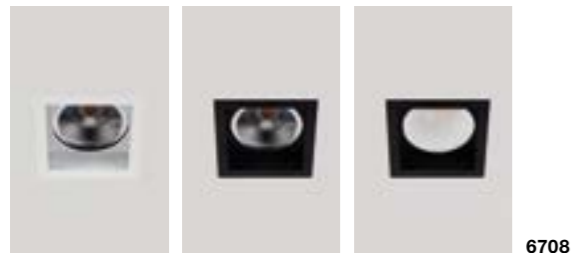

6708

- .01 White
- .02 Black
- .02/ST Satin

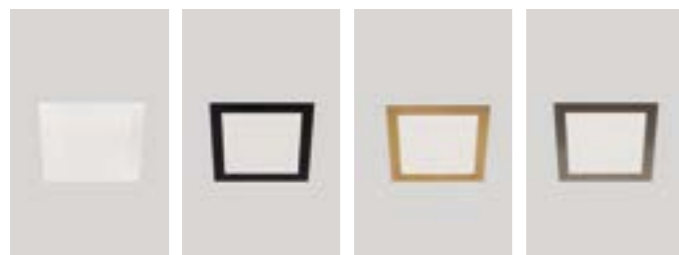

6707

- .01 White
- .02 Black
- .25 Satin Gold
- .32 Nickel mat

## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA
6707	1
6708	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
6707	1	1	1
6708	1	1	1

Only serial connection


### CASAMBI

0145/CASA	
6707	1
6708	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
6707	1
6708	1


# STAR MEDIUM



**6710** 0,20 Kg

- .01 White
- .02 Black
- .25 Satin gold
- .32 Nickel mat

/W	4000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1466lm 1150lm (out)
/W	4000K	/ST Satin	LED 8,7W 17,5V 500mA	1466lm 1150lm (out)
/WW	3000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1424lm 1117lm (out)
/WW	3000K	/ST Satin	LED 8,7W 17,5V 500mA	1424lm 1068lm (out)
/XW	2700K	/24 /40 /60	LED 8,7W 17,5V 500mA	1340lm 1051lm (out)
/XW	2700K	/ST Satin	LED 8,7W 17,5V 500mA	1340lm 1005lm (out)



**6711** 0,25 Kg

- .01 White
- .02 Black

/W	4000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1466lm 1150lm (out)
/W	4000K	/ST Satin	LED 8,7W 17,5V 500mA	1466lm 1150lm (out)
/WW	3000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1424lm 1117lm (out)
/WW	3000K	/ST Satin	LED 8,7W 17,5V 500mA	1424lm 1068lm (out)
/XW	2700K	/24 /40 /60	LED 8,7W 17,5V 500mA	1340lm 1051lm (out)
/XW	2700K	/ST Satin	LED 8,7W 17,5V 500mA	1340lm 1005lm (out)



## ACCESSORIES


Brick installation  
**0200**

Recessed box for brick mounting (**6710**)

Brick installation  
**0282/C**


Perforated plaster kit (**6710**)

## FINISHES CODES

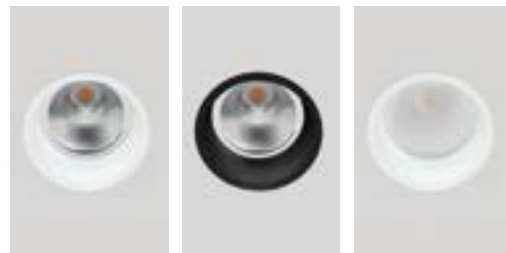

**6711**

.01 White .02 Black .01/ST Satin

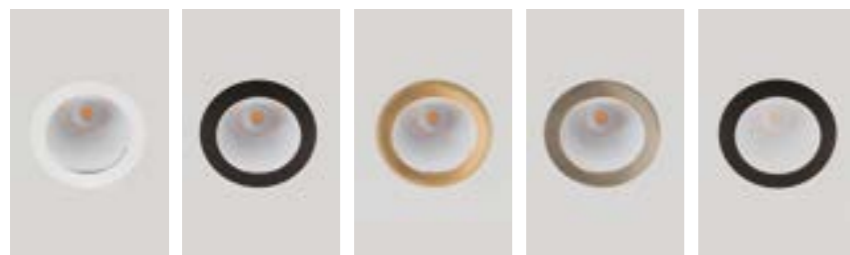

**6710**

.01 White .02 Black .25 Satin Gold .32 Nickel mat .02/ST Satin



## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA	0149/COB 500mA
<b>6710</b>	1-2	1
<b>6711</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT	
<b>6710</b>	1-2	1-2	1-3	1-3	1
<b>6711</b>	1-2	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

**0145/CASA**


**6710** 1-3  
**6711** 1-3

### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

**6710** 1  
**6711** 1


# STAR MEDIUM



**6713** 0,20 Kg

- .01** White
- .02** Black
- .25** Satin gold
- .32** Nickel mat

<b>/W</b>	4000K	/ST Satin	LED 8,7W 17,5V 500mA	1466lm	1099lm (out)
<b>/WW</b>	3000K	/ST Satin	LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/ST Satin	LED 8,7W 17,5V 500mA	1340lm	1005lm (out)



**6714** 0,25 Kg

- .01** White
- .02** Black

<b>/W</b>	4000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1466lm	1150lm(out)
<b>/W</b>	4000K	/ST Satin	LED 8,7W 17,5V 500mA	1466lm	1099lm(out)
<b>/WW</b>	3000K	/24 /40 /60	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/WW</b>	3000K	/ST Satin	LED 8,7W 17,5V 500mA	1424lm	1068lm (out)
<b>/XW</b>	2700K	/24 /40 /60	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)
<b>/XW</b>	2700K	/ST Satin	LED 8,7W 17,5V 500mA	1340lm	1005lm(out)



## ACCESSORIES

Brick installation

**0200**

Recessed box for brick mounting (**6713**)

Brick installation

**0283/Q**


Perforated plaster kit (**6713**)

## FINISHES CODES



**6714**

- .01** White
- .02** Black
- .02/ST** Satin

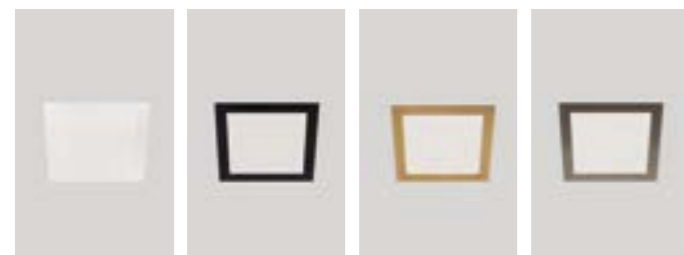

**6713**

- .01** White
- .02** Black
- .25** Satin Gold
- .32** Nickel mat



## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA	0149/COB 500mA
<b>6713</b>	1-2	1
<b>6714</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
<b>6713</b>	1-2	1-3	1-3	1
<b>6714</b>	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

**0145/CASA**



- 6713** 1-3
- 6714** 1-3

### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

- 6713** 1
- 6714** 1


# STAR MEDIUM ASYMMETRIC



**6712** 0,20 Kg

- .01** White ■
- .02** Black ■
- .25** Satin gold ■
- .32** Nickel mat ■

<b>/W</b>	4000K	/ST	Satin	LED 8,7W 17,5V 500mA	1466lm	1150lm (out)
<b>/WW</b>	3000K	/ST	Satin	LED 8,7W 17,5V 500mA	1424lm	1117lm (out)
<b>/XW</b>	2700K	/ST	Satin	LED 8,7W 17,5V 500mA	1340lm	1051lm (out)



## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA	0149/COB 500mA
<b>6712</b>	1-2	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0734/DIM PHASE CUT
<b>6712</b>	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

**0145/CASA**


**6712** 1-3

### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

**6712** 1


## FINISHES CODES

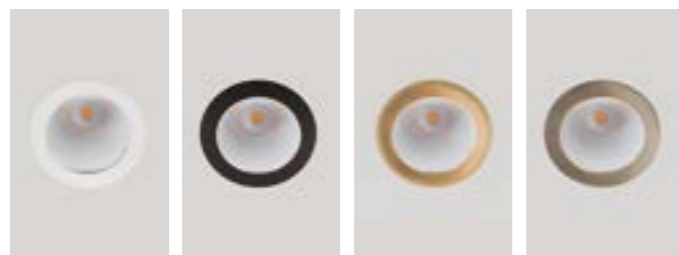

**.01** White    **.02** Black    **.25** Satin Gold    **.32** Nickel mat





## INSTALLATION EXAMPLE

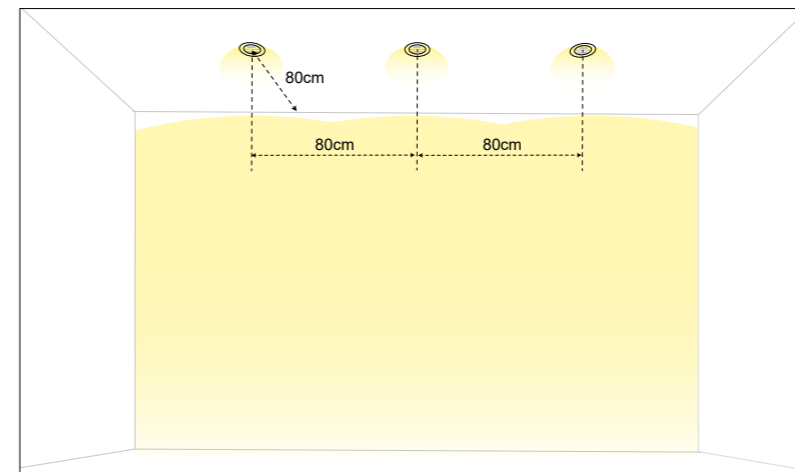

To uniformly illuminate a wall, position the spotlights according to the diagram

# STAR ADJUSTABLE



**6715** 0,16 Kg

- .01 White
- .02 Black

/W	4000K	/18 /40 /60	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/18 /40 /60	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/18 /40 /60	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



**6716** 0,16 Kg

- .01 White
- .02 Black

/W	4000K	/18 /40 /60	LED 5,9W 17V 350mA	1060lm	880lm (out)
/W	4000K	/ST Satin	LED 5,9W 17V 350mA	1060lm	816lm (out)
/WW	3000K	/18 /40 /60	LED 5,9W 17V 350mA	1030lm	855lm (out)
/WW	3000K	/ST Satin	LED 5,9W 17V 350mA	1030lm	793lm (out)
/XW	2700K	/18 /40 /60	LED 5,9W 17V 350mA	969lm	804lm (out)
/XW	2700K	/ST Satin	LED 5,9W 17V 350mA	969lm	746lm (out)



## ACCESSORIES

Brick installation

**0200**

Recessed box for brick mounting

Brick installation

**0281/O**


Perforated plaster kit

## FINISHES CODES



.01 White

.02 Black

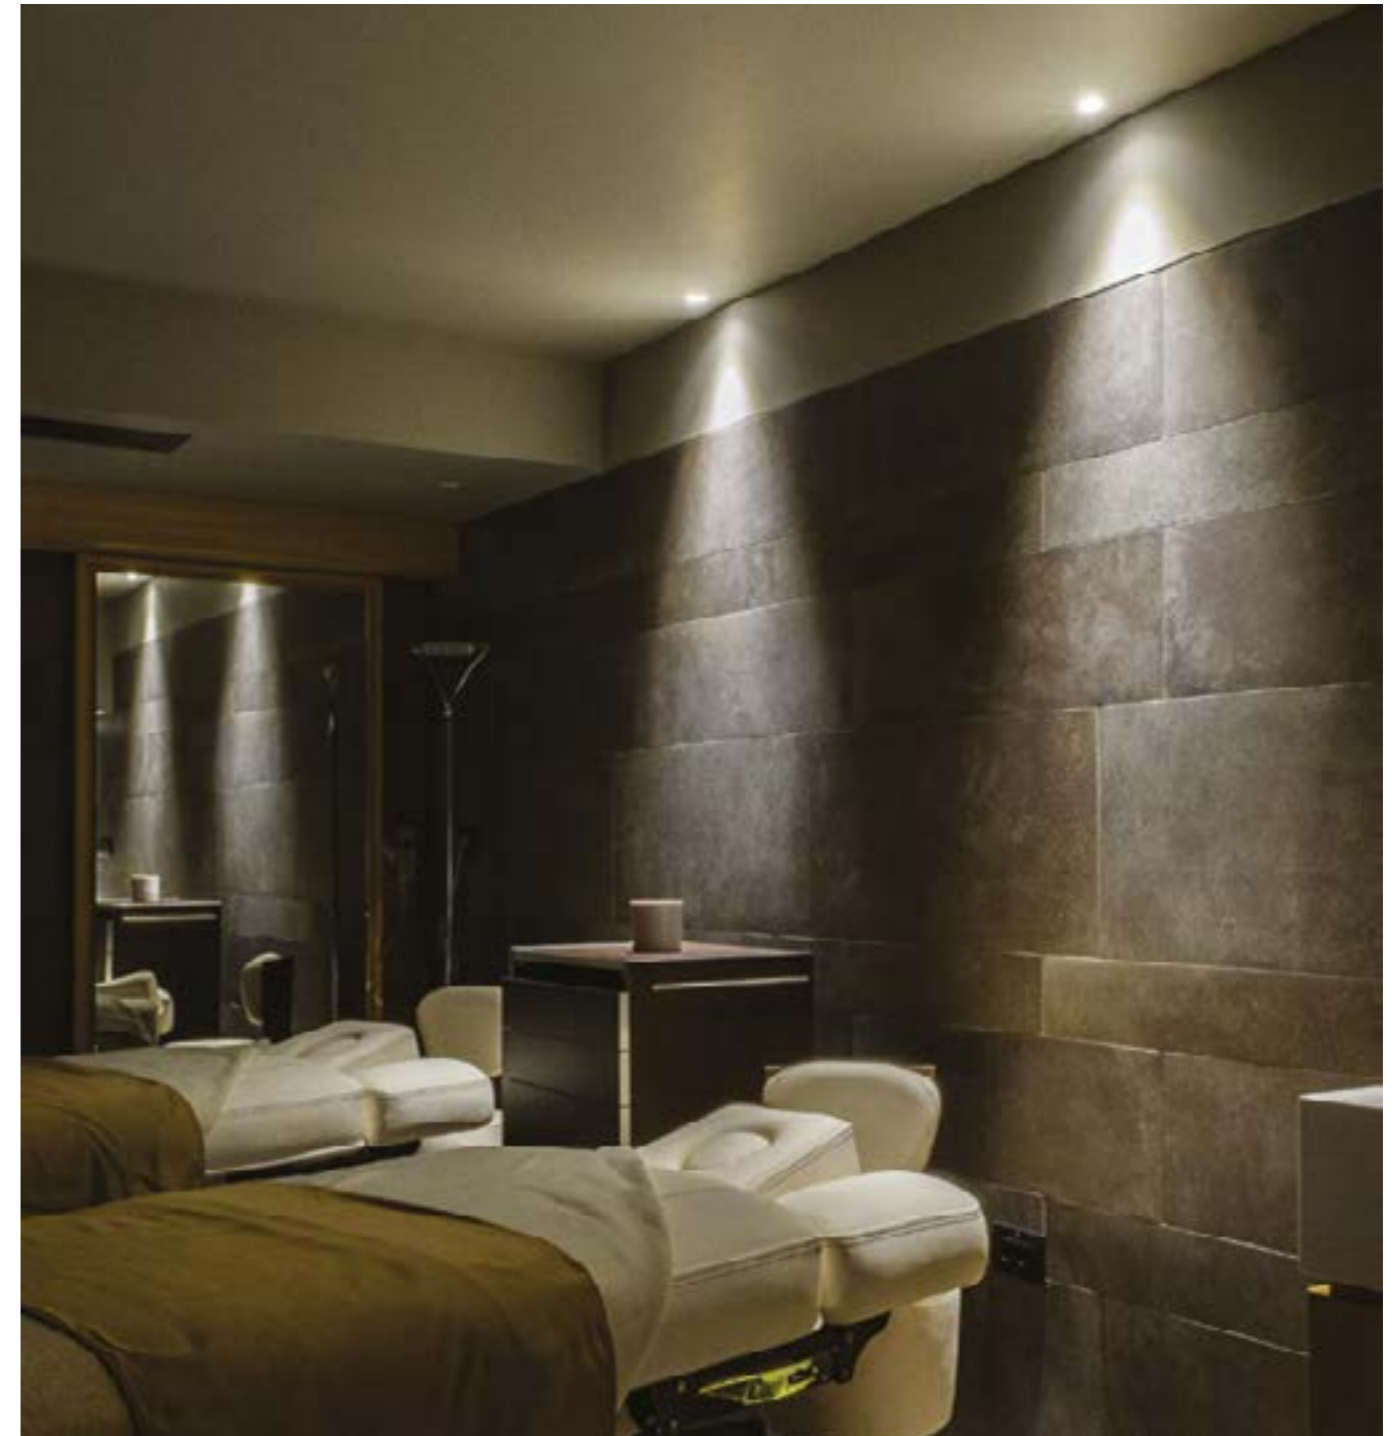

## DRIVERS

### ON/OFF

Cod.	0136/15 350mA	0125 350mA	0128 350mA
6715	1-2	1	1-2
6716	1-2	1	1-2

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
6715 1-2	1-2	1-3	1-3	1
6716 1-2	1-2	1-3	1-3	1

Only serial connection

### CASAMBI

0145/CASA

6715 1-3  
6716 1-3

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR

6715 1  
6716 1



ACCESSORIES

TRIMLESS RECESSED INSTALLATION IN PLASTERBOARD



**0206**

- .01 White
- .02 Black

Round wall box for installation in plasterboard false ceiling



6,7 cm




**0207**

- .01 White
- .02 Black

Square wall box for installation in plasterboard false ceiling



5,5 x 5,5 cm




**0206 +**

- 6690 Star 1 H=9cm
- 6691 Star 2 H=12cm
- 6692 Star IP H=8cm
- 6693 Star RGB H=8cm

**0207 +**

- 6690 Star 1 H=9cm
- 6691 Star 2 H=12cm
- 6692 Star IP H=8cm
- 6693 Star RGB H=8cm

ASSEMBLY SCHEME

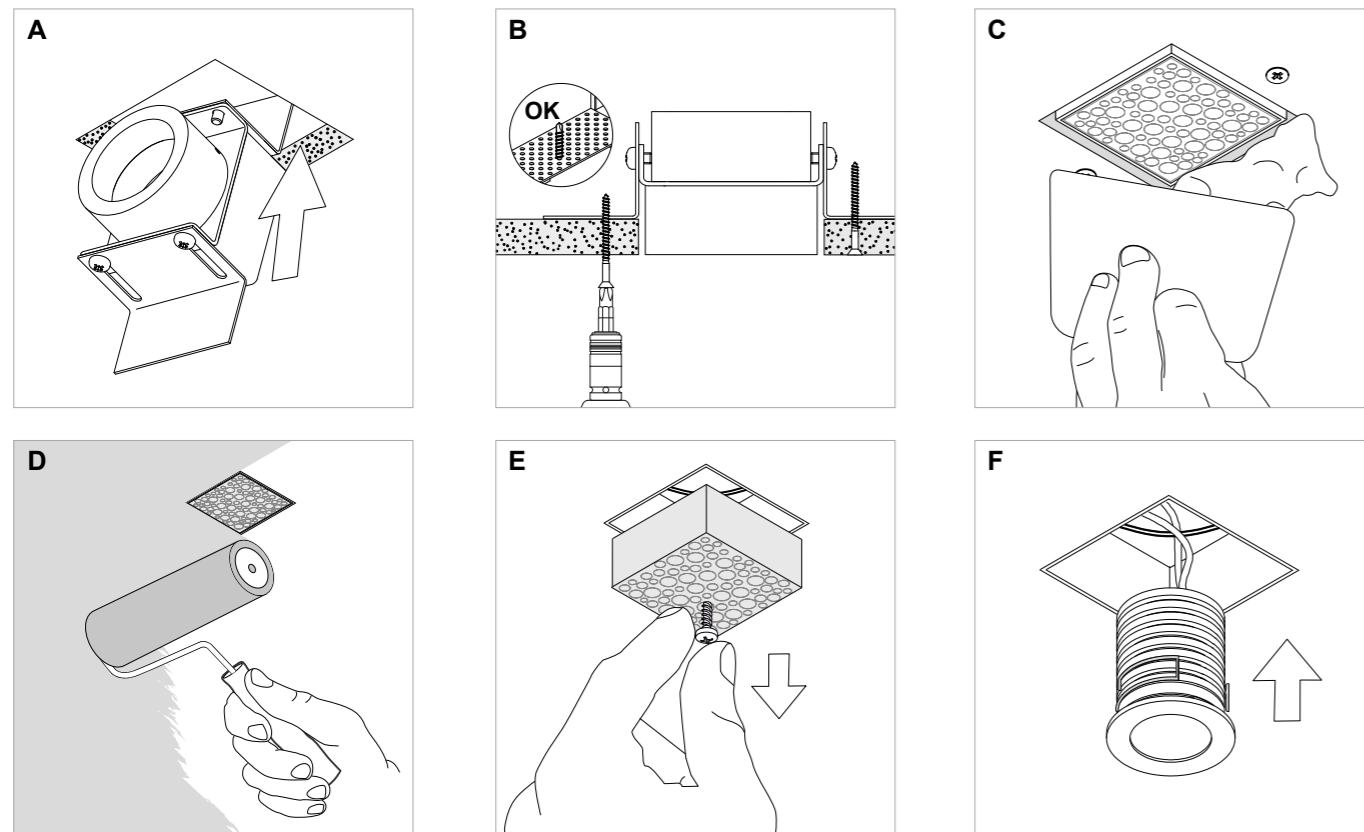



ACCESSORIES

BRICK INSTALLATION

**0225**

Recessed box for brick mounting  
9,5 x 6,5 H 9,5 cm



+

**0224/C**

Perforated plaster kit

6690 Star 1  
6691 Star 2  
6692 Star IP  
6693 Star RGB



**0224/Q**

Perforated plaster kit

6695 Star 4  
6696 Star 5



**0200**

Recessed box for brick mounting  
15,5 x 12 H 9,5 cm



+

**0281/O**

Perforated plaster kit

6715 Star Adjustable  
6716 Star Adjustable



**0282/C**

Perforated plaster kit

6710 Star Medium









**0283/Q**

Perforated plaster kit

6713 Star Medium



ASSEMBLY SCHEME

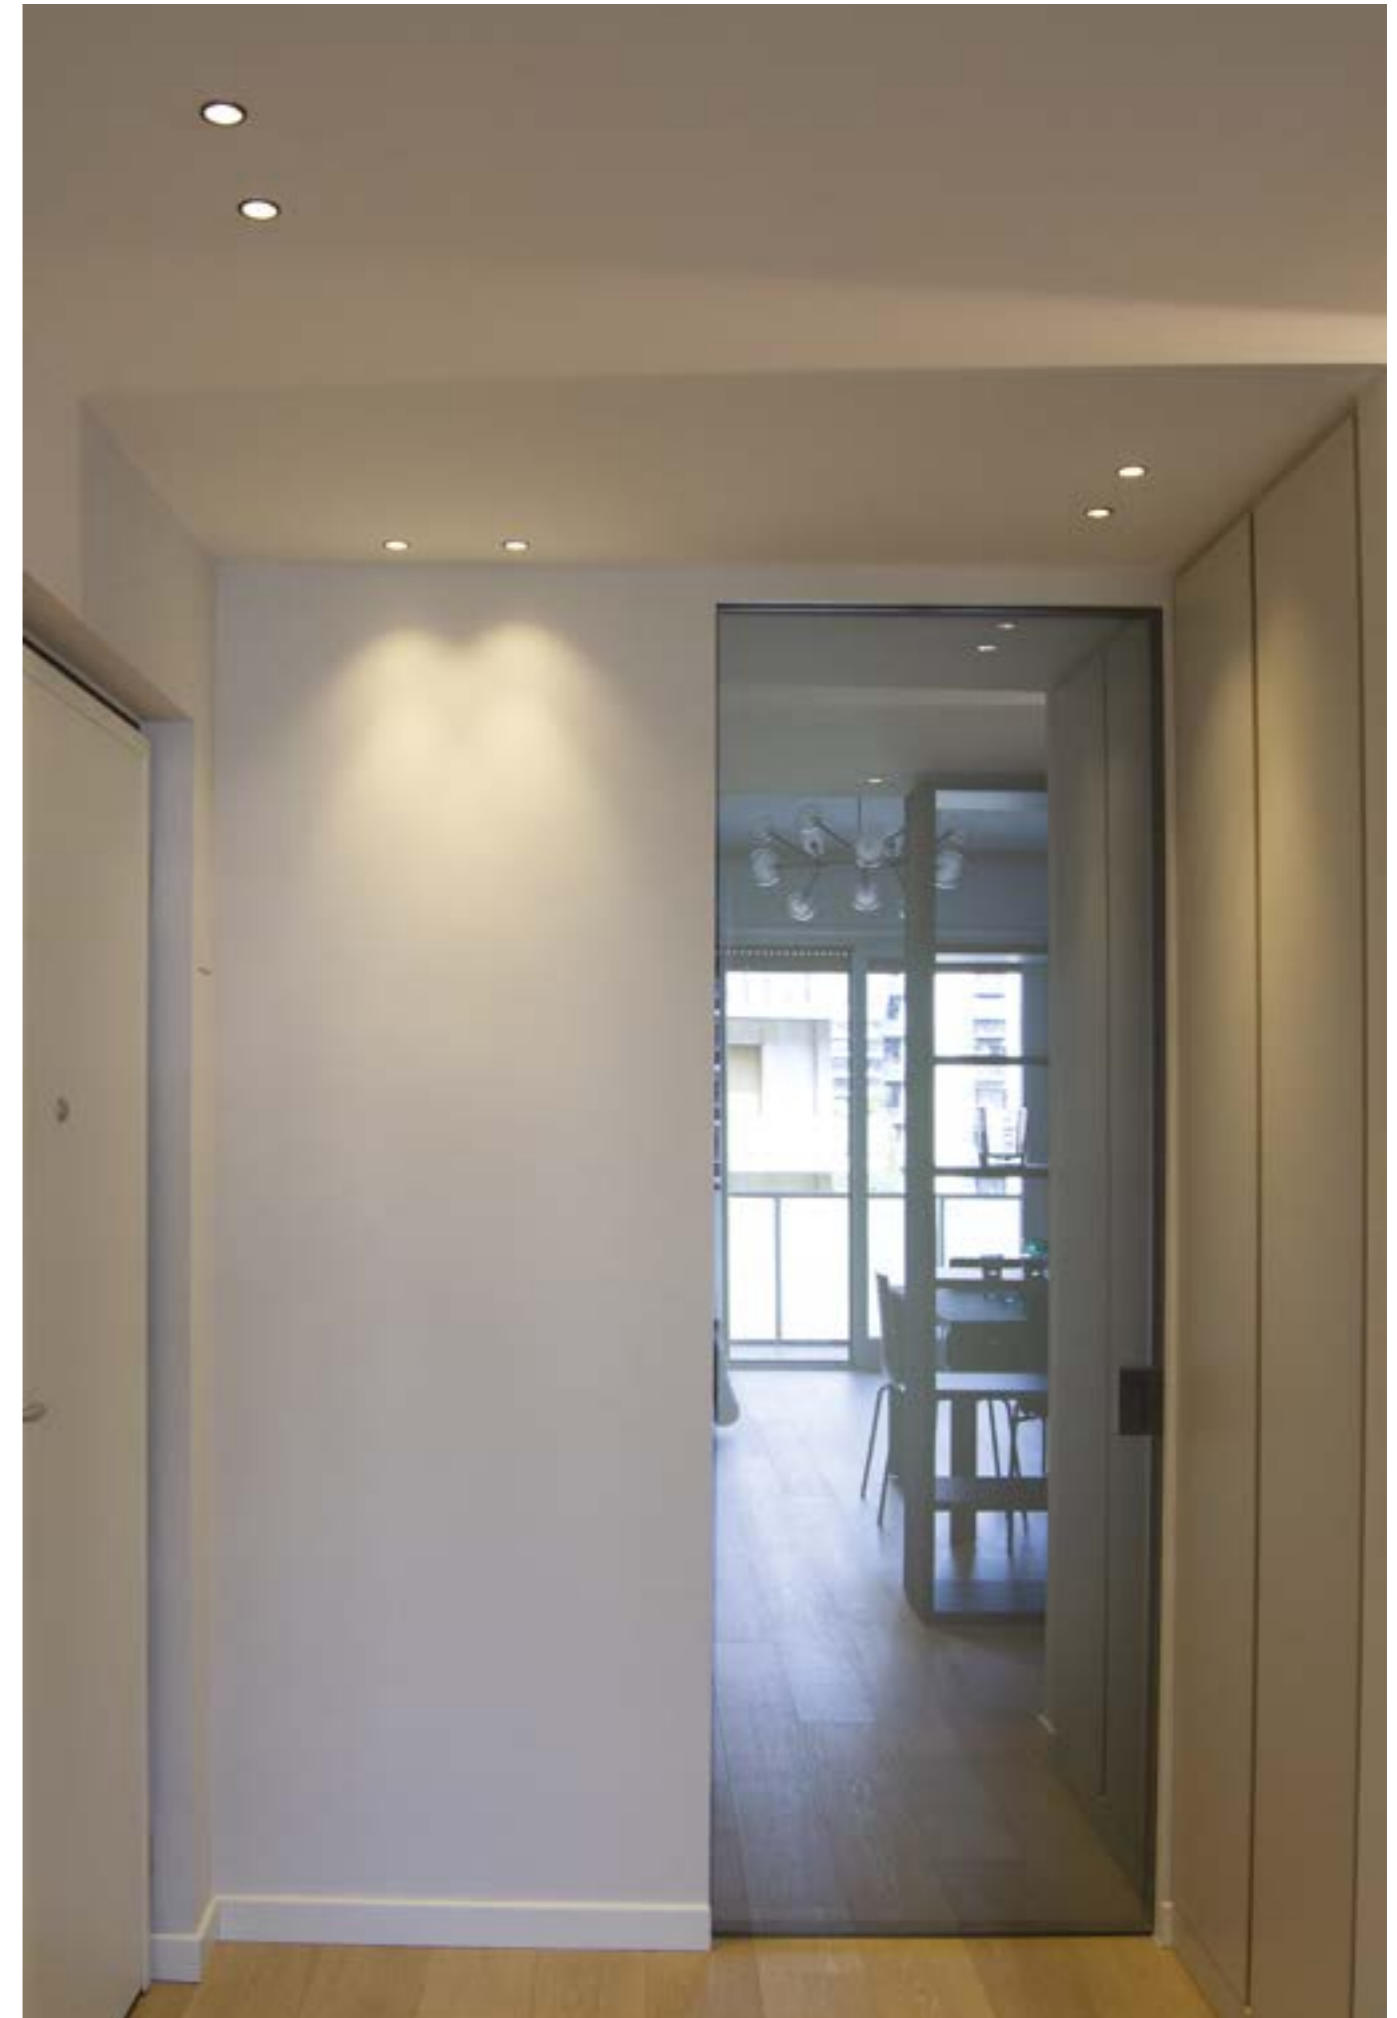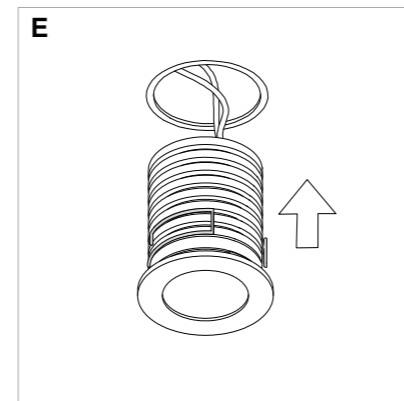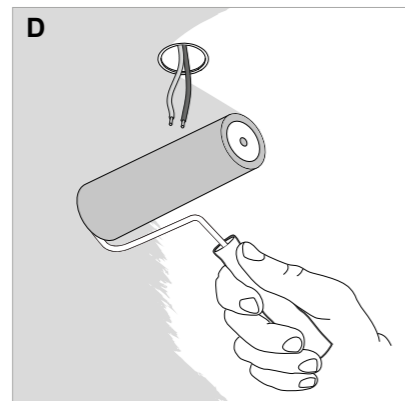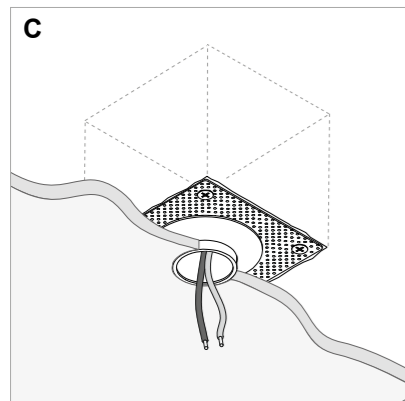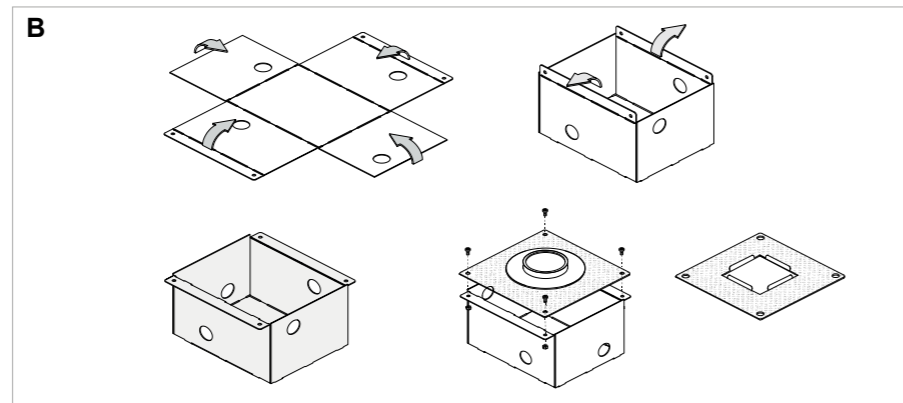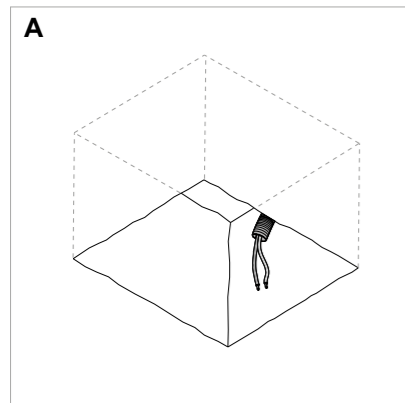



## ACCESSORIES

### 0200

Recessed box for brick mounting  
9 x 9 H 9 cm



### 0224/C

Perforated plaster kit

6690 Star 1  
6691 Star 2  
6692 Star IP  
6693 Star RGB



### 0224/Q

Perforated plaster kit








6695 Star 4  
6696 Star 5



## INSTALLATION IN CONCRETE



## ASSEMBLY SCHEME

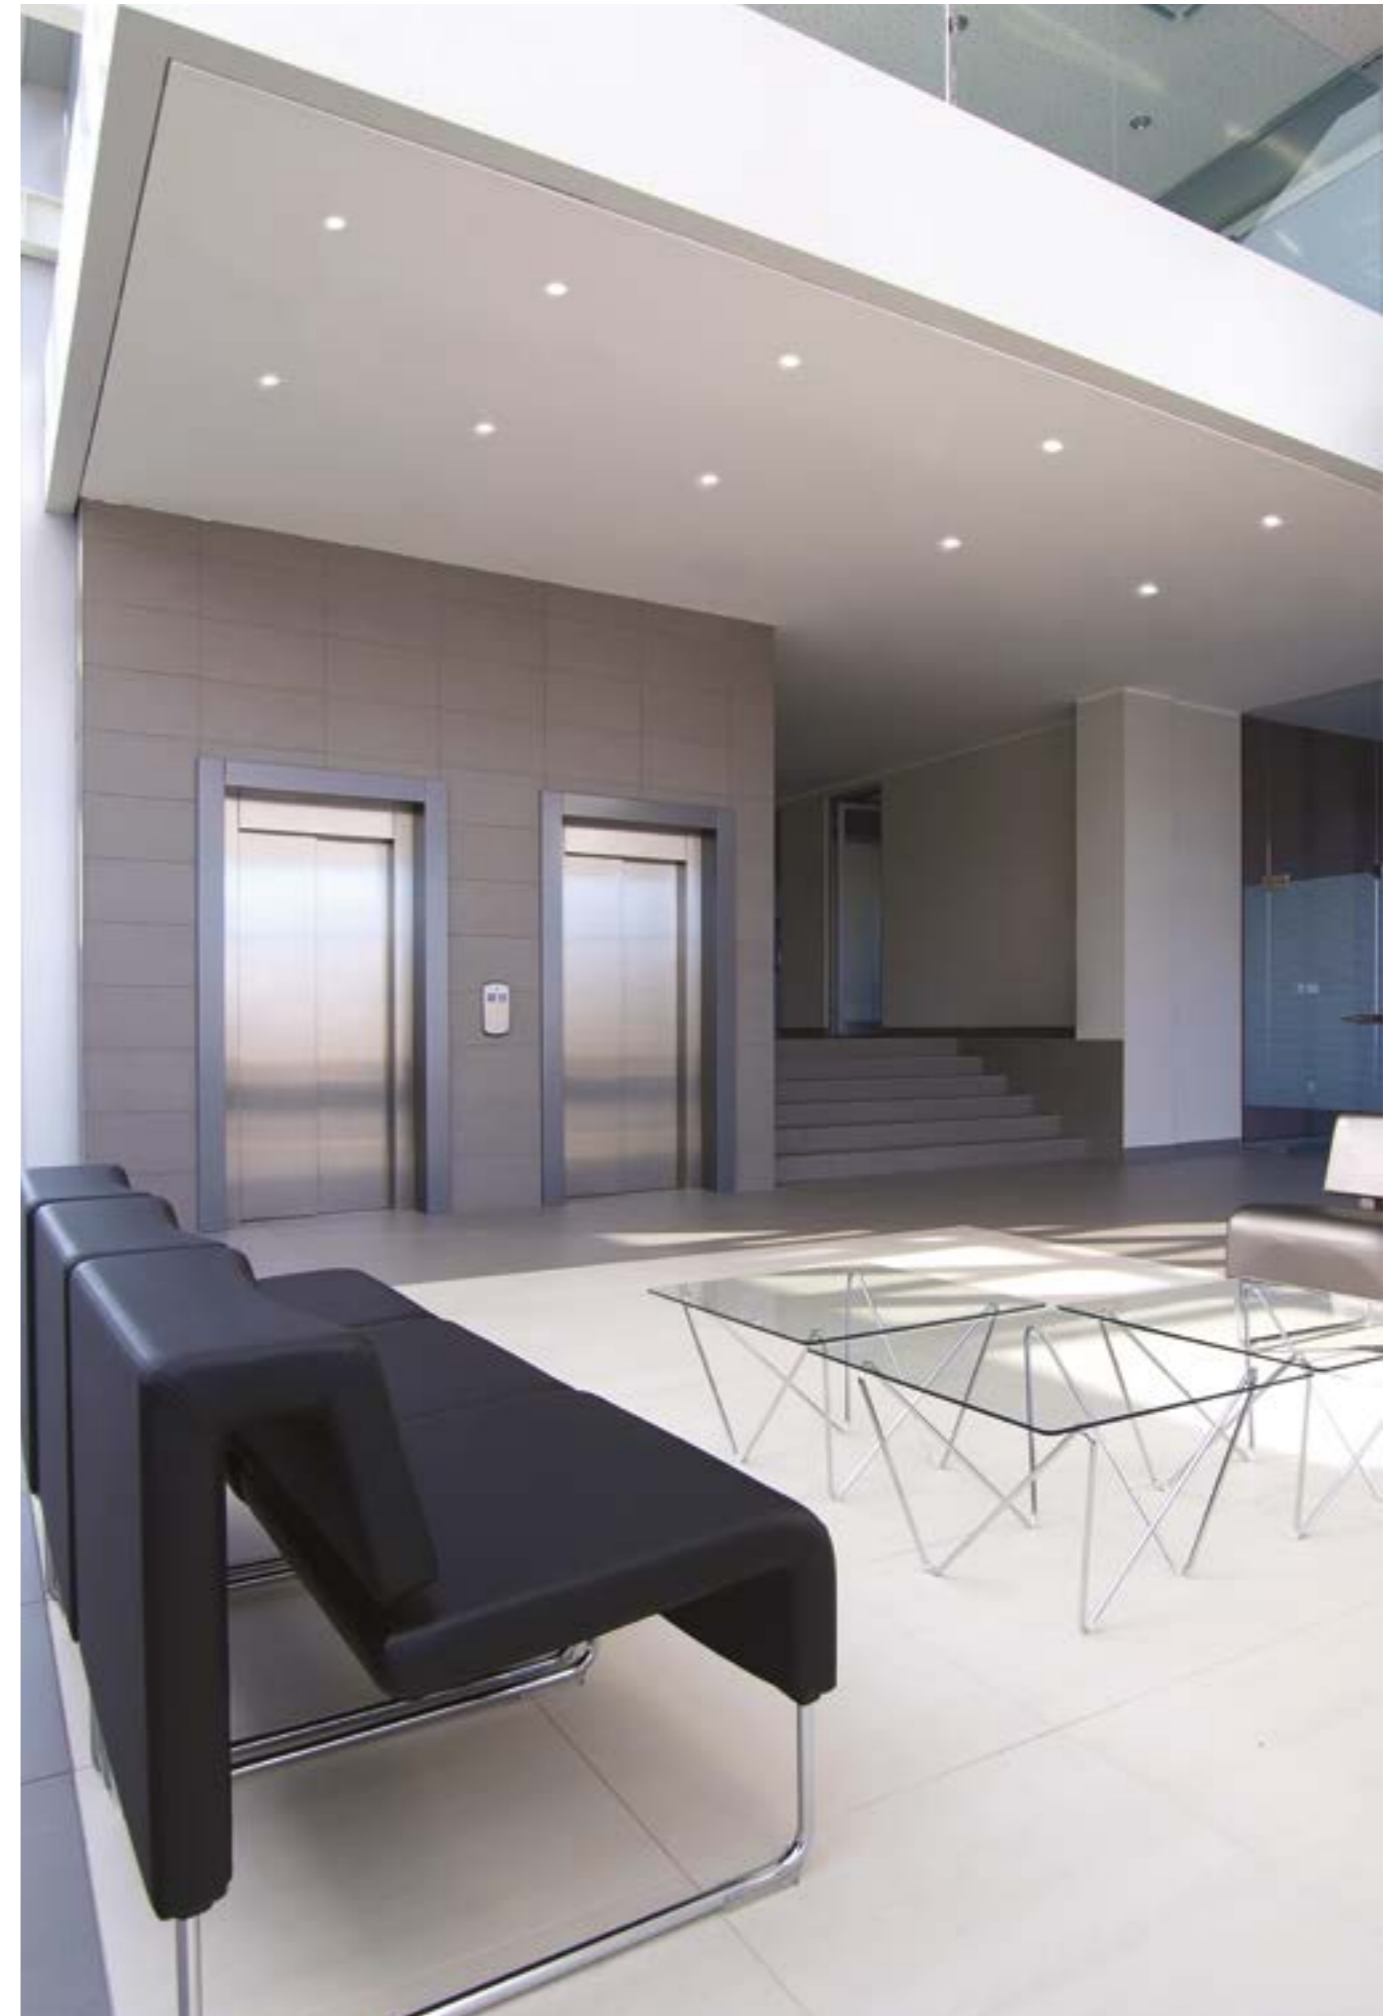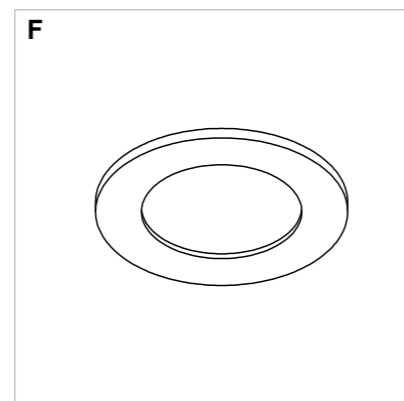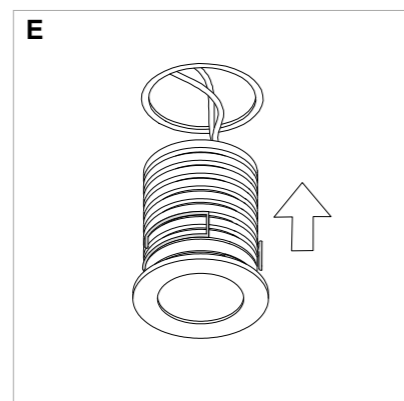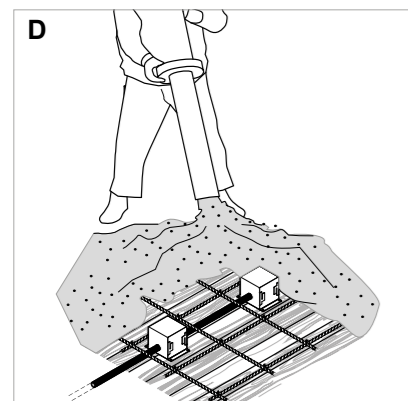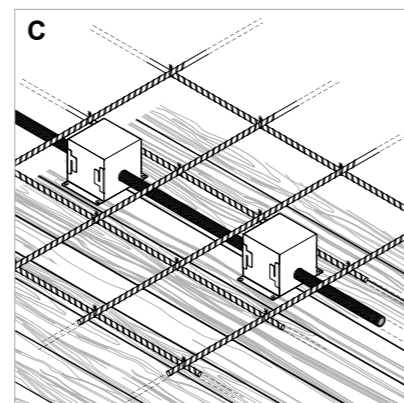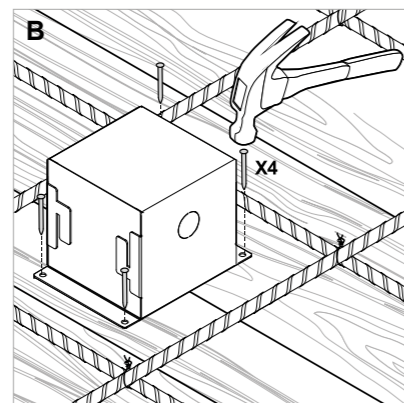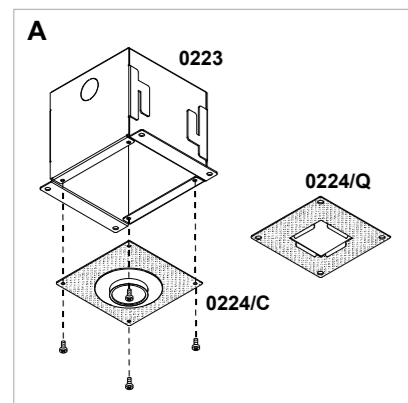





INDOOR

# MODUS

Design U.T. EgoLuce



## MODUS



Recessed spotlight providing diffused light with a die-cast aluminium structure with round flange, sand-blasted Pyrex glass and lamp holder with G4 socket. MODUS, due to its low height, is ideal for plasterboard ceilings, wooden shelves or aluminium slats and for illuminating cupboards, bookcases, display cabinets or worktops.

This spotlight is designed for the use of conventional LED sources with G4 socket powered at 12 V with power supply unit to be ordered separately. The suitably selected ballast can be inserted through the hole in the plasterboard and can be placed on it. This is of great help for both installation and maintenance.



*Spot encastré à lumière diffuse, doté d'une structure en aluminium moulé sous pression avec collerette ronde, verre en pyrex sablé et douille avec prise G4. MODUS, grâce à sa faible hauteur, est idéal pour les plafonds en plâtré, les étagères en bois ou les lattes en aluminium et pour l'éclairage des armoires, des bibliothèques, des vitrines ou des plans de travail.*

*Ce projecteur est conçu pour l'utilisation de sources LED conventionnelles avec douille G4 alimentées en 12 V avec un bloc d'alimentation à commander séparément. Le ballast choisi peut être inséré dans le trou de la plaque de plâtre et peut être placé sur celle-ci. Cela facilite grandement l'installation et l'entretien.*



*Einbaustrahler für diffuses Licht mit Struktur aus Aluminiumdruckguss mit rundem Flansch, sandgestrahltem Pyrexglas und Lampenfassung mit G4-Fassung. MODUS ist aufgrund seiner geringen Höhe ideal für Gipskartondecken, Holzregale oder Aluminiumleisten und zur Beleuchtung von Schränken, Bücheregalen, Vitrinen oder Arbeitsflächen.*

*Dieser Strahler ist für den Einsatz von herkömmlichen LED-Leuchtmitteln mit G4-Sockel und 12 V Betriebsspannung ausgelegt, wobei das Vorschaltgerät separat zu bestellen ist. Das entsprechend gewählte Vorschaltgerät kann durch das Loch in der Gipskartonplatte gesteckt und auf diese aufgesetzt werden. Dies ist sowohl bei der Installation als auch bei der Wartung eine große Hilfe.*

# MODUS



6 cm



6 cm

**6265** 0,07 Kg

- .01** White ■
- .21** Shiny gold ■
- .31** Chromed ■
- .32** Nickel mat ■

G4 12V 20W



**6421** 0,07 Kg

- .01** White ■
- .21** Shiny gold ■
- .31** Chromed ■
- .32** Nickel mat ■

**/W** 4000K LED 24V 4W 658lm

**/WW** 3000K LED 24V 4W 608lm

**/XW** 2700K LED 24V 4W 562lm



Only parallel connection 24V

## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6421</b>	1-2	1-5


Only parallel connection

### DIMMABLE


Cod.	0717/DIM60/V	0717/DIM60
	1...10V	DALI - PUSH
<b>6421</b>	1-12	1-12

Only parallel connection

## FINISHES CODES

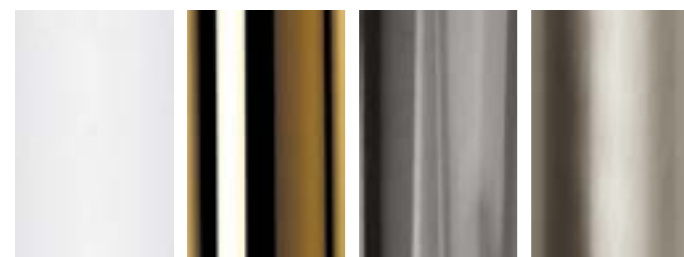

**.01** White   **.21** Shiny gold   **.31** Chromed   **.32** Nickel mat

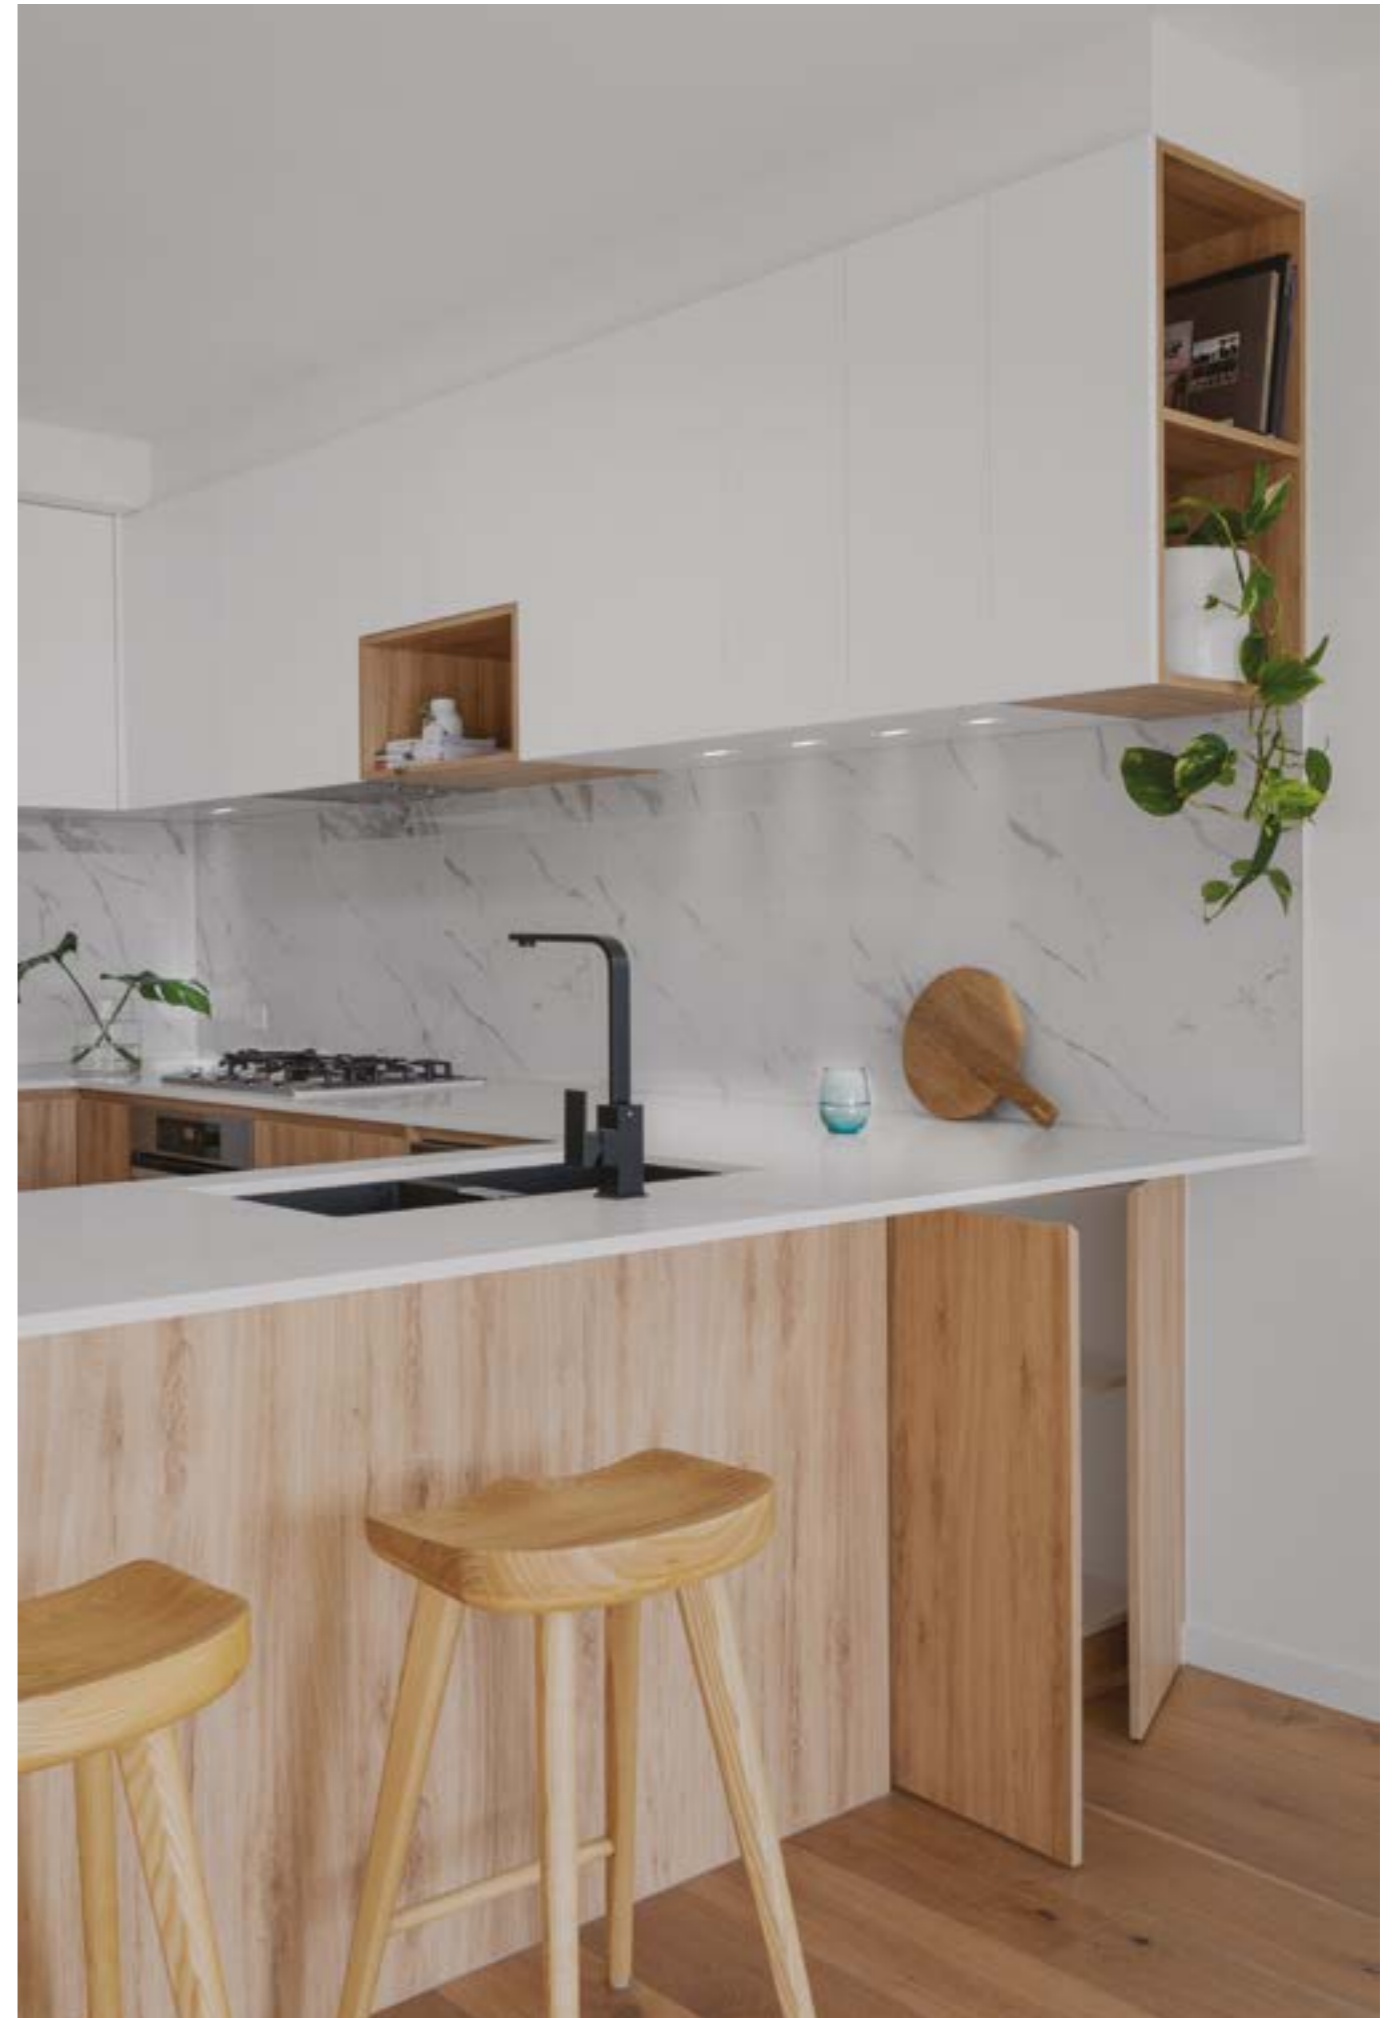



INDOOR

# ZEN

Design U.T. Egoluce



## ZEN



Diffused-light recessed spotlight with round-flange die-cast aluminum frame, sandblasted Pyrex glass and lamp holder with G4 socket.

ZEN, because of its low height dimensions, is ideal for plasterboard ceilings, wooden shelves or aluminum slats and for illuminating cabinets, bookcases, display cases or countertops.

This spotlight is designed to use conventional LED sources with G4 socket powered at 12V to be ordered separately. A separately orderable power supply is therefore required for operation.

*Spot encastré à lumière diffuse avec structure en aluminium moulé sous pression avec bride ronde, verre pyrex sablé et douille avec prise G4.*

*ZEN, grâce à sa faible hauteur, est idéal pour les plafonds en placoplâtre, les étagères en bois ou les lattes en aluminium et pour éclairer les armoires, les bibliothèques, les vitrines ou les plans de travail.*

*Ce spot est conçu pour l'utilisation de sources LED conventionnelles avec douille G4 alimentée en 12V à commander séparément. Un ballast commandé séparément est donc nécessaire pour le fonctionnement.*



*Einbaustrahler für diffuses Licht mit Struktur aus Aluminiumdruckguss mit rundem Flansch, sandgestrahltem Pyrexglas und Lampenfassung mit G4-Fassung.*

*ZEN ist aufgrund seiner geringen Höhe ideal für Gipskartondecken, Holzregale oder Aluminiumleisten und zur Beleuchtung von Schränken, Bücherregalen, Vitrinen oder Arbeitsflächen.*



*Dieser Strahler ist für die Verwendung von konventionellen LED-Leuchtmitteln mit G4-Sockel, die mit 12 V betrieben werden, ausgelegt und muss separat bestellt werden. Für den Betrieb ist daher ein separat zu bestellendes Vorschaltgerät erforderlich.*



# ZEN



6 cm




6 cm

**6251** 0,07 Kg

- .01** White ■
- .21** Shiny gold ■
- .31** Chromed ■
- .32** Nickel mat ■

G4 12V 20W



**6420** 0,07 Kg

- .01** White ■
- .21** Shiny gold ■
- .31** Chromed ■
- .32** Nickel mat ■

**/W** 4000K LED 24V 4W 658lm

**/WW** 3000K LED 24V 4W 608lm

**/XW** 2700K LED 24V 4W 562lm



Only parallel connection 24V

## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6420</b>	1-2	1-5


Only parallel connection

### DIMMABLE

Cod.	0717/DIM60/V	0717/DIM60
	1...10V	DALI - PUSH
<b>6420</b>	1-12	1-12

Only parallel connection

## FINISHES CODES

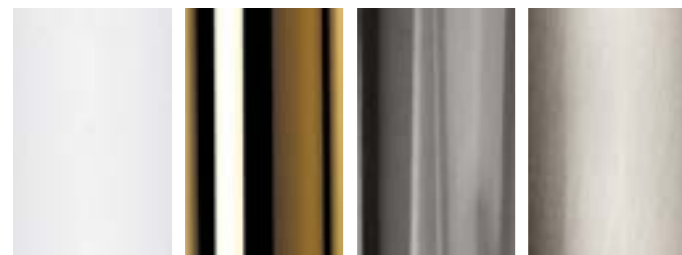

**.01** White   **.21** Shiny gold   **.31** Chromed   **.32** Nickel mat



INDOOR

# KRONO

Design U.T. EgoLuce





## KRONO



IP54 24V recessed spotlight for plasterboard false ceilings with diffused light, with aluminum structure and opal methacrylate diffuser screen.

The special features of this spotlight are the reduced thickness of the body, making it extremely useful where the height of the false ceiling is extremely minimal, and the power of the circuit.

KRONO is available with different shades of white light, 2700K (/XW), 3000K (/WW) and 4000K (/W).

The operation of the spotlight requires a special driver to be ordered separately. Dimmable drivers are also available for PUSH, 1...10V or DALI control.

*Spot encastré IP54 24V pour faux-plafonds en plaques de plâtre à lumière diffuse, avec structure en aluminium et écran diffuseur en méthacrylate opalin.*

*La particularité de ce projecteur réside dans l'épaisseur réduite du corps, ce qui le rend très utile lorsque la hauteur du faux-plafond est extrêmement réduite, et dans la puissance du circuit.*

*KRONO est disponible en différentes teintes de lumière blanche, 2700K (/XW), 3000K (/WW) et 4000K (/W).*

*Le fonctionnement du projecteur nécessite un pilote spécial à commander séparément. Des pilotes à gradation sont également disponibles pour les commandes PUSH, 1...10V ou DALI.*


Einbaustrahler IP54 24V für Zwischendecken aus Gipskarton mit diffusem Licht, mit Aluminiumstruktur und Diffusorscheibe aus opalem Methacrylat.

Die besonderen Merkmale dieses Strahlers sind die reduzierte Dicke des Gehäuses, was ihn sehr nützlich macht, wenn die Höhe der Zwischendecke extrem minimal ist, und die Leistung des Stromkreises.

KRONO ist in verschiedenen Weißlichttönen erhältlich: 2700K (/XW), 3000K (/WW) und 4000K (/W).

Für den Betrieb des Scheinwerfers ist ein spezieller Treiber erforderlich, der separat zu bestellen ist. Es sind auch dimmbare Treiber für PUSH, 1...10V oder DALI-Steuerung erhältlich.



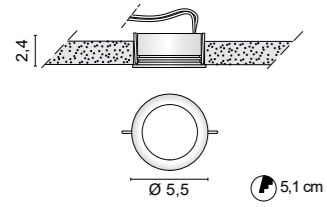

**6314** 0,07 Kg

.01	White	
.02	Black	
.31	Chromed	

/W	4000K	LED 24V 4W	658lm
/WW	3000K	LED 24V 4W	608lm
/XW	2700K	LED 24V 4W	562lm



Only parallel connection 24V

**DRIVERS**

**ON/OFF**

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6314</b>	1-2	1-5


Only parallel connection

**DIMMABLE**

Cod.	0717/DIM60/V	0717/DIM60
	1...10V	DALI - PUSH
<b>6314</b>	1-6	1-6

Only parallel connection

**FINISHES CODES**

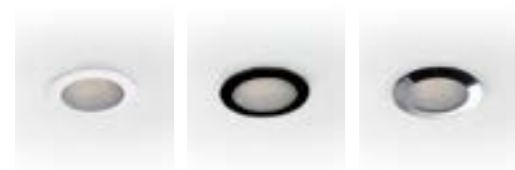

.01 White    .02 Black    .31 Chromed





INDOOR

# TAPPO

Design U.T. EgoLucce





## TAPPO



“Mini trim” recessed spotlights with die-cast aluminum structure, recessed optics, made in three different sizes to allow the use of various light sources. The light source set back in the body ensures better control of direct glare.

The COB LED modules are available with color temperatures of 2700K (XW), 3000K (WW), 4000K (W) with CRI>90 and with optical apertures of 24°, 40° and 60°. Operation involves the use of a driver to be ordered separately. Dimmable driver for PUSH, 1...10V or DALI control and units for emergency operation are also available. Possibility of operation at 24V with art. 0226

*Spots encastrés “mini trim” avec structure en aluminium moulé sous pression, optique encastrée, réalisés en trois tailles différentes pour permettre l'utilisation de différentes sources lumineuses. La source lumineuse en retrait dans le corps assure un meilleur contrôle de l'éblouissement direct.*


*Les modules LED COB sont disponibles avec des températures de couleur de 2700K (XW), 3000K (WW), 4000K (W) avec CRI>90 et avec des ouvertures optiques de 24°, 40° et 60°. Le fonctionnement implique l'utilisation d'une alimentation à commander séparément. Des alimentations graduables pour le contrôle PUSH, 1...10V ou DALI et des unités pour le fonctionnement d'urgence sont également disponibles. Possibilité de fonctionnement en 24V avec art. 0226*

“Mini trim” Einbaustrahler mit Struktur aus Aluminiumdruckguss, Einbauoptik, in drei verschiedenen Größen hergestellt, um die Verwendung verschiedener Lichtquellen zu ermöglichen. Die im Korpus zurückgesetzte Lichtquelle sorgt für eine bessere Kontrolle der Direktblendung.

*Die COB-LED-Module sind mit Farbtemperaturen von 2700K (XW), 3000K (WW), 4000K (W) mit CRI>90 und mit optischen Aperturen von 24°, 40° und 60° erhältlich. Der Betrieb erfolgt über ein separat zu bestellendes Netzteil. Dimmbare Netzteil für PUSH, 1...10V oder DALI Steuerung und Geräte für den Notbetrieb sind ebenfalls erhältlich. Möglichkeit des Betriebs bei 24 V mit Kunst. 0226*




# TAPPO

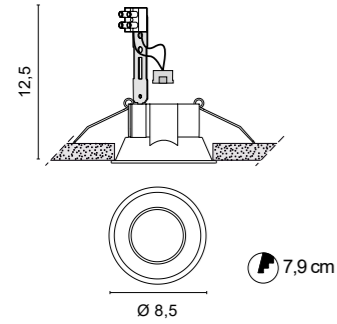

**6330** 0,14 Kg

- .01** White
- .02** Black
- .21** Shiny gold
- .25** Satin gold
- .31** Chromed
- .32** Nickel mat
- .38** Shiny copper

50W 12V GU5.3

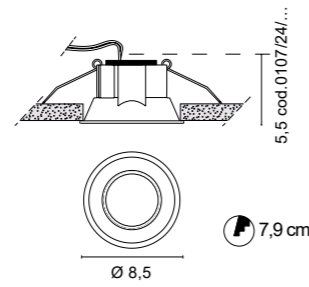

**6330 + 24V LED MODULE** 0,14 Kg


- .01** White
- .02** Black
- .21** Shiny gold
- .25** Satin gold
- .31** Chromed
- .32** Nickel mat
- .38** Shiny copper

LED MODULE 4W 24V

<b>0107/24/W</b>	4000K	/120	LED MODULE 4W 24V	658lm
<b>0107/24/WW</b>	3000K	/120	LED MODULE 4W 24V	608lm
<b>0107/24/XW</b>	2700K	/120	LED MODULE 4W 24V	562lm



Only Parallel connection 24V

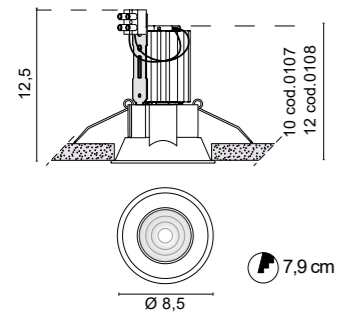

**6330 + COB LED** 0,14 Kg

- .01** White
- .02** Black
- .21** Shiny gold
- .25** Satin gold
- .31** Chromed
- .32** Nickel mat
- .38** Shiny copper

<b>0107/W</b>	4000K	/24 /40 /60	COB LED 5,9W 17V 350mA	885lm
<b>0107/WW</b>	3000K	/24 /40 /60	COB LED 5,9W 17V 350mA	836lm
<b>0107/XW</b>	2700K	/24 /40 /60	COB LED 5,9W 17V 350mA	800lm

<b>0108/W</b>	4000K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1223lm
<b>0108/WW</b>	4000K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1156lm
<b>0108/XW</b>	2700K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1106lm

<b>0108/W/IP</b>	4000K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1223lm
<b>0108/WW/IP</b>	4000K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1156lm
<b>0108/XW/IP</b>	2700K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1106lm



Only serial connection



## DRIVERS

### ON/OFF

Cod.	0125	0147/COB	0149/COB	0126
	350mA	500mA	500mA	700mA
<b>0107 - COB LED</b>	1	NO	NO	NO
<b>0108 - COB LED</b>	1	1-2	1	NO

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>0107/24/...</b>	1-2	1-5

### DIMMABLE

	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>0107</b>	1-2	1-2	1-3	1-3
<b>0108</b>	1-2	1-2	1-3	1-3

Only serial connection

	0717/DIM60/V	0717/DIM60
	PUSH - 1...10V	DALI - PUSH

<b>0107/24/...</b>	1-12	1-12
--------------------	------	------


Only Parallel connection 24V

## FINISHES CODES



**.01** White   **.02** Black   **.21** Shiny gold   **.25** Satin gold   **.31** Chromed   **.32** Nickel mat   **.38** Shiny copper


# TAPPO ADJUSTABLE

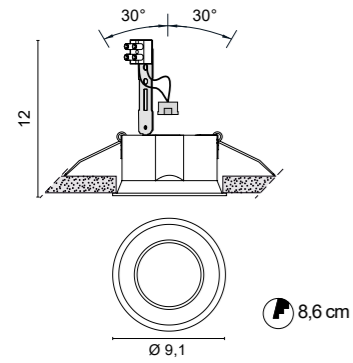

**6318** 0,22 Kg

- .01 White
- .02 Black

50W 12V GU5.3



**6318 + 24V LED MODULE** 0,22 Kg


- .01 White
- .02 Black

LED MODULE 4W 24V

<b>0107/24/W</b>	4000K	/120	LED MODULE 4W 24V	658lm
<b>0107/24/WW</b>	3000K	/120	LED MODULE 4W 24V	608lm
<b>0107/24/XW</b>	2700K	/120	LED MODULE 4W 24V	562lm



Only Parallel connection 24V

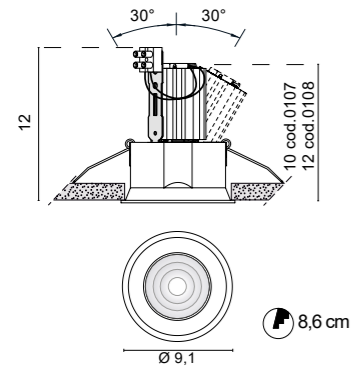

**6318 + COB LED** 0,22 Kg

- .01 White
- .02 Black

<b>0107/W</b>	4000K	/24 /40 /60	COB LED 5,9W 17V 350mA	885lm
<b>0107/WW</b>	3000K	/24 /40 /60	COB LED 5,9W 17V 350mA	836lm
<b>0107/XW</b>	2700K	/24 /40 /60	COB LED 5,9W 17V 350mA	800lm

<b>0108/W</b>	4000K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1223lm
<b>0108/WW</b>	4000K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1156lm
<b>0108/XW</b>	2700K	/24 /40 /60	COB LED 8,7W 17,5V 500mA	1106lm

<b>0108/W/IP</b>	4000K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1223lm
<b>0108/WW/IP</b>	4000K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1156lm
<b>0108/XW/IP</b>	2700K	/24 /40 /60	COB LED IP44 8,7W 17,5V 500mA	1106lm



Only serial connection



## DRIVERS

### ON/OFF

Cod.	0125	0147/COB	0149/COB	0126
	350mA	500mA	500mA	700mA
<b>0107 - COB LED</b>	1	NO	NO	NO
<b>0108 - COB LED</b>	1	1-2	1	NO

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>0107/24/...</b>	1-2	1-5

### DIMMABLE

	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>0107</b>	1-2	1-2	1-3	1-3
<b>0108</b>	1-2	1-2	1-3	1-3

Only serial connection

<b>0717/DIM60/V</b>	<b>0717/DIM60</b>
PUSH - 1...10V	DALI - PUSH

<b>0107/24/...</b>	1-12	1-12
--------------------	------	------

Only Parallel connection 24V

## FINISHES CODES



.01 White .02 Black

### DIMMABLE DRIVERS WIRELESS CASAMBI

#### 0145/CASA


- 0107** 1-3
- 0108** 1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

- 0107** 1
- 0108** 1



# TAPPO 230V

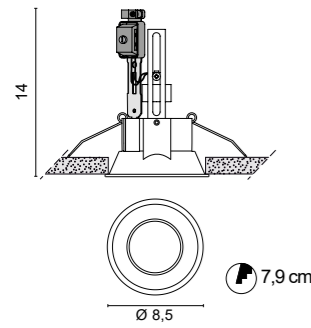

**6329** 0,20 Kg

- .01 White
- .02 Black
- .21 Shiny gold
- .25 Satin gold
- .31 Chromed
- .32 Nickel mat
- .38 Shiny copper


LED GU10 7W DIMM (COD.0104/16)  
 LED GU10 7W (COD.0094/16)  
 MAX 50W GU10 (COD.0072)



**6325** 0,10 Kg

- .01 White
- .02 Black


LED GU10 3W (COD.0093/19)

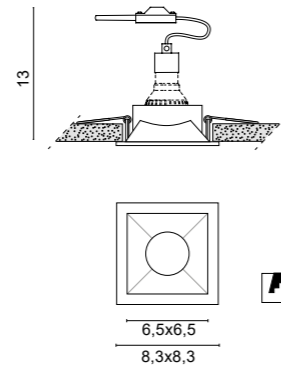

**6670** 0,12 Kg

- .01 White

LED GU10 7W DIMM (COD.0104/..)  
 LED GU10 7W (COD.0094/..)

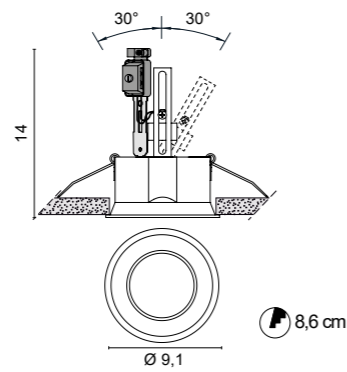

**6319** 0,28 Kg

- .01 White
- .02 Black

LED GU10 7W DIMM (COD.0104/16)  
 LED GU10 7W (COD.0094/16)  
 MAX 50W GU10 (COD.0072)



## ACCESSORIES


Kit  
**0221**

Plaster kit preforated  
12,5 x 9 cm (**6325**)



Kit  
**0203**

Plaster kit preforated  
12,5 x 9 cm (**6329**)

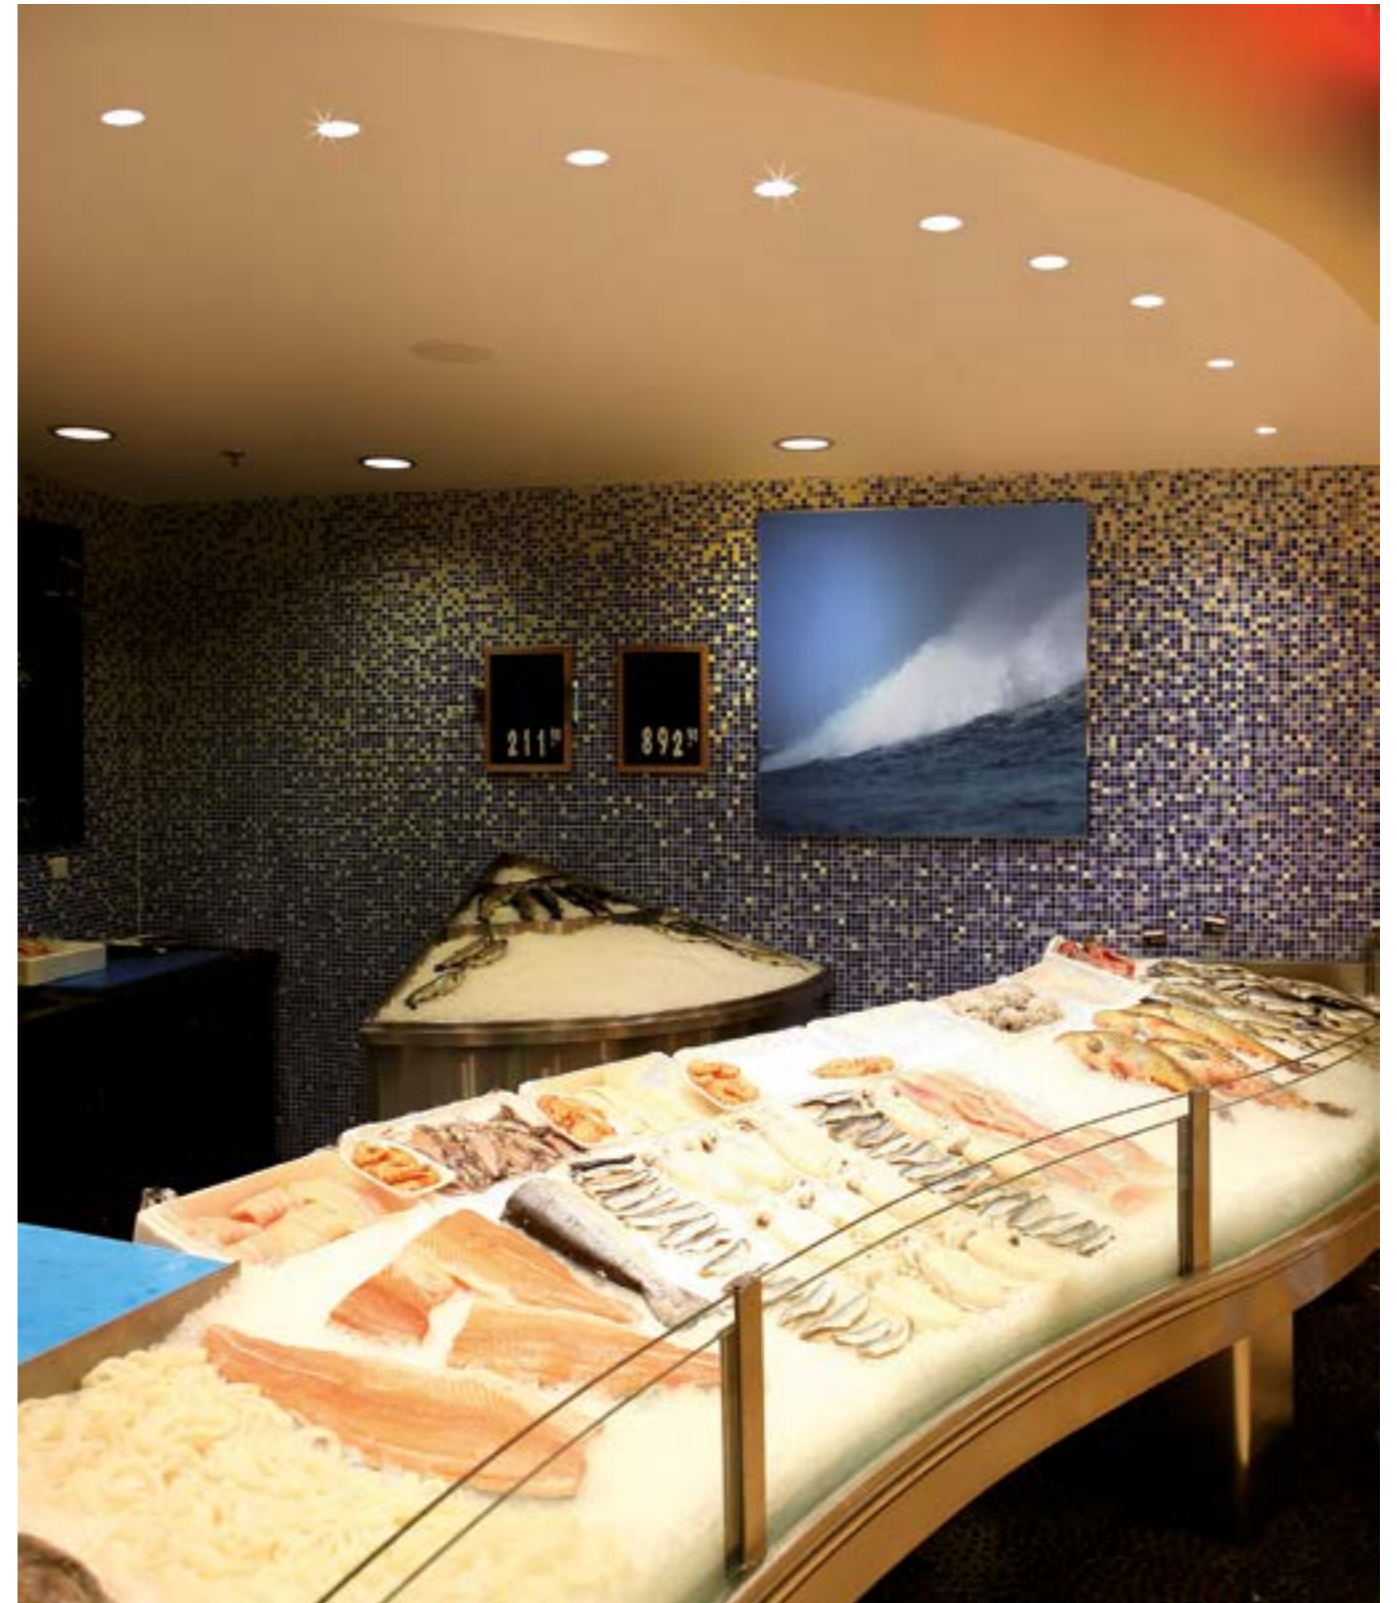

## FINISHES CODES



.01 White .02 Black .21 Shiny gold .25 Satin gold .31 Chromed .32 Nickel mat .38 Shiny copper .01 White

INDOOR

# EASY

Design U.T. EgoIuce





## EASY



“Mini trim” recessed spotlights for plasterboard false ceilings with matt white painted metal body, very small round or square frame, with recessed optics and set up to allow the use of various light sources. Accent or diffused light thanks to the satin methacrylate diffuser screen to be ordered separately.

The COB LED modules are available with color temperatures of 2700K (XW), 3000K (WW), 4000K (W) with CRI>90 and with optical apertures of 24°, 40° and 60°. Operation involves the use of a driver to be ordered separately. Dimmable driver for PUSH, 1...10V or DALI control and units for emergency operation are also available. Possibility of operation at 24V with art. 0226

*Spots encastrés « mini trim » pour faux plafonds en plaques de plâtre avec corps en métal peint en blanc mat, très petit cadre rond ou carré, avec optique encastrée et configuré pour permettre l'utilisation de différentes sources lumineuses. Lumière d'accentuation ou diffuse grâce à l'écran diffuseur en méthacrylate satiné à commander séparément.*

*Les modules LED COB sont disponibles avec des températures de couleur de 2700K (XW), 3000K (WW), 4000K (W) avec CRI>90 et avec des ouvertures optiques de 24°, 40° et 60°. Le fonctionnement implique l'utilisation d'une alimentation à commander séparément. Des alimentations graduables pour le contrôle PUSH, 1...10V ou DALI et des unités pour le fonctionnement d'urgence sont également disponibles. Possibilité de fonctionnement en 24V avec art. 0226*


“Mini trim“ Einbaustrahler für abgehängte Decken aus Gipskarton mit mattweiß lackiertem Metallkörper, sehr kleinem rundem oder quadratischem Rahmen, mit zurückgesetzter Optik und so eingerichtet, dass verschiedene Lichtquellen verwendet werden können.

Die COB-LED-Module sind mit Farbtemperaturen von 2700K (XW), 3000K (WW), 4000K (W) mit CRI>90 und mit optischen Aperturen von 24°, 40° und 60° erhältlich. Der Betrieb erfolgt über ein separat zu bestellendes Netzteil. Dimmbare Netzteil für PUSH, 1...10V oder DALI Steuerung und Geräte für den Notbetrieb sind ebenfalls erhältlich. Möglichkeit des Betriebs bei 24V mit Kunst. 0226





# EASY QUADRO

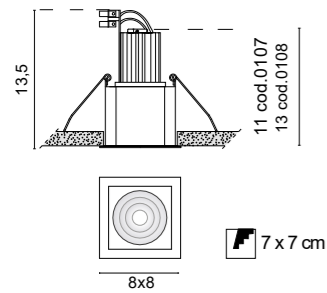


**6431** **+ COB LED** 0,20 Kg

.01	White	
<b>0107/W</b>	4000K /24 /40 /60	COB LED 5,9W 17V 350mA 885lm
<b>0107/WW</b>	3000K /24 /40 /60	COB LED 5,9W 17V 350mA 836lm
<b>0107/XW</b>	2700K /24 /40 /60	COB LED 5,9W 17V 350mA 800lm
<b>0108/W</b>	4000K /24 /40 /60	COB LED 8,7W 17,5V 500mA 1223lm
<b>0108/WW</b>	4000K /24 /40 /60	COB LED 8,7W 17,5V 500mA 1156lm
<b>0108/XW</b>	2700K /24 /40 /60	COB LED 8,7W 17,5V 500mA 1106lm
<b>0108/W/IP</b>	4000K /24 /40 /60	COB LED IP44 8,7W 17,5V 500mA 1223lm
<b>0108/WW/IP</b>	4000K /24 /40 /60	COB LED IP44 8,7W 17,5V 500mA 1156lm
<b>0108/XW/IP</b>	2700K /24 /40 /60	COB LED IP44 8,7W 17,5V 500mA 1106lm



Only serial connection

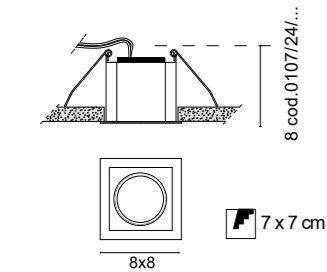


**6431** **+ 24V LED MODULE** 0,20 Kg

.01	White	
LED MODULE 4W 24V		
<b>0107/24/W</b>	4000K /120	LED MODULE 4W 24V 658lm
<b>0107/24/WW</b>	3000K /120	LED MODULE 4W 24V 608lm
<b>0107/24/XW</b>	2700K /120	LED MODULE 4W 24V 562lm



Only Parallel connection 24V

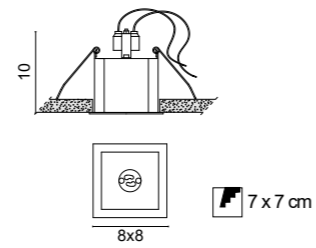

**6432** 0,20 Kg

.01	White	
LED GU10 7W DIMM (COD.0104/..)		
LED GU10 7W (COD.0094/..)		



## ACCESSORIES

Screen  
**0288**

.01	White	
-----	-------	--

Satin methacrylate screen



## DRIVERS

### ON/OFF

Cod.	0125	0147/COB	0149/COB
	350mA	500mA	500mA
<b>0107 - COB LED</b>	1	NO	NO
<b>0108 - COB LED</b>	1	1-2	1

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>0107/24/...</b>	1-2	1-5

### DIMMABLE

	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>0107</b>	1-2	1-2	1-3	1-3
<b>0108</b>	1-2	1-2	1-3	1-3

Only serial connection

	0717/DIM60/V	0717/DIM60
	PUSH - 1...10V	DALI - PUSH

<b>0107/24/...</b>	1-12	1-12
--------------------	------	------

Only Parallel connection 24V

## FINISHES CODES



.01 White

### DIMMABLE DRIVERS WIRELESS CASAMBI

**0145/CASA**


<b>0107</b>	1-3
<b>0108</b>	1-3

### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

<b>0107</b>	1
<b>0108</b>	1


# EASY TONDO



<b>6441</b>		<b>+ COB LED</b>		0,40 Kg	
.01	White				
<b>0107/W</b>	4000K	/24	/40	/60	COB LED 5,9W 17V 350mA 885lm
<b>0107/WW</b>	3000K	/24	/40	/60	COB LED 5,9W 17V 350mA 836lm
<b>0107/XW</b>	2700K	/24	/40	/60	COB LED 5,9W 17V 350mA 800lm
<b>0108/W</b>	4000K	/24	/40	/60	COB LED 8,7W 17,5V 500mA 1223lm
<b>0108/WW</b>	4000K	/24	/40	/60	COB LED 8,7W 17,5V 500mA 1156lm
<b>0108/XW</b>	2700K	/24	/40	/60	COB LED 8,7W 17,5V 500mA 1106lm
<b>0108/W/IP</b>	4000K	/24	/40	/60	COB LED IP44 8,7W 17,5V 500mA 1223lm
<b>0108/WW/IP</b>	4000K	/24	/40	/60	COB LED IP44 8,7W 17,5V 500mA 1156lm
<b>0108/XW/IP</b>	2700K	/24	/40	/60	COB LED IP44 8,7W 17,5V 500mA 1106lm




Only serial connection



<b>6441</b>		<b>+ 24V LED MODULE</b>		0,40 Kg	
.01	White				
LED MODULE 4W 24V					
<b>0107/24/W</b>	4000K	/120			LED MODULE 4W 24V 658lm
<b>0107/24/WW</b>	3000K	/120			LED MODULE 4W 24V 608lm
<b>0107/24/XW</b>	2700K	/120			LED MODULE 4W 24V 562lm



Only Parallel connection 24V



<b>6442</b>		0,40 Kg	
.01	White		
LED GU10 7W DIMM		(COD.0104/..)	
LED GU10 7W		(COD.0094/..)	



## ACCESSORIES

Screen  
**0289**

.01	White	
-----	-------	--

Satin methacrylate  
screen



## DRIVERS

### ON/OFF

Cod.	0125	0147/COB	0149/COB
	350mA	500mA	500mA
<b>0107 - COB LED</b>	1	NO	NO
<b>0108 - COB LED</b>	1	1-2	1

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>0107/24/...</b>	1-2	1-5

### DIMMABLE

	0141/DIM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>0107</b>	1-2	1-2	1-3	1-3
<b>0108</b>	1-2	1-2	1-3	1-3

Only serial connection

<b>0717/DIM60/V</b>	<b>0717/DIM60</b>
PUSH - 1...10V	DALI - PUSH

<b>0107/24/...</b>	1-12	1-12
--------------------	------	------

Only Parallel connection 24V

## FINISHES CODES



.01 White

### DIMMABLE DRIVERS WIRELESS CASAMBI

#### 0145/CASA

<b>0107</b>	1-3
<b>0108</b>	1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

<b>0107</b>	1
<b>0108</b>	1



INDOOR

# TANYA

Design U.T. Egołuce





## TANYA



Trimless recessed spotlight for plasterboard false ceilings with diffused light, with galvanized iron body and satin methacrylate diffuser.

*Spot encastré sans garniture pour faux-plafonds en plaques de plâtre à lumière diffuse, avec corps en fer galvanisé et diffuseur en méthacrylate satiné.*

*Randloser Einbaustrahler für abgehängte Gipskartondecken mit diffusem Licht, mit Gehäuse aus verzinktem Eisen und Diffusor aus satinierem Methacrylat.*

The installation involves fixing the body by means of a system that can be adapted to the different thicknesses of the plasterboard and subsequent grouting, smoothing and painting.

*L'installation prévoit la fixation du corps au moyen d'un système adaptable aux différentes épaisseurs de la plaque de plâtre, puis le jointoiement, le lissage et la peinture.*

*Die Installation umfasst die Befestigung des Gehäuses mit Hilfe eines Systems, das an die verschiedenen Gipskartonstärken angepasst werden kann, sowie das anschließende Verfugen, Spachteln und Streichen.*

The electrical components are inserted later and can be easily removed for maintenance. The final result provides for the complete integration of the light body with the architecture without the presence of protrusions or external frames.

*Les composants électriques sont insérés ultérieurement et peuvent être facilement retirés pour l'entretien. Le résultat final prévoit l'intégration complète du corps lumineux à l'architecture sans la présence de saillies ou de cadres extérieurs.*

*Die elektrischen Komponenten werden später eingesetzt und können für die Wartung leicht entfernt werden. Das Endergebnis ermöglicht die vollständige Integration des Leuchtenkörpers in die Architektur, ohne dass Vorsprünge oder externe Rahmen vorhanden sind.*

TANYA allows the use of COB LED, latest generation light sources, to be ordered separately.

*TANYA permet l'utilisation de COB LED, sources lumineuses de dernière génération, à commander séparément.*


*TANYA ermöglicht die Verwendung von COB LED, Lichtquellen der neuesten Generation, die separat bestellt werden können.*

The COB LED modules are available with different shades of white light, 2700K, 3000K and 4000K and with different optic beams, 24°, 40° and 60° or with satin glass to diffuse the light.

*Les modules COB LED sont disponibles avec différentes nuances de lumière blanche, 2700K, 3000K et 4000K et avec différents faisceaux optiques, 24°, 40° et 60° ou avec du verre satiné pour diffuser la lumière.*


*Die COB-LED-Module sind in verschiedenen Weißtönen (2700K, 3000K und 4000K) und mit verschiedenen optischen Abstrahlwinkeln (24°, 40° und 60°) oder mit satinierem Glas zur Streuung des Lichts erhältlich.*

# TANYA

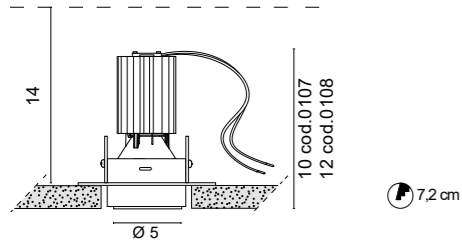

**6666** **COB LED CRI>90** 0,15 Kg

<b>.57</b> White glass							
<b>0107/W</b>	4000K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	885lm	695lm(out)			
<b>0107/WW</b>	3000K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	836lm	657lm(out)			
<b>0107/XW</b>	2700K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	800lm	629lm(out)			
<b>0108/W</b>	4000K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1223lm	957lm(out)			
<b>0108/WW</b>	4000K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1156lm	905lm(out)			
<b>0108/XW</b>	2700K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1106lm	865lm(out)			
<b>0108/W/IP</b>	4000K /24 /38 /58	IP54 8,7W 17,5V 500mA	1223lm	957lm(out)			
<b>0108/WW/IP</b>	4000K /24 /38 /58	IP54 8,7W 17,5V 500mA	1156lm	905lm(out)			
<b>0108/XW/IP</b>	2700K /24 /38 /58	IP54 8,7W 17,5V 500mA	1106lm	865lm(out)			



**6667** **230V** 0,20 Kg

<b>.57</b> White glass			
7W GU10 LED DIM	(cod.0104/..)		
7W GU10 LED	(cod.0094/..)		



## FINISHES CODES



**.57** White glass



## DRIVERS

### ON/OFF

Cod.	<b>0125</b> 350mA	<b>0147/COB</b> 500m	<b>0149/COB</b> 500mA
<b>0107 - COB LED</b>	1	NO	NO
<b>0108 - COB LED</b>	1	1-2	1

### DIMMABLE

	<b>0141/DIM</b> PUSH - 1...10V	<b>0141/DALI</b> DIM DALI	<b>0145</b> DIM	<b>0145/DALI</b> DIM - DALI	<b>0733/DIM</b> PHASE CUT	<b>0734/DIM</b> PHASE CUT
<b>0107</b>	1-2	1-2	1-3	1-3	1	NO
<b>0108</b>	1-2	1-2	1-3	1-3	NO	1

Only serial connection

### CASAMBI

#### 0145/CASA

<b>0107</b>	1-3
<b>0108</b>	1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

<b>0107</b>	1
<b>0108</b>	1



INDOOR

# ALYA

Design U.T. EgoIuce





## ALYA



Trimless recessed spotlight for plasterboard false ceilings with accent or diffused light and with galvanized iron body.

The installation involves fixing the body by means of a system that can be adapted to the different thicknesses of the plasterboard and subsequent grouting, smoothing and painting.

The electrical components are inserted later and can be easily removed for maintenance. The final result provides for the complete integration of the light body with the architecture without the presence of protrusions or external frames.

ALYA allows the use of COB LED, latest generation light sources, to be ordered separately.

The COB LED modules are available with different shades of white light, 2700K, 3000K and 4000K and with different optic beams, 24°, 40° and 60° or with satin glass to diffuse the light.

*Einbaustrahler ohne Rahmen für abgehängte Gipskartondecken mit akzentuiertem oder diffusem Licht und mit Gehäuse aus verzinktem Eisen.*

*Die Installation umfasst die Befestigung des Gehäuses mit Hilfe eines Systems, das an die verschiedenen Gipskartonstärken angepasst werden kann, sowie das anschließende Verfugen, Spachteln und Streichen.*

*Die elektrischen Komponenten werden später eingebaut und können für die Wartung leicht entfernt werden. Das Endergebnis ermöglicht die vollständige Integration des Leuchtenkörpers in die Architektur, ohne dass Vorsprünge oder äußere Rahmen vorhanden sind.*

*ALYA ermöglicht die Verwendung von COB LED, Lichtquellen der neuesten Generation, die separat bestellt werden können.*

*Die COB-LED-Module sind in verschiedenen Weißtönen (2700K, 3000K und 4000K) und mit verschiedenen optischen Abstrahlwinkeln (24°, 40° und 60°) oder mit satiniertem Glas zur Streuung des Lichts erhältlich.*

*Spot encastré sans garniture pour faux-plafonds en plaques de plâtre, à lumière accentuée ou diffuse, avec corps en fer galvanisé.*


*L'installation prévoit la fixation du corps à l'aide d'un système adaptable aux différentes épaisseurs de la plaque de plâtre, puis le jointoiement, le lissage et la peinture.*

*Les composants électriques sont insérés ultérieurement et peuvent être facilement retirés pour l'entretien. Le résultat final permet l'intégration complète du corps lumineux à l'architecture sans la présence de saillies ou de cadres extérieurs.*

*ALYA permet l'utilisation de COB LED, des sources lumineuses de dernière génération, à commander séparément.*


*Les modules COB LED sont disponibles avec différentes nuances de lumière blanche, 2700K, 3000K et 4000K et avec différents faisceaux optiques, 24°, 40° et 60° ou avec du verre satiné pour diffuser la lumière.*

# ALYA

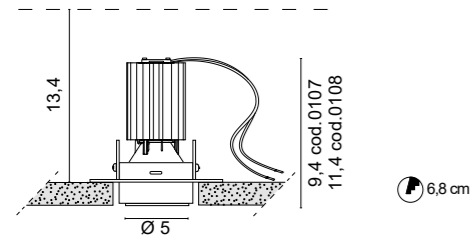

**6668** **COB LED CRI>90** 0,14 Kg

.01 White							
<b>0107/W</b>	4000K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	885lm	695lm(out)			
<b>0107/WW</b>	3000K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	836lm	657lm(out)			
<b>0107/XW</b>	2700K /24 /40 /60 /ST	COB LED 5,9W 17V 350mA	800lm	629lm(out)			
<b>0108/W</b>	4000K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1223lm	957lm(out)			
<b>0108/WW</b>	4000K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1156lm	905lm(out)			
<b>0108/XW</b>	2700K /24 /40 /60 /ST	COB LED 8,7W 17,5V 500mA	1106lm	865lm(out)			
<b>0108/W/IP</b>	4000K /24 /38 /58	IP54 8,7W 17,5V 500mA	1223lm	957lm(out)			
<b>0108/WW/IP</b>	4000K /24 /38 /58	IP54 8,7W 17,5V 500mA	1156lm	905lm(out)			
<b>0108/XW/IP</b>	2700K /24 /38 /58	IP54 8,7W 17,5V 500mA	1106lm	865lm(out)			

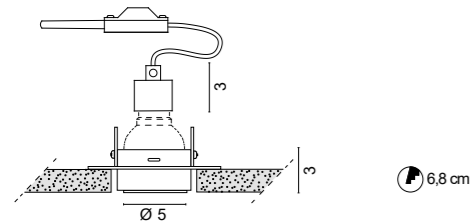

**6669** **230V** 0,20 Kg

.01 White			
7W GU10 LED DIM	(cod.0104/..)		
7W GU10 LED	(cod.0094/..)		



## FINISHES CODES



.01 White



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0147/COB 500m	0149/COB 500mA
<b>0107 - COB LED</b>	1	NO	NO
<b>0108 - COB LED</b>	1	1-2	1

### DIMMABLE

	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT	0734/DIM PHASE CUT
<b>0107</b>	1-2	1-2	1-3	1-3	1	NO
<b>0108</b>	1-2	1-2	1-3	1-3	NO	1

Only serial connection

### CASAMBI

#### 0145/CASA

<b>0107</b>	1-3
<b>0108</b>	1-3

### LED EMERGENCY UNIT

#### 0115/EM INVERTER + BATTERY + LED INDICATOR

<b>0107</b>	1
<b>0108</b>	1





INDOOR

# CERCHIETTO

Design U.T. Egoluce





## CERCHIETTO



IP44 recessed spotlight with direct/diffused light with aluminum body and satin methacrylate diffuser.

*Spot encastré IP44 à lumière directe/diffusée avec corps en aluminium et diffuseur en méthacrylate satiné.*

*IP44 Einbaustrahler mit direktem/difusem Licht mit Aluminiumgehäuse und satiniertem Methacrylatdiffusor.*

The spotlight is available in the catalogue with integrated power LED with blue light /B or white light 2700K, 3000K and 4000K with CRI>80.

*Le spot est disponible dans le catalogue avec LED de puissance intégrée à lumière bleue /B ou blanche 2700K, 3000K et 4000K avec CRI>80.*


*Der Strahler ist im Katalog mit integrierter Power-LED mit blauem Licht /B oder weißem Licht 2700K, 3000K und 4000K mit CRI>80 erhältlich.*

The spotlight can be installed on plasterboard with the special accessory supplied or in masonry with the dedicated formworks to be ordered separately.

*Le spot peut être installé sur une plaque de plâtre avec l'accessoire spécial fourni ou dans la maçonnerie avec les coffrages dédiés à commander séparément.*

*Der Strahler kann mit dem mitgelieferten Spezialzubehör auf Gipskartonplatten oder mit der separat zu bestellenden Schalung im Mauerwerk installiert werden.*


# CERCHIETTO

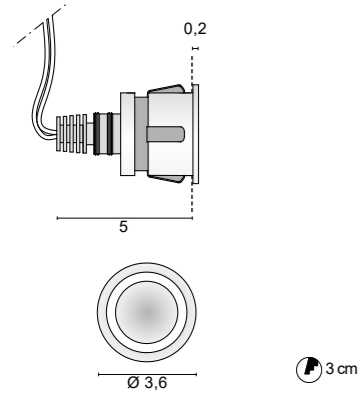

**6391** 0,04 Kg

**.01** White

<b>/B</b>	LED BLU	1W 350mA	
<b>/W</b>	4000K	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	max LED 1,5W 500mA	199lm



ETL version available upon request



**.01/B**



**.01/W**



**.01/WW**



**.01/XW**

## FINISHES CODES



**.01** White



## ACCESSORIES

Kit  
**0213**

Kit box + plaster



Box  
**0216**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6391</b>	1-6	1-10	1-6

### DIMMABLE DRIVERS CASAMBI

0145/CASA
<b>6391</b> 1-21

### DIMMABLE

0141/DIMM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6391</b> 1-11	1-11	1-21	1-21

Only serial connection



INDOOR

# OKKIO

Design U.T. EgoIuce





## OKKIO



Adjustable recessed micro spotlight (IP40) with direct light with aluminum body and 15° optical aperture beam.

OKKIO LED is available in the catalog with power LEDs with different shades of white light, 3000K /WW and 4000K /W. On request it is also available at 2700K and 5000K.

The spotlight can be mounted directly on supports such as wood or plasterboard with the special supplied spring.

*Micro spot encastrable orientable (IP40) à lumière directe avec corps en aluminium et faisceau à ouverture optique de 15°.*


*OKKIO LED est disponible dans le catalogue avec des LED de puissance avec différentes nuances de lumière blanche, 3000K /WW et 4000K /W. Sur demande, il est également disponible à 2700K et 5000K. Sur demande, il est également disponible en 2700K et 5000K.*

*Le projecteur peut être monté directement sur des supports tels que le bois ou le plâtré grâce au ressort spécial fourni.*

*Einstellbarer Mikro-Einbaustrahler (IP40) mit direktem Licht mit Aluminiumgehäuse und 15° optischer Apertur Strahl.*

*OKKIO LED ist im Katalog mit Power-LEDs mit verschiedenen Schattierungen von weißem Licht, 3000K /WW und 4000K /W erhältlich. Auf Anfrage ist er auch in 2700K und 5000K erhältlich.*

*Der Strahler kann direkt auf Stützen wie Holz oder Gipskarton mit der speziellen mitgelieferten Feder montiert werden.*

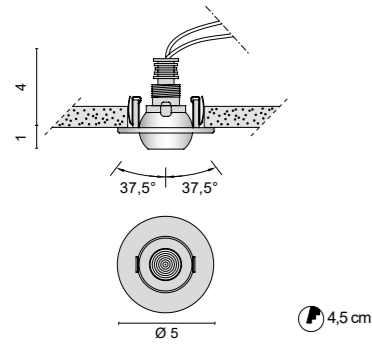

**6324**

0,09 Kg

<b>.01</b>	White	
<b>.21</b>	Shiny gold	
<b>.31</b>	Chromed	
<b>.32</b>	Nickel mat	

<b>/W</b>	4000K	/11 /25 /45	LED 1W 350mA	158lm
<b>/WW</b>	3000K	/11 /25 /45	LED 1W 350mA	150lm
<b>/XW</b>	2700K	/11 /25 /45	LED 1W 350mA	143lm



ETL version available upon request

**DRIVERS**

**ON/OFF**

Cod.	0125	0128
	350mA	350m
<b>6324</b>	1-6	1-10

**DIMMABLE DRIVERS WIRELESS CASAMBI**

0145/CASA
<b>6324</b> 1-21

**DIMMABLE**

0141/DIMM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6324</b> 1-12	1-12	1-21	1-21

Only serial connection

**FINISHES CODES**



**.01** White





INDOOR

# TOP

Design U.T. Egoluce





## TOP



The spotlight is available in the catalog with integrated power LED in 2700K, 3000K and 4000K white light with CRI>80.

The shape with the parabola integrated into the body is able to maximize the quality of the LED source by projecting an extremely clean cone of light, with a design free of smudges or colored reflections.

TOP can be installed directly on substrates such as wood, walls and plasterboard ceilings with the supplied spring or on masonry with the appropriate formwork to be ordered separately.

*Le projecteur est disponible dans le catalogue avec des LED de puissance intégrées en lumière blanche 2700K, 3000K et 4000K avec CRI>80.*

*La forme avec la parabole intégrée dans le corps est capable de maximiser la qualité de la source LED en projetant un cône de lumière extrêmement propre, avec un design exempt de taches ou de reflets colorés.*

*TOP peut être installé directement sur des supports tels que le bois, les murs et les plafonds en plaques de plâtre avec le ressort fourni ou sur la maçonnerie avec le coffrage approprié à commander séparément.*


*Der Strahler ist im Katalog mit integrierter Power-LED in 2700K, 3000K und 4000K weißem Licht mit CRI>80 erhältlich.*

*Die Form mit der in den Körper integrierten Parabel ist in der Lage, die Qualität der LED-Quelle zu maximieren, indem ein extrem sauberer Lichtkegel projiziert wird, mit einem Design frei von Flecken oder farbigen Reflexen.*

*TOP kann direkt auf Untergründen wie Holz, Wänden und Gipskartondecken mit der mitgelieferten Feder oder auf Mauerwerk mit der entsprechenden, separat zu bestellenden Schalung installiert werden.*




# TOP - TOP IP - TOP MINI

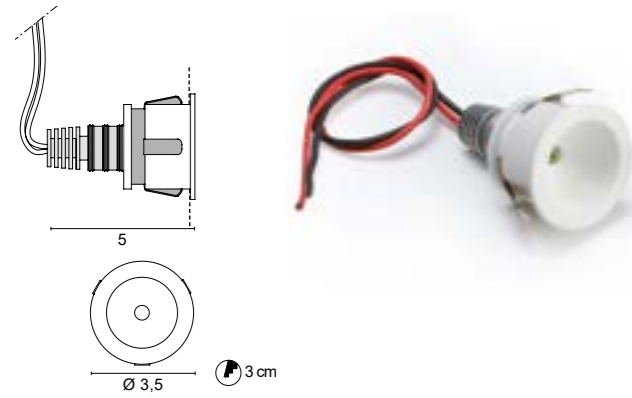


**6363** 0,04 Kg

- .01 White
- .02 Black

/W	4000K	max LED 1,5W 500mA	221lm
/WW	3000K	max LED 1,5W 500mA	210lm
/XW	2700K	max LED 1,5W 500mA	199lm



ETL version available upon request

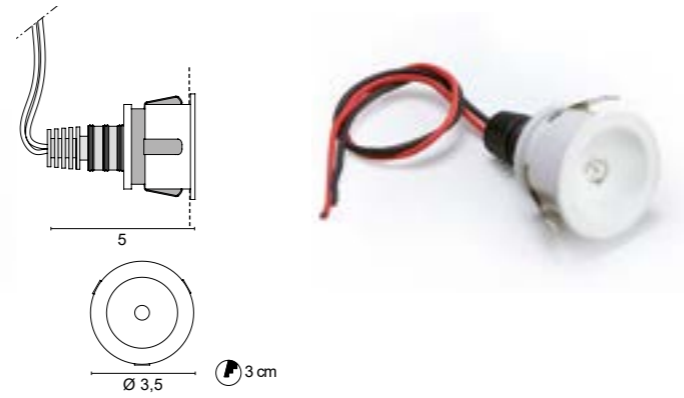


**6740** 0,04 Kg

- .01 White
- .02 Black
- .31 Chromed

/W	4000K	/15 /25 /45	max LED 1,5W 500mA	221lm
/WW	3000K	/15 /25 /45	max LED 1,5W 500mA	210lm
/XW	2700K	/15 /25 /45	max LED 1,5W 500mA	199lm




ETL version available upon request

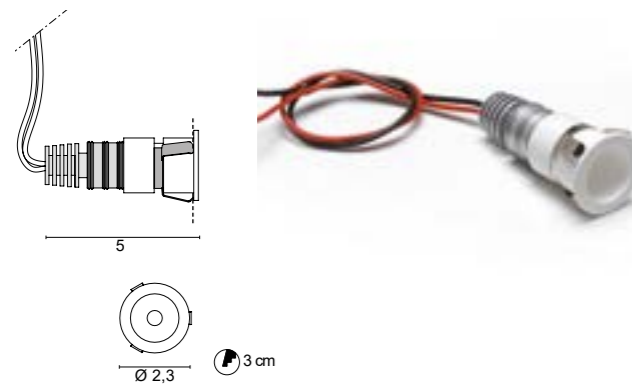

**6364** 0,02 Kg


- .01 White
- .02 Black

/W	4000K	LED 1W 350mA	158lm
/WW	3000K	LED 1W 350mA	150lm
/XW	2700K	LED 1W 350mA	143lm



ETL version available upon request

## FINISHES CODES

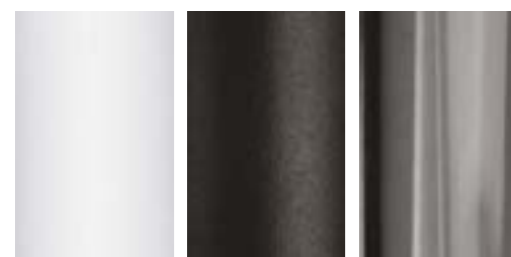

.01 White    .02 Black    .31 Chromed



## ACCESSORIES

Kit  
**0213**

Kit box + plaster



Kit  
**0212**

Kit box + plaster  
Top MINI



Box  
**0216**

Plastic box



Box  
**0215**

Plastic box  
Top MINI



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350m	500mA
<b>6363</b>	1-6	1-10	1-6
<b>6740</b>	1-6	1-10	1-6
<b>6364</b>	1-6	1-10	

### DIMMABLE DRIVERS CASAMBI

	0145/CASA
<b>6363</b>	1-21
<b>6740</b>	1-21
<b>6364</b>	1-21

### DIMMABLE

	0141/DIMM	0141/DALI	0145	0145/DALI
	PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6363</b>	1-11	1-11	1-21	1-21
<b>6740</b>	1-11	1-11	1-21	1-21
<b>6364</b>	1-12	1-12	1-21	1-21

Only serial connection

INDOOR

**PIX**

Design U.T. Egoluce





## PIX



IP40 recessed spotlight with direct light for plasterboard or aluminum slat false ceilings with aluminum structure and heat sink, methacrylate front lens and three optical beams: 11°, 25° and 45°.

The spotlight is available in the catalogue with integrated power LED with 2700K, 3000K and 4000K white light with CRI>80.

The LED source combined with the lens makes the spotlight ideal for direct lighting, and provides the designer with a valid tool for all micro applications in the world of lighting; inside a shop window, a display stand or a wardrobe but also in corridors or along the perimeter of walls or furnishing scenes.

PIX can be installed directly on supports such as wood, walls and plasterboard ceilings with the supplied spring, or in masonry or on aluminum slats with the appropriate formwork and adapters to be ordered separately.

*Spot encastré à lumière directe IP40 pour faux-plafonds en plaques de plâtre ou en lamelles d'aluminium, avec structure et dissipateur thermique en aluminium, lentille frontale en méthacrylate et trois faisceaux optiques : 11°, 25° et 45°.*

*Le projecteur est disponible dans le catalogue avec une LED de puissance intégrée avec une lumière blanche de 2700K, 3000K et 4000K avec un IRC>80.*

*La source LED combinée à la lentille rend le projecteur idéal pour l'éclairage direct et fournit au concepteur un outil valable pour toutes les micro-applications dans le monde de l'éclairage ; à l'intérieur d'une vitrine, d'un présentoir ou d'une armoire, mais aussi dans les couloirs ou le long du périmètre des murs ou des scènes d'ameublement.*

*PIX peut être installé directement sur des supports tels que le bois, les murs et les plafonds en plaques de plâtre avec le ressort fourni, ou dans la maçonnerie ou sur des lattes d'aluminium avec le coffrage approprié et les adaptateurs à commander séparément.*


*IP40-Einbaustrahler mit direktem Licht für Gipskarton- oder Aluminium-Lamellen-Zwischendecken mit Aluminiumstruktur und Kühlkörper, Methacrylat-Frontlinse und drei optischen Ausstrahlwinkeln: 11°, 25° und 45°.*

*Der Strahler ist im Katalog mit integrierter Power-LED mit 2700K, 3000K und 4000K weißem Licht mit CRI>80 erhältlich.*

*Die LED-Quelle in Kombination mit der Linse macht den Strahler ideal für die direkte Beleuchtung und gibt dem Designer ein nützliches Werkzeug für alle Mikroanwendungen in der Welt der Beleuchtung an die Hand: im Inneren eines Schaufensters, eines Ausstellungsstandes oder einer Garderobe, aber auch in Fluren oder entlang des Umfangs von Wänden oder Einrichtungsszenen.*

*PIX kann direkt auf Trägern wie Holz, Wänden und Gipskartondecken mit der mitgelieferten Feder installiert werden, oder in Mauerwerk oder auf Aluminiumleisten mit der entsprechenden Schalung und Adaptern, die separat zu bestellen sind.*

# PIX

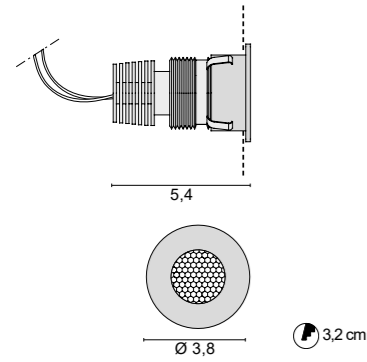


**6322** 0,06 Kg

- .01 White
- .32 Nickel mat

/W	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm
/WW	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm
/XW	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm




ETL version available upon request

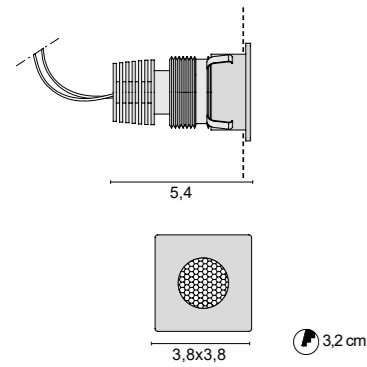

**6323** 0,06 Kg


- .01 White
- .32 Nickel mat

/W	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm
/WW	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm
/XW	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm



ETL version available upon request

## FINISHES CODES



.01 White .32 Nickel mat



## ACCESSORIES

Kit  
**0213**

Kit box + plaster



Box  
**0234**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350m	500mA
<b>6322</b>	1-6	1-10	1-6
<b>6323</b>	1-6	1-10	1-6

### DIMMABLE DRIVERS CASAMBI

0145/CASA	
<b>6322</b>	1-21
<b>6323</b>	1-21

### DIMMABLE

0141/DIMM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6322</b>	1-12	1-21	1-21
<b>6323</b>	1-12	1-21	1-21

Only serial connection

INDOOR

# LUCCIOLA

Design U.T. EgoLuce





## LUCCIOLA



Recessed micro-spotlight with white painted aluminum body ideal for installation directly on plasterboard ceilings or walls, wooden panels or aluminum slats.

Available in the catalog with LEDs of different light shades 2700W (/XW) 3000K (/WW) and 5000K (/CW) or blue light (/B).

The micro dimensions make it suitable for use in groups to create surprising decorative solutions such as starry skies or scenographic paths of light.

*Micro-lumière encastrée avec corps en aluminium peint en blanc, idéale pour l'installation directement sur des plafonds ou des murs en plaques de plâtre, des panneaux en bois ou des lattes en aluminium.*

*Disponible dans le catalogue avec des LED de différentes teintes de lumière 2700W (/XW) 3000K (/WW) et 5000K (/CW) ou lumière bleue (/B).*


*Les micro dimensions permettent de l'utiliser en groupe pour créer des solutions décoratives surprenantes telles que des ciels étoilés ou des chemins de lumière scénographiques.*

*Mikro-Einbaustrahler mit weiß lackiertem Aluminiumgehäuse, ideal für die Installation direkt auf Gipskartondecken oder -wänden, Holzplatten oder Aluminiumlamellen.*

*Erhältlich im Katalog mit LEDs in verschiedenen Farbtönen 2700W (/XW) 3000K (/WW) und 5000K (/CW) oder blauem Licht (/B).*

*Die Mikro-Abmessungen machen es für den Einsatz in Gruppen geeignet, um überraschende dekorative Lösungen wie Sternenhimmel oder szenografische Wege des Lichts zu schaffen.*


# LUCCIOLA - LUCCIOLA RGB

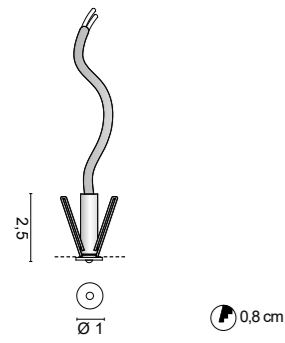

**6372** 0,01 Kg

**.01** White


<b>/B</b>	LED BLU	8V DC 0,16W 20mA
<b>/CW</b>	5000K	8V DC 0,16W 20mA
<b>/WW</b>	3000K	8V DC 0,16W 20mA
<b>/XW</b>	2700K	8V DC 0,16W 20mA

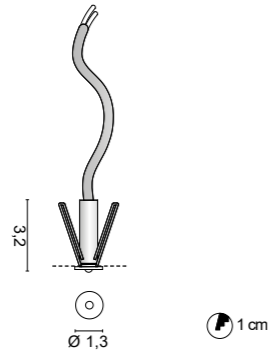

**6353** 0,01 Kg

**.01** White

12V DC 0,7W



## DRIVERS

### ON/OFF

<b>Cod.</b>	<b>0130</b>
	8V DC
<b>6372</b>	1-40

Only Parallel connection  
Non Dimmable

### RGB CONTROLLER

<b>Cod.</b>	<b>0152</b>
	Kit RGB controller + Remote control
<b>6353</b>	


### DRIVER RGB

<b>0159</b>	<b>0173</b>
12V 25W	12V 50W
1-26	1-50

## FINISHES CODES



**.01** White

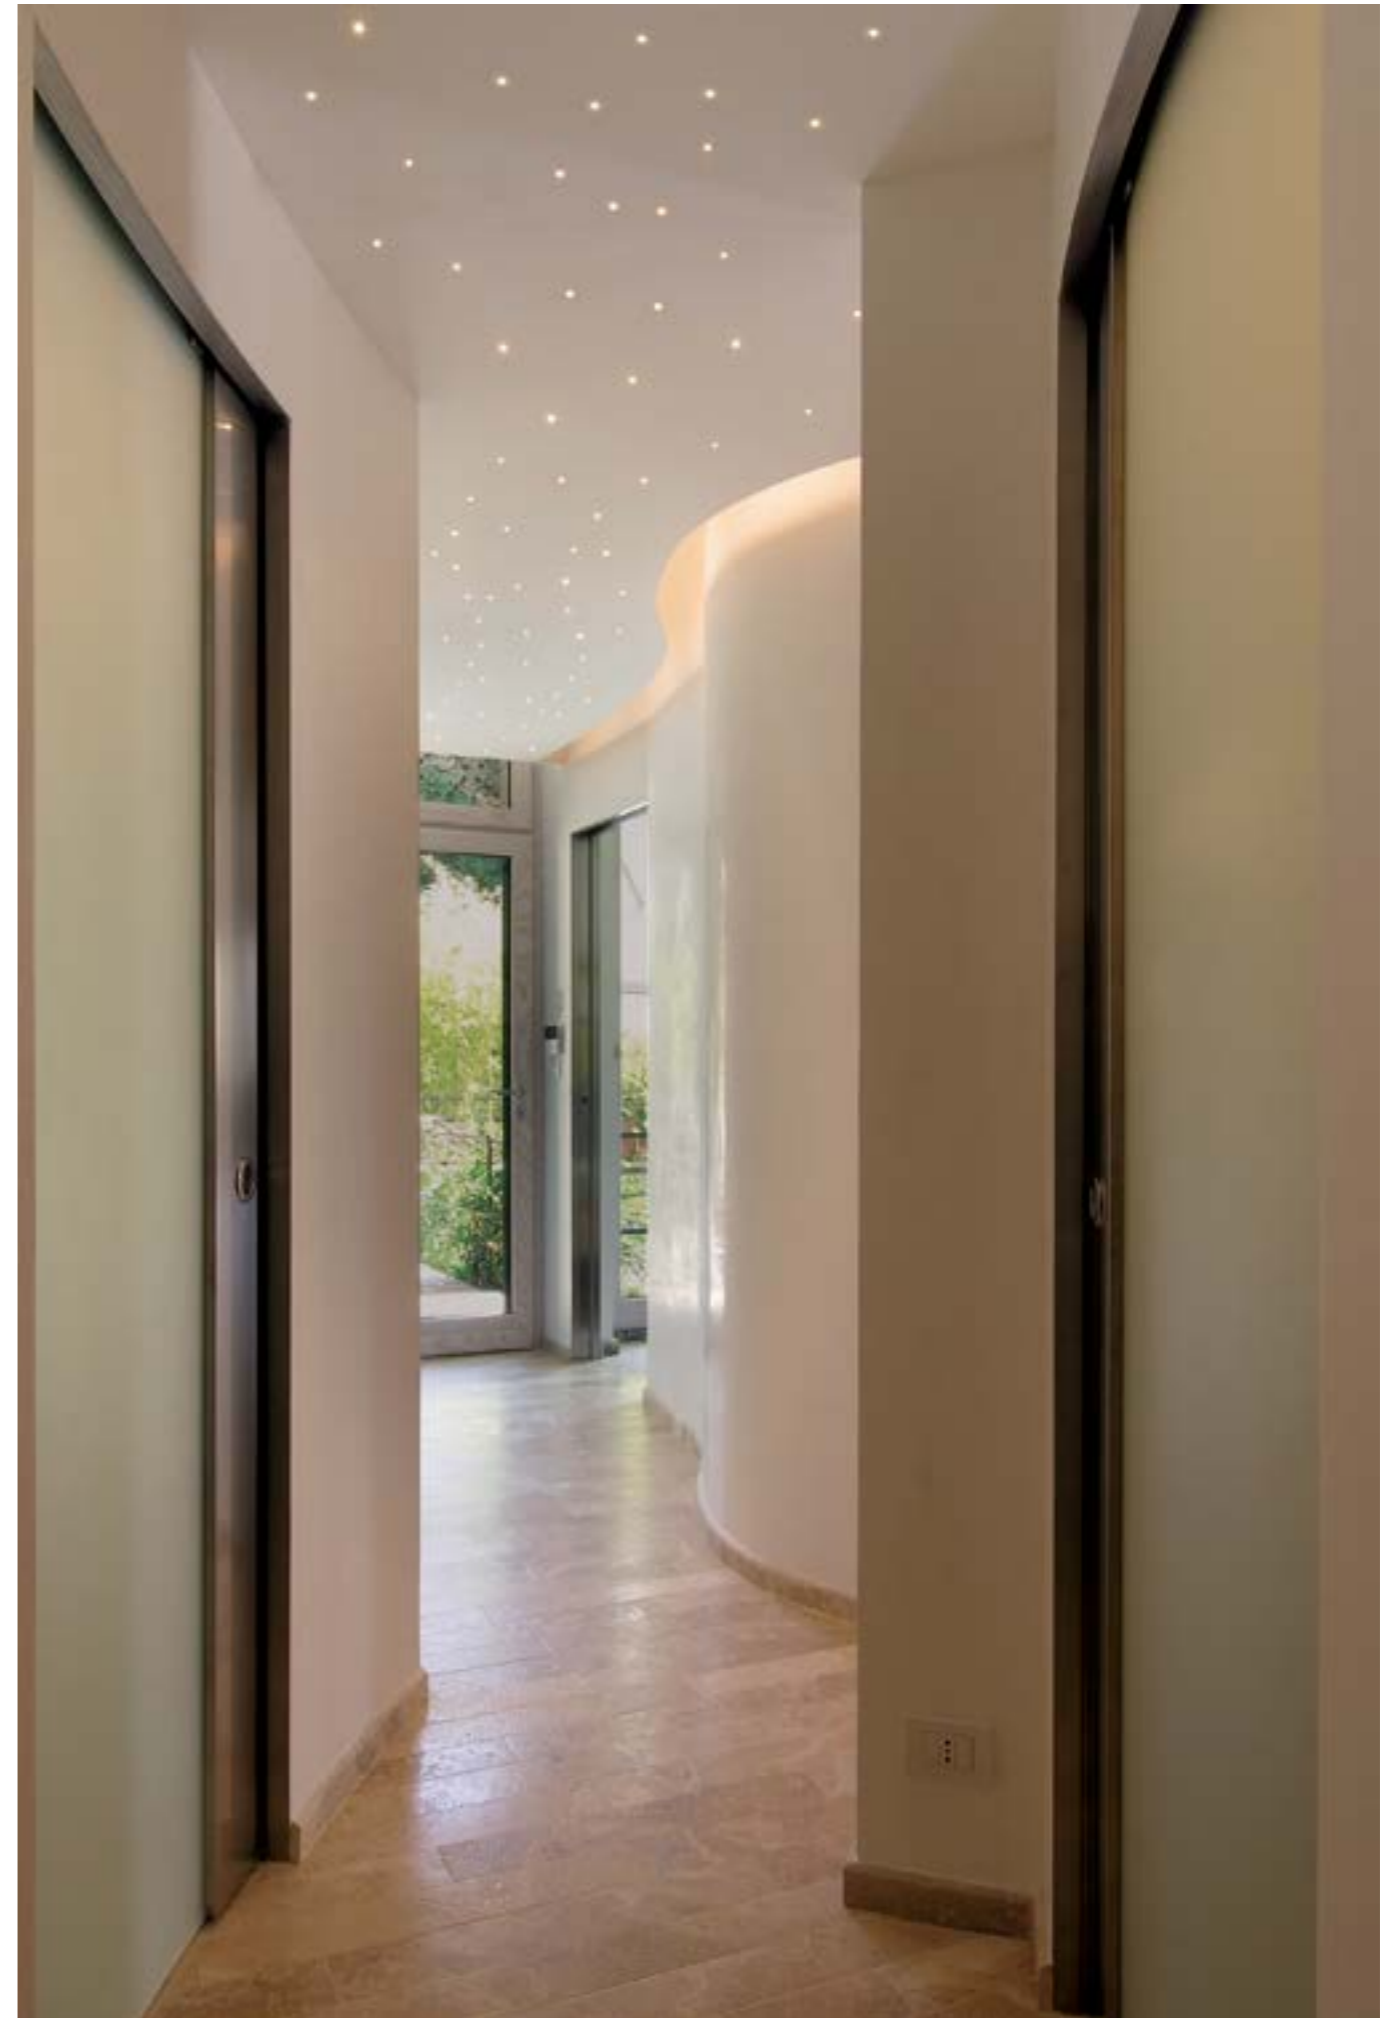



INDOOR

# DOT

Design U.T. Egoluce







## DOT PLUS



Micro recessed spotlight (IP44) with direct light with round aluminum body and 25° optical opening.

DOT PLUS is available in the catalog with LEDs of different shades of white light, 2700K /XW, 3000K /WW and 4000K /W. On request it is also available at 5000K.

The spotlight can be mounted directly on plasterboard ceilings or walls with the supplied spring or installed in masonry using the formwork that can be ordered separately.

*Micro spot encastré (IP44) à lumière directe avec corps rond en aluminium et ouverture optique de 25°.*

*DOT PLUS est disponible dans le catalogue avec des LED de différentes nuances de lumière blanche, 2700K /XW, 3000K /WW et 4000K /W. Sur demande, il est également disponible en 5000K.*


*Le projecteur peut être monté directement sur des plafonds ou des murs en plaques de plâtre à l'aide du ressort fourni ou installé dans la maçonnerie à l'aide d'un coffrage qui peut être commandé séparément.*

*Mikro-Einbaustrahler (IP44) mit direktem Licht mit rundem Aluminiumgehäuse und 25° optischer Öffnung.*

*DOT PLUS ist im Katalog mit LEDs in verschiedenen Weißlichtfarben erhältlich, 2700K /XW, 3000K /WW und 4000K /W. Auf Anfrage ist er auch mit 5000K erhältlich.*



*Der Strahler kann mit der mitgelieferten Feder direkt an Gipskartondecken oder -wänden montiert oder mit der separat zu bestellenden Schalung im Mauerwerk installiert werden.*

# DOT PLUS




**6316** 0,02 Kg

<b>.01</b>	White	■
<b>.32</b>	Nickel mat	■
<b>/W</b>	4000K /15 /25 /45	LED 1W 350mA 158lm
<b>/WW</b>	3000K /15 /25 /45	LED 1W 350mA 150lm
<b>/XW</b>	2700K /15 /25 /45	LED 1W 350mA 143lm

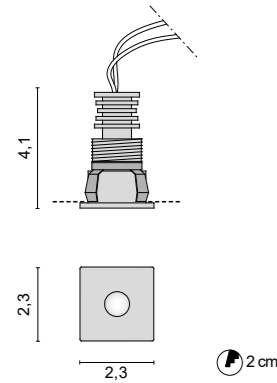


**6317** 0,02 Kg

<b>.01</b>	White	■
<b>.32</b>	Nickel mat	■
<b>/W</b>	4000K /15 /25 /45	LED 1W 350mA 158lm
<b>/WW</b>	3000K /15 /25 /45	LED 1W 350mA 150lm
<b>/XW</b>	2700K /15 /25 /45	LED 1W 350mA 143lm



## FINISHES CODES



**.01** White **.32** Nickel mat



## ACCESSORIES

Kit  
**0212**

Kit box + plaster



Box  
**0215**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350m
<b>6316</b>	1-6	1-10
<b>6317</b>	1-6	1-10

### DIMMABLE DRIVERS CASAMBI

	0145/CASA
<b>6316</b>	1-21
<b>6317</b>	1-21

### DIMMABLE

	0141/DIMM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6316</b>	1-12	1-12	1-21	1-21
<b>6317</b>	1-12	1-12	1-21	1-21

Only serial connection



INDOOR

# SNORKY

Design U.T. EgoLuce





## SNORKY



Adjustable recessed micro spotlight with direct light with chromed aluminum body and 15° optical aperture beam.

The shape with the small parabola integrated into the body is able to maximize the quality of the LED source by projecting an extremely clean cone of light, with a design free of smudges or colored reflections.

The spotlight is available in the catalog with integrated power LED with white light 2700K /XW, 3000K /WW, 4000K /W, CRI>80. On request it is also available at 5000K.

*Micro spot encastrable orientable à lumière directe avec corps en aluminium chromé et faisceau à ouverture optique de 15°.*

*La forme avec la petite parabole intégrée dans le corps est en mesure de maximiser la qualité de la source LED en projetant un cône de lumière extrêmement propre, avec un design exempt de taches ou de reflets colorés.*


*Le projecteur est disponible dans le catalogue avec des LED de puissance intégrées en lumière blanche 2700K /XW, 3000K /WW, 4000K /W, CRI>80. Sur demande, il est également disponible à 5000K.*

*Einstellbarer Mikro-Einbaustrahler mit direktem Licht mit verchromtem Aluminiumgehäuse und 15° optischer Apertur.*

*Die Form mit der kleinen Parabel, die in den Körper integriert ist, ist in der Lage, die Qualität der LED-Quelle zu maximieren, indem sie einen extrem sauberen Lichtkegel projiziert, mit einem Design frei von Flecken oder farbigen Reflexionen.*

*Der Strahler ist im Katalog mit integrierter Power-LED mit weißem Licht 2700K /XW, 3000K /WW, 4000K /W, CRI>80 erhältlich. Auf Anfrage ist er auch mit 5000K erhältlich.*

# SNORKY

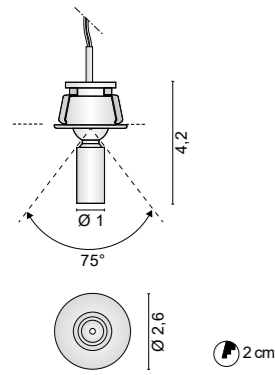

**6373** 0,02 Kg

**.31** Chromed

<b>/W</b>	4000K	LED 1W 350mA	158lm
<b>/WW</b>	3000K	LED 1W 350mA	150lm
<b>/XW</b>	2700K	LED 1W 350mA	143lm



ETL version available upon request



## FINISHES CODES



**.31** Chromed

## ACCESSORIES

Kit  
**0212**

Kit box + plaster



Box  
**0215**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350m
<b>6373</b>	1-6	1-10


### DIMMABLE DRIVERS CASAMBI

0145/CASA
<b>6373</b> 1-21


### DIMMABLE

0141/DIMM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6373</b> 1-12	1-12	1-21	1-21

Only serial connection

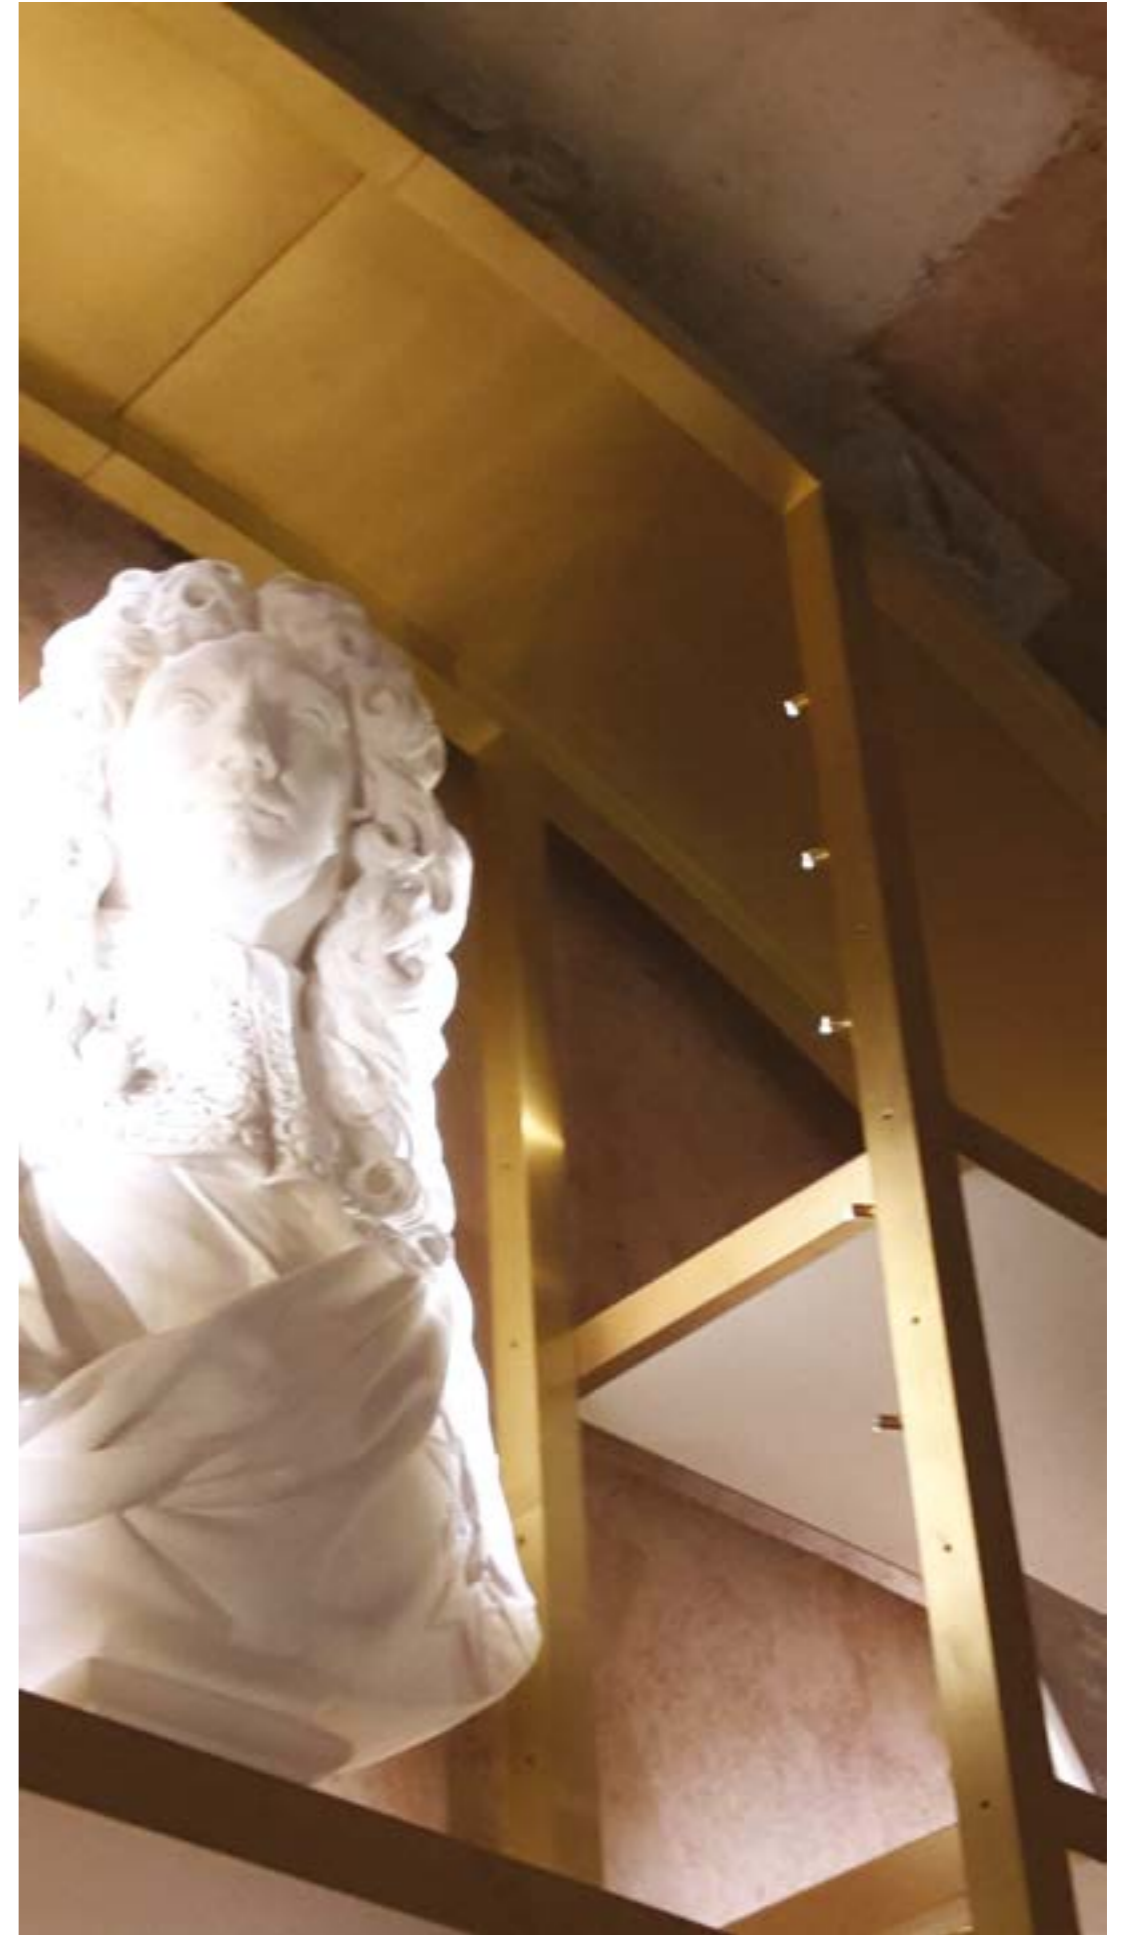

# SNORKY MAXI

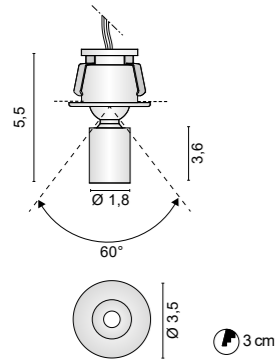

**6313** 0,06 Kg

<b>.31</b>	Chromed	■
<b>/W</b>	4000K /15 /25 /45	max LED 1,5W 500mA 221lm
<b>/WW</b>	3000K /15 /25 /45	max LED 1,5W 500mA 210lm
<b>/XW</b>	2700K /15 /25 /45	max LED 1,5W 500mA 199lm



## FINISHES CODES



.31 Chromed

## ACCESSORIES

Kit  
**0213**  
Kit box + plaster



Box  
**0216**  
Plastic box



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350m	500mA
<b>6313</b>	1-6	1-10	1-6

### DIMMABLE DRIVERS CASAMBI


0145/CASA
<b>6313</b> 1-21

### DIMMABLE

0141/DIMM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6313</b> 1-11	1-11	1-21	1-21

Only serial connection

# SNORKY

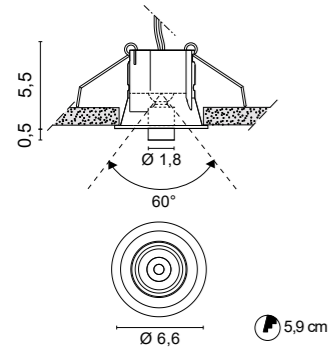

**6698**

0,12 Kg

<b>.01</b>	White	
<b>.02</b>	Black	
<b>/W</b>	4000K /15 /25 /45	LED 1,5W 500mA 221lm
<b>/WW</b>	3000K /15 /25 /45	LED 1,5W 500mA 210lm
<b>/XW</b>	2700K /15 /25 /45	LED 1,5W 500mA 199lm



## FINISHES CODES



**.01** White

**.02** Black

## ACCESSORIES

Kit  
**0221**  
Plaster kit preforated  
12,5 x 9 cm



Box  
**0216**  
Plastic box



## DRIVERS

### ON/OFF

<b>Cod.</b>	<b>0127</b> 500mA
<b>6698</b>	1-6

### CASAMBI

<b>0145/CASA</b>
<b>6698</b> 1-21

### DIMMABLE

<b>0141/DIMM</b> PUSH - 1...10V	<b>0141/DALI</b> DIM DALI	<b>0145</b> DIM	<b>0145/DALI</b> DIM - DALI
<b>6698</b> 1-11(500mA)	1-11(500mA)	1-21	1-21


Only serial connection




INDOOR / OUTDOOR

# RACCORDI DI LUCE JOY

Design officinadiarchitettura&design



## RACCORDI DI LUCE - JOY



Collection of IP65 direct light system, wall, ceiling, and floor lamps, for both outdoor and indoor use, with structure in 304 stainless steel and aluminum with reinforced anodizing for outdoor use or, in the satin steel finish, in AISI 316L stainless steel.

The system is a new and different way of interpreting light: starting from a single power supply point, the modularity of the various elements allows for the creation of multiple configurations bringing the light wherever it is needed.

*Collection de systèmes d'éclairage direct IP65, appliques, plafonniers et lampadaires, pour l'intérieur et l'extérieur, avec structure en acier inoxydable 304 et en aluminium avec anodisation renforcée pour l'extérieur ou, dans la finition acier satiné, en acier inoxydable AISI 316L.*



*Le système est une façon nouvelle et différente d'interpréter la lumière : à partir d'un point d'alimentation unique, la modularité des différents éléments permet de créer de multiples configurations en apportant la lumière là où elle est nécessaire.*

*Kollektion von IP65-Direktbeleuchtungssystemen, Wand-, Decken- und Stehlampen, sowohl für den Außen- als auch für den Innenbereich, mit Strukturen aus Edelstahl 304 und Aluminium mit verstärkter Eloxierung für den Außenbereich oder, in der Ausführung aus satiniertem Stahl, aus Edelstahl AISI 316L.*

*Das System ist eine neue und andere Art, Licht zu interpretieren: Ausgehend von einem einzigen Stromanschluss, ermöglicht die Modularität der verschiedenen Elemente die Schaffung von mehreren Konfigurationen, die das Licht dorthin bringen, wo es benötigt wird.*



# RACCORDI DI LUCE - JOY

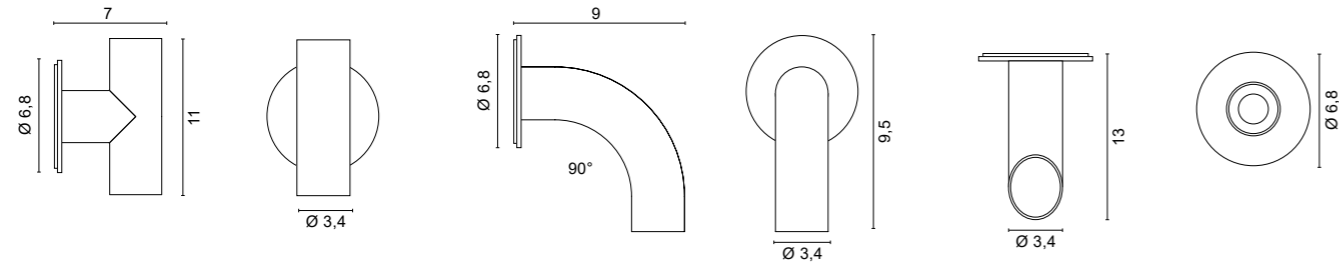

## 4672 0,31 Kg

- .01 White
- .02 Black
- .33 Stainless Steel AISI 316L
- .34 Painted corten finishing

/W	4000K	LED 3W 500mA	442lm
/WW	3000K	LED 3W 500mA	420lm
/XW	2700K	LED 3W 500mA	398lm



## 4673 0,25 Kg

- .01 White
- .02 Black
- .33 Stainless Steel AISI 316L
- .34 Painted corten finishing

/W	4000K	LED 1,5W 500mA	221lm
/WW	3000K	LED 1,5W 500mA	210lm
/XW	2700K	LED 1,5W 500mA	199lm



## 5690 0,25 Kg

- .01 White
- .02 Black
- .33 Stainless Steel AISI 316L
- .34 Painted corten finishing

/W	4000K	LED 1,5W 500mA	221lm
/WW	3000K	LED 1,5W 500mA	210lm
/XW	2700K	LED 1,5W 500mA	199lm




## DRIVERS ON/OFF

Cod. LED	0143/IP 500mA	0127 500mA
4672	1-3	1-3
4673	1-7	1-6
5690	1-7	1-6

Only serial connection

## FINISHES CODES

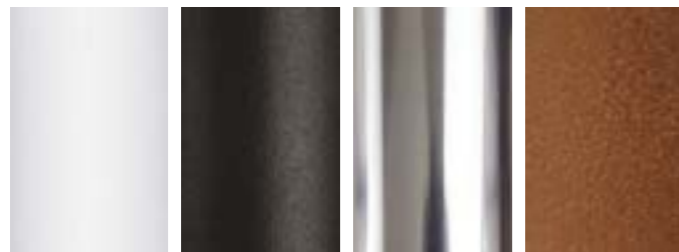


- .01 White
- .02 Black
- .33 Stainless Steel AISI 316L
- .34 Painted Corten Finishing







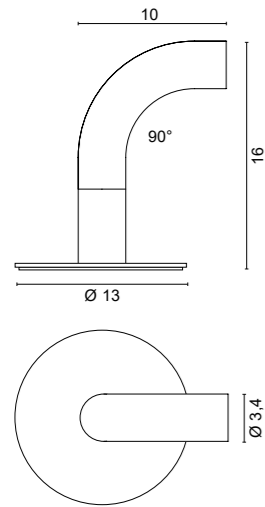

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM




The lamps are supplied without drivers  
These are to be ordered separately and placed remotely

**3547** 0,60 Kg

**.33** Stainless Steel AISI 316L   
**.34** Painted corten finishing 

<b>/W</b>	4000K	LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	LED 1,5W 500mA	199lm



Only Serial Connection



## ACCESSORIES

Box  
**0246/R**

Draining formwork  
with plate




Connector  
**0276**

IP67 connector  
with gel



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L  
**.34** Painted Corten  
Finishing



## DRIVERS

### ON/OFF

Cod.	0143/IP 500mA	0127 500mA
<b>3547</b>	1-7	1-6

Only serial connection

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

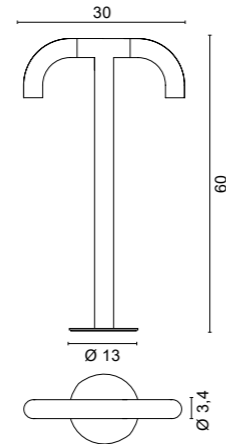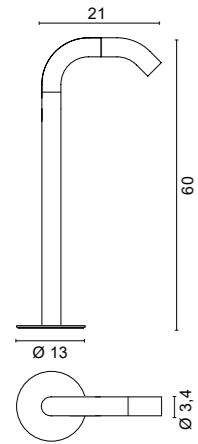

**3548** 1,50 Kg

- .33** Stainless Steel AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 3W 500mA	442lm
<b>/WW</b>	3000K	LED 3W 500mA	420lm
<b>/XW</b>	2700K	LED 3W 500mA	398lm



Only Serial Connection

**3549** 2 Kg

- .33** Stainless Steel AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 3W 500mA	442lm
<b>/WW</b>	3000K	LED 3W 500mA	420lm
<b>/XW</b>	2700K	LED 3W 500mA	398lm



Only Serial Connection



## FINISHES CODES



- .33** Stainless Steel AISI 316L
- .34** Painted Corten Finishing

## ACCESSORIES

Box  
**0246/R**

Draining formwork with plate



Connector  
**0276**

IP67 Connector



## DRIVERS

### ON/OFF


Cod.	0143/IP 500mA	0127 500mA
<b>3548</b>	1-3	1-3
<b>3549</b>	1-3	1-3





# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

## ILLUMINATOR




**7516** Illuminatori 0,08 Kg

<b>.45</b>	Anodized aluminium	
<b>/W</b>	4000K LED 1,5W 500mA	221lm
<b>/WW</b>	3000K LED 1,5W 500mA	210lm
<b>/XW</b>	2700K LED 1,5W 500mA	199lm




## ELEMENTS




**7500** 90° expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted corten finishing	




**7501** T Joint expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted corten finishing	




**7504** 45° expanding bend

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted corten finishing	



**7505** Joint with 45° cut

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted corten finishing	



**7508** Linear tube

<b>.01</b>	White	
<b>.02</b>	Black	
<b>.06</b>	Green	
<b>.33</b>	Stainless Steel AISI 316L	
<b>.34</b>	Painted corten finishing	

<b>/20</b>	20cm
<b>/50</b>	50cm
<b>/100</b>	100cm
<b>/150</b>	150cm

## DRIVERS


### ON/OFF

Cod.	0143/IP	0127
	500mA	500mA
<b>7516</b>	1-7	1-6

Only serial connection




## FINISHES CODES

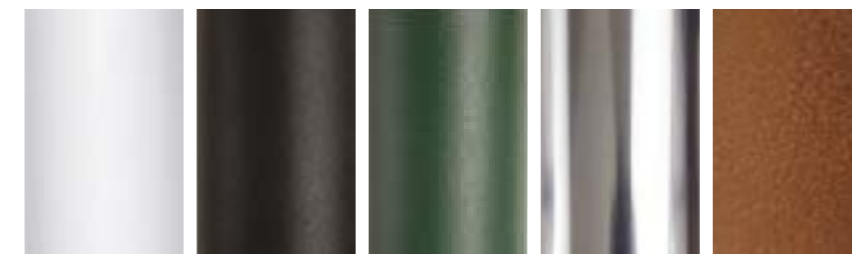


**.01** White  
**.02** Black  
**.06** Green  
**.33** Stainless Steel AISI 316L  
**.34** Painted Corten Finishing

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM


## ACCESSORIES



**7510** Junction element  
 .02 Black




**7521** Aluminium wall base with cover disk  
 .01 White  
 .02 Black  
 .06 Green  
 .33 Stainless Steel AISI 316L  
 .34 Painted corten finishing




**7522** Base with cover disk  
 .01 White  
 .02 Black  
 .06 Green  
 .33 Stainless Steel AISI 316L  
 .34 Painted corten finishing


## BOX & CONNECTORS




**0213** Box + Perforated plaster




**0216** Plastic box




**0228/R** Draining junction box




**0246/R** Draining formwork with plate




**0276** IP67 Connector

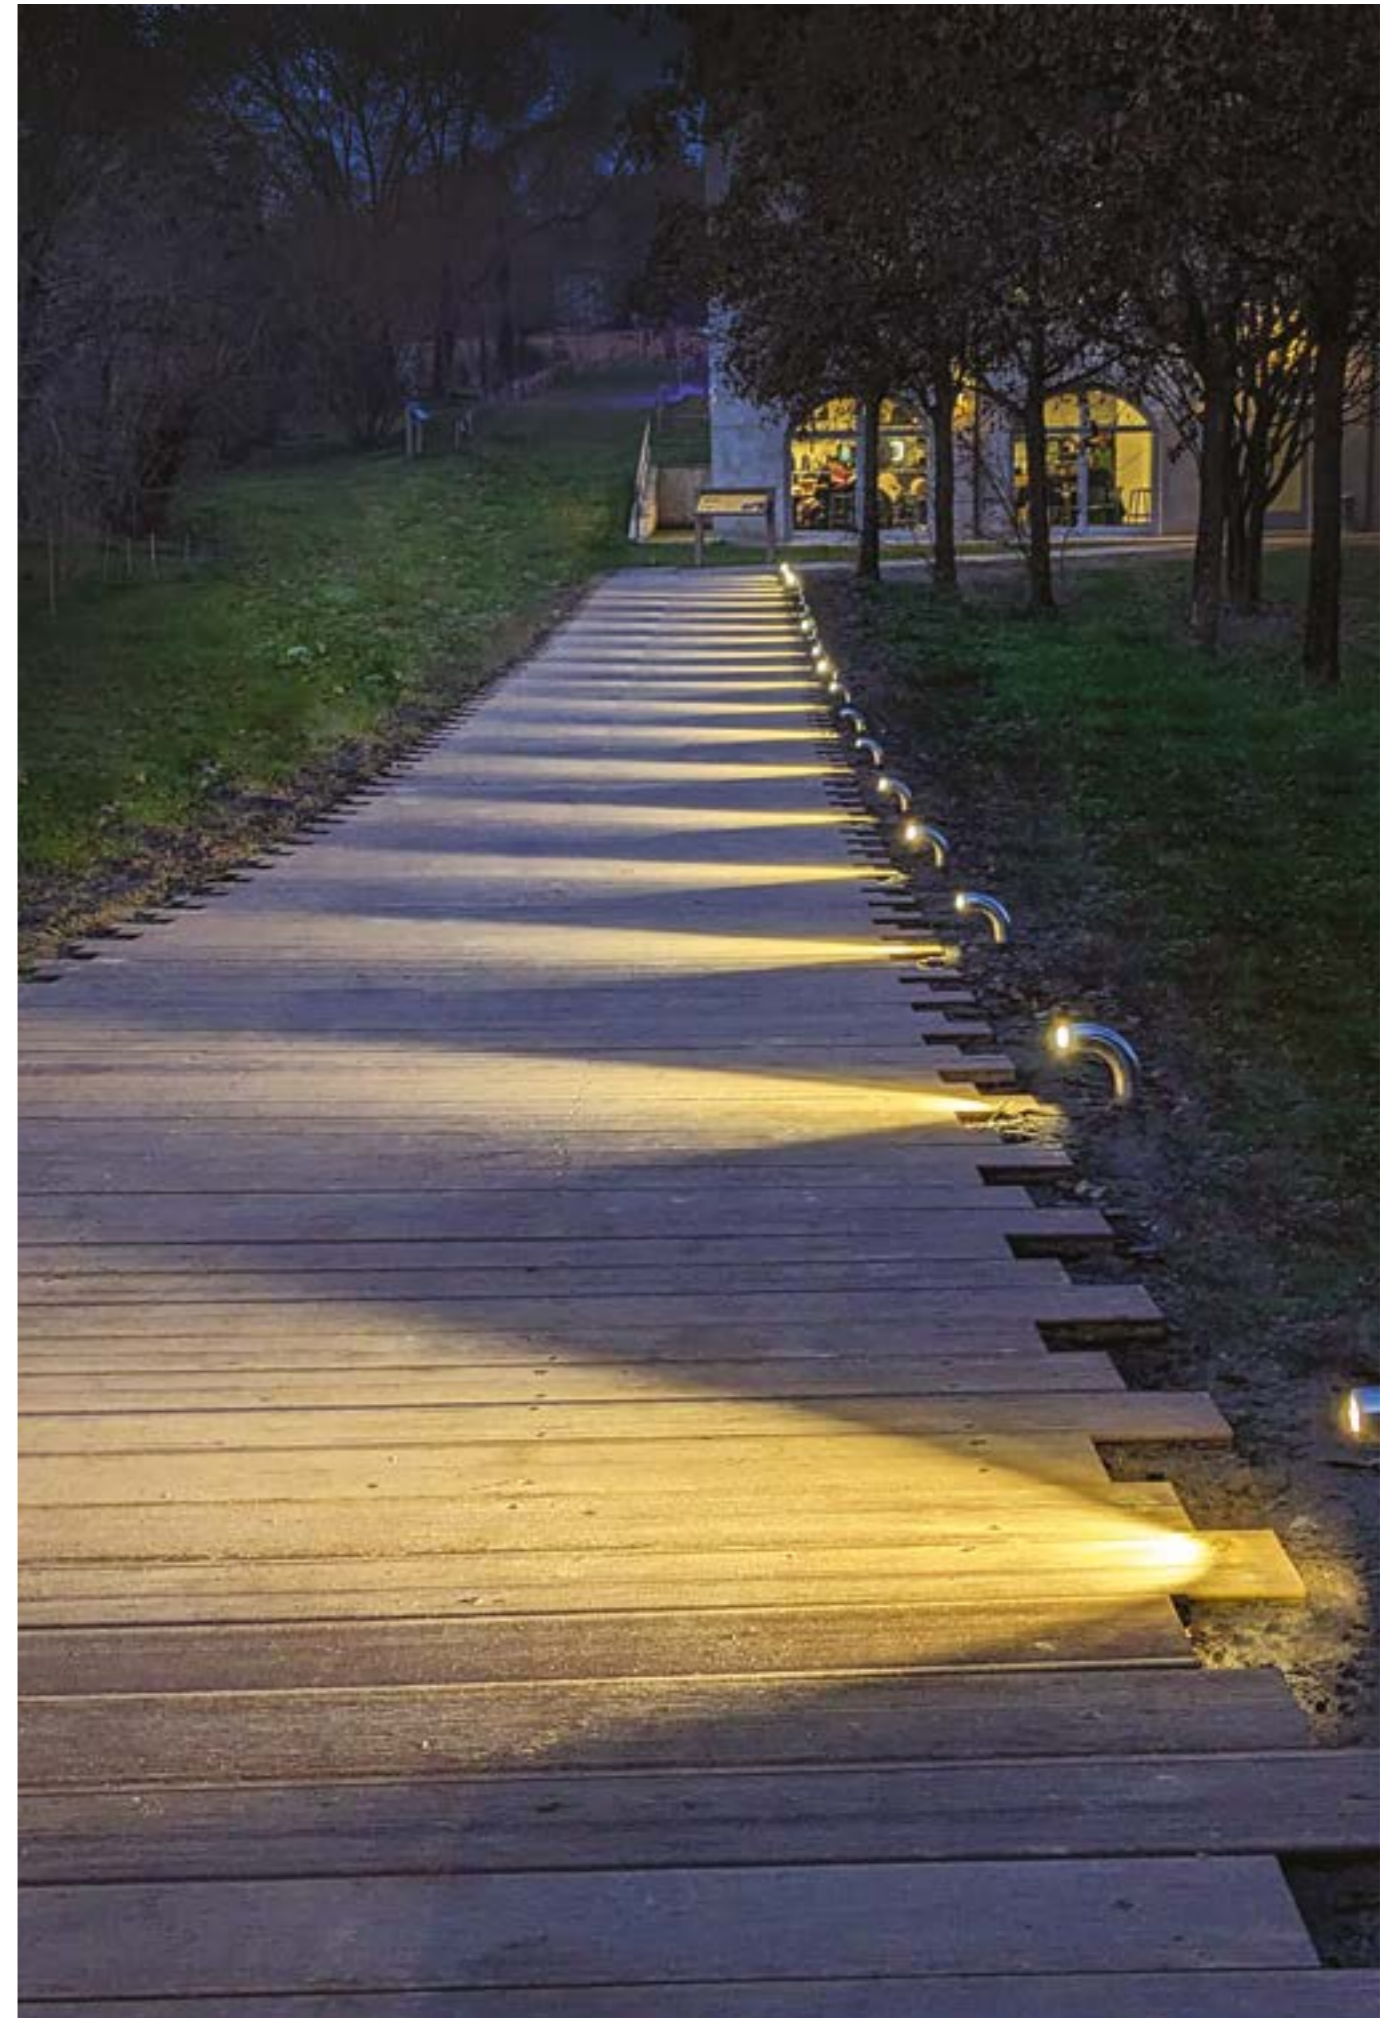







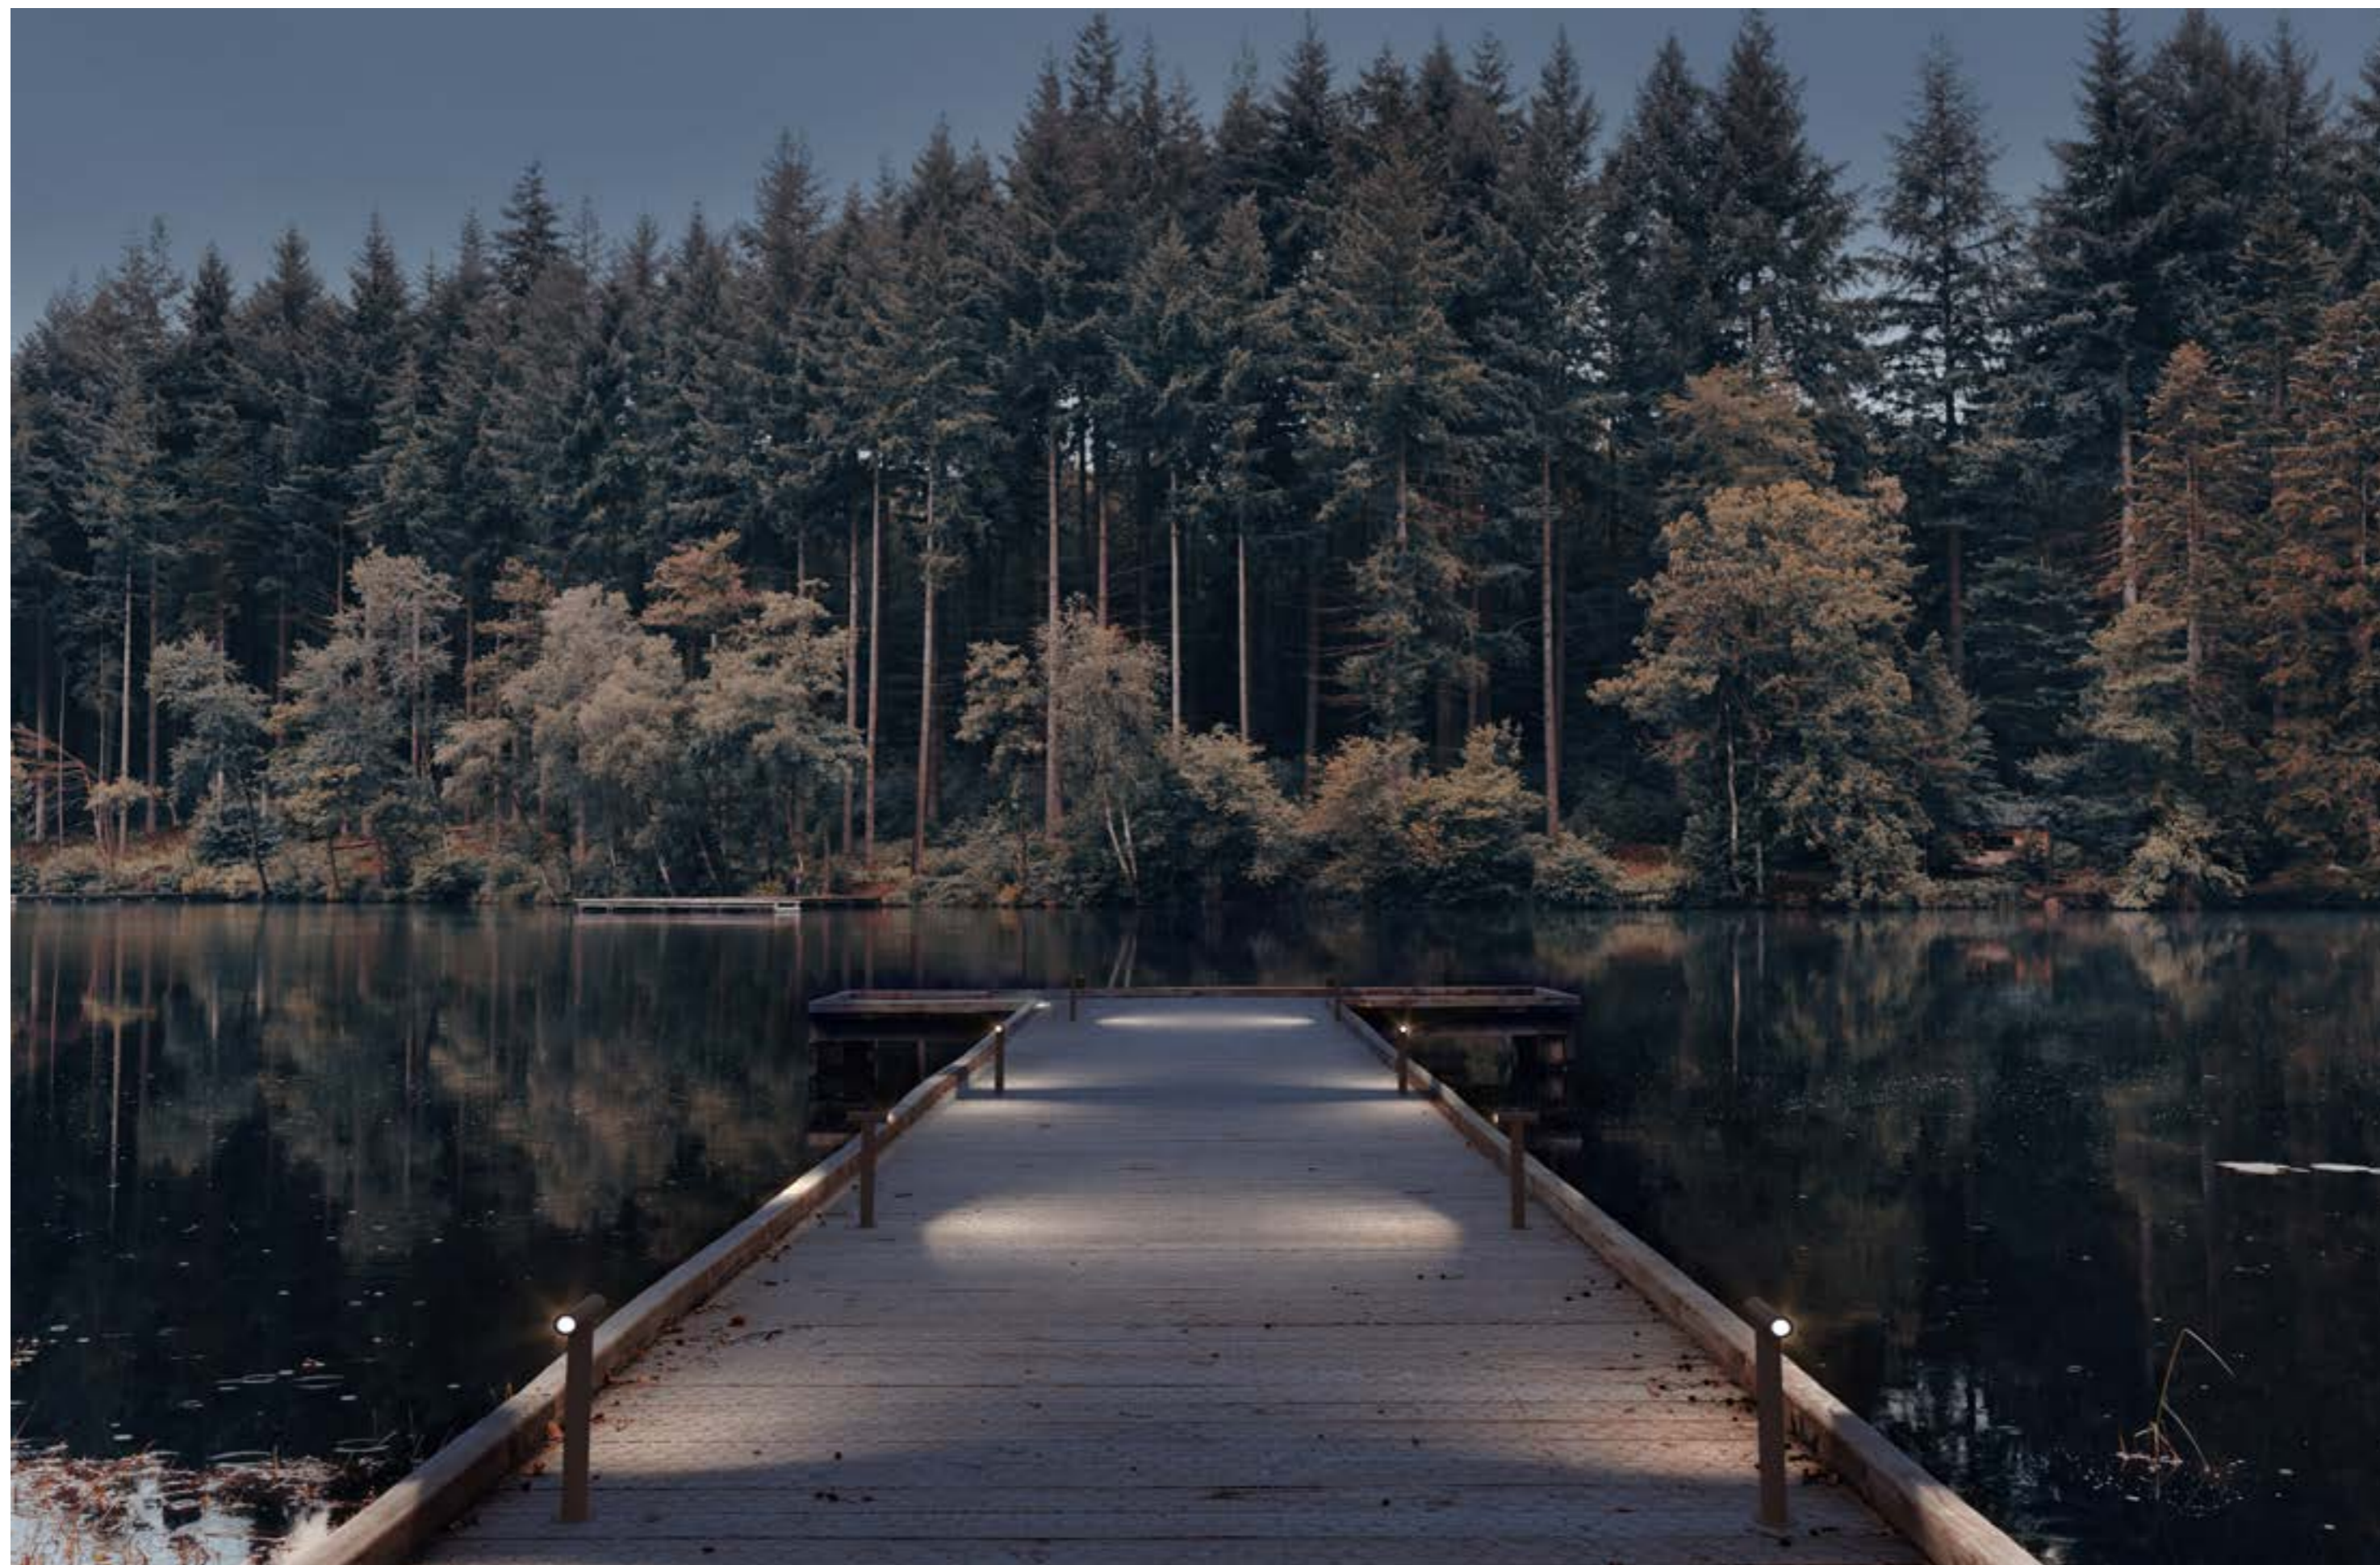

# RACCORDI DI LUCE SYSTEM - JOY SYSTEM

## EXAMPLES OF MULTIPLE CONFIGURATION

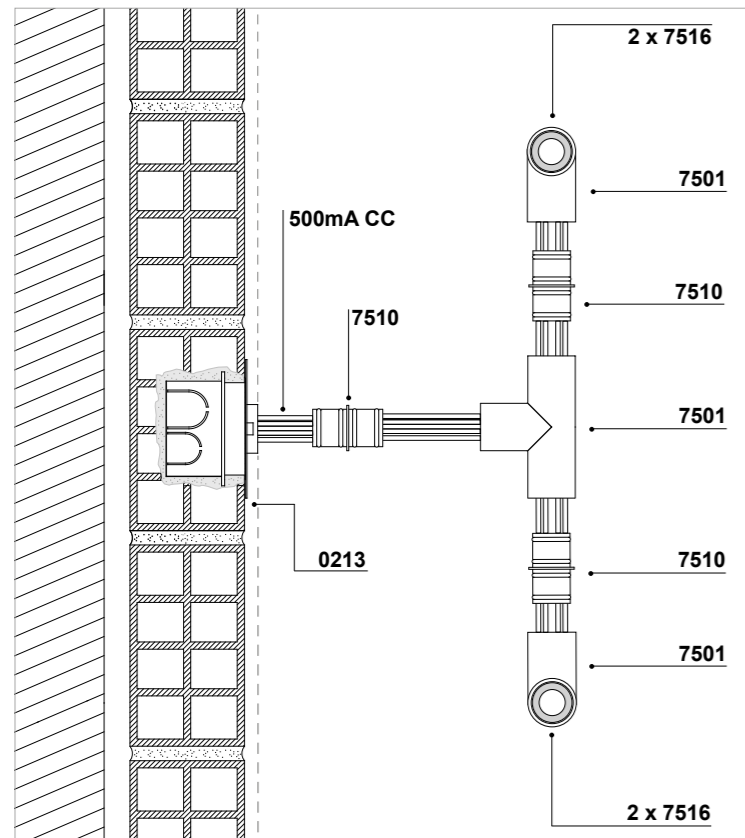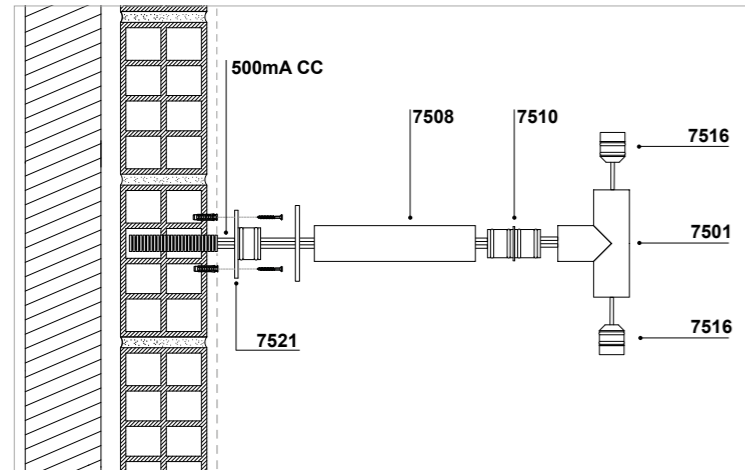



INDOOR / OUTDOOR

# WANDA


Design U.T. Egołuce







## WANDA




IP67 adjustable light bar for wall and ceiling or suspension applications with diffused light made of transparent anti-UV coextruded methacrylate and terminals in stainless steel. Wanda is offered in different modular lengths from 18 cm up to 298 cm and in three shades of light, 2700K, 3000K, and 4000K, with CRI>90. This simple yet effective illumination offers creative solutions for various environments, from offices and kitchens to outdoor poolside and gardens.

*Barre lumineuse réglable IP67 pour applications murales, au plafond ou en suspension, avec lumière diffuse en méthacrylate coextrudé transparent anti-UV et bornes en acier inoxydable. Wanda est proposée en différentes longueurs modulaires de 18 cm à 298 cm et en trois teintes de lumière, 2700K, 3000K et 4000K, avec un IRC>90. Cet éclairage simple mais efficace offre des solutions créatives pour divers environnements, des bureaux et cuisines aux piscines et jardins extérieurs.*

*Verstellbarer IP67-Lichtbalken für Wand-, Decken- oder Hängeanwendungen mit diffusem Licht aus transparentem, UV-beständigem, koextrudiertem Methacrylat und Anschlüssen aus Edelstahl. Wanda wird in verschiedenen modularen Längen von 18 cm bis 298 cm und in drei Lichtfarben, 2700K, 3000K und 4000K, mit einem CRI>90 angeboten. Diese einfache, aber effektive Beleuchtung bietet kreative Lösungen für verschiedene Umgebungen, von Büros und Küchen bis hin zu Außenpools und Gärten.*




# WANDA




**4536.33/** 0,50 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 24V 7,5W	920lm
<b>/WW</b>	3000K	LED 24V 7,5W	825lm
<b>/XW</b>	2700K	LED 24V 7,5W	780lm




ETL version available upon request




**4537.33/** 1,00 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 24V 16,5W	2024lm
<b>/WW</b>	3000K	LED 24V 16,5W	1815lm
<b>/XW</b>	2700K	LED 24V 16,5W	1716lm



ETL version available upon request




**4538.33** 0,50 Kg

**.33** Stainless Steel AISI 316L

LED 7,2W 24V



ETL version available upon request



**4539.33** 1,00 Kg

**.33** Stainless Steel AISI 316L

LED 16,5W 24V



ETL version available upon request

## DRIVERS

### ON/OFF

Cod.	0155	0156	0169	0157	0161/100	0161/150
	24V-13W	24V-25W	24V-60W	24V-75W	24V-100W	24V-150W

### IP67 DRIVERS

Cod.	0033/IP	0034/IP	0038/IP	0035/IP
	24V 14,4W	24V 70W	24V 100W	24V 160W

### DIMMABLE DRIVERS

Cod.	0717/DIM60/V	0717/DIM60	0717/DIM100	0717/DIM150
	24V-60W 1... 10V	24V-60W PUSH - DALI	24V-100W 1... 10V - PUSH - DALI	24V-150W 1... 10V - PUSH - DALI

### DIMMABLE DRIVERS - PHASE CUT-OFF

Cod.	0727/DIM30	0727/DIM50	0717/DIM100/T	0717/DIM150/T
	24V-30W TRIAC	24V-50W TRIAC	24V-100W TRIAC	24V-150W TRIAC

Only Parallel Connection

### DRIVER RGB

0164	0167	0163	0165	0166
120W	22W	IR Sensor	IR Remote controller	Sync Cable

IN 230V - OUT 3 X 24V

### LED EMERGENCY UNIT

0115/EM
INVERTER + BATTERY + LED INDICATOR



## CUSTOM SIZE


Table of available lengths. Measures are referred to complete fixtures including closing heads.

cm	watt	2700K	lm	3000K	lm	4000K	lm	RGB
18	1,5W	A4536.33/18/XW	152	A4536.33/18/WW	165	A4536.33/18/W	184	A4536.33/18RGB
28	3W	A4536.33/28/XW	312	A4536.33/28/WW	330	A4536.33/28/W	368	A4536.33/28RGB
38	4,5W	A4536.33/38/XW	468	A4536.33/38/WW	495	A4536.33/38/W	552	A4536.33/38RGB
48	6W	A4536.33/48/XW	624	A4536.33/48/WW	660	A4536.33/48/W	736	A4536.33/48RGB
58	7,5W	4536.33/XW	780	4536.33/WW	825	4536.33/W	920	4538.33
68	9W	A4536.33/68/XW	936	A4536.33/68/WW	990	A4536.33/68/W	1104	A4536.33/68RGB
78	10,5W	A4536.33/78/XW	1092	A4536.33/78/WW	1155	A4536.33/78/W	1288	A4536.33/78RGB
88	12W	A4536.33/88/XW	1248	A4536.33/88/WW	1320	A4536.33/88/W	1472	A4536.33/88RGB
98	13,5W	A4536.33/98/XW	1404	A4536.33/98/WW	1485	A4536.33/98/W	1656	A4536.33/98RGB
108	15W	A4536.33/108/XW	1560	A4536.33/108/WW	1650	A4536.33/108/W	1840	A4536.33/108RGB
118	16,5W	4537.33/XW	1716	4537.33/WW	1815	4537.33/W	2024	4539.33
128	18W	A4536.33/128/XW	1872	A4536.33/128/WW	1980	A4536.33/128/W	2208	A4536.33/128RGB
138	19,5W	A4536.33/138/XW	2028	A4536.33/138/WW	2145	A4536.33/138/W	2392	A4536.33/138RGB
148	21W	A4536.33/148/XW	2184	A4536.33/148/WW	2310	A4536.33/148/W	2576	A4536.33/148RGB
158	22,5W	A4536.33/158/XW	2340	A4536.33/158/WW	2475	A4536.33/158/W	2760	A4536.33/158RGB
168	24W	A4536.33/168/XW	2496	A4536.33/168/WW	2640	A4536.33/168/W	2944	A4536.33/168RGB
178	25,5W	A4536.33/178/XW	2652	A4536.33/178/WW	2805	A4536.33/178/W	3128	A4536.33/178RGB
188	27W	A4536.33/188/XW	2808	A4536.33/188/WW	2970	A4536.33/188/W	3312	A4536.33/188RGB
198	28,5W	A4536.33/198/XW	2964	A4536.33/198/WW	3135	A4536.33/198/W	3496	A4536.33/198RGB
208	30W	A4536.33/208/XW	3120	A4536.33/208/WW	3300	A4536.33/208/W	3680	A4536.33/208RGB
218	31,5W	A4536.33/218/XW	3276	A4536.33/218/WW	3465	A4536.33/218/W	3864	A4536.33/218RGB
228	33W	A4536.33/228/XW	3432	A4536.33/228/WW	3630	A4536.33/228/W	4048	A4536.33/228RGB
238	34,5W	A4536.33/238/XW	3588	A4536.33/238/WW	3795	A4536.33/238/W	4232	A4536.33/238RGB
248	36W	A4536.33/248/XW	3744	A4536.33/248/WW	3960	A4536.33/248/W	4416	A4536.33/248RGB
258	37,5W	A4536.33/258/XW	3900	A4536.33/258/WW	4125	A4536.33/258/W	4600	A4536.33/258RGB
268	39W	A4536.33/268/XW	4056	A4536.33/268/WW	4290	A4536.33/268/W	4784	A4536.33/268RGB
278	40,5W	A4536.33/278/XW	4212	A4536.33/278/WW	4455	A4536.33/278/W	4968	A4536.33/278RGB
288	42W	A4536.33/288/XW	4368	A4536.33/288/WW	4620	A4536.33/288/W	5152	A4536.33/288RGB
298	43,5W	A4536.33/298/XW	4524	A4536.33/298/WW	4785	A4536.33/298/W	5336	A4536.33/298RGB

## FINISHES CODES




**.33** Stainless Steel AISI 316L

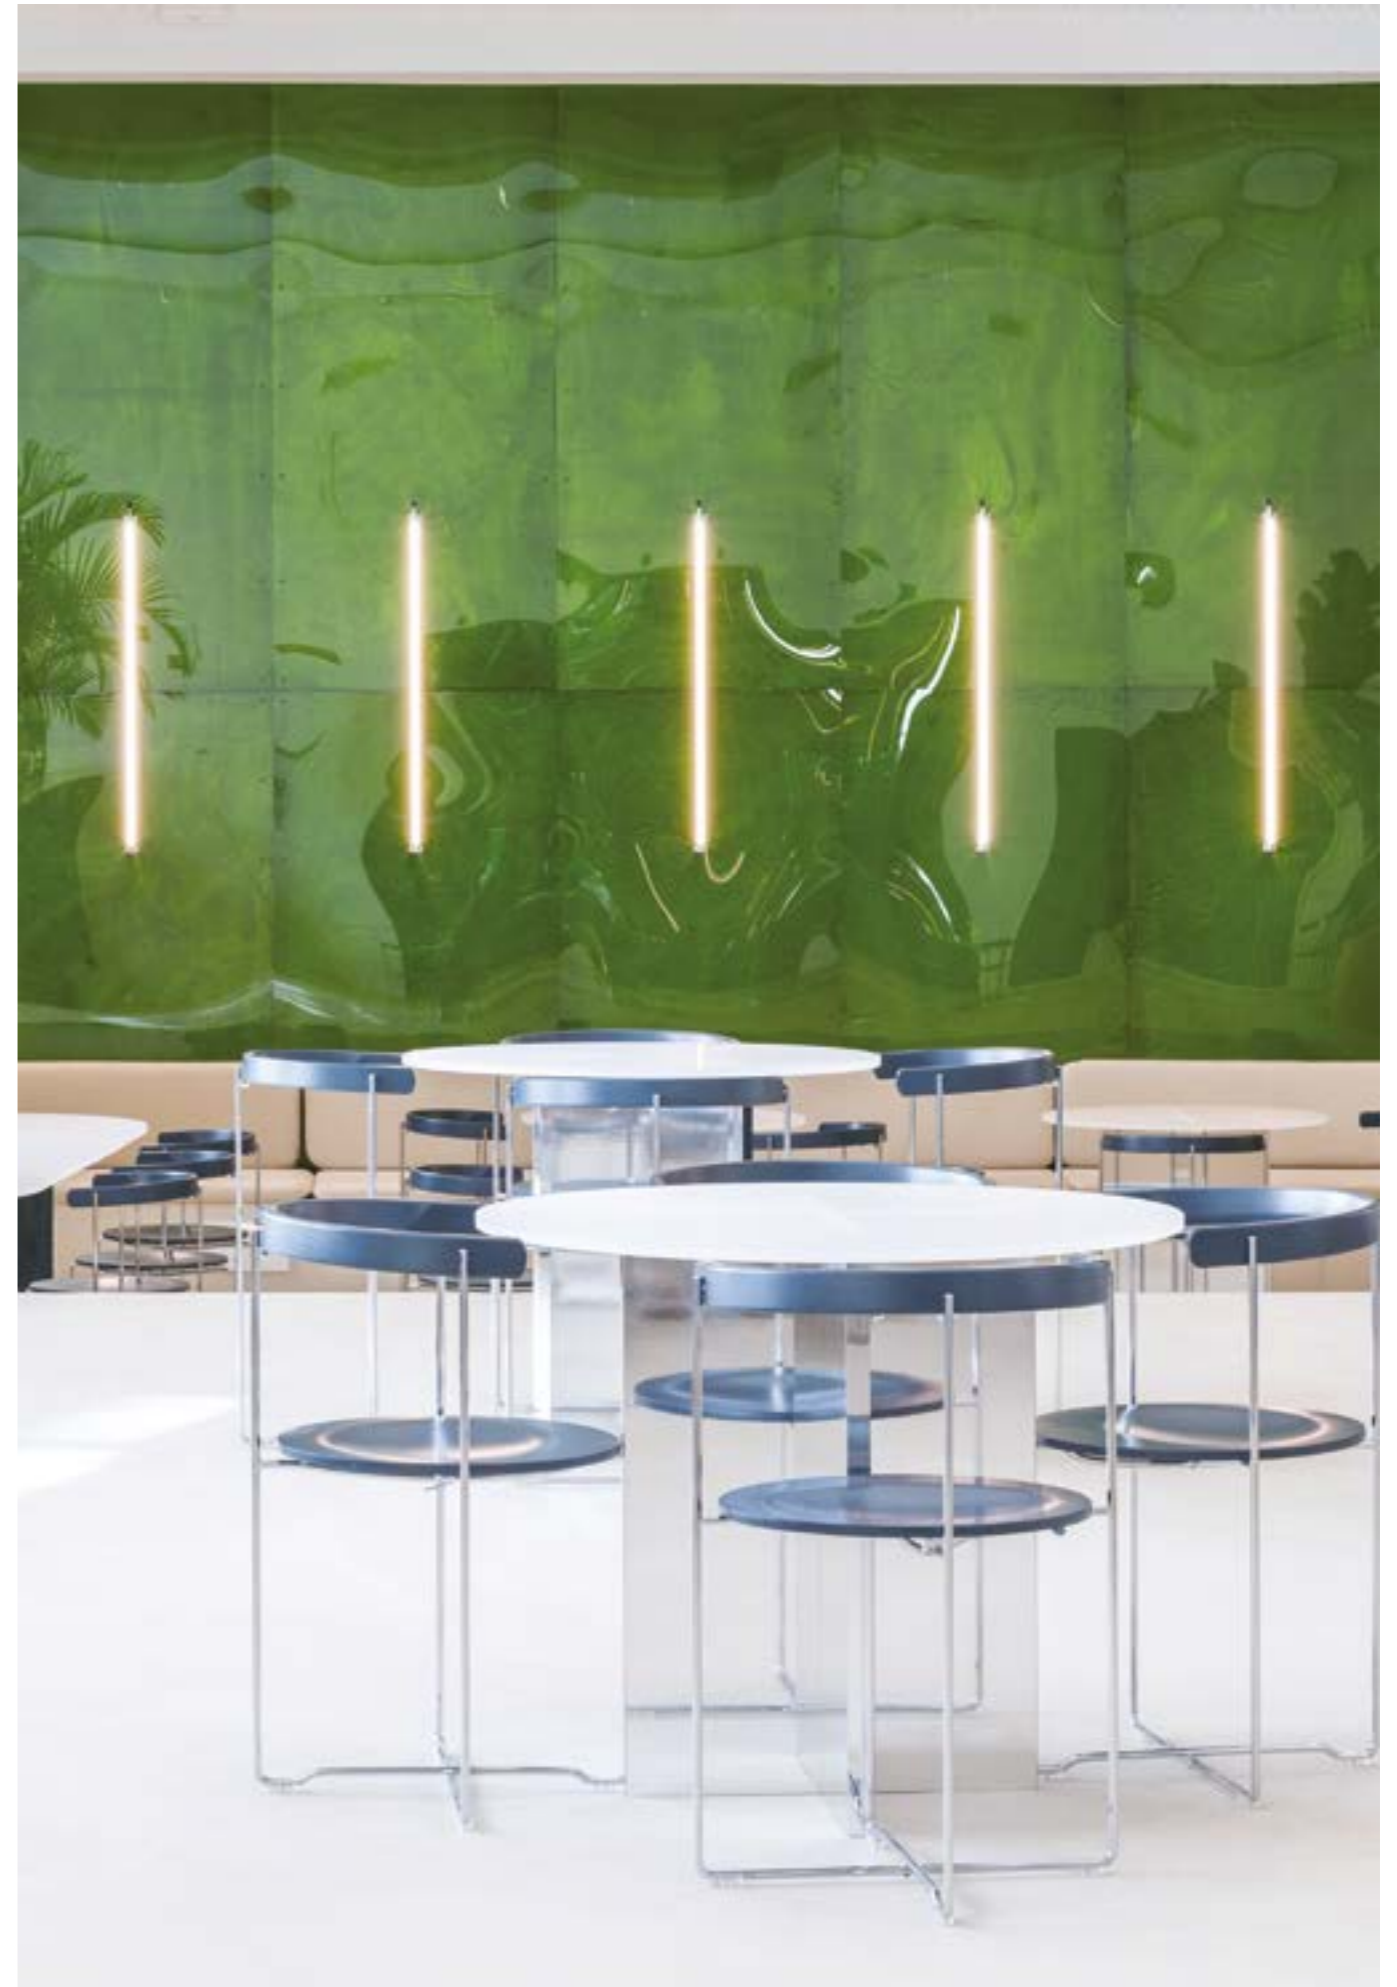



Cobra studios design, HUGUES DELAUNAY & KENNY DECOMMER



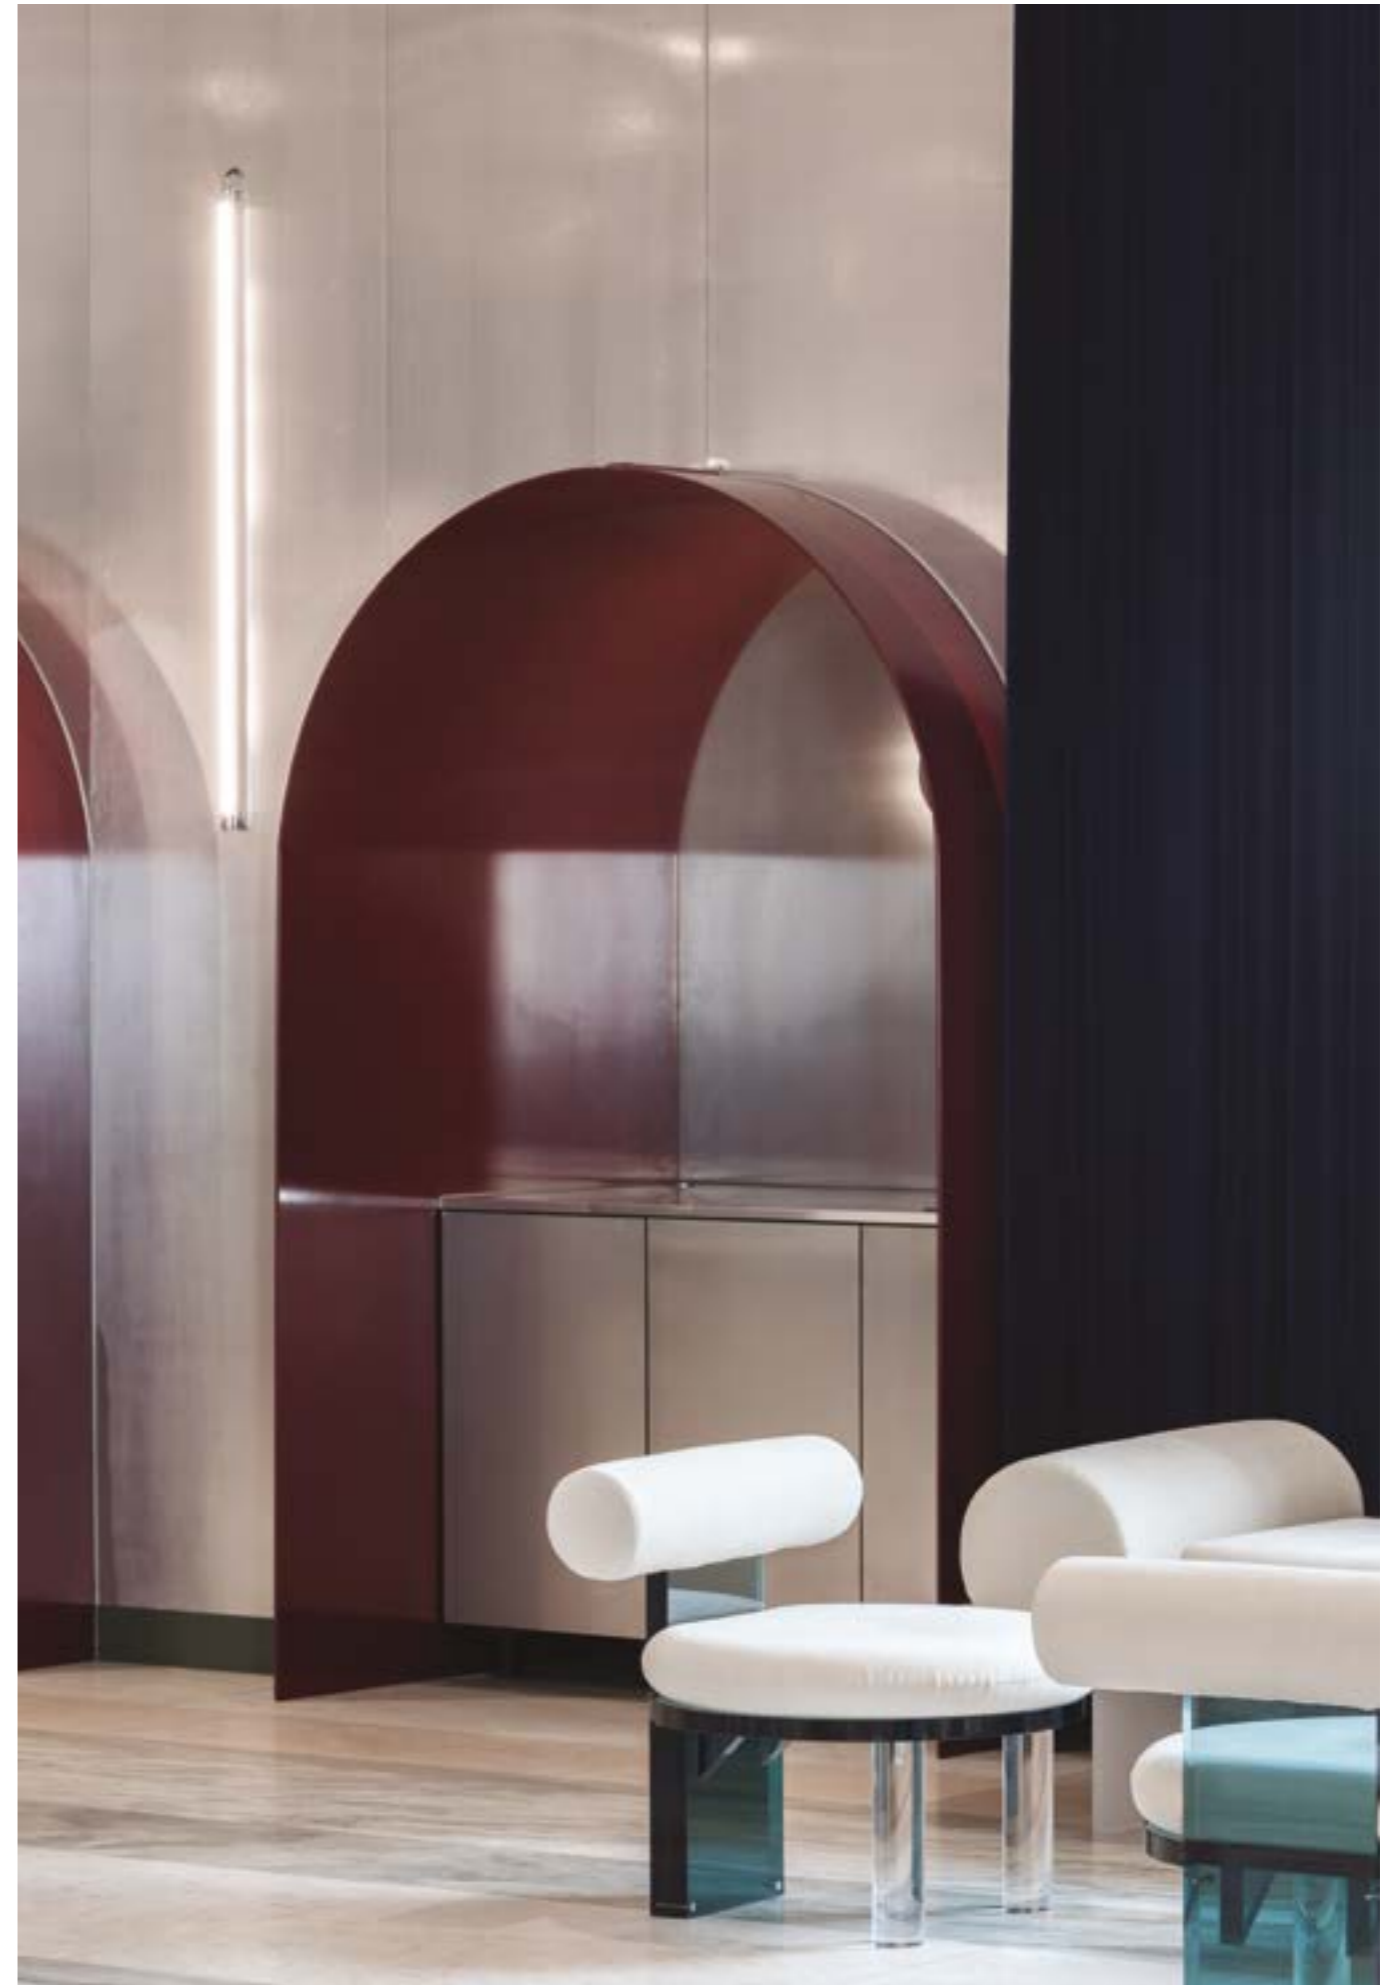










# WANDA SYSTEM

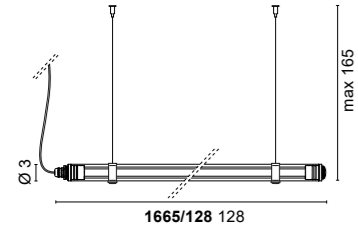


**1665.33/128/** 1,10 Kg

<b>.33</b>	Stainless Steel AISI 316L			■
<b>/128/W</b>	4000K	LED 18W	2208lm	
<b>/128/WW</b>	3000K	LED 18W	1980lm	
<b>/128/XW</b>	2700K	LED 18W	1872lm	



Suspension fixing kit supplied with the lamp

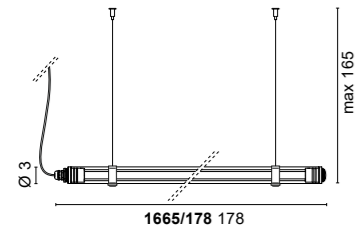


**1665.33/178/** 1,53 Kg

<b>.33</b>	Stainless Steel AISI 316L			■
<b>/178/W</b>	4000K	LED 25,5W	3128lm	
<b>/178/WW</b>	3000K	LED 25,5W	2805lm	
<b>/178/XW</b>	2700K	LED 25,5W	2652lm	



Suspension fixing kit supplied with the lamp

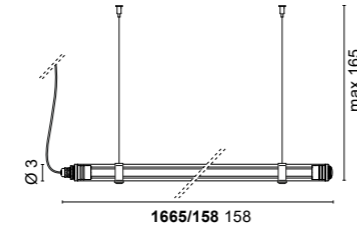


**1665.33/158/** 1,36 Kg

<b>.33</b>	Stainless Steel AISI 316L			■
<b>/158/W</b>	4000K	LED 22,5W	2760lm	
<b>/158/WW</b>	3000K	LED 22,5W	2475lm	
<b>/158/XW</b>	2700K	LED 22,5W	2340lm	



Suspension fixing kit supplied with the lamp

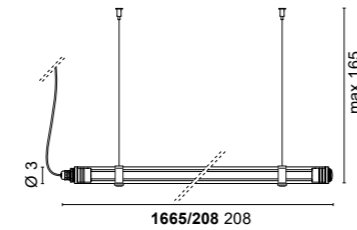


**1665.33/208/** 1,79 Kg

<b>.33</b>	Stainless Steel AISI 316L			■
<b>/208/W</b>	4000K	LED 30W	3680lm	
<b>/208/WW</b>	3000K	LED 30W	3300lm	
<b>/208/XW</b>	2700K	LED 30W	3120lm	




Suspension fixing kit supplied with the lamp

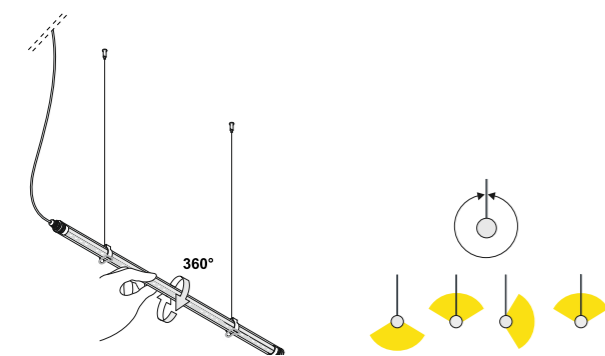

## FINISHES CODES




**.33** Stainless Steel  
AISI 316L

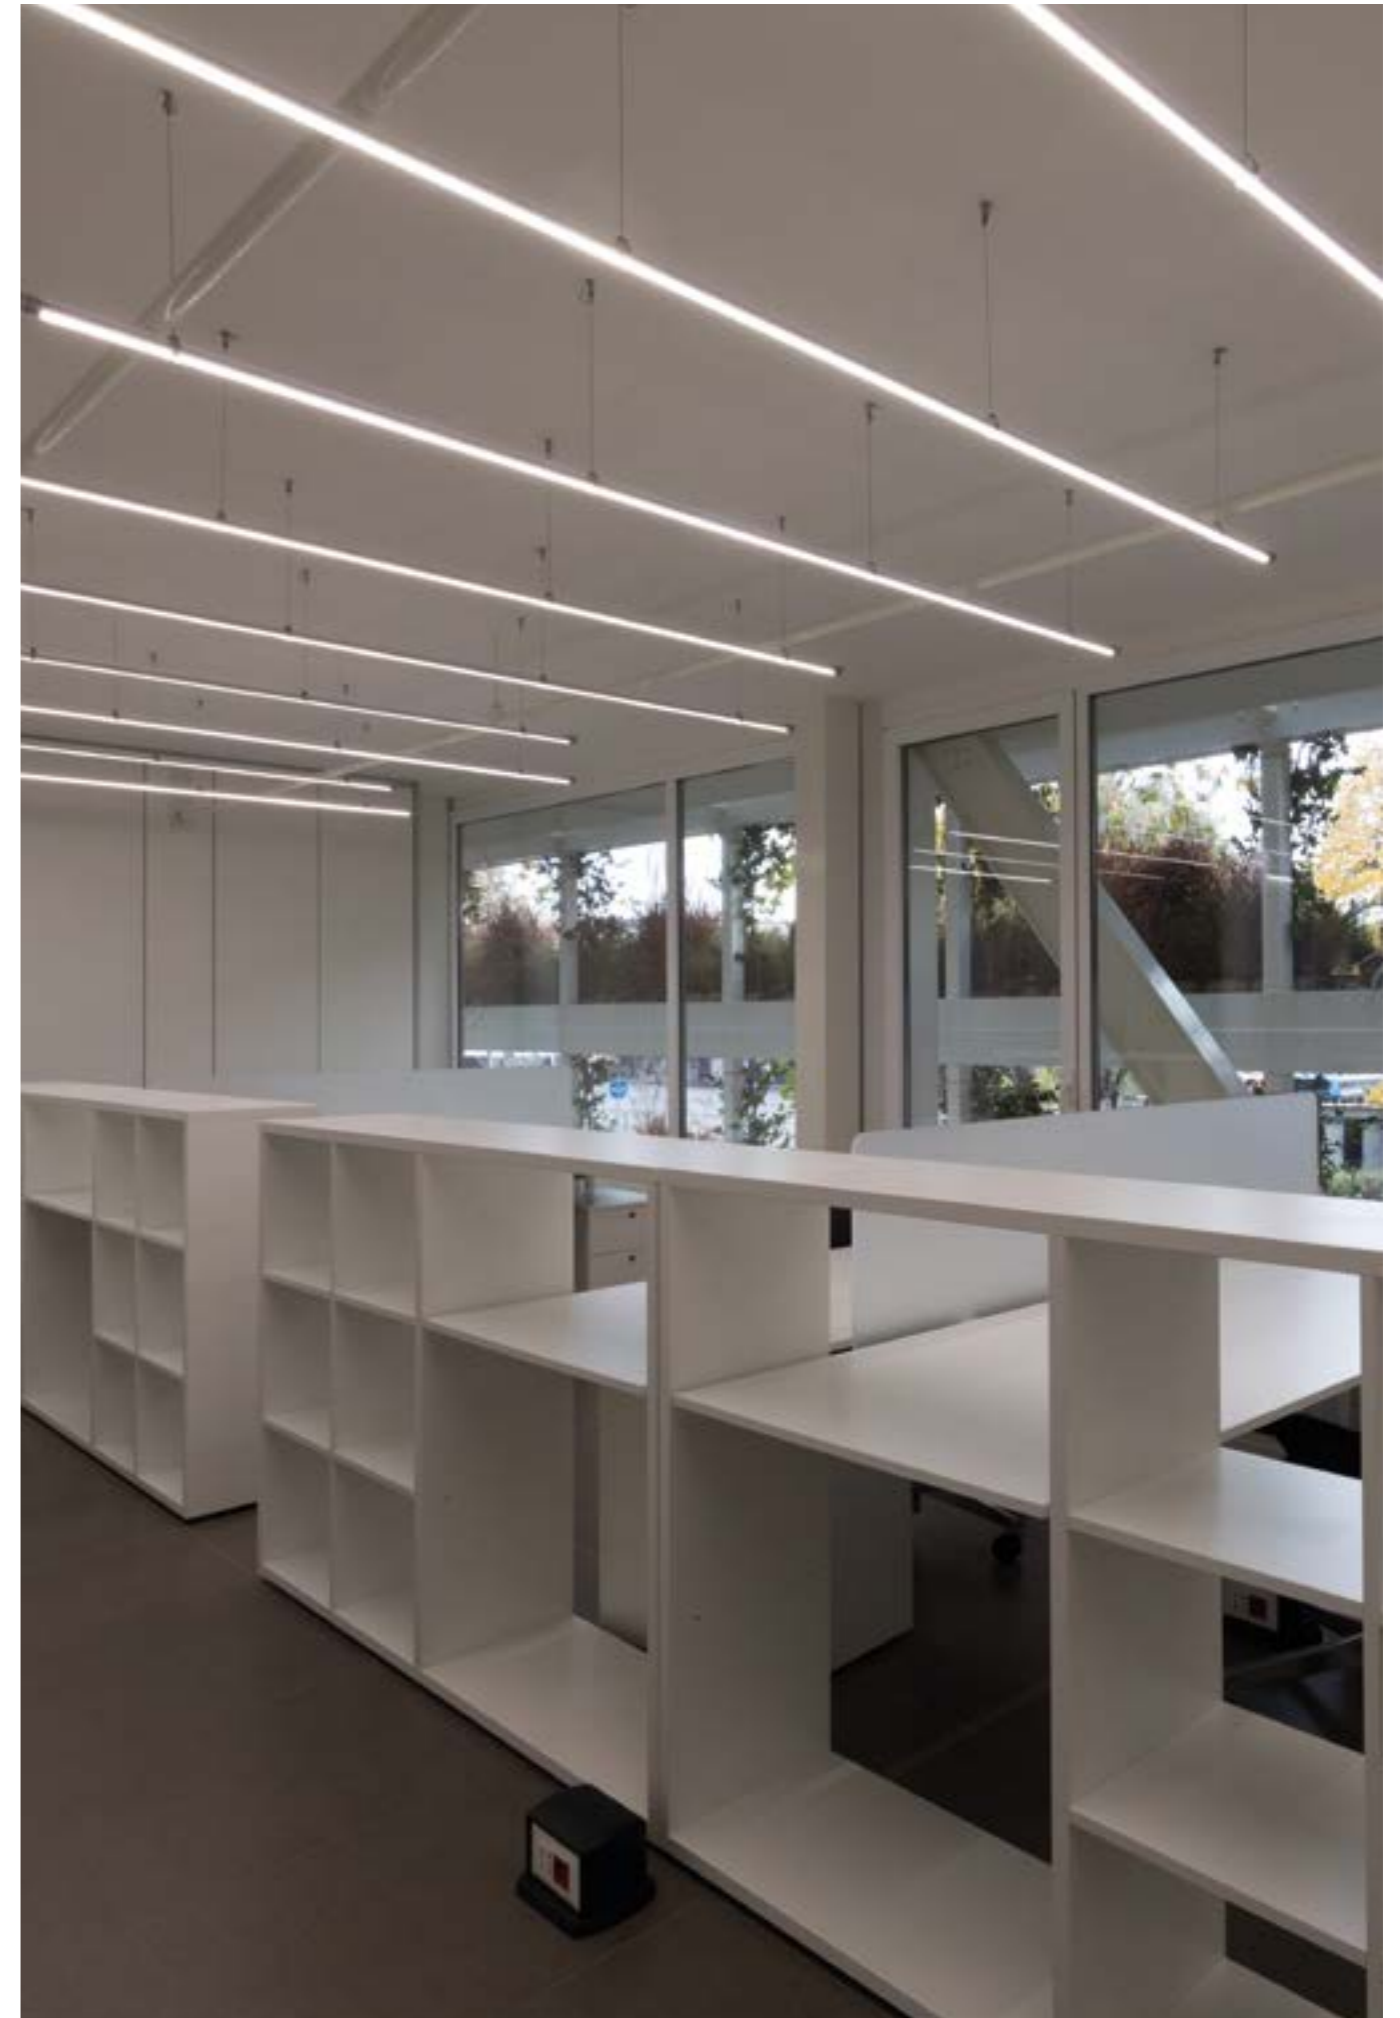



# CEILING ROSES FOR SUSPENSION SYSTEM 24V

WANDA system




Ceiling rose with **30W** driver

50/60Hz 220-230V

## 0990/30

0,50Kg

- .01 White ■
- .02 Black ■
- .23 Satin Aluminium ■




Ceiling rose with **60W** driver

50/60Hz 220-230V

## 0993/60

0,60Kg

- .01 White ■
  - .02 Black with white base ■
- /P DIMMER
- /V DIMMER
- /D DIMMER



Ceiling rose with **60W** driver


50/60Hz 220-230V

## 0990/60

0,70Kg

- .01 White ■
- .02 Black ■
- .85 Painted silver finishing ■
- .86 Painted gold finishing ■
- .87 Painted copper finishing ■
- .88 Painted bronze finishing ■

- /P DIMMER  MAX 60W
- /V DIMMER  MAX 60W
- /D DIMMER  MAX 60W



Ceiling rose with **100W** driver


50/60Hz 220-230V

## 0990/100

1,30Kg

- .01 White ■
- .02 Black ■
- .85 Painted silver finishing ■
- .86 Painted gold finishing ■
- .87 Painted copper finishing ■
- .88 Painted bronze finishing ■

- /P DIMMER  MAX 100W
- /V DIMMER  MAX 100W
- /D DIMMER  MAX 100W
- /T DIMMER  MAX 100W



Ceiling rose with **150W** driver


50/60Hz 220-230V

## 0990/150

1,30Kg

- .01 White ■
- .02 Black ■
- .85 Painted silver finishing ■
- .86 Painted gold finishing ■
- .87 Painted copper finishing ■
- .88 Painted bronze finishing ■

- /P DIMMER  MAX 150W
- /V DIMMER  MAX 150W
- /D DIMMER  MAX 150W
- /T DIMMER  MAX 150W



Ceiling rose with **200W** driver


50/60Hz 220-230V

## 0990/200

2,00kg

- .01 White ■
- .02 Black ■
- .85 Painted silver finishing ■
- .86 Painted gold finishing ■
- .87 Painted copper finishing ■
- .88 Painted bronze finishing ■

- /P DIMMER  MAX 2x100W
- /V DIMMER  MAX 2x100W
- /D DIMMER  MAX 2x100W
- /T DIMMER  MAX 2x100W

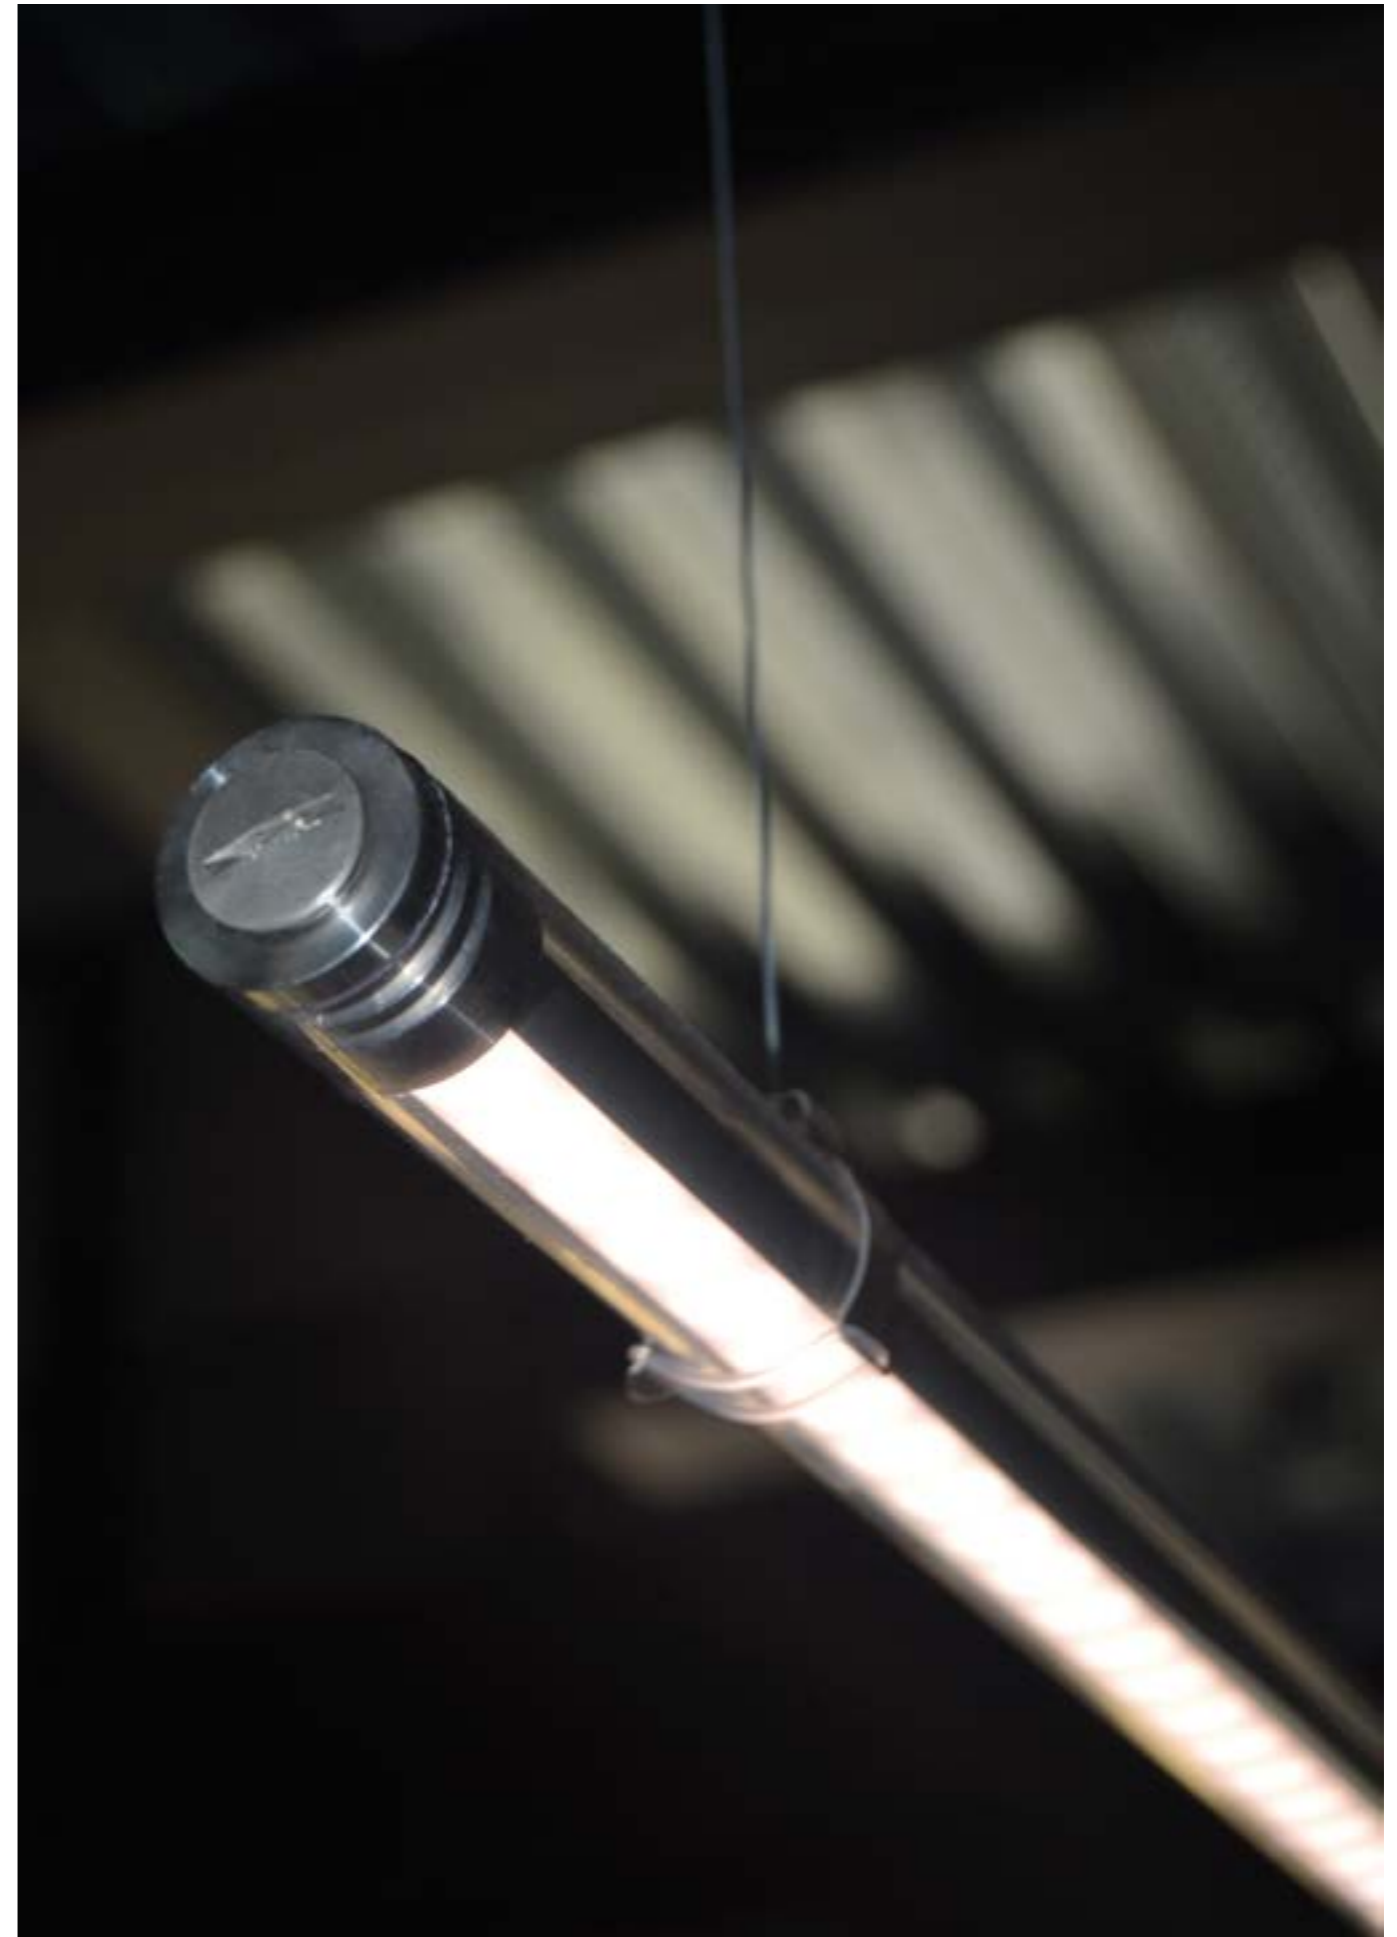



OUTDOOR

# AGOS

Design Officinadiarchitettura&design



Collection of adjustable outdoor lamps with structure in AISI 316L steel and diffuser in anti-UV coextruded transparent methacrylate.

The diffusers can rotate independently of 350° on their axis making the fixture extremely functional and comfortable.

AGOS can take on different shapes and heights and can be placed on the floor or on the wall.

Its operation involves the use of a driver to be positioned remotely.

*Collection de lampes d'extérieur orientables avec structure en acier AISI 316L et diffuseur en méthacrylate transparent co-extrudé anti-UV.*

*Les diffuseurs peuvent pivoter indépendamment de 350° sur leur axe, ce qui rend le luminaire extrêmement fonctionnel et confortable.*

*AGOS peut prendre différentes formes et hauteurs et peut être placé au sol ou au mur.*


*Son fonctionnement implique l'utilisation d'une alimentation à positionner à distance.*

*Kollektion verstellbarer Außenleuchten mit Struktur aus AISI 316L-Stahl und Diffusor aus coextrudiertem transparentem Methacrylat mit UV-Schutz.*

*Die Diffusoren können unabhängig von 350° um ihre Achse gedreht werden, was die Leuchte äußerst funktional und komfortabel macht.*

*AGOS kann verschiedene Formen und Höhen annehmen und auf dem Boden oder an der Wand platziert werden.*

*Sein Betrieb beinhaltet die Verwendung einer Stromversorgung, die entfernt positioniert werden soll.*

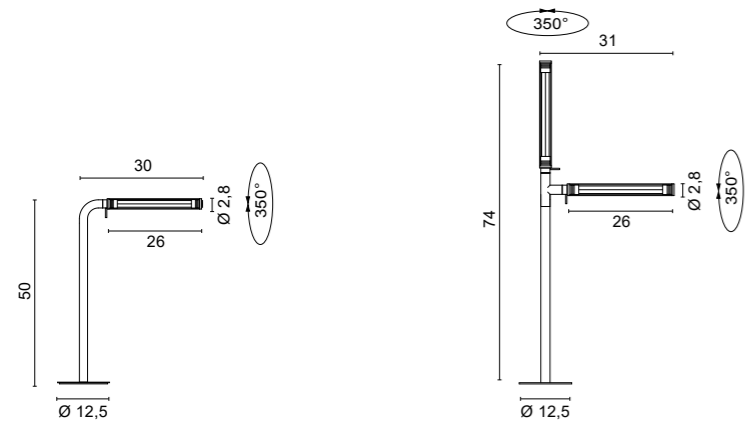

**3540.33/** 0,75 Kg

**.33** Matt Steel INOX AISI 316L


<b>/W</b>	4000K	LED 24V 3W	368lm
<b>/WW</b>	3000K	LED 24V 3W	330lm
<b>/XW</b>	2700K	LED 24V 3W	312lm



**3541.33/** 1,00 Kg

**.33** Matt Steel INOX AISI 316L

<b>/W</b>	4000K	LED 24V 6W	736lm
<b>/WW</b>	3000K	LED 24V 6W	660lm
<b>/XW</b>	2700K	LED 24V 6W	624lm

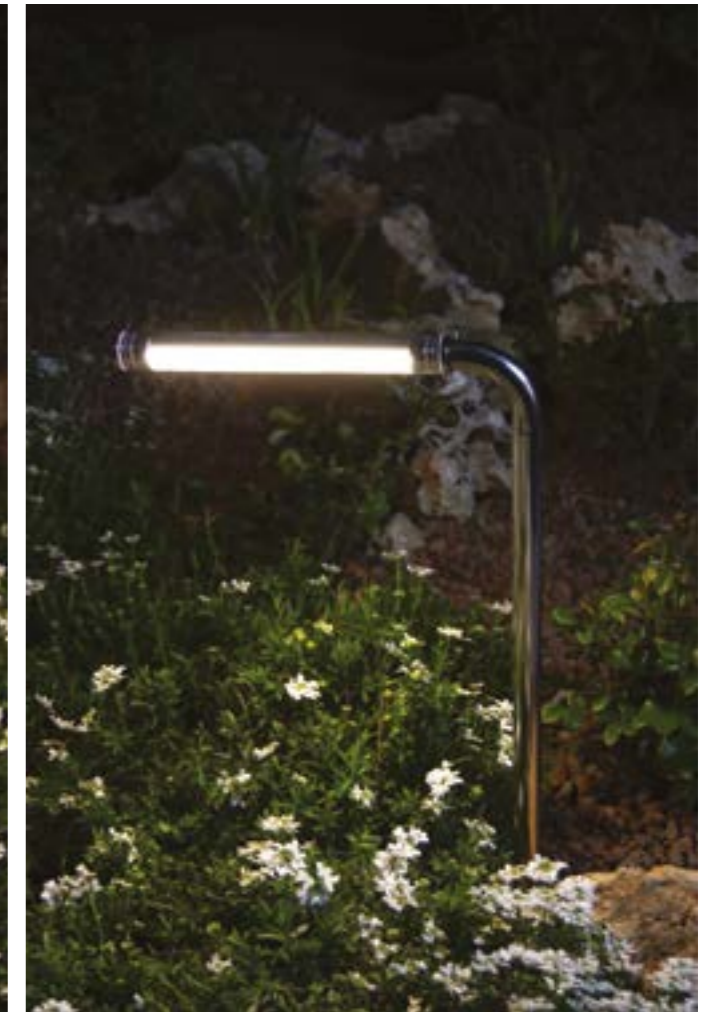

ACCESSORIES

Kit  
**0246/R**

Draining formork with plate



Box  
**0243**

IP Connector on cable



Box  
**0245**

Stakes for temporary installation on field



DRIVERS

ON/OFF

<b>Cod.</b>	<b>0155</b>	<b>0156</b>	<b>0157</b>	<b>0160</b>
	24V-13W	24V-25W	24V-75W	24V-60W


IP67 DRIVER

<b>Cod.</b>	<b>0033/IP</b>	<b>0034/IP</b>
	24V 14,4W	24V 70W

FINISHES CODES




**.33**  
Stainless Steel  
AISI 316L

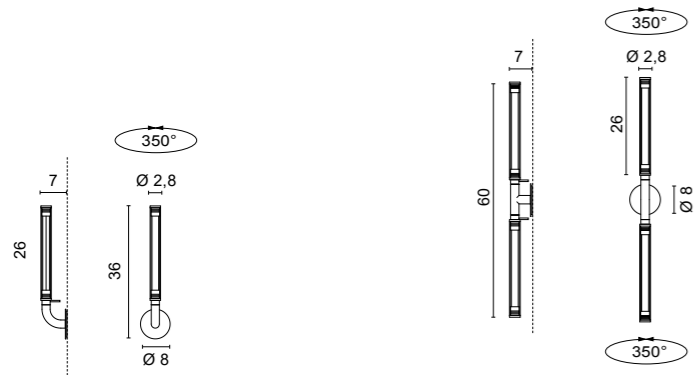


**4680.33/** 0,40 Kg

<b>.33</b>	Matt Steel INOX AISI 316L	
<b>/W</b>	4000K LED 24V 3W	368lm
<b>/WW</b>	3000K LED 24V 3W	330lm
<b>/XW</b>	2700K LED 24V 3W	312lm



**4681.33/** 0,75 Kg

<b>.33</b>	Matt Steel INOX AISI 316L	
<b>/W</b>	4000K LED 24V 6W	736lm
<b>/WW</b>	3000K LED 24V 6W	660lm
<b>/XW</b>	2700K LED 24V 6W	624lm



DRIVERS

ON/OFF

<b>Cod.</b>	<b>0155</b>	<b>0156</b>	<b>0157</b>	<b>0160</b>
	24V-13W	24V-25W	24V-75W	24V-60W

IP67 DRIVER

<b>Cod.</b>	<b>0033/IP</b>	<b>0034/IP</b>
	24V 14,4W	24V 70W

FINISHES CODES



**.33**  
Stainless Steel  
AISI 316L







OUTDOOR

# SPILLO

Design Officinadiarchitettura&design





## SPILLO



IP67 floor lamp providing diffused light with an AISI 316L steel structure and a transparent coextruded UV-resistant methacrylate diffuser.

Light is emitted 360° along the entire length of the diffuser.

Accessories for the installation of SPILLO such as the box plate with steel screws, the IP connector for cables with a diameter of less than 7.0 mm, the stakes for temporary ground installation and the base cover must be ordered separately.

*Lampadaire IP67 à lumière diffuse avec structure en acier AISI 316L et diffuseur en méthacrylate coextrudé transparent résistant aux UV.*

*La lumière est émise à 360° sur toute la longueur du diffuseur.*

*Les accessoires pour l'installation de SPILLO, tels que la plaque de coffrage avec des vis en acier, le connecteur IP pour les câbles d'un diamètre inférieur à 7,0 mm, les piquets pour l'installation temporaire au sol et le couvercle de la base, doivent être commandés séparément.*


Stehleuchte IP67 für diffuses Licht mit einer Struktur aus Stahl AISI 316L und einem transparenten, koextrudierten Diffusor aus UV-beständigem Methacrylat.

Der Lichtaustritt erfolgt um 360° über die gesamte Länge des Schirms.

Das Zubehör für die Installation von SPILLO, wie z.B. die Kastenplatte mit Schraubenschrauben, der IP-Anschluss für Kabel mit einem Durchmesser von weniger als 7,0 mm, die Pflöcke für die vorübergehende Bodeninstallation und die Sockelabdeckung, muss separat bestellt werden.




# SPILLO



**3542** 0,60Kg

- .33** Matt Steel INOX AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 24V 6W	650lm
<b>/WW</b>	3000K	LED 24V 6W	576lm
<b>/XW</b>	2700K	LED 24V 3W	520lm




**3543** 0,90 Kg

- .33** Matt Steel INOX AISI 316L ■
- .34** Painted corten finishing ■

<b>/W</b>	4000K	LED 24V 6W	650lm
<b>/WW</b>	3000K	LED 24V 6W	576lm
<b>/XW</b>	2700K	LED 24V 3W	520lm



## FINISHES CODES



- .33** Stainless Steel  
AISI 316L
- .34** Painted Corten  
Finishing



# SPILLO



## ACCESSORIES

Kit  
**0246/R**

Draining formork  
with plate



Box  
**0243**

IP Connector on  
cable



Box  
**0245**

Stakes for temporary  
installation on field



Box  
**0252/S.33**

Basecover




## DRIVERS

### ON/OFF

Cod.	<b>0155</b>	<b>0156</b>	<b>0157</b>	<b>0160</b>
	24V-13W	24V-25W	24V-75W	24V-60W

### IP67 DRIVER

Cod.	<b>0033/IP</b>	<b>0034/IP</b>
	24V 14,4W	24V 70W

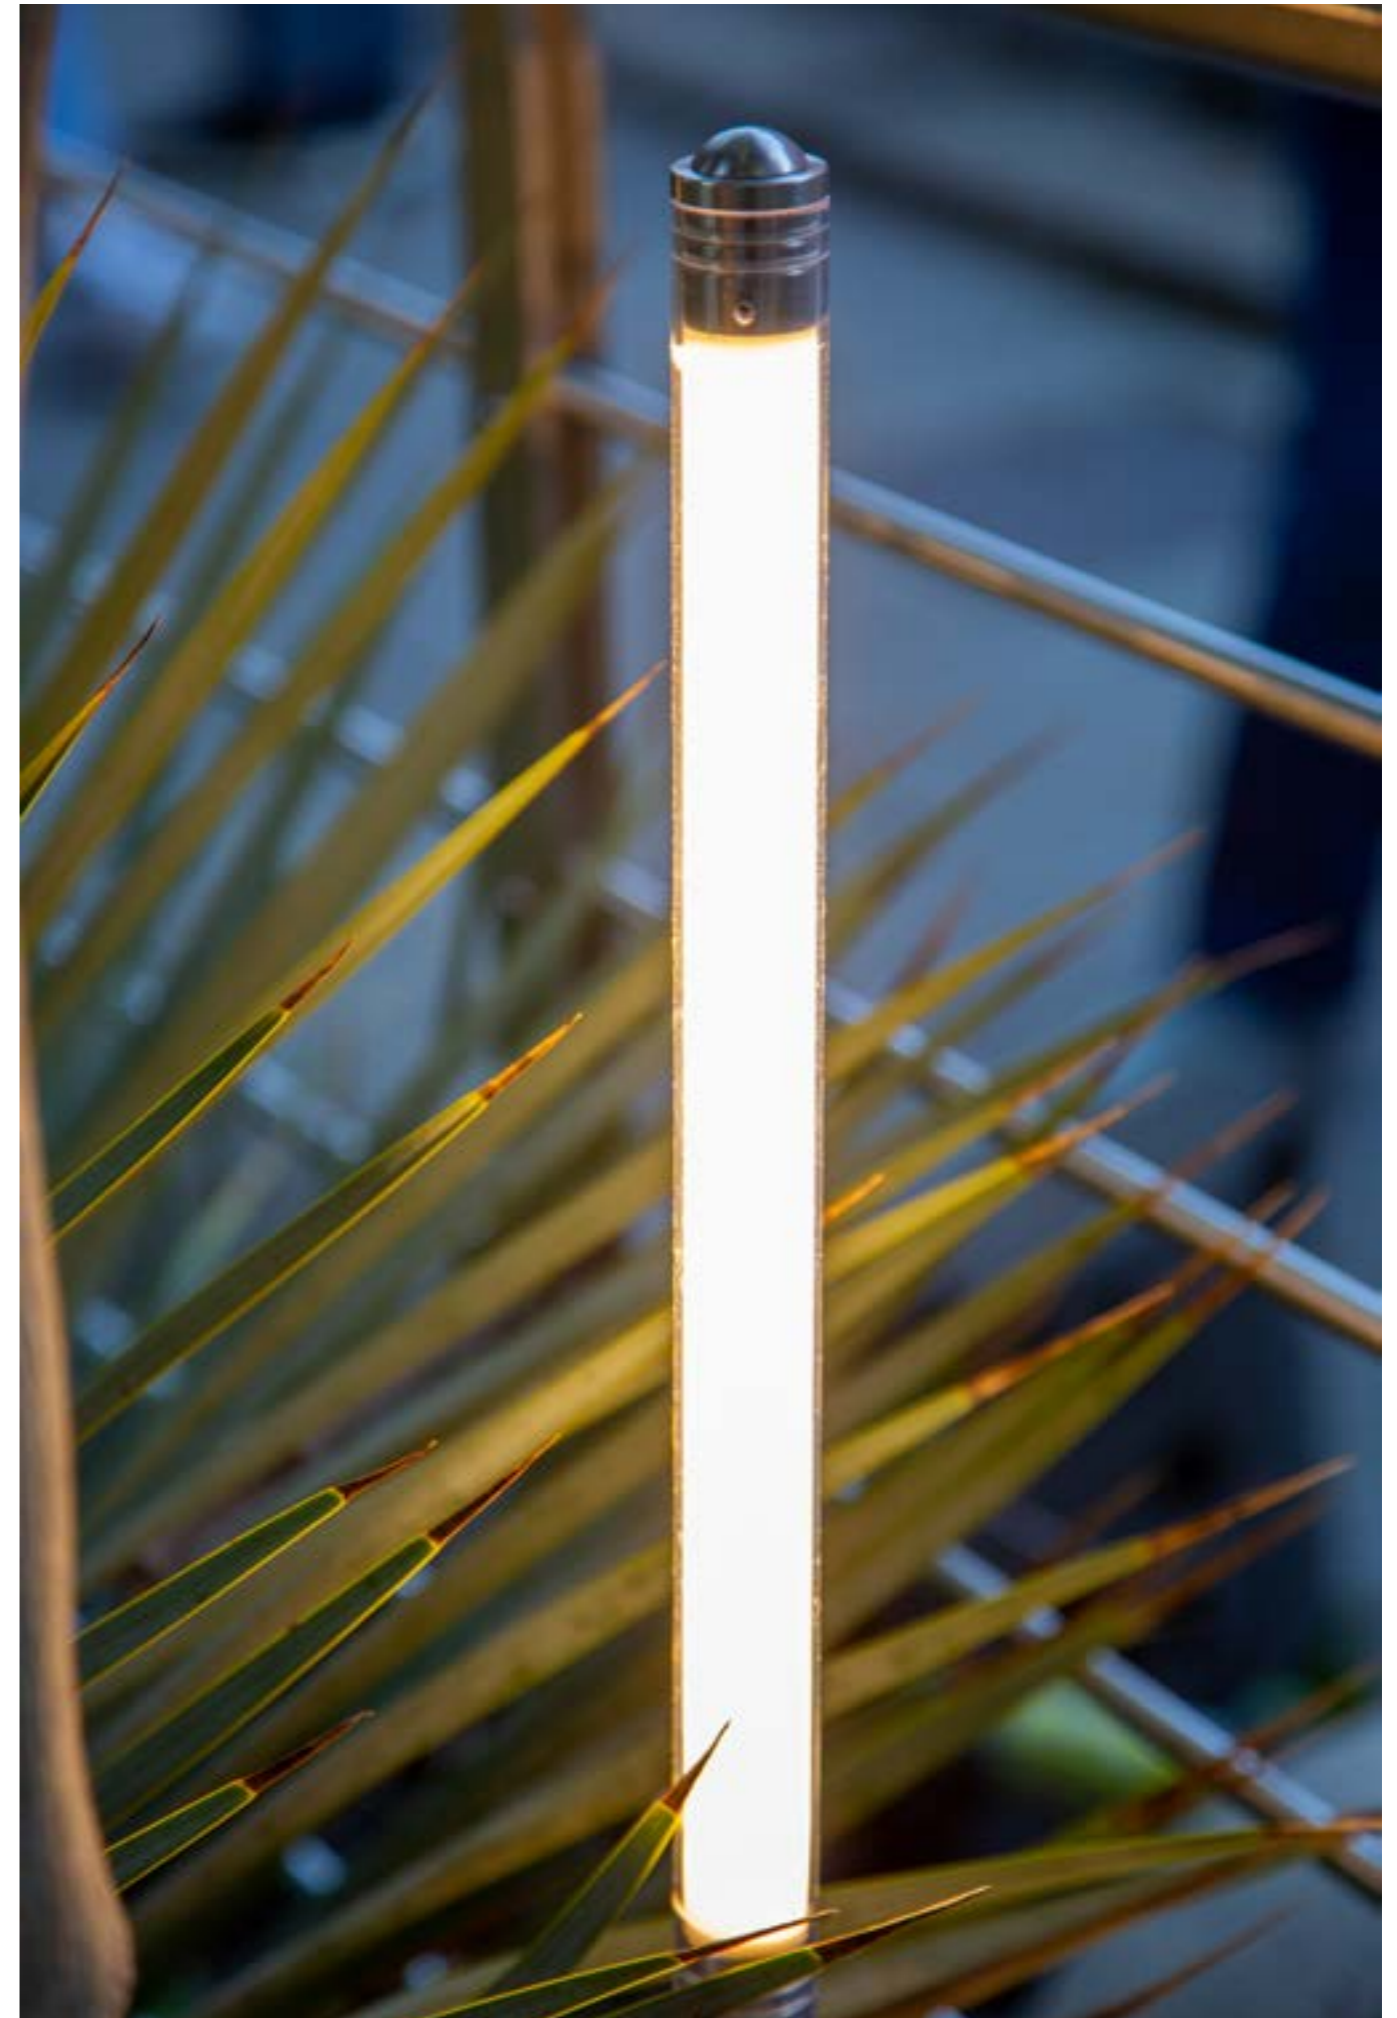



**INDOOR / OUTDOOR**

# **ZEPPELIN**

Design U.T. EgoLucé



## ZEPPELIN




Series of walkable downlights (IP 67) with AISI 316L stainless steel flange, aluminum heat sink and 30cm neoprene cable. Available in round and square versions. Formwork or plasterboard mounting with special accessory.

*Série de projecteurs orientables (IP 67) avec bride en acier inoxydable AISI 316L, dissipateur thermique en aluminium et câble en néoprène de 30cm. Disponible en version ronde ou carrée. Montage sur coffrage ou sur plaque de plâtre avec un accessoire spécial.*

*Serie von begehbaren Downlights (IP 67) mit Flansch aus rostfreiem Stahl AISI 316L, Kühlkörper aus Aluminium und 30cm Neoprenkabel. Erhältlich in runder und quadratischer Ausführung. Montage auf Schalung oder Gipskarton mit speziellem Zubehör.*



# ZEPPELIN

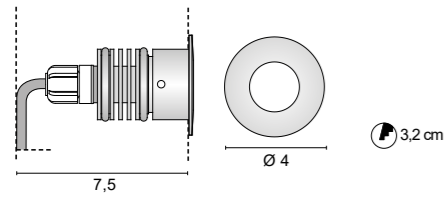


**6348.33/** 0,08 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	max LED 1,5W 500mA	199lm



ETL version available upon request

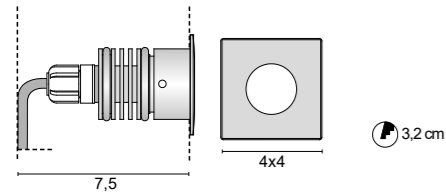

**6349.33/** 0,10 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	max LED 1,5W 500mA	199lm



ETL version available upon request

## ACCESSORIES

Kit  
**0220**

Draining junction +  
IP Connector



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6348</b>	1-6	1-10	1-6
<b>6349</b>	1-6	1-10	1-2


### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6348</b>	1-12	1-7
<b>6349</b>	1-12	1-7


### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6348</b>	2-11	1-21	1-21
<b>6349</b>	2-11	1-21	1-21

Only serial connection

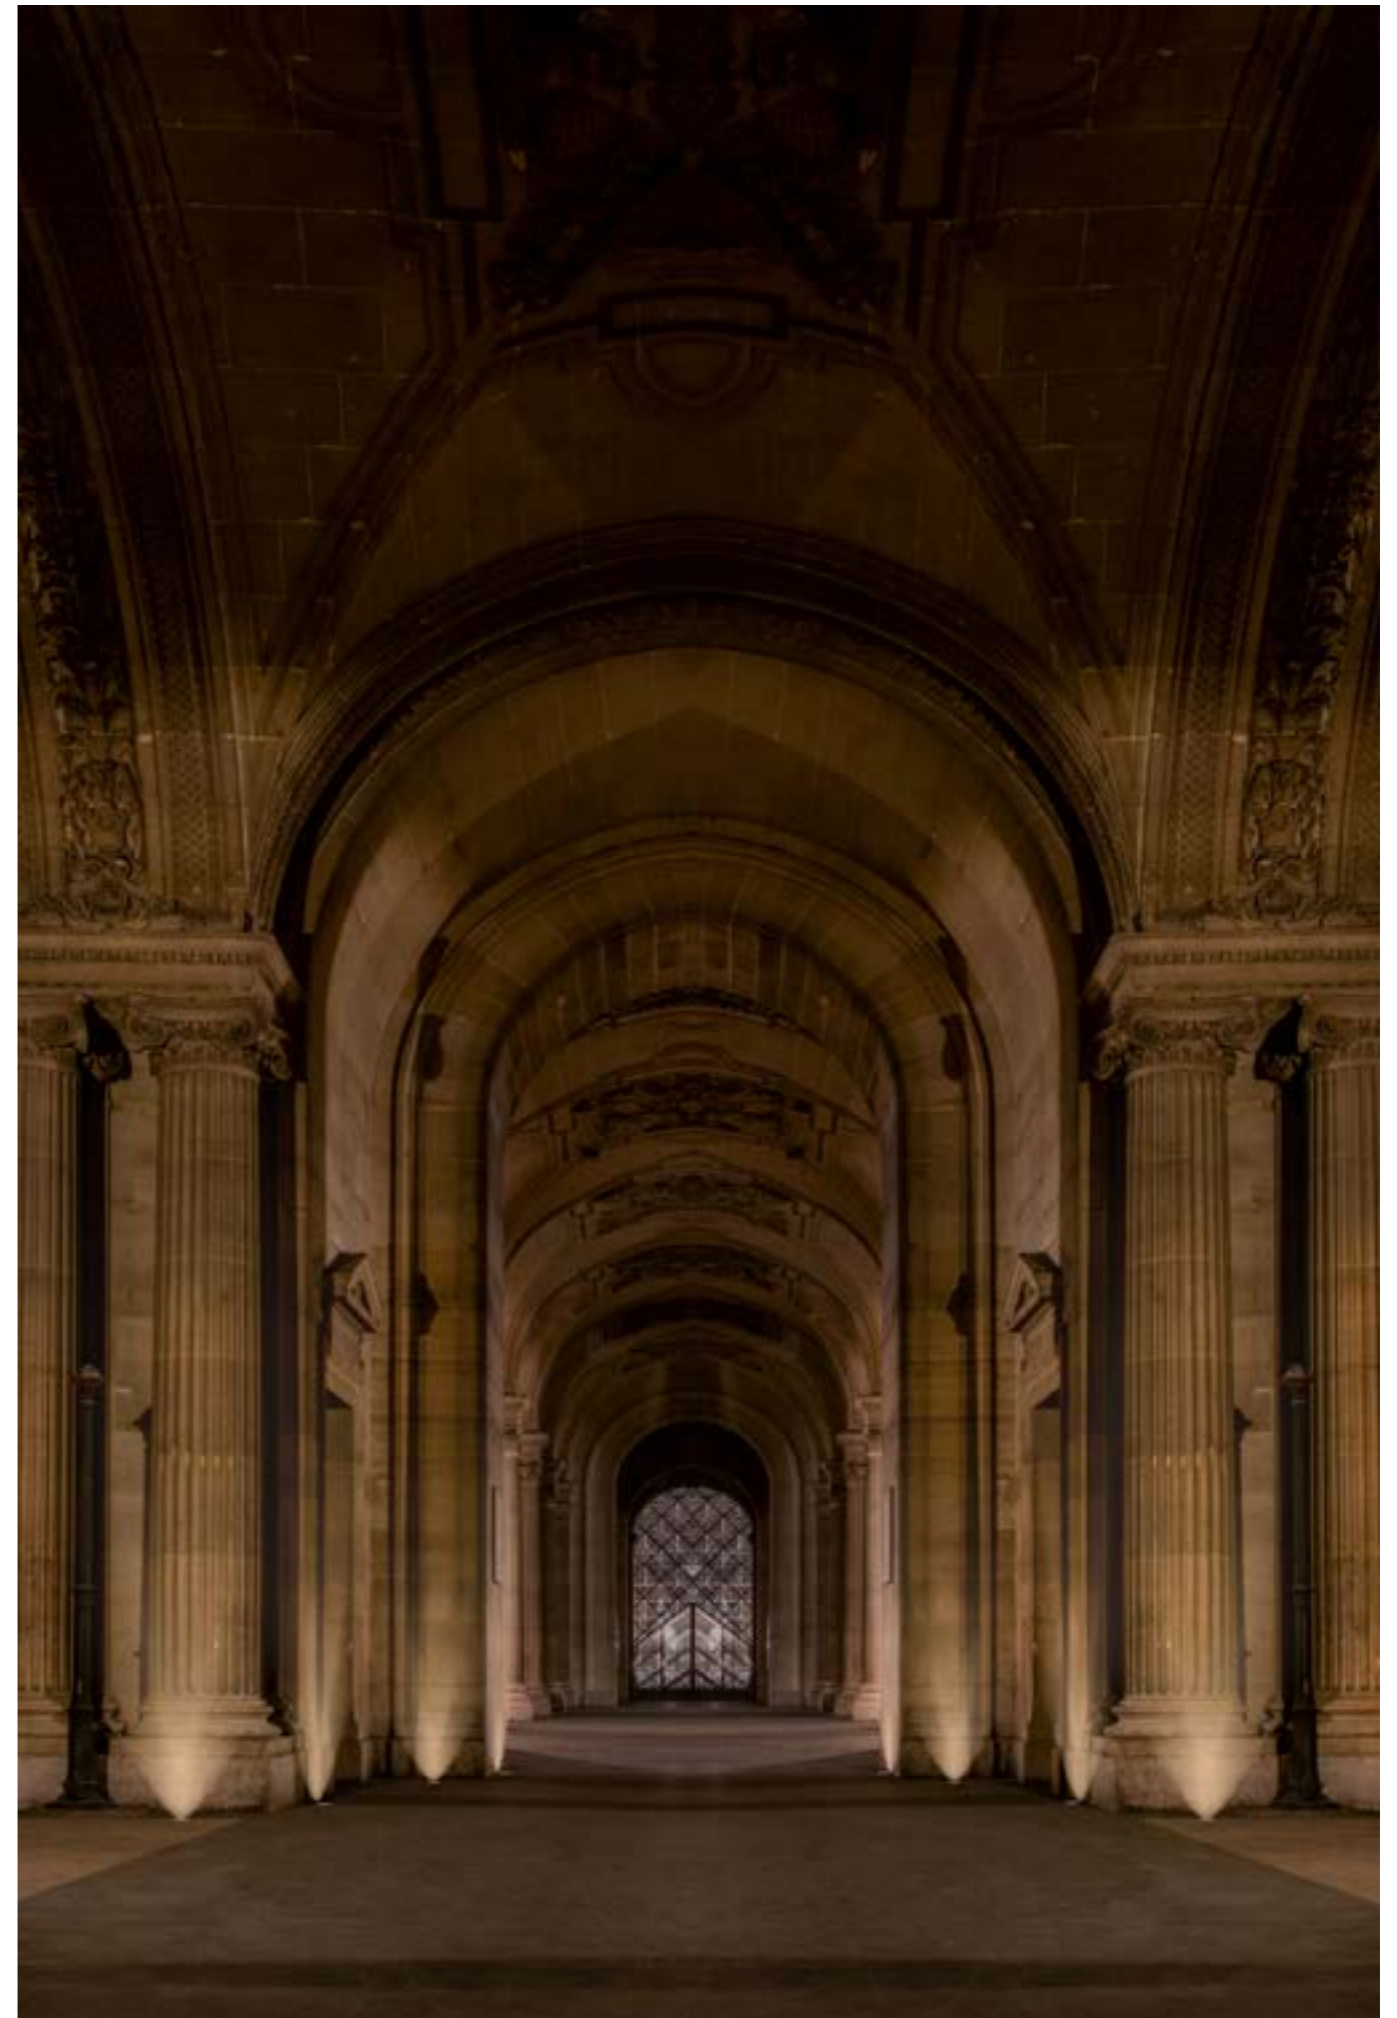


# ZEPPELIN RGB

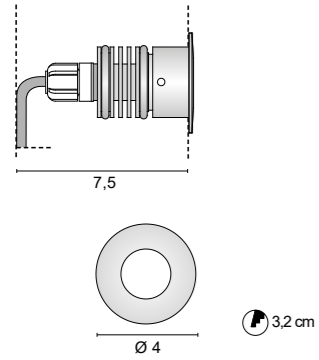

**6376.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L


LED 3 x 250mA

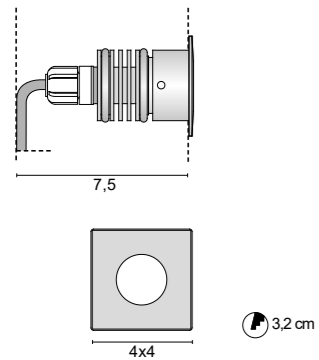

**6395.33/** 0,20 Kg

**.33** Stainless Steel AISI 316L

LED 3 x 250mA

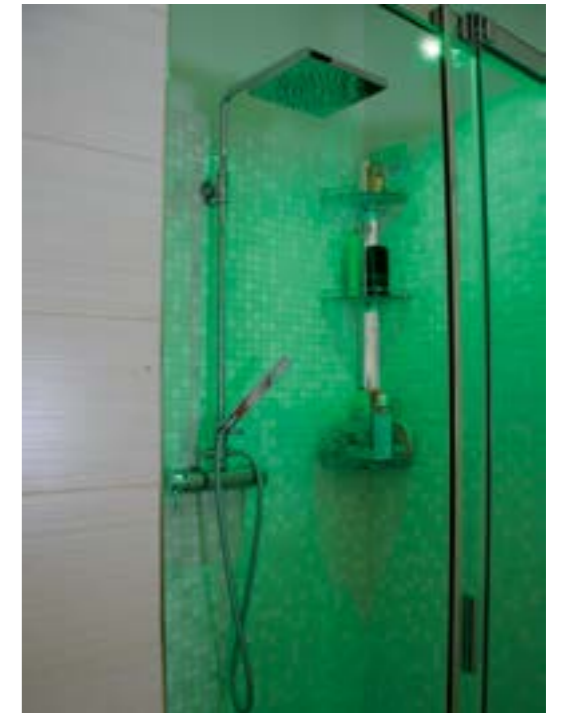

## ACCESSORIES

Kit  
**0228**

Draining junction



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



## DRIVERS

### DRIVER RGB

**0164**      **0167**  
120W      22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

**0164/CASA**  
120W

IN 230V - OUT 3 X 24V

### CONVERTER RGB

**0168**  
IN 24V - OUT 3 X 250mA 1-5 Zeppelin RGB

### SENSOR & CABLE RGB


**0163**  
IR Sensor

**0165**  
IR Remote controller

**0166**  
Sync Cable



# ZEPPELIN PLUS

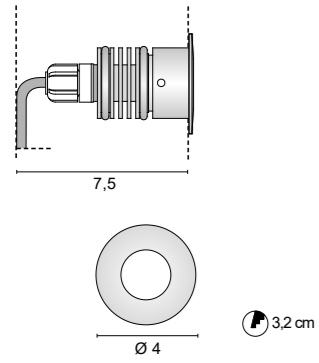


**6384.33/** 0,08 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm



ETL version available upon request

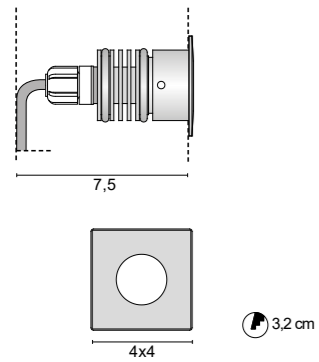

**6394.33/** 0,10 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm



ETL version available upon request

## ACCESSORIES

Kit  
**0220**

Draining junction +  
IP Connector



Box  
**0216**

Plastic box



Spring for  
plasterbox Included



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350m	0127 500mA
<b>6384</b>	1-6	1-10	1-6
<b>6394</b>	1-6	1-10	1-6

### IP67 DRIVER


Cod.	0031/IP 350mA	0143/IP 500mA
<b>6384</b>	1-12	1-7
<b>6394</b>	1-12	1-7

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6384</b>	2-11	2-11	1-21
<b>6394</b>	2-11	2-11	1-21

Only serial connection


# ZEPPELIN MAXI

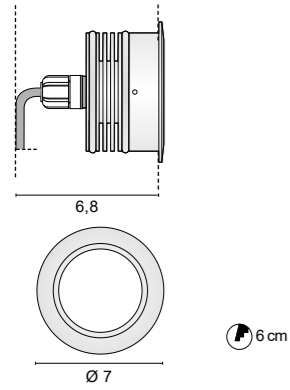


**6736.33/** 0,40 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 4W 24V	658lm
<b>/WW</b>	3000K	LED 4W 24V	608lm
<b>/XW</b>	2700K	LED 4W 24V	562lm




Only Parallel connection

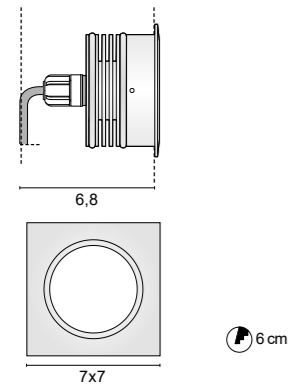

**6737.33/** 0,35 Kg



**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 4W 24V	658lm
<b>/WW</b>	3000K	LED 4W 24V	608lm
<b>/XW</b>	2700K	LED 4W 24V	562lm



Only Parallel connection

## ACCESSORIES

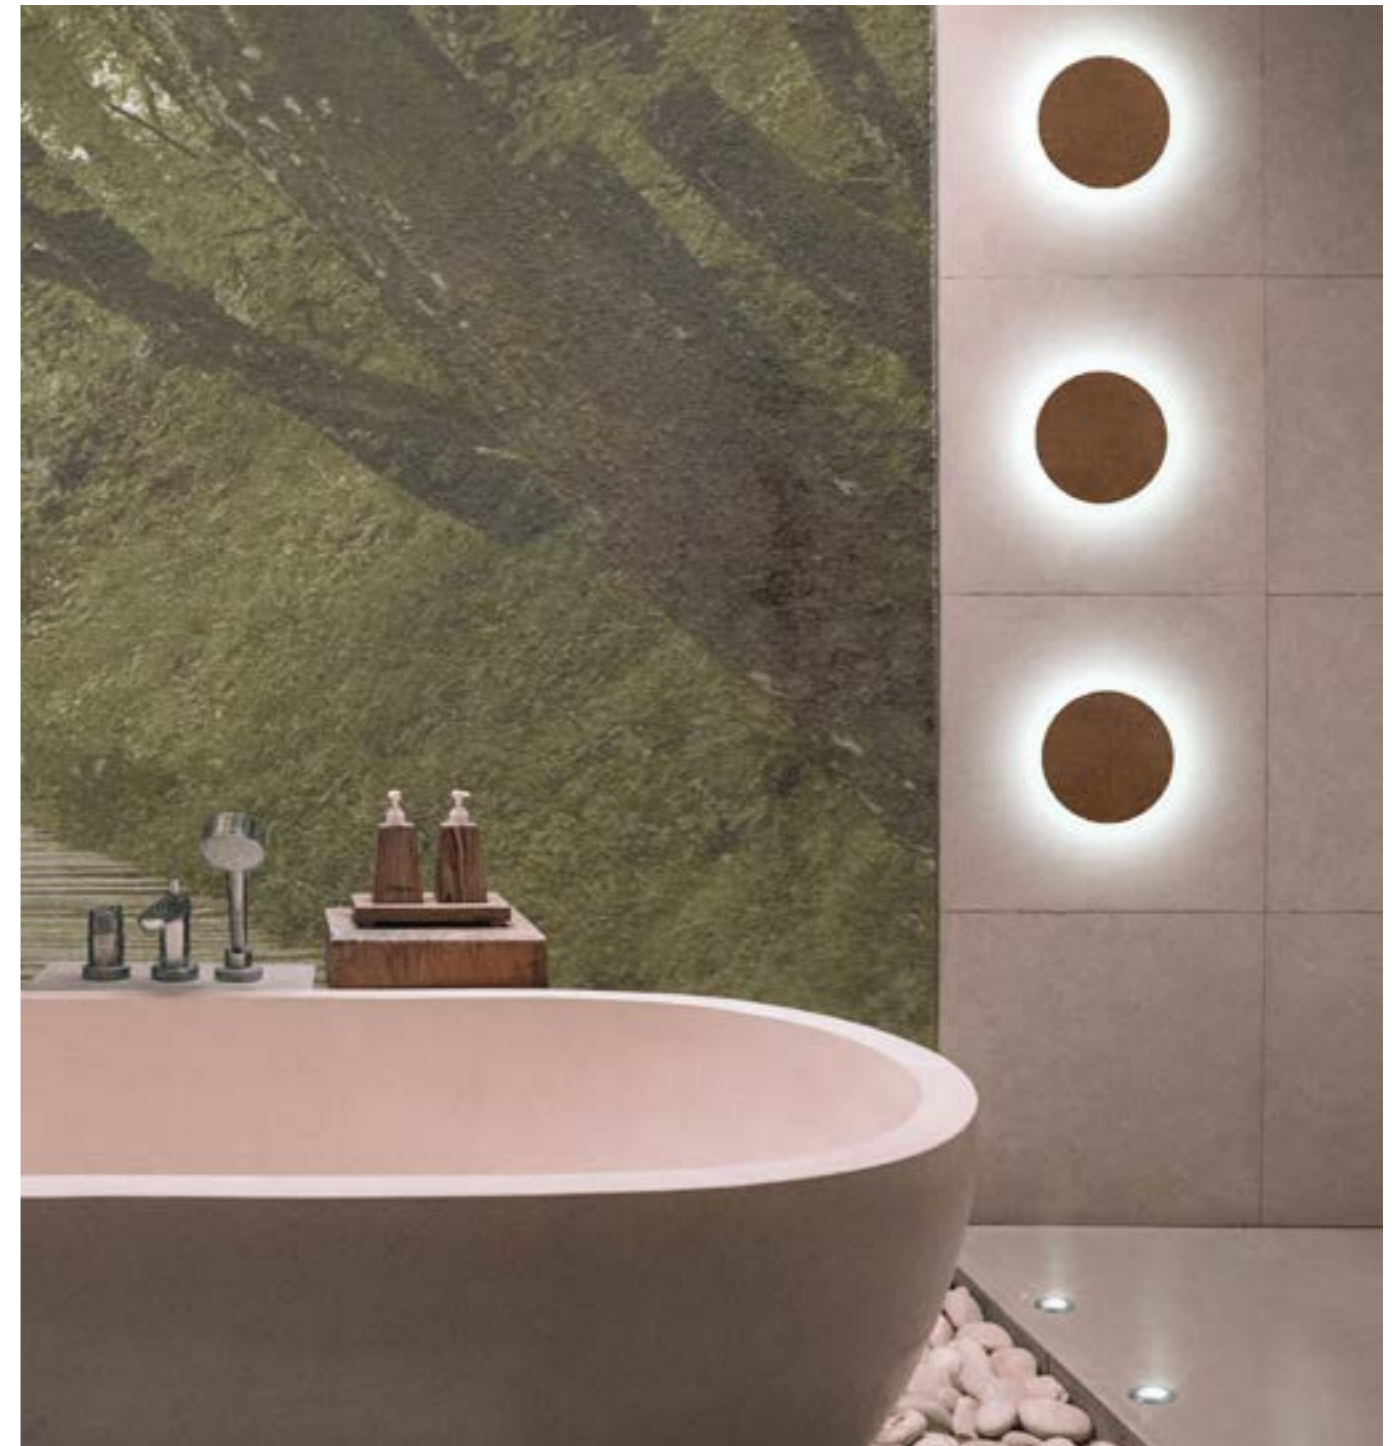

## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6736</b>	1-2	1-5
<b>6737</b>	1-2	1-5

### DIMMABLE


	0717/DIM60/V	0717/DIM60
	PUSH - 1...10V	DALI - PUSH
<b>6736</b>	1-12	1-12
<b>6737</b>	1-12	1-12

Only Parallel connection

### IP67 DRIVER



Cod.	0033/IP	0037/IP
	24V 14,4W	24V 60W
<b>6736</b>	1-2	1-12
<b>6737</b>	1-2	1-12

# ZEPPELIN MAXI COB

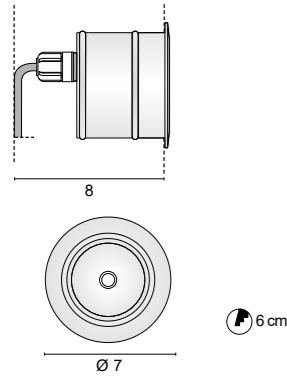


**6397.33/** 0,40 Kg

<b>.33</b>	Stainless Steel AISI 316L					
<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1466lm
<b>/WW</b>	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1424lm
<b>/XW</b>	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1340lm

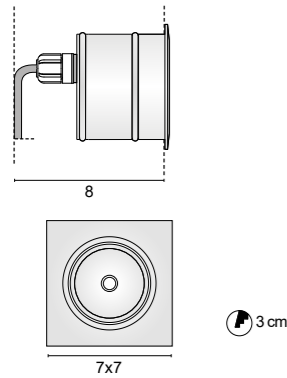

**6741.33/** 0,40 Kg

<b>.33</b>	Stainless Steel AISI 316L					
<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1466lm
<b>/WW</b>	3000K	/15	/28	/60	LED 8,7W 17,5V 500mA	1424lm
<b>/XW</b>	2700K	/15	/28	/60	LED 8,7W 17,5V 500mA	1340lm



## ACCESSORIES

Kit  
**0230**  
Draining junction + IP Connector

Spring  
**0260/C**  
Spring for plasterboard



## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA
<b>6397</b>	1-2
<b>6741</b>	1-2

### IP67 DRIVER


Cod.	0143/IP 500mA
<b>6397</b>	1
<b>6741</b>	1

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6397</b>	1-2	1-2	1-3
<b>6741</b>	1-2	1-2	1-3

Only serial connection



# ZEPPELIN MINI



**6730.33/** 0,05 Kg

**.33** Stainless Steel AISI 316L



<b>/W</b>	4000K	LED 1W 350mA	158lm
<b>/WW</b>	3000K	LED 1W 350mA	150lm
<b>/XW</b>	2700K	LED 1W 350mA	143lm

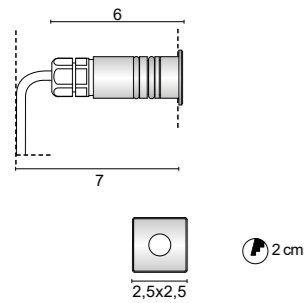

**6731.33/** 0,06 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 1W 350mA	158lm
<b>/WW</b>	3000K	LED 1W 350mA	150lm
<b>/XW</b>	2700K	LED 1W 350mA	143lm

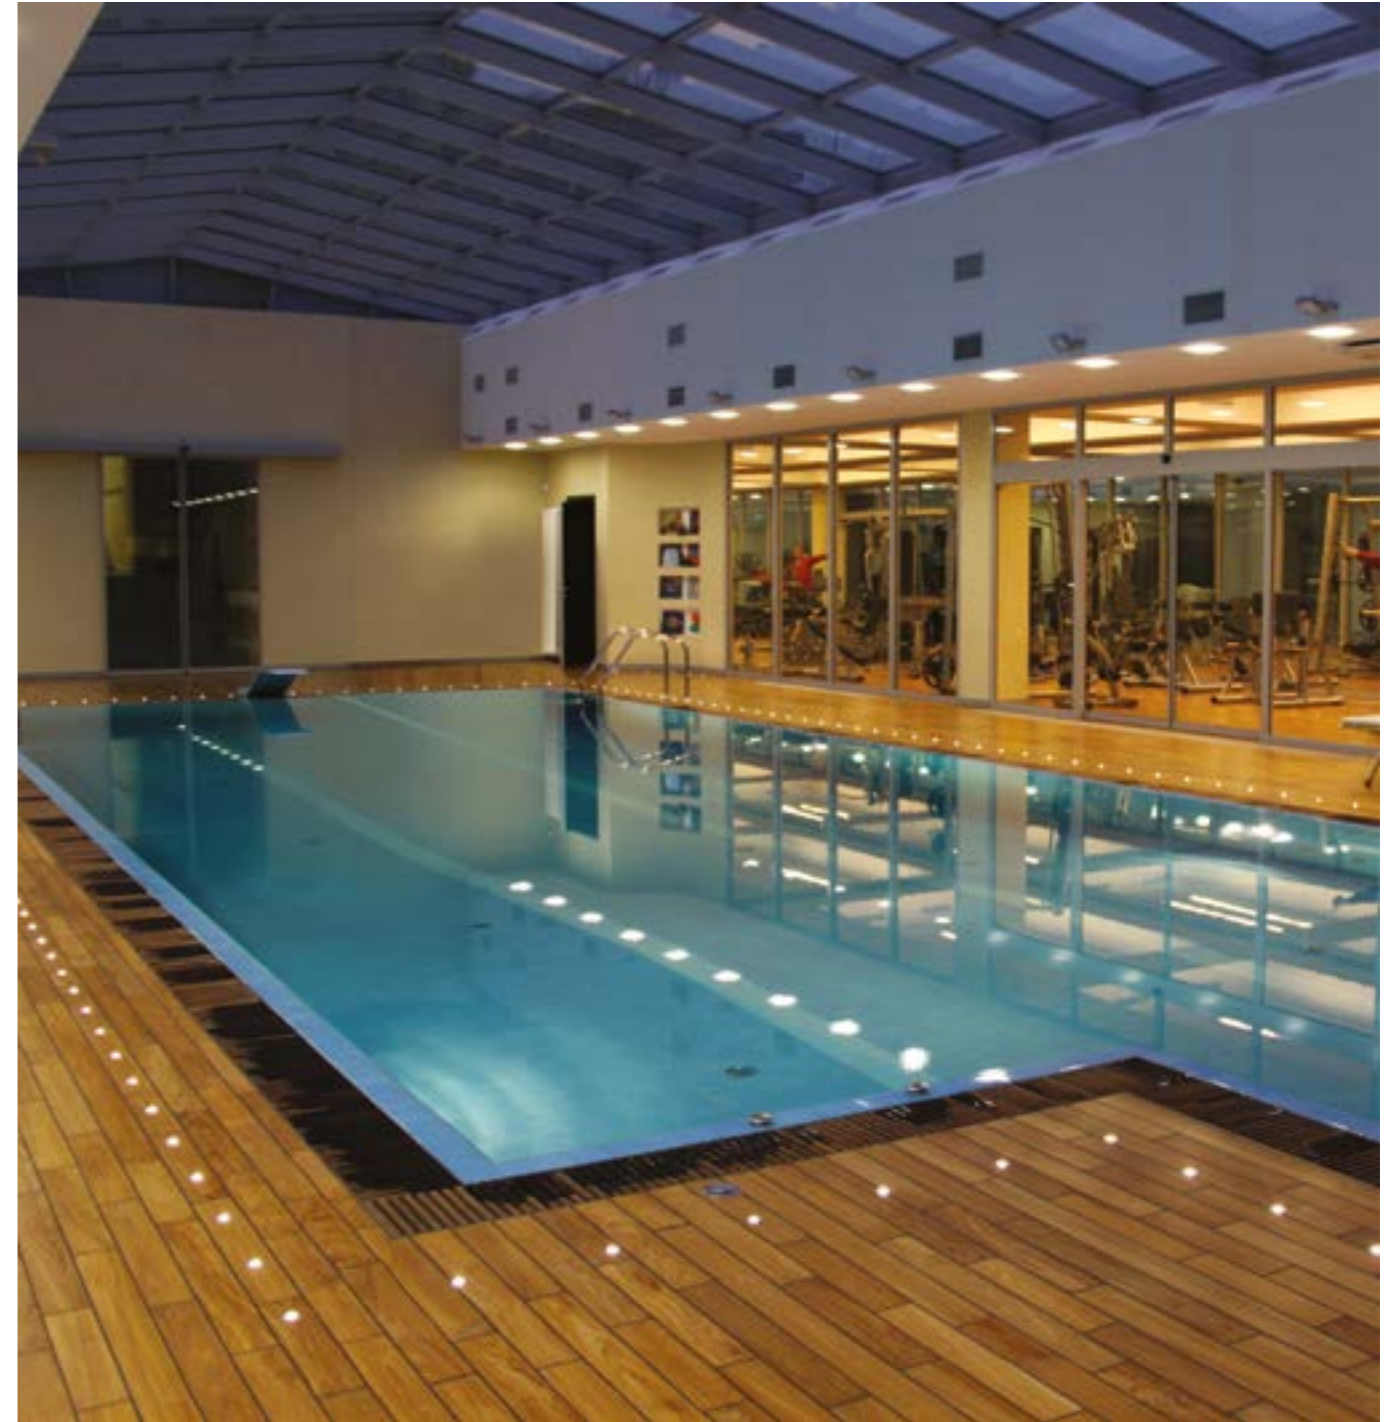

## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
<b>6730</b>	1-6	1-10
<b>6731</b>	1-6	1-10

### IP67 DRIVER


Cod.	0031/IP 350mA
<b>6730</b>	1-12
<b>6731</b>	1-12

### DIMMABLE

0141/DIMM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6730</b>	5-14	4-14	1-21
<b>6731</b>	5-14	4-14	1-21

Only Serial connection



# ZEPPELIN MINI PLUS



**6732.33/** 0,05 Kg

**.33** Stainless Steel AISI 316L


<b>/W</b>	4000K	/11	/25	/45	LED 1W 350mA	158lm
<b>/WW</b>	3000K	/11	/25	/45	LED 1W 350mA	150lm
<b>/XW</b>	2700K	/11	/25	/45	LED 1W 350mA	143lm



**6733.33/** 0,06 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	LED 1W 350mA	158lm
<b>/WW</b>	3000K	/11	/25	/45	LED 1W 350mA	150lm
<b>/XW</b>	2700K	/11	/25	/45	LED 1W 350mA	143lm



## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
<b>6732</b>	1-6	1-10
<b>6731</b>	1-6	1-10

### IP67 DRIVER



Cod.	0031/IP 350mA
<b>6732</b>	1-12
<b>6733</b>	1-12

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>6732</b>	5-14	4-14	1-21
<b>6733</b>	5-14	4-14	1-21

Only Serial connection

# ZEPPELIN ADJUSTABLE



**6411.33/** 0,22 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	221lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	210lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	199lm



ETL version available upon request

## ACCESSORIES

**Kit 0230**  
Draining junction + IP Connector

**Box 0232**  
Wall Plastic box

**Spring 0238**  
Spring for plasterboard

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6411</b>	1-6	1-10	1-6

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6411</b>	1-12	1-7

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6411</b>	2-11	1-21	1-21


Only serial connection



INDOOR

# CRUISE

Design U.T. EgoLucce





## CRUISE




Direct light recessed spotlight with matt white (RAL 9010) painted aluminium body.

*Spot encastré à lumière directe avec corps en aluminium peint en blanc mat (RAL 9010).*

*Direkt strahlender Einbaustrahler mit mattweiß (RAL 9010) lackiertem Aluminiumgehäuse.*




# CRUISE

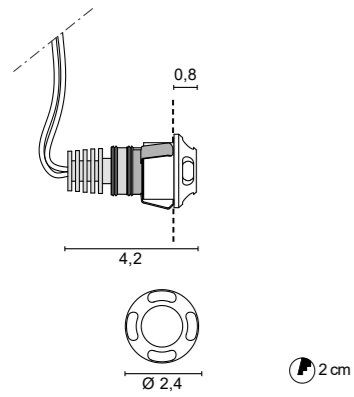


**6382** 0,02 Kg

**.01** White

<b>/B</b>	LED BLU	1W 350mA	
<b>/W</b>	4000K	LED 1W 350mA	158lm
<b>/WW</b>	3000K	LED 1W 350mA	150lm
<b>/XW</b>	2700K	LED 1W 350mA	143lm



ETL version available upon request



**.01/B**



**.01/W**



**.01/WW**

## ACCESSORIES

Kit  
**0212**

Kit box + plaster



Box  
**0215**

Plastic box



## FINISHES CODES



**.01** White



## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350m
<b>6382</b>	1-6	1-10

### DIMMABLE DRIVERS WIRELESS CASAMBI

0145/CASA
<b>6382</b> 1-21

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM - DALI
<b>6382</b> 1-12	1-12	1-21	1-21


Only serial connection



OUTDOOR

# SPOOK

Design U.T. EgoLuce





## SPOOK



LED linear trampleable IP67 in coextruded transparent and opal methacrylate.

Modular anodized aluminium blind boxes (reinforced anodizing for outdoor).

To be installed into floor or wall and possibility to compose endless light lines.

*LED linéaire piétinable IP67 en méthacrylate coextrudé transparent et opale. Boîtes aveugles modulables en aluminium anodisé (anodisation renforcée pour l'extérieur).*

*À installer au sol ou au mur et possibilité de composer des lignes lumineuses infinies.*


*Begehbarer LED Einbaulinie IP67, Struktur aus transparentem und opalisiertem fließgepresstem Methakrylat.*

*Modularen Einbaugehäuse aus Aluminium (verstärktem Eloxierung für Außenbereich) für wand-oder Boden-*

*einsetzung. Montage als endlose Linearsystem möglich.*



# SPOOK

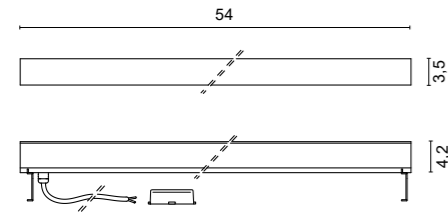


**6417** 0,80 Kg

**.01** White

**/W** 4000K LED 24V 4,5W 540lm  
**/WW** 3000K LED 24V 4,5W 510lm



ETL version available upon request

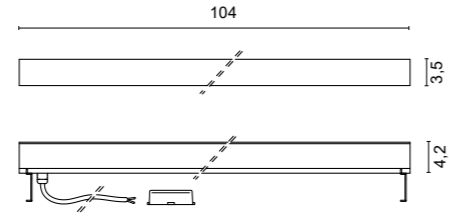


**6418** 1,60 Kg

**.01** White

**/W** 4000K LED 24V 8,9W 1080lm  
**/WW** 3000K LED 24V 8,9W 1020lm



ETL version available upon request

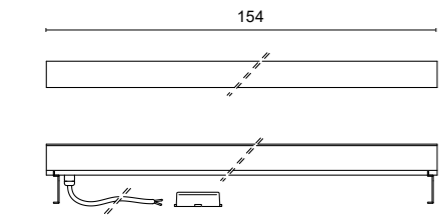

**6419** 2,30 Kg

**.01** White

**/W** 4000K LED 24V 13,4W 1620lm  
**/WW** 3000K LED 24V 13,4W 1530lm



ETL version available upon request

## FINISHES CODES



**.01** White



## CUSTOM SIZE

Table of available lengths Measures are referred to complete fixtures including closing heads

cm	watt	3000K	lm	4000K	lm
14	1W	A6417.01/14/WW	102	A6417.01/14/W	108
24	1,9W	A6417.01/24/WW	204	A6417.01/24/W	216
34	2,9W	A6417.01/34/WW	306	A6417.01/34/W	324
44	3,8W	A6417.01/44/WW	408	A6417.01/44/W	432
54	4,8W	6417.01/WW	510	6417.01/W	540
64	5,8W	A6417.01/64/WW	612	A6417.01/64/W	648
74	6,7W	A6417.01/74/WW	714	A6417.01/74/W	756
84	7,7W	A6417.01/84/WW	816	A6417.01/84/W	864
94	8,6W	A6417.01/94/WW	918	A6417.01/94/W	972
104	9,6W	6418.01/WW	1020	6418.01/W	1080
114	10,6W	A6417.01/114/WW	1122	A6417.01/114/W	1188
124	11,5W	A6417.01/124/WW	1224	A6417.01/124/W	1296
134	12,5W	A6417.01/134/WW	1326	A6417.01/134/W	1404
144	13,4W	A6417.01/144/WW	1428	A6417.01/144/W	1512
154	14,4W	6419.01/WW	1530	6419.01/W	1620

## DRIVERS

### ON/OFF

Cod.	0155	0156	0157	0160	0161/100	0162
	24V-13W	24V-25W	24V-75W	24V-60W	24V-100W	24V-150W

### DIMMABLE

Cod.	0110/DIM	0717/DIM60	0717/DIM60/V	0717/DIM100
	12/24V	24V-60W PUSH - DALI	24V-60W 1...10V	24V-100W 1...10V - PUSH - DALI

### IP67 DRIVER

Cod.	0033/IP	0034/IP	0036/IP
	24V 14,4W	24V 70W	24V 160W


### LED EMERGENCY UNIT

**0115/EM** INVERTER + BATTERY + LED INDICATOR

Only Parallel Connection



## CONFIGURATION EXAMPLE

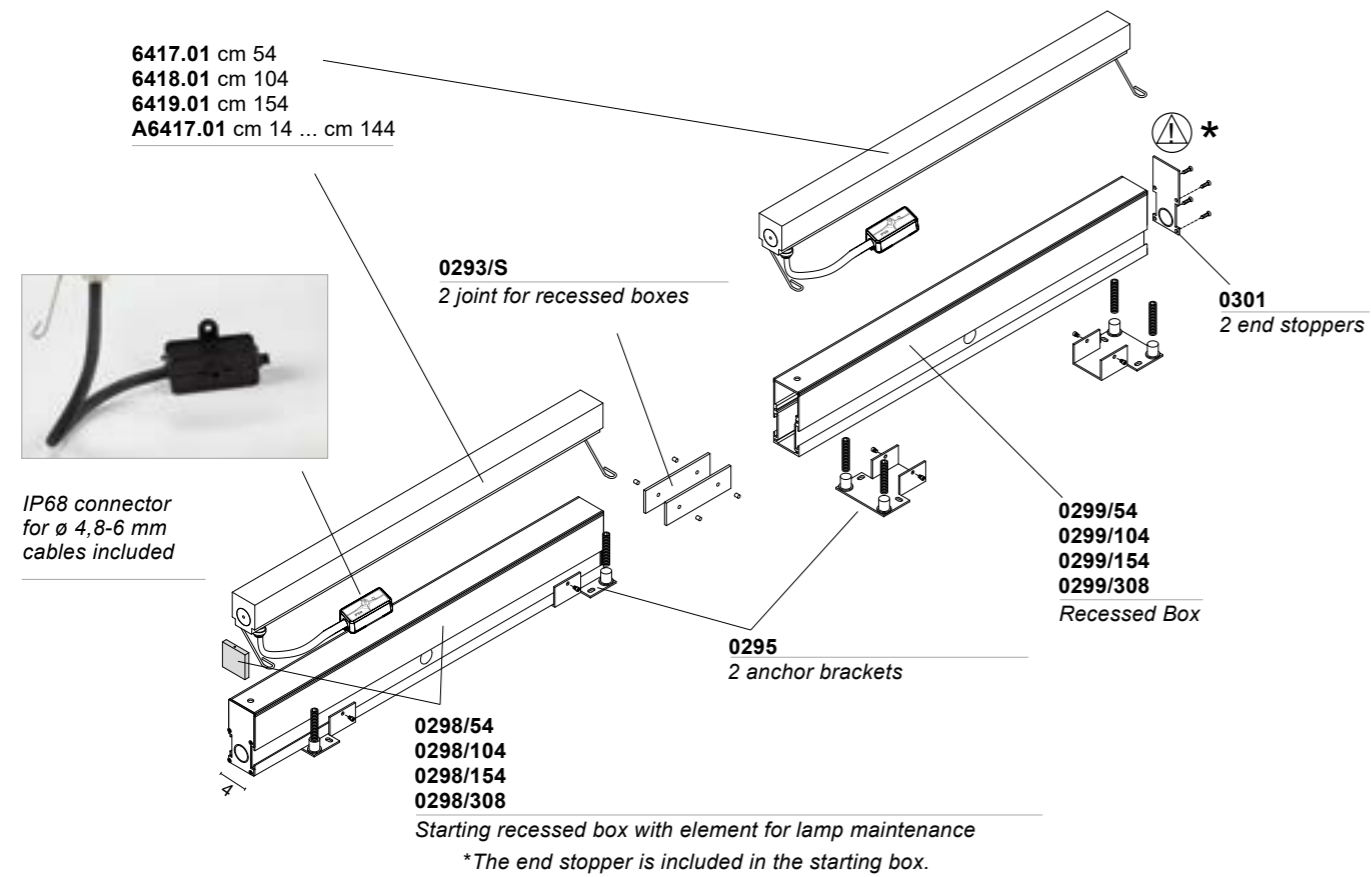

## ACCESSORIES



Element  
**0298**

Starting recessed box with caps and element for lamp maintenance.

<b>/54</b>	55,1 X 4 X 9 cm	0,9 kg
<b>/104</b>	105,1 X 4 X 9 cm	1,7 kg
<b>/154</b>	155,1 X 4 X 9 cm	2,6 kg
<b>/308</b>	309,1 X 4 X 9 cm	5,7 kg



Element  
**0299**

Recessed box  
The end stoppers are included in the starting box

<b>/54</b>	55,1 X 4 X 9 cm	0,8 kg
<b>/104</b>	105,1 X 4 X 9 cm	1,6 kg
<b>/154</b>	155,1 X 4 X 9 cm	2,5 kg
<b>/308</b>	309,1 X 4 X 9 cm	5,6 kg



Element  
**0295**

2 anchor brackets for recessed box



Element  
**0293/S**


2 joints for recessed box



Element  
**0301**

2 end stoppers for recessed box



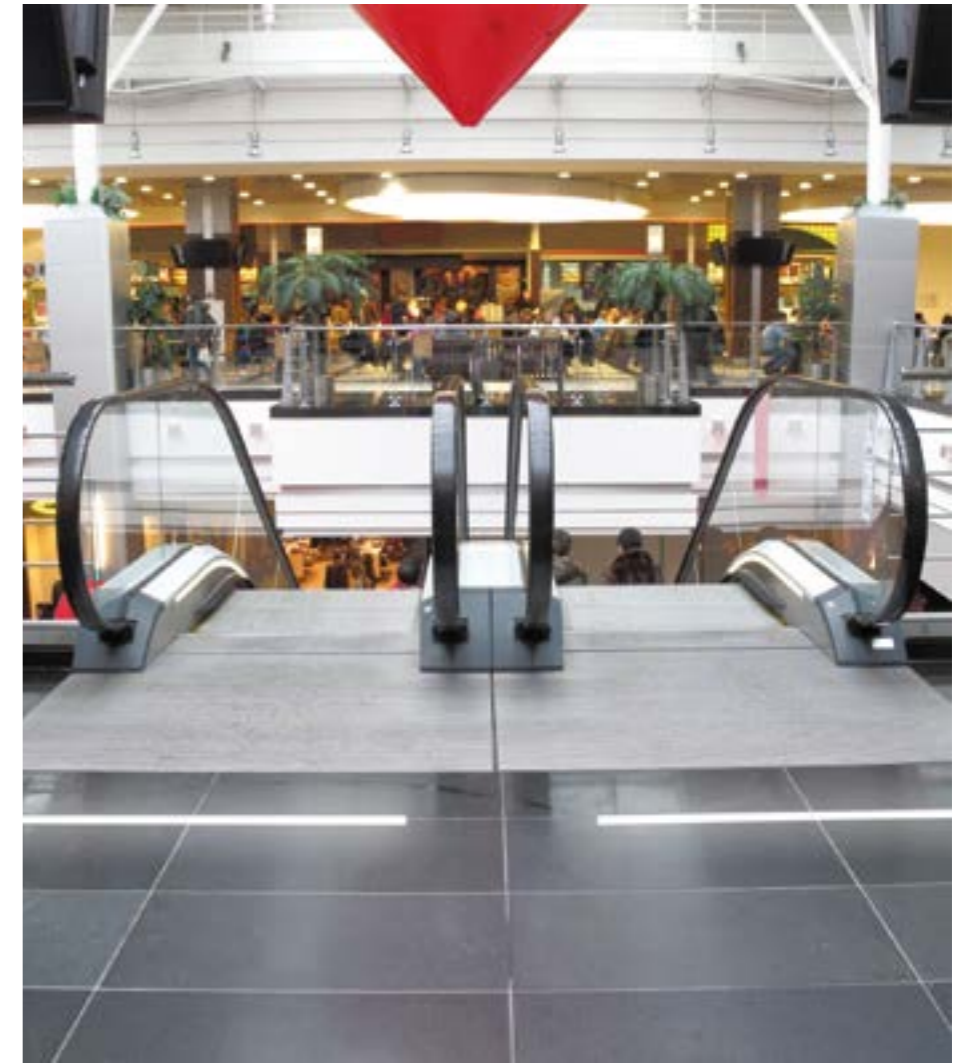





**OUTDOOR**

# CERCHIO

Design U.T. EgoLuce







## CERCHIO




IP67 walk-over recessed direct/diffused spotlight with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable

*Spot encastré à éclairage direct/diffusé IP67 avec bride en acier inoxydable AISI 316L, dissipateur thermique en aluminium et câble en néoprène de 30 cm.*

*Begehbarer Direkt-/Diffusor-Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel*



# CERCHIO

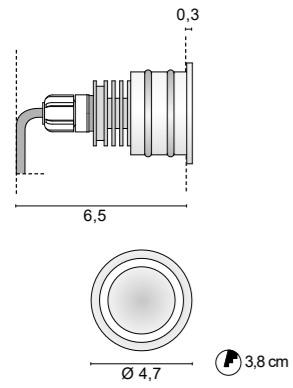

**6389** 0,20 Kg

<b>.33</b>	Stainless Steel AISI 316L	
<b>/B</b>	LED BLU max 1W 350mA	
<b>/W</b>	4000K max 1,5W 500mA	221lm
<b>/WW</b>	3000K max 1,5W 500mA	210lm
<b>/XW</b>	2700K max 1,5W 500mA	199lm



**.33/B**



**.33/W**



**.33/WW**



**.33/XW**

## FINISHES CODES



**.01** White



## ACCESSORIES

Kit  
**0250**

Kit draining junction  
+ IP connector



Box  
**0217**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA
<b>6389</b>	1-6	1-10	1-6

### DIMMABLE


0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6389</b> 1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0033/IP 350mA	0143/IP 500mA
<b>6389</b>	1-10	1-7

# CERCHIO RGB

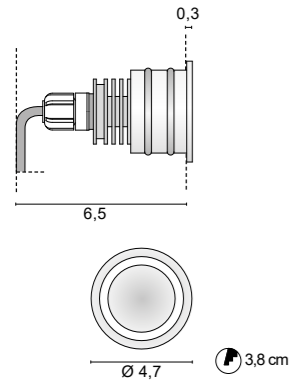

**6390** 0,30 Kg

**.33** Stainless Steel AISI 316L

3 x 250mA



## FINISHES CODES



**.01** White



## ACCESSORIES

Kit  
**0251**

Draining junction



Box  
**0217**

Plastic box



## DRIVERS

### DRIVER RGB

**0164** 120W      **0167** 22W

IN 230V - OUT 3 X 24V

### DRIVER RGB CASAMBI

**0164/CASA** 120W

IN 230V - OUT 3 X 24V

### SENSOR & CABLE RGB

**0163** IR Sensor

**0165** IR Remote controller

**0166** Sync Cable

### CONVERTER RGB

**0168** IN 24V - OUT 3 X 250mA 1-5 Cerchio RGB

OUTDOOR  
**STEP**

Design U.T. EgoLuce





## STEP




Outdoor recessed spotlight (IP 55) with asymmetrical light in anodised or white painted aluminium with reinforced outdoor finish and neoprene cable.

*Spot encastré d'extérieur (IP 55) à lumière asymétrique en aluminium anodisé ou peint en blanc avec finition renforcée pour l'extérieur et câble en néoprène. .*

*Einbaustrahler für den Außenbereich (IP 55) mit asymmetrischem Licht aus eloxiertem oder weiß lackiertem Aluminium mit verstärkter Außenlackierung und Neoprenkabel.*



## STEP MINI

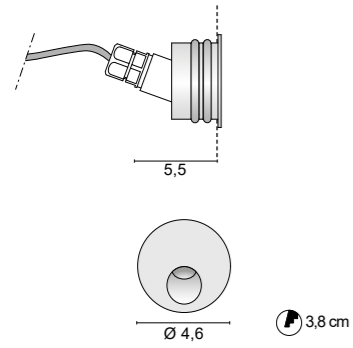

**6738** 0,08 Kg

**.01** White   
**.45** Anodized Aluminium


**/W** 4000K 1W 350mA 158lm  
**/WW** 3000K 1W 350mA 150lm  
**/XW** 2700K 1W 350mA 143lm

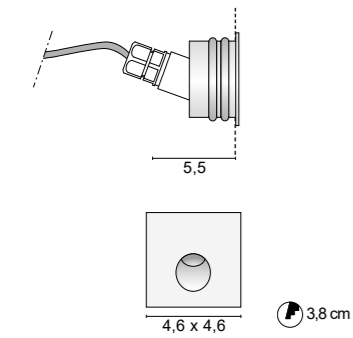

**6739** 0,08 Kg

**.01** White   
**.45** Anodized Aluminium

**/W** 4000K 1W 350mA 158lm  
**/WW** 3000K 1W 350mA 150lm  
**/XW** 2700K 1W 350mA 143lm



## FINISHES CODES



**.01** White **.45** Anodized Aluminium



## ACCESSORIES

Kit  
**0214**

Box + Plaster



Box  
**0217**

Plastic box



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA
<b>6738</b>	1-6	1-10
<b>6739</b>	1-6	1-10

### IP67 DRIVER

Cod.	0031/IP 350mA
<b>6738</b>	1-12
<b>6739</b>	1-12

### DIMMABLE

	0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>6738</b>	1-12	1-12	1-21	1-21
<b>6739</b>	1-12	1-12	1-21	1-21

Only serial connection

OUTDOOR

# KROSS

Design U.T. EgoLucce





## KROSS





IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Projecteur orientable IP67 à lumière radiale avec bride en acier inoxydable AISI 316L, dissipateur thermique en aluminium et câble en néoprène de 30 cm.*

*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*




# KROSS




**6361** 0,10 Kg

**.33** Stainless Steel AISI 316L


<b>/B</b>	LED BLU	1W 350mA	
<b>/W</b>	4000K	max 1,5W 500mA	221lm
<b>/WW</b>	3000K	max 1,5W 500mA	210lm
<b>/XW</b>	2700K	max 1,5W 500mA	199lm




ETL version available upon request



**.33/W**



**.33/WW**



**.33/B**

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0220**

Kit draining junction  
+ IP connector



Box  
**0216**

Plastic box



Spring for  
plasterboard included



3,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6361</b>	1-6	1-10	1-6

### DIMMABLE


0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6361</b> 1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6361</b>	1-12	1-7

# KROSS MINI

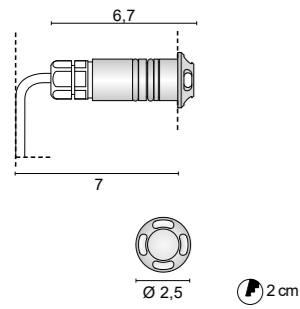

**6735** 0,07 Kg

**.33** Stainless Steel AISI 316L

**/W** 4000K 1W 350mA 158lm

**/WW** 3000K 1W 350mA 150lm

**/XW** 2700K 1W 350mA 143lm



## ACCESSORIES

Box

**0215**

Plastic box



Spring for  
plasterboard included




2,2 cm

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

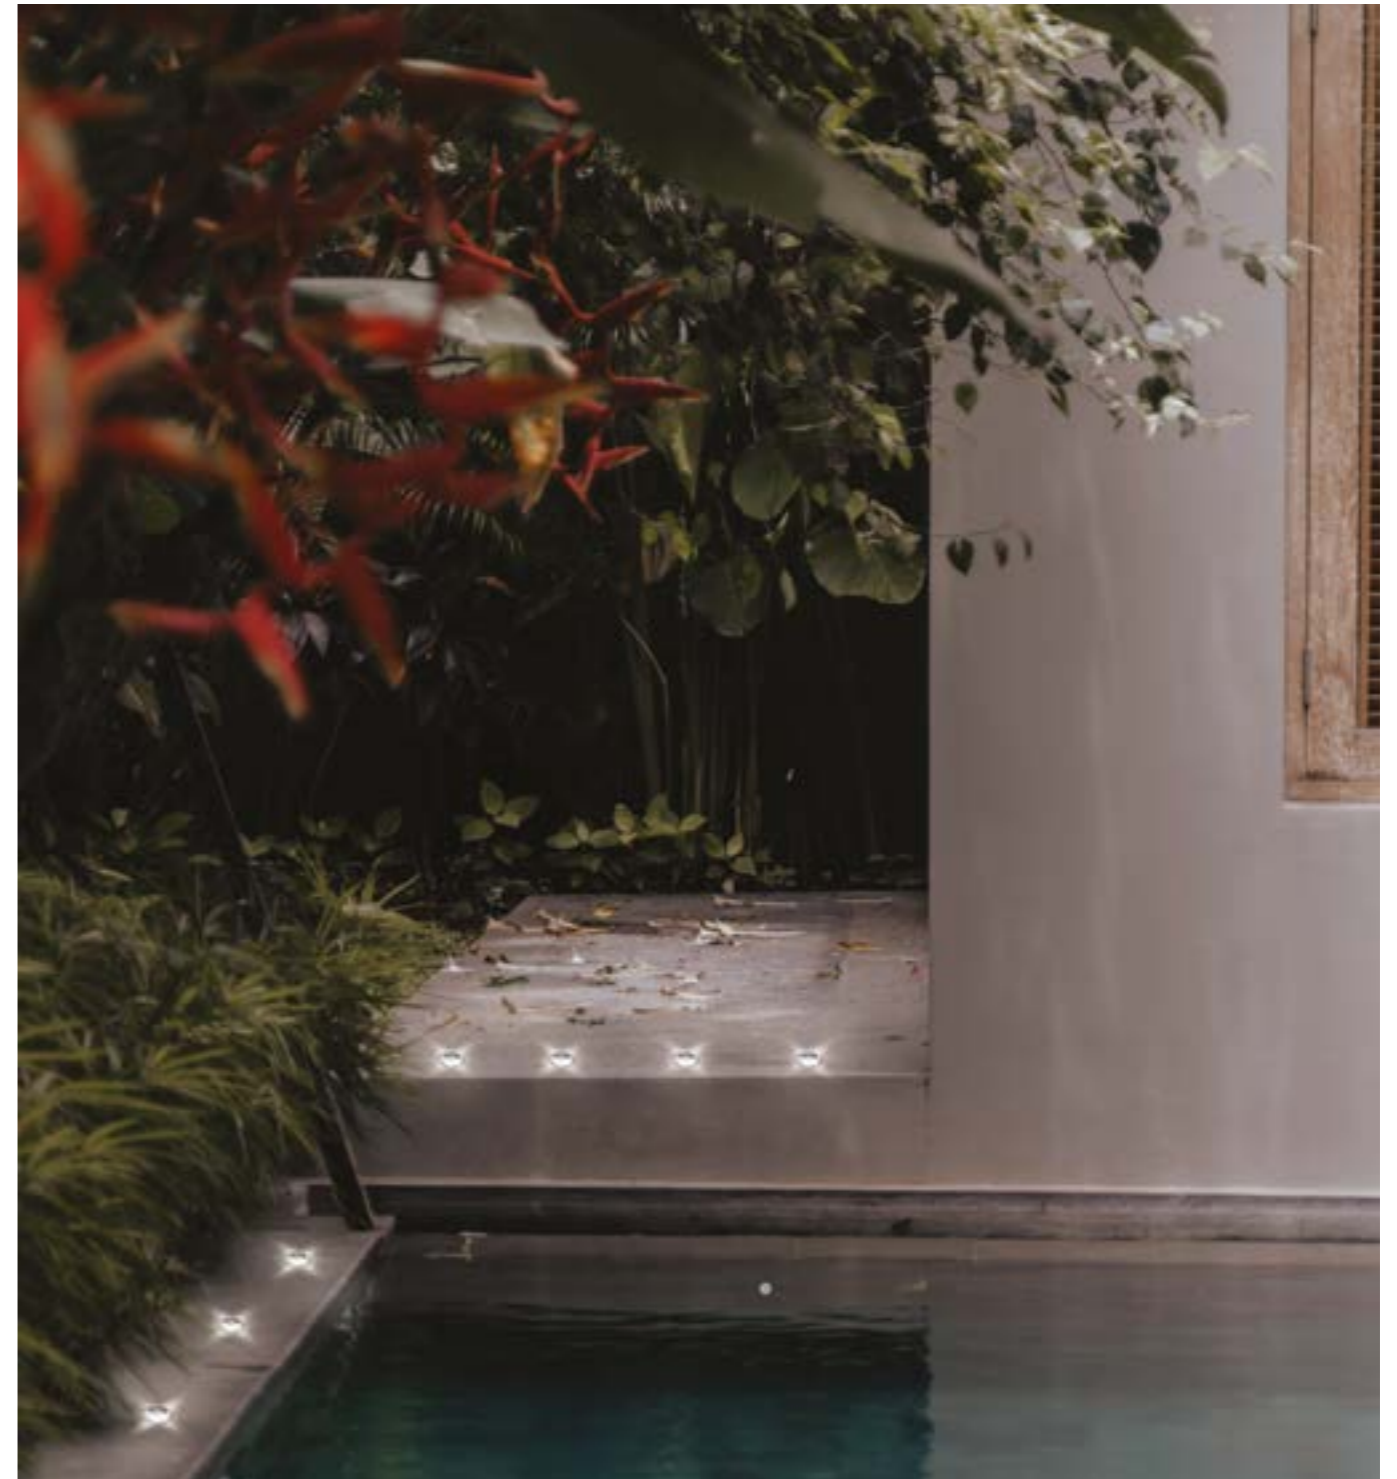

## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350mA

<b>6735</b>	1-6	1-10
-------------	-----	------

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI

<b>6735</b>	1-12	1-12	1-21	1-21
-------------	------	------	------	------

Only serial connection

### IP67 DRIVER

Cod.	0031/IP
	350mA

<b>6735</b>	1-12
-------------	------



**OUTDOOR**

# VISTA

Design U.T. EgoIuce





## VISTA





IP67 walkable downlight with radial light with AISI 316L stainless steel flange, aluminium heat sink and 30 cm neoprene cable.

*Projecteur orientable IP67 à lumière radiale avec bride en acier inoxydable AISI 316L, dissipateur thermique en aluminium et câble en néoprène de 30 cm.*


*Begehbares IP67-Downlight mit Radiallicht mit Flansch aus Edelstahl AISI 316L, Aluminiumkühlkörper und 30 cm Neoprenkabel.*

# VISTA



**6362** 0,10 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	max 1,5W 500mA	221lm
<b>/WW</b>	3000K	max 1,5W 500mA	210lm
<b>/XW</b>	2700K	max 1,5W 500mA	199lm



ETL version available upon request



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

## ACCESSORIES

Kit  
**0220**

Kit draining junction  
+ IP connector



Box  
**0216**

Plastic box



Spring for  
plasterboard included



3,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6362</b>	1-6	1-10	1-6

### DIMMABLE


0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6362</b> 1-11	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6362</b>	1-12	1-7


# VISTA MINI



**6374** 0,07 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	1W 350mA	158lm
<b>/WW</b>	3000K	1W 350mA	150lm
<b>/XW</b>	2700K	1W 350mA	143lm



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L

## ACCESSORIES

Box  
**0215**

Plastic box



Spring for  
plasterboard included



Ø 2,2 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128
	350mA	350mA
<b>6374</b>	1-6	1-10

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6374</b>	1-12	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP
	350mA
<b>6374</b>	1-12



OUTDOOR

# DRIVE

Design U.T. Egoluce





## DRIVE




IP67 driveway recessed diffused spotlight with AISI 316L stainless steel flange, screen-printed opal glass diffuser, aluminium heat sink, frosted glass screen and neoprene cable.

*Projecteur encastré diffus IP67 avec bride en acier inoxydable AISI 316L, diffuseur en verre opale sérigraphié, dissipateur thermique en aluminium, écran en verre dépoli et câble en néoprène.*

*Diffuser Einbaustrahler IP67 mit Flansch aus Edelstahl AISI 316L, Diffusor aus Opalglas mit Siebdruck, Kühlkörper aus Aluminium, Mattglasscheibe und Neoprenkabel*




## DRIVE

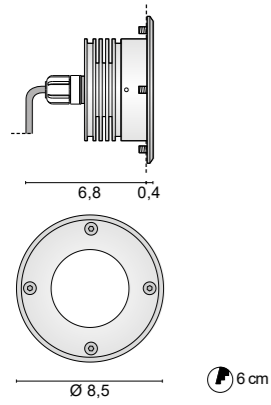

**6729** 0,40 Kg

**.33** Stainless Steel AISI 316L

<b>/W</b>	4000K	LED 4W 24V	658lm
<b>/WW</b>	3000K	LED 4W 24V	608lm
<b>/XW</b>	2700K	LED 4W 24V	562lm



Driveover recessed spot 2000Kg

## ACCESSORIES

Kit  
**0229**

Kit draining junction  
+ IP connector



## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## DRIVERS

### ON/OFF

Cod.	0155	0156
	24V - 13W	24V - 25W
<b>6729</b>	1-2	1-4

### DIMMABLE

0717/DIM60/V	0717/DIM60
PUSH - 1...10V	DALI - PUSH
<b>6729</b> 1-10	1-10

Only Parallel connection

### IP67 DRIVER

Cod.	0033/IP	0037/IP
	24V 14,4W	24V 60W
<b>6729</b>	1-2	1-10



OUTDOOR

# TRIS

Design U.T. EgoIuce





## TRIS




IP67 walk-over recessed outdoor spotlight with AISI 316L stainless steel flange and aluminium heat sink, fitted with clear protective glass and 30 cm neoprene cable.

*Spot encastré d'extérieur IP67 avec bride en acier inoxydable AISI 316L et dissipateur thermique en aluminium, équipé d'une vitre de protection transparente et d'un câble en néoprène de 30 cm.*

*Begehbarer IP67-Einbaustrahler für den Außenbereich mit Flansch aus Edelstahl AISI 316L und Kühlkörper aus Aluminium, ausgestattet mit klarem Schutzglas und 30 cm Neoprenkabel.*

# TRIS

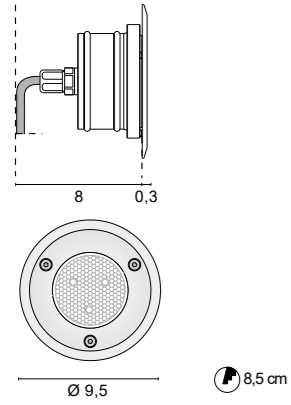

**6371** 0,40 Kg

<b>.33</b>	Stainless Steel AISI 316L		
<b>/W</b>	4000K	max 3x1,5W 500mA	663lm
<b>/WW</b>	3000K	max 3x1,5W 500mA	630lm
<b>/XW</b>	2700K	max 3x1,5W 500mA	597lm



ETL version available upon request

## FINISHES CODES



**.33** Stainless Steel  
AISI 316L



## ACCESSORIES

Kit  
**0231**  
Kit draining junction  
+ IP connector



Box  
**0235**  
Wall plastic box



Connector  
**0243**  
IP connector



Kit  
**0233**  
Spring for plaster-  
board



8,5 cm

## DRIVERS

### ON/OFF

Cod.	0125	0128	0127
	350mA	350mA	500mA
<b>6371</b>	1-2	1-3	1-2

### DIMMABLE

0141/DIM	0141/DALI	0145	0145/DALI
PUSH - 1...10V	DIM DALI	DIM	DIM DALI
<b>6371</b>	1-3	1-7	1-7

Only serial connection

### IP67 DRIVER

Cod.	0031/IP	0143/IP
	350mA	500mA
<b>6371</b>	1-3	1-2

**OUTDOOR**  
**SOFT**

Design U.T. Ego luce





## SOFT




IP67 walk-over downlight with AISI 316L stainless steel round flange, aluminium heat sink, frosted safety glass and 30 cm neoprene cable.

*Projecteur bas IP67 avec bride ronde en acier inoxydable AISI 316L, dissipateur thermique en aluminium, verre de sécurité dépoli et câble en néoprène de 30 cm.*

*Begehbares Downlight IP67 mit rundem Flansch aus Edelstahl AISI 316L, Kühlkörper aus Aluminium, mattiertem Sicherheitsglas und 30 cm Neoprenkabel.*

# SOFT

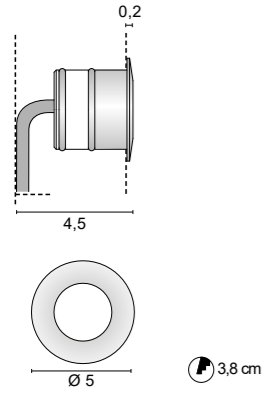

**6388** 0,11 Kg

**.33** Stainless Steel AISI 316L

**/W** 4000K LED 1,5W 12V  
**/WW** 3000K LED 1,5W 12V



## ACCESSORIES

Kit  
**0250**

Kit draining junction  
 + IP connector



Box  
**0217**

Plastic box



## FINISHES CODES



**.33** Stainless Steel  
 AISI 316L



## DRIVERS

### ON/OFF

Cod.	0158
	12V - 25W
<b>6388</b>	1-15

### DIMMABLE

0129	0129/DALI
Multi power dimmable driver	Multi power DALI dimmable driver
<b>6388</b> 1-6	1-6

Only Parallel connection


### IP67 DRIVER

Cod.	0036/IP
	12V 14,4W
<b>6388</b>	1-8



**OUTDOOR**  
**VISION**


Design U.T. Egoluce







## VISION



Series of adjustable outdoor projectors in anodized aluminium (reinforced anodizing for outdoor) with bracket in stainless steel AISI 316L. Supplied with neoprene cable.

To be installed on tile, pavements, walls, ceiling or temporary positioning on soft ground.

*Série de projecteurs d'extérieur orientables en aluminium anodisé (anodisation renforcée pour l'extérieur) avec support en acier inoxydable AISI 316L. Fourni avec un câble en néoprène.*




*A installer sur dalle, trottoir, mur, plafond ou positionnement temporaire sur sol meuble.*

*Serie von verstellbaren Außenprojektoren aus eloxiertem Aluminium (verstärkte Eloxierung für den Außenbereich) mit Halterung aus rostfreiem Stahl AISI 316L. Geliefert mit Neoprenkabel.*

*Zur Installation auf Fliesen, Gehwegen, Wänden, Decken oder zur vorübergehenden Aufstellung auf weichem Untergrund.*



# VISION 1



**4529**

0,20 Kg

<b>.34</b>	Painted Corten finishing	■
<b>.39</b>	Painted Anthracite finishing	■
<b>.45</b>	Anodized Aluminium	■

<b>/W</b>	4000K	/11	/25	/45	max LED 1,5W 500mA	180lm
<b>/WW</b>	3000K	/11	/25	/45	max LED 1,5W 500mA	162lm
<b>/XW</b>	2700K	/11	/25	/45	max LED 1,5W 500mA	153lm



## ACCESSORIES

Kit  
**0247**

Stake



Connector  
**0243**

Connector



## FINISHES CODES



**.39** Painted Corten

**.39** Painted Anthracite

**.45** Anodized Aluminium



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA
<b>4529</b>	1-6	1-10	1-6

### DIMMABLE



0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>4529</b>	1-11	1-21	1-21

Only serial connection

### IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
<b>4529</b>	1-12	1-7

# VISION 2

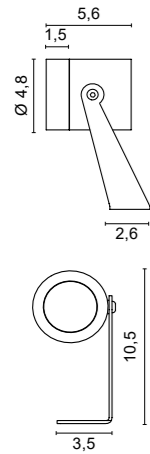

**4530**

0,35 Kg

<b>.34</b>	Painted Corten finishing	<span style="color: brown;">■</span>
<b>.39</b>	Painted Anthracite finishing	<span style="color: black;">■</span>
<b>.45</b>	Anodized Aluminium	<span style="color: grey;">■</span>

<b>/W</b>	4000K	/18	/40	/60	max LED 1,5W 350mA	1060lm
<b>/WW</b>	3000K	/18	/40	/60	max LED 1,5W 350mA	1030lm
<b>/XW</b>	2700K	/18	/40	/60	max LED 1,5W 350mA	969lm



## ACCESSORIES

Kit  
**0248**

Stake




Connector  
**0243**

Connector



## FINISHES CODES

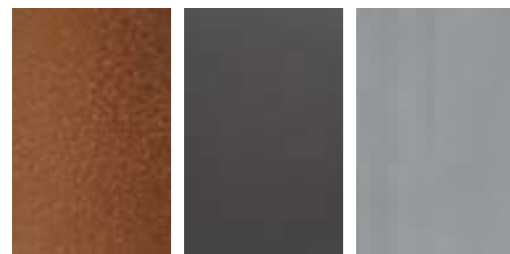

**.39** Painted  
Corten

**.39** Painted  
Anthracite

**.45** Anodized  
Aluminium



## DRIVERS

### ON/OFF

Cod.	0125 350mA	0128 350mA	0127 500mA	0147/COB 500mA
<b>4530</b>	1-2	1-3	1-2	1-2

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI
<b>4530</b>	1-3	1-7	1-7

Only serial connection



### IP67 DRIVER

Cod.	0031/IP 350mA	0143/IP 500mA
<b>4530</b>	1-3	1-2

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
<b>4530</b>	No

# VISION 3

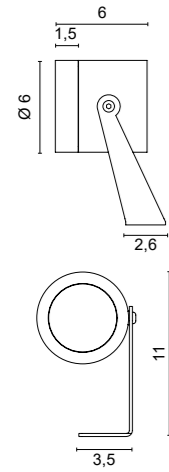

**4531** 0,50 Kg

<b>.34</b>	Painted Corten finishing	■
<b>.39</b>	Painted Anthracite finishing	■
<b>.45</b>	Anodized Aluminium	■

<b>/W</b>	4000K	/15	/28	/60	LED 8,7W 500mA	1466lm
<b>/WW</b>	3000K	/15	/28	/60	LED 1,5W 500mA	1424lm
<b>/XW</b>	2700K	/15	/28	/60	LED 1,5W 500mA	1340lm

## ACCESSORIES

Kit  
**0248**

Stake




Connector  
**0243**

Connector



## FINISHES CODES

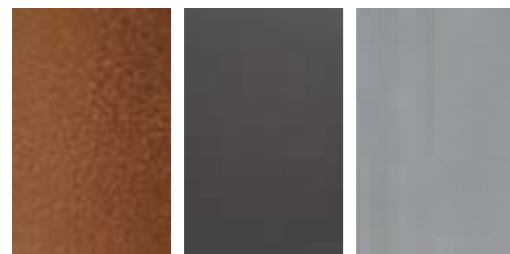

**.39** Painted Corten    **.39** Painted Anthracite    **.45** Anodized Aluminium



## DRIVERS

### ON/OFF

Cod.	0147/COB 500mA
<b>4531</b>	1-2

### DIMMABLE

0141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI
<b>4531</b> 1-2	1-2	1-3	1-3

Only serial connection

### IP67 DRIVER

Cod.	0143/IP 500mA
<b>4531</b>	1

### LED EMERGENCY UNIT

0115/EM INVERTER + BATTERY + LED INDICATOR	
<b>4531</b>	1



**INDOOR / OUTDOOR**

# **LARA**

Design Serge Cornelissen





## LARA



IP65 rechargeable and dimmable table lamp with metal frame, PVC diffuser and USB-C cable for charging included.

The battery life is 8 hours at 100% brightness and continuous dimming and the recharge time is 7 hours.

*Lampe de table IP65 rechargeable et dimmable avec cadre en métal, diffuseur en PVC et câble USB-C pour la recharge inclus.*


*L'autonomie de la batterie est de 8 heures à 100 % de luminosité et à gradation continue et le temps de recharge est de 7 heures.*

*Wiederaufladbare und dimmbare IP65-Tischleuchte mit Metallrahmen, PVC-Diffusor und USBC- Kabel zum Aufladen im Lieferumfang enthalten.*

*Die Akkulaufzeit beträgt 8 Stunden bei 100 % Helligkeit und stufenlosem Dimmen, die Aufladezeit 7 Stunden.*




# LARA

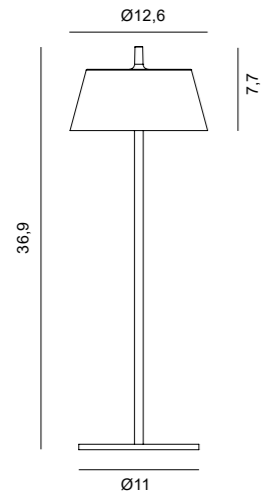

**2550** 0,65Kg

- .02** Black
- .06** Green
- .34** Rust Brown
- .39** Anthracite

<b>/WW</b>	3000K	LED 2,2W	117lm
<b>/XW</b>	2700K	LED 2,2W	117lm

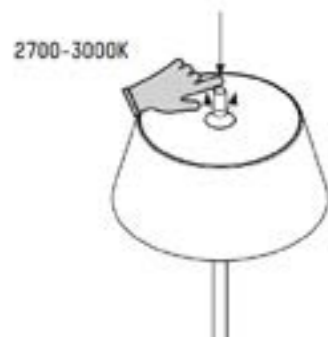


## FINISHES CODES



**.02** Black    **.06** Green    **.34** Rust Brown    **.39** Anthracite



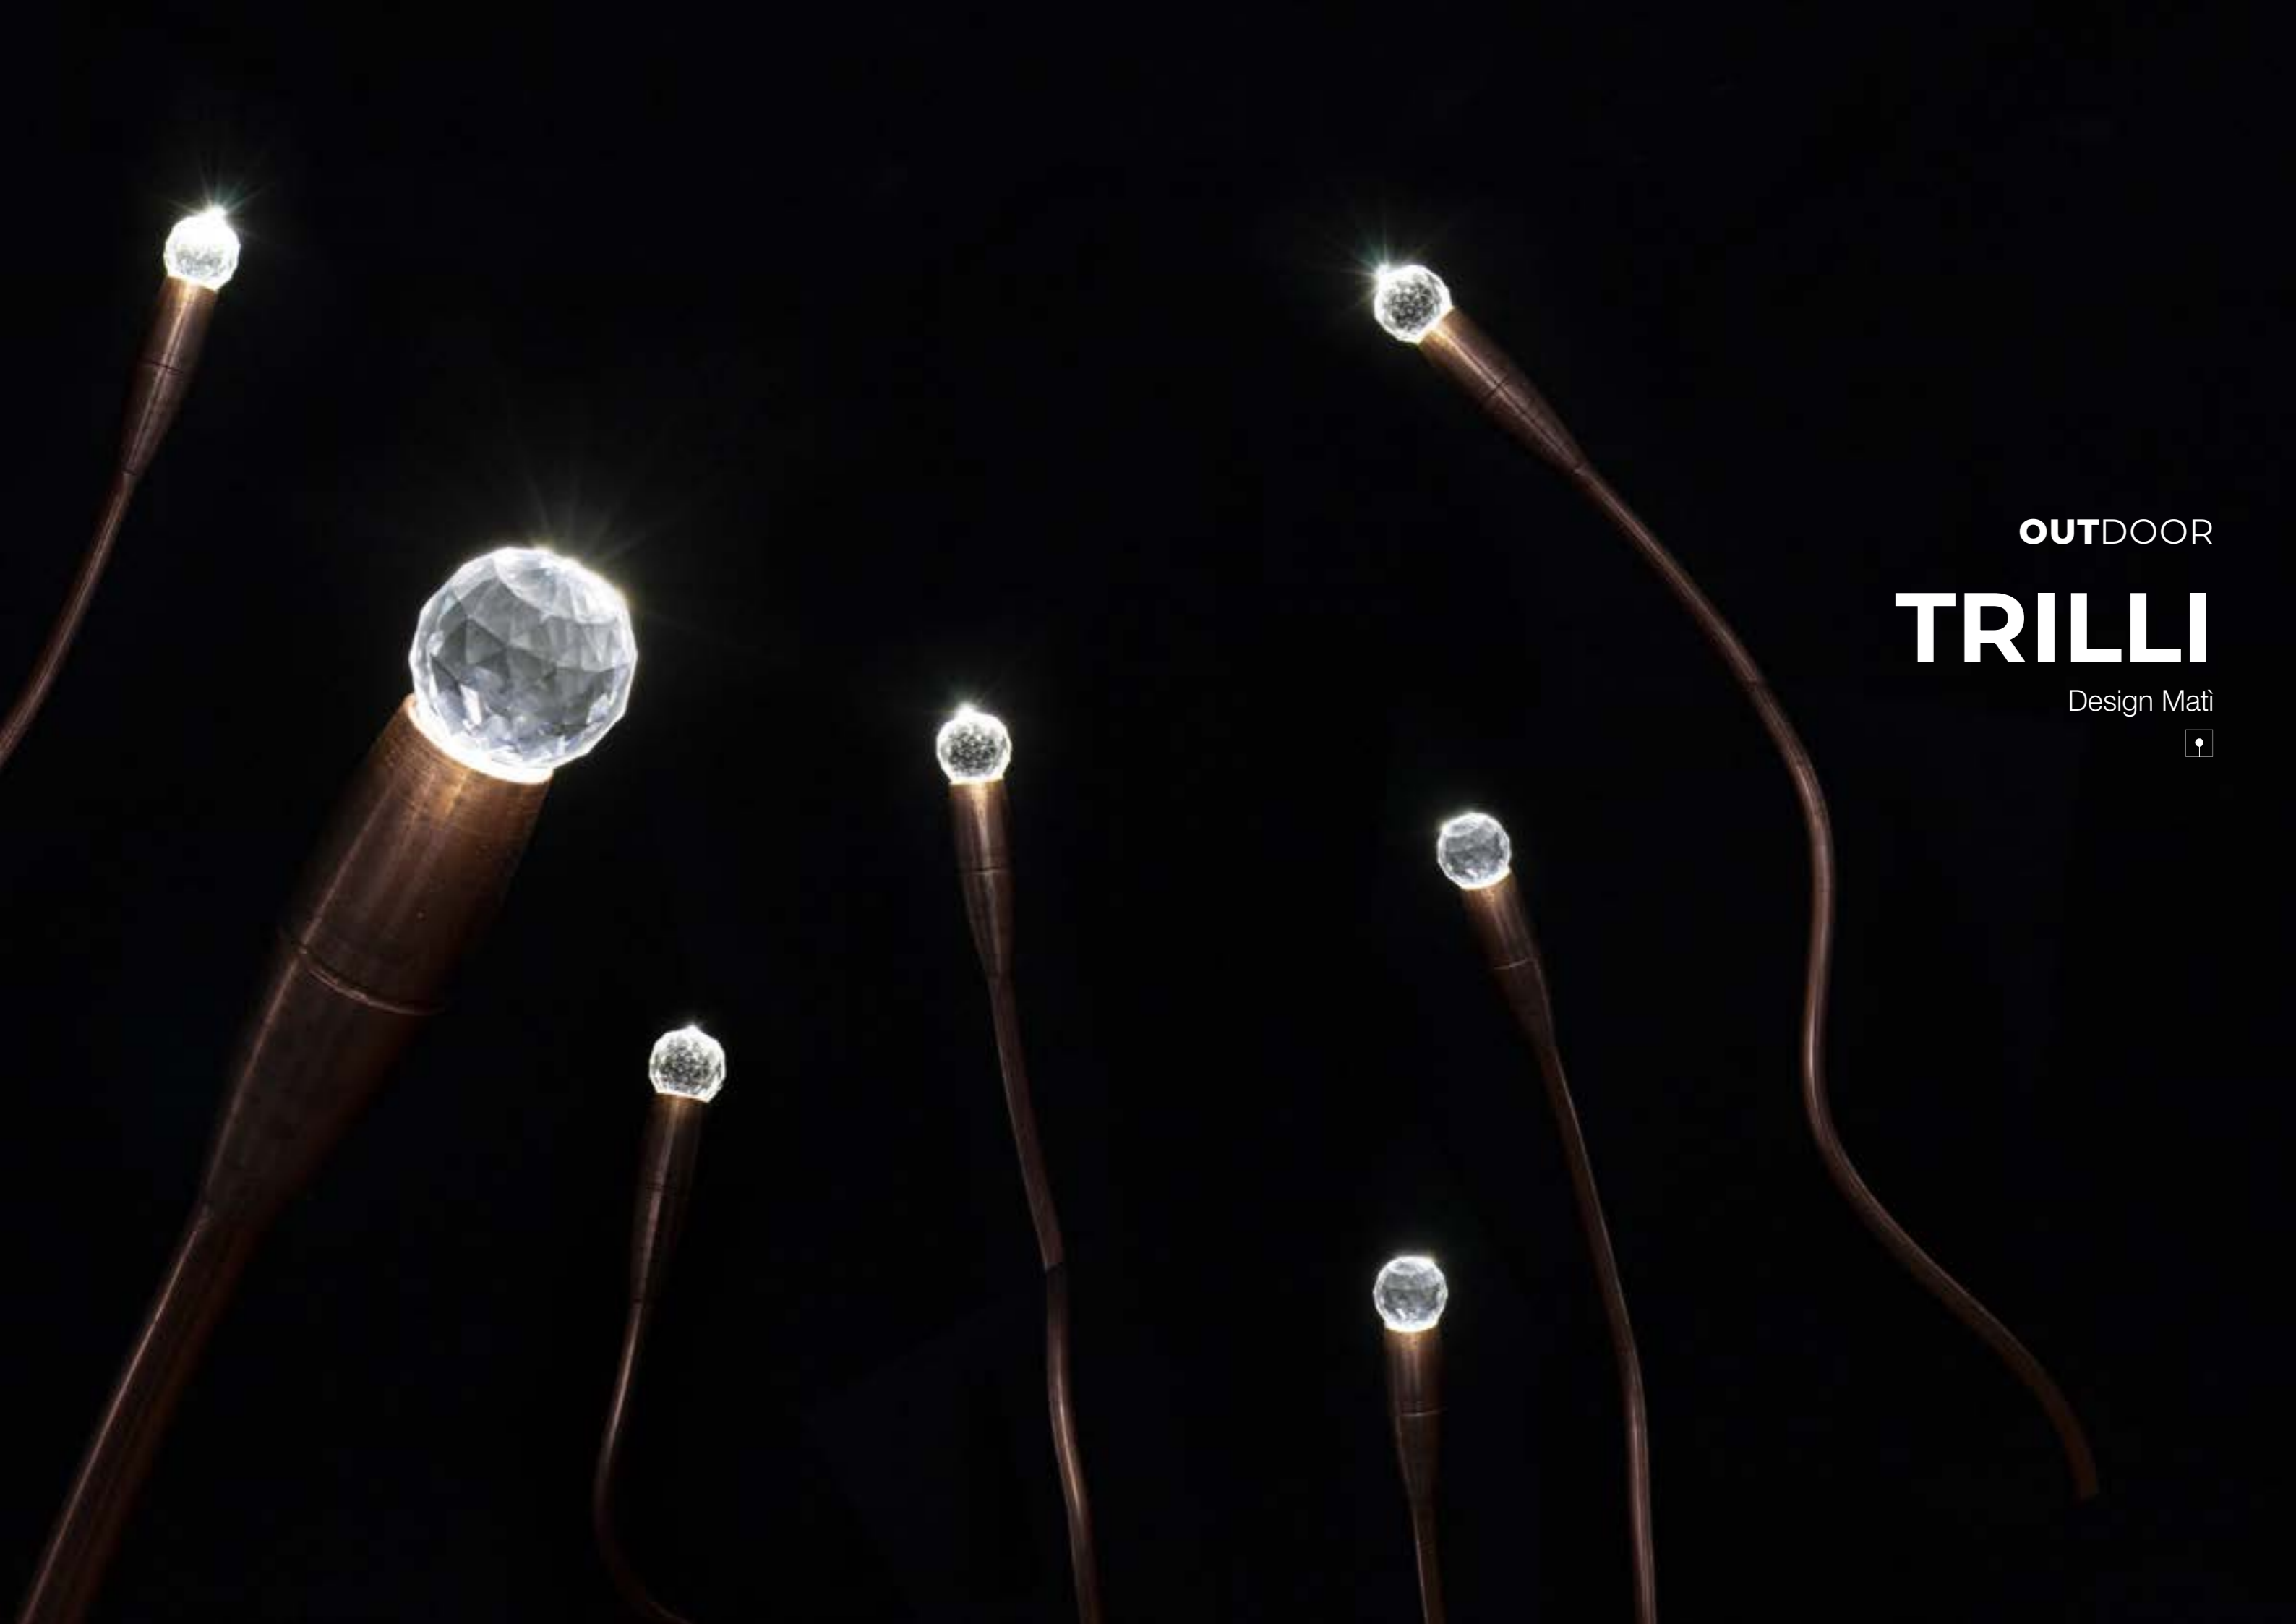

OUTDOOR

# TRILLI

Design Mati







## TRILLI



IP67 floor lamp providing diffused light with natural copper stem and crystal diffuser. It can be installed with a single or multiple lamp base or with a spike.



Accessories, and the driver to be remotely positioned, are to be ordered separately.

*Lampadaire IP67 à lumière diffuse avec tige en cuivre naturel et diffuseur en cristal. Il peut être installé avec un culot à une ou plusieurs lampes ou avec une pointe. Les accessoires et le driver à positionner à distance doivent être commandés séparément.*

*Stehleuchte IP67 mit diffusem Licht, Stiel aus natürlichem Kupfer und Kristalldiffusor. Sie kann mit einem einzelnen oder mehreren Lampensockeln oder mit einem Erdspieß installiert werden. Das Zubehör und das Driver für die entfernte Positionierung sind separat zu bestellen.*




# TRILLI

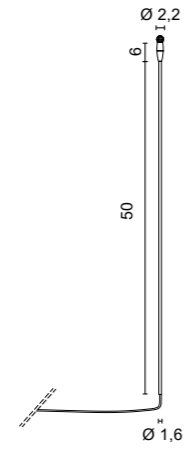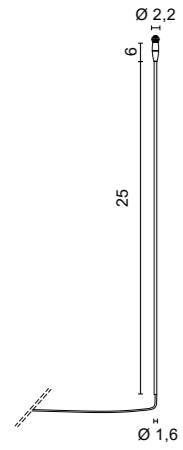


**3547** 0,15 Kg

<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm




Moldable and adjustable

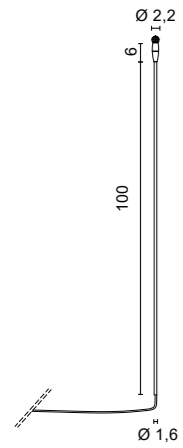

**3549** 0,40 Kg


<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm




Moldable and adjustable

**3548** 0,25 Kg

<b>.38</b>	Shiny Copper	
<b>/W</b>	4000K LED 1W 350mA	129lm
<b>/WW</b>	3000K LED 1W 350mA	117lm
<b>/XW</b>	2700K LED 1W 350mA	110lm



Moldable and adjustable

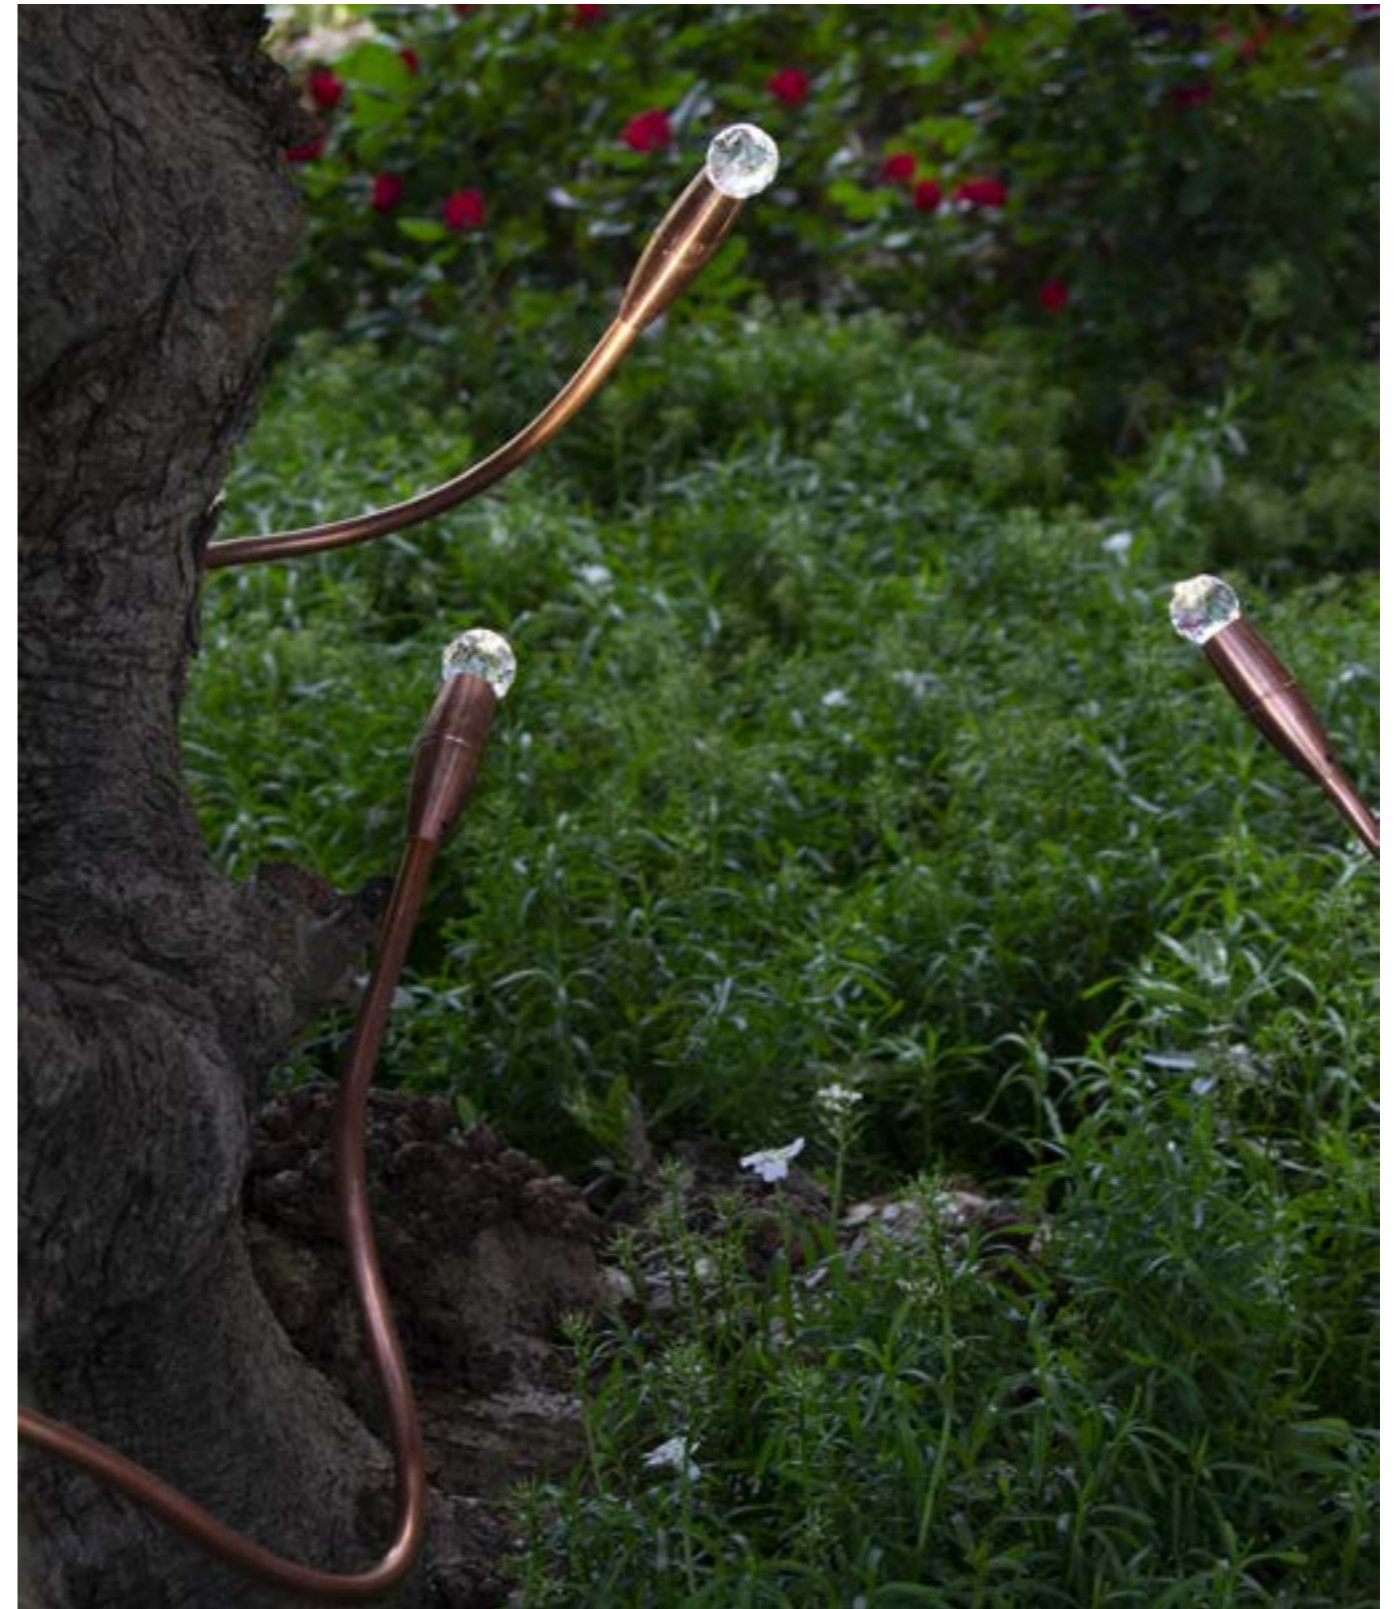

## FINISHES CODES




**.38** Shiny Copper


# TRILLI




## ACCESSORIES




**0259/1** Stake for temporary installation on field




**0243** IP connector on cable




**0246/R** Draining formwork with plate




**0252/1** Installation base for 1 art. Trilli



**0252/2** Installation base for 2 art. Trilli



**0252/3** Installation base for 3 art. Trilli



**0276** IP67 Connector with gel



## DRIVERS

### ON/OFF

Cod.	0031/IP 350mA	0125 350m	0128 350mA
3547	1-12	1-6	1-12
3548	1-12	1-6	1-12
3549	1-12	1-6	1-12


### DIMMABLE

Cod.	141/DIM PUSH - 1...10V	0141/DALI DIM DALI	0145 DIM	0145/DALI DIM - DALI	0733/DIM PHASE CUT
3547	4-14	5-14	1-21	1-21	1
3548	4-14	5-14	1-21	1-21	1
3549	4-14	5-14	1-21	1-21	1

Only serial connection






EXAMPLES OF MULTIPLE CONFIGURATION

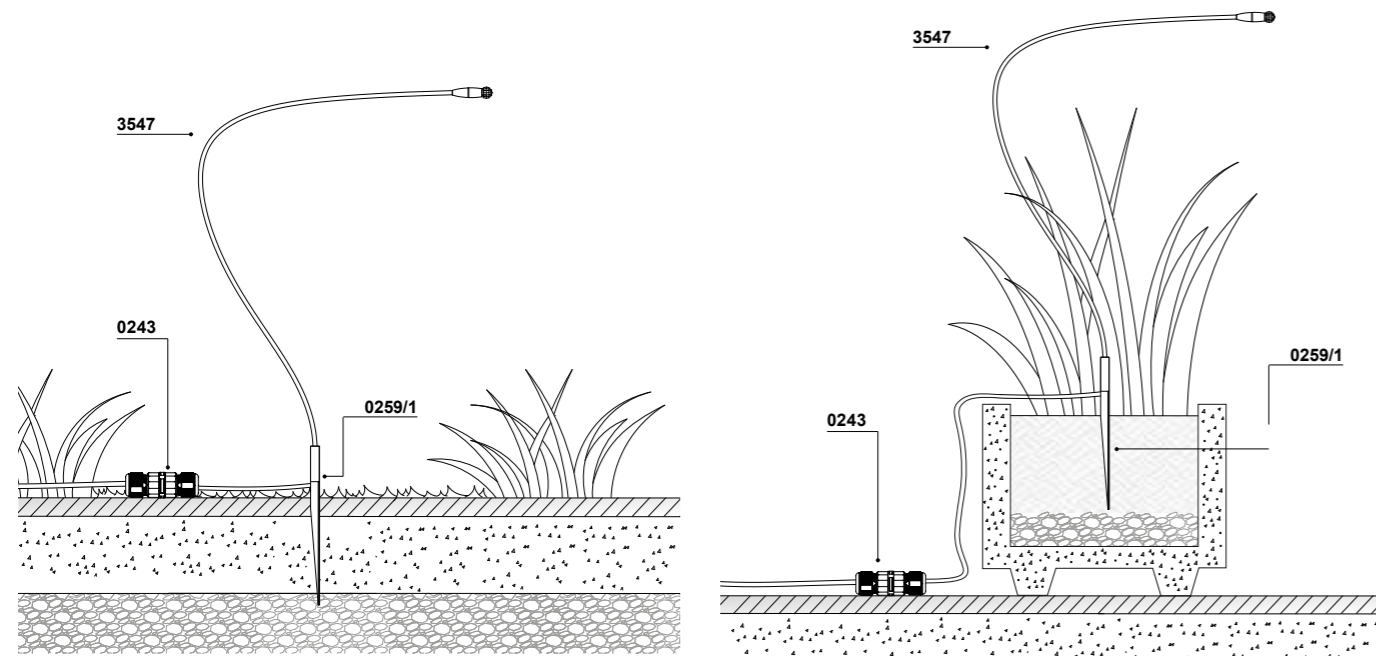

Soft copper pipe, when installed outdoors, will begin a spontaneous reaction with oxygen and water to form its own natural protective layer of copper oxide on its surface. Depending on the composition of the water, the color of this layer varies from turquoise blue to deep green.

The choice of the driver depends on total power consumption. The drivers, to be ordered separately, must be placed remotely.

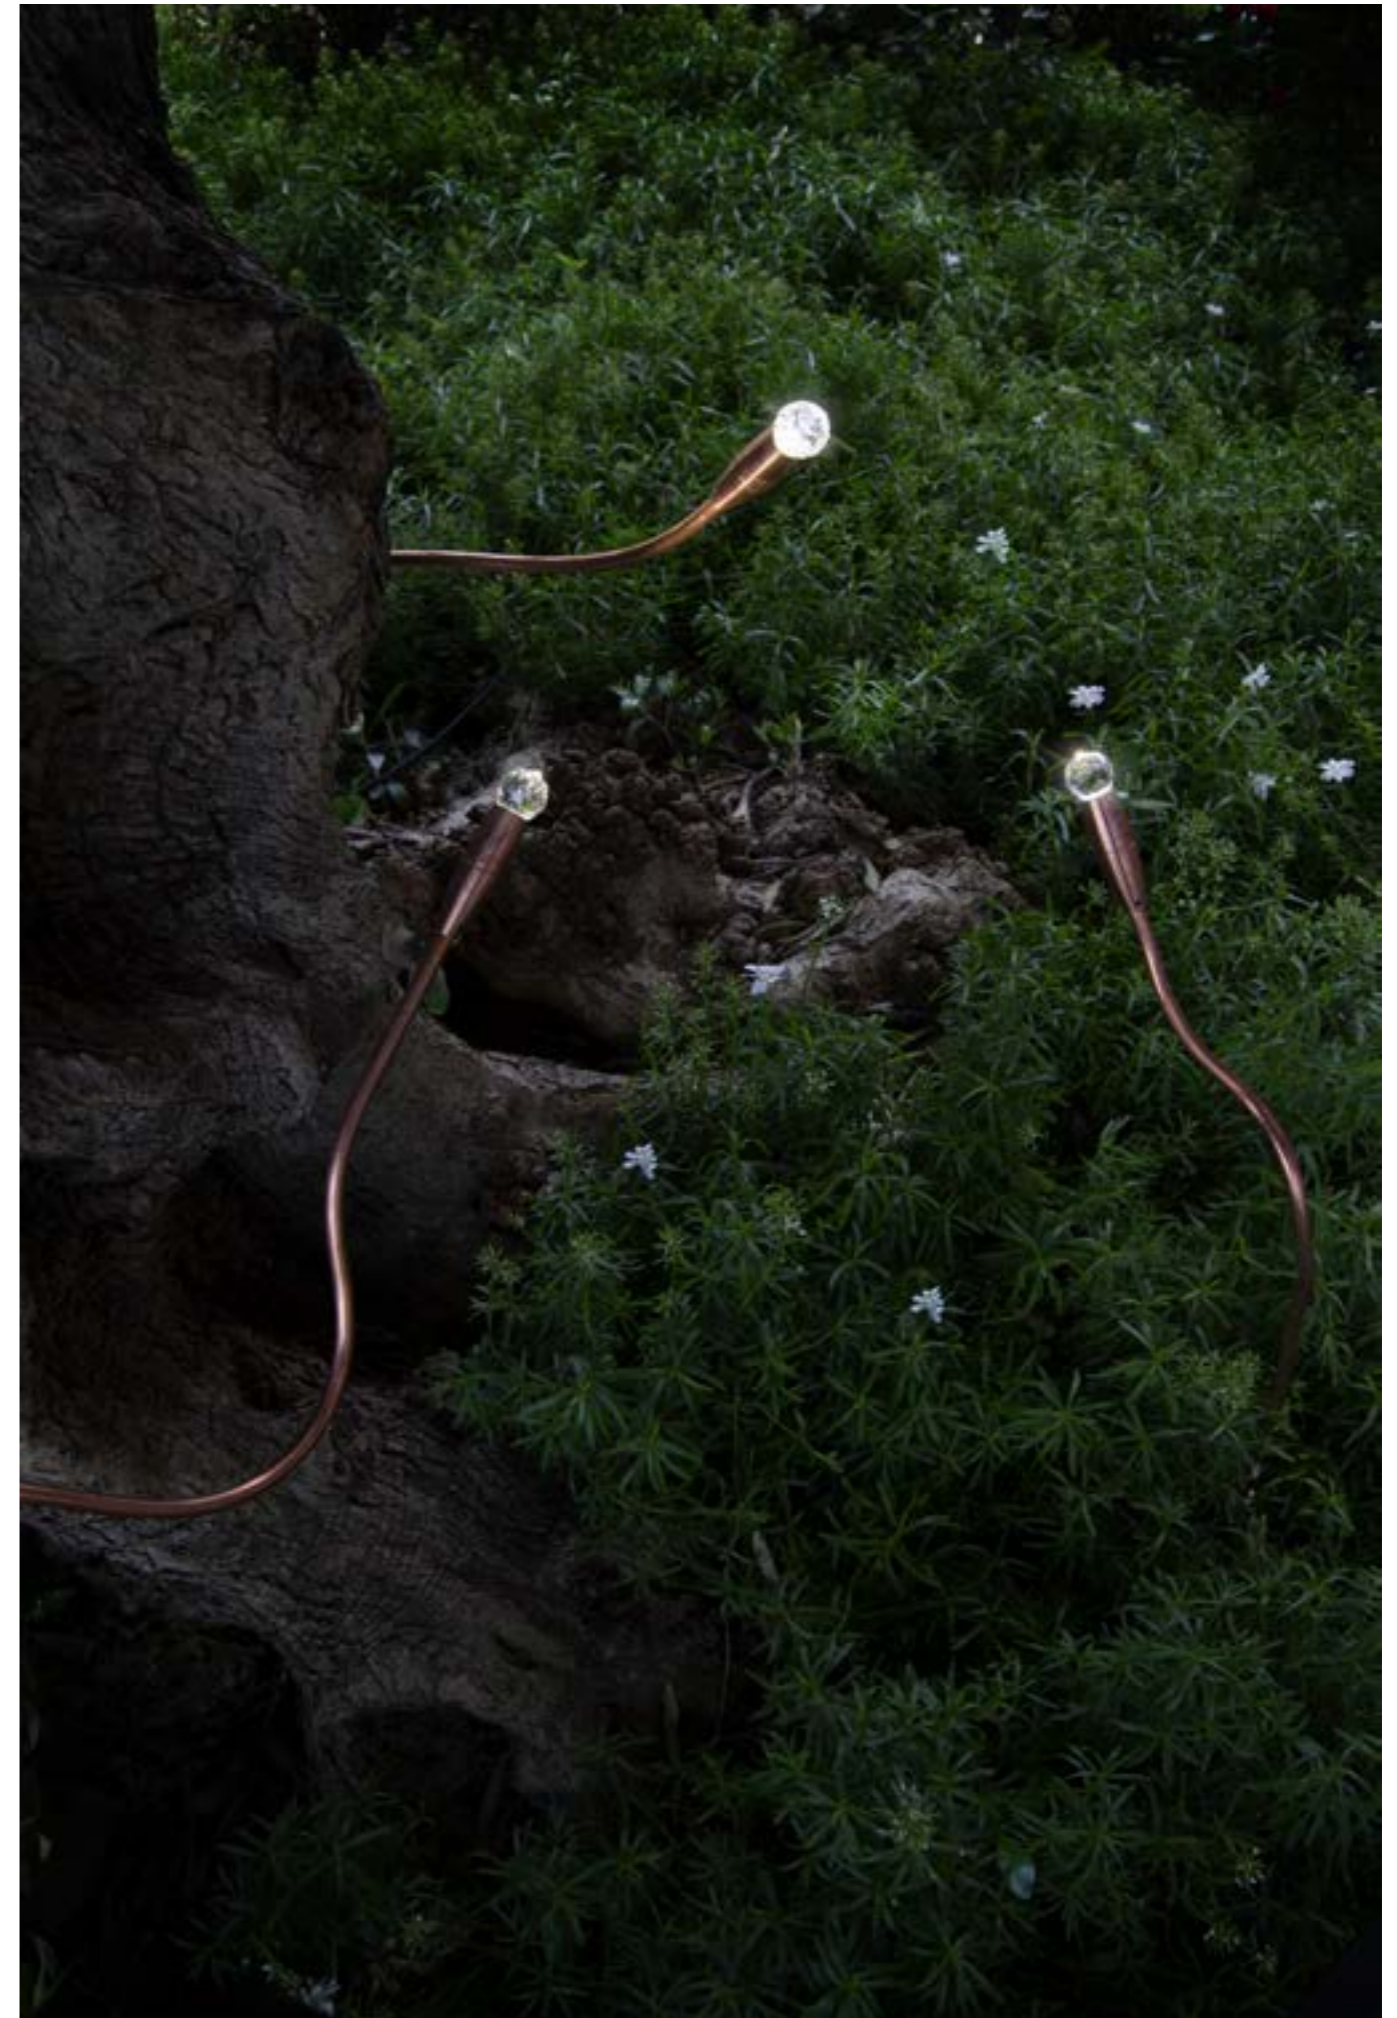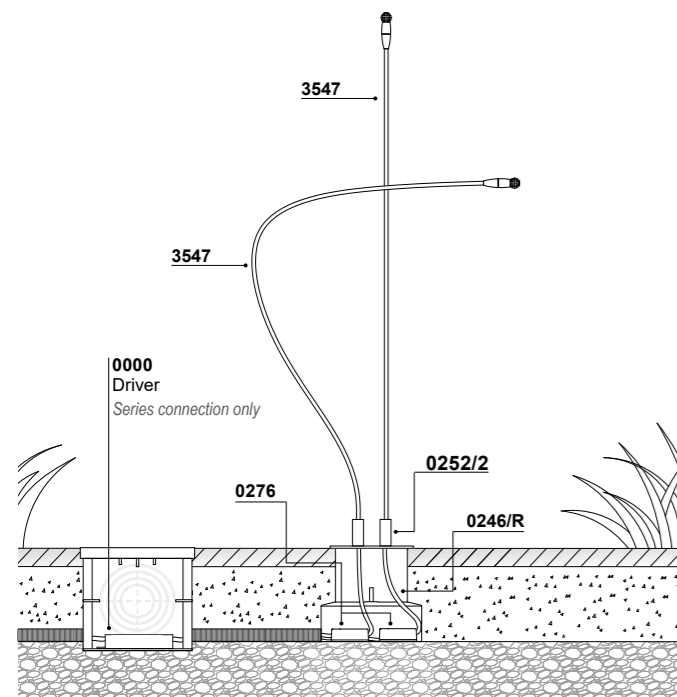

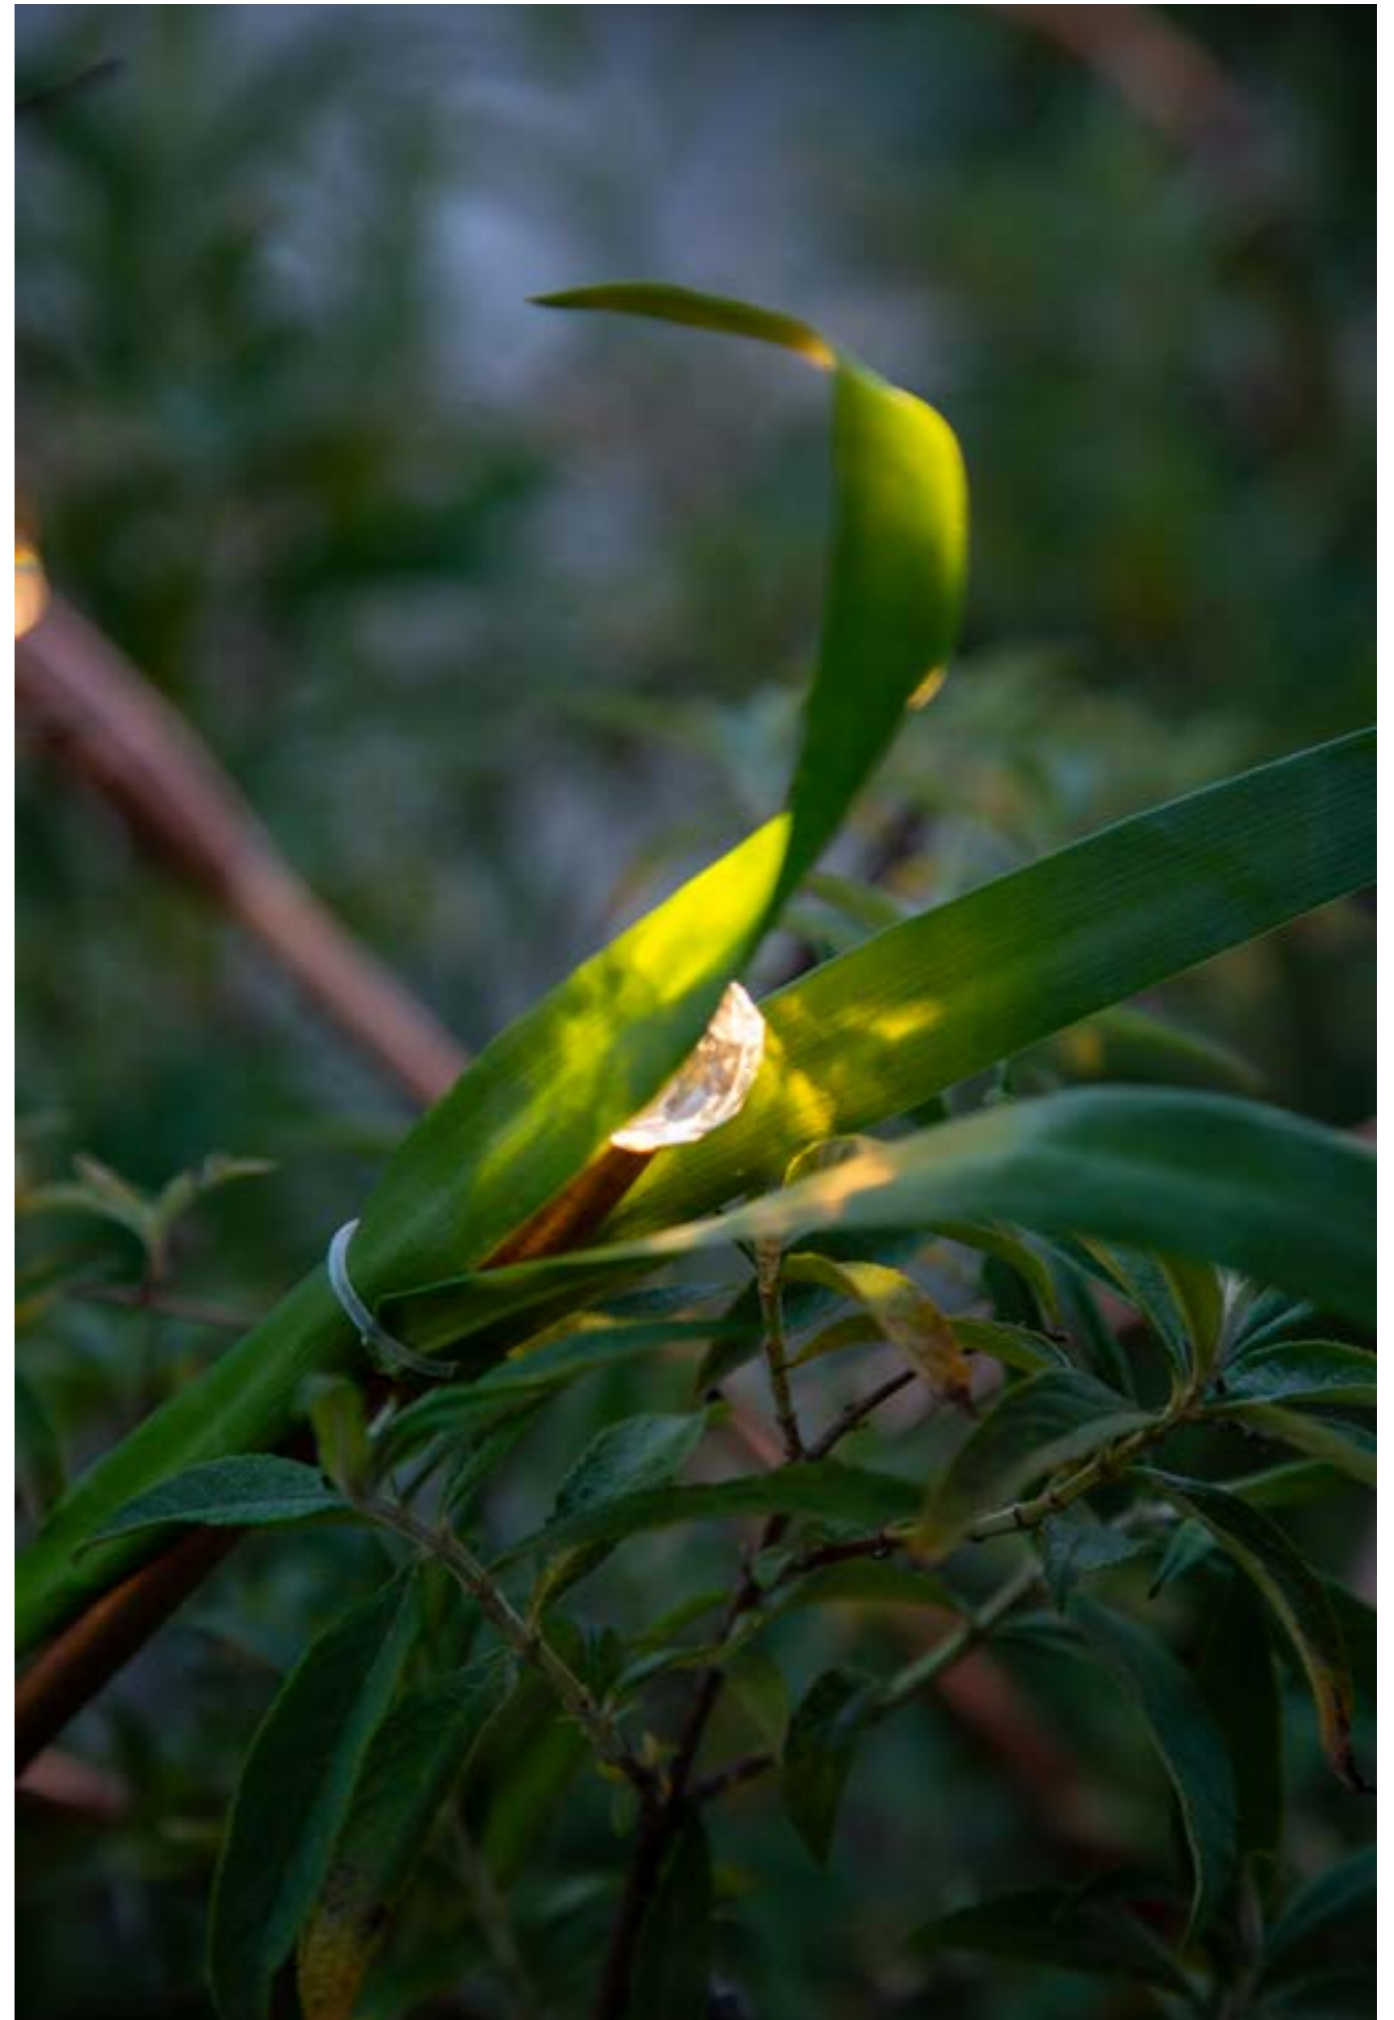



Our fittings are manufactured in conformity with the european standard CEI-EN 60598 and, consequently, get the mark CE.

*Nos appareils sont fabriqués en conformité aux règles européennes CEI-EN 60598 et, par conséquent, fournis avec marque CE.*

*Unsere Produkte werden gemäss europäischer Norm CEI-EN 60598 hergestellt und sind als solche mit dem CE-Zeichen gekennzeichnet.*

Egoluce s.r.l. reserves the right to change, at any time and without prior warning, the technical specification of any product illustrated in this catalogue.

Colours are simply indicative of the real nuance.

*Egoluce s.r.l. se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue. Les couleurs sont simplement a titre indicatif.*

*Egoluce s.r.l. behält sich vor, jederzeit und fristlos die in beiliegendem Katalog erläuterten technischen Daten zu ändern.*

*Die Farben sind nicht genau wirklichkeitsgetreu.*



---

**EDITION**  
2024 © All rights reserved

**PHOTOS**  
Bordegoni S.r.l.  
U.T. Egoluce

# THE — BEST — OF



MADE IN ITALY

**EGOLUCE s.r.l.**

Via I. Newton, 12 - 20016 Pero - Milano - Italy

Tel. +39 02339586.1 - Italia fax +39 023535112 - Int. fax +39 0233911087

E-mail: [export@egoluce.com](mailto:export@egoluce.com) - Int. E-mail: [infoworld@egoluce.com](mailto:infoworld@egoluce.com)

[www.egoluce.com](http://www.egoluce.com)

**VOL.**

**01**