

OUTDOOR LIGHTING

Let's humanize the light



ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri


Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

info@zambelislights.gr | zambelislights.gr

Connect to our B2B platform through our website and access everything you need, anytime - 24/7

-  B2B Online Order/Open Orders
-  Product Availability & Arrival Dates
-  Extensive Range of Products
-  HD Photos
-  Product Data Sheets
-  Installation Manuals
-  Flexibility & Customized Products
-  Manufacturing Products
-  Photometric Files
-  CE Certificates
-  COC Certificates
-  3D Models / 3D Viewer on Website

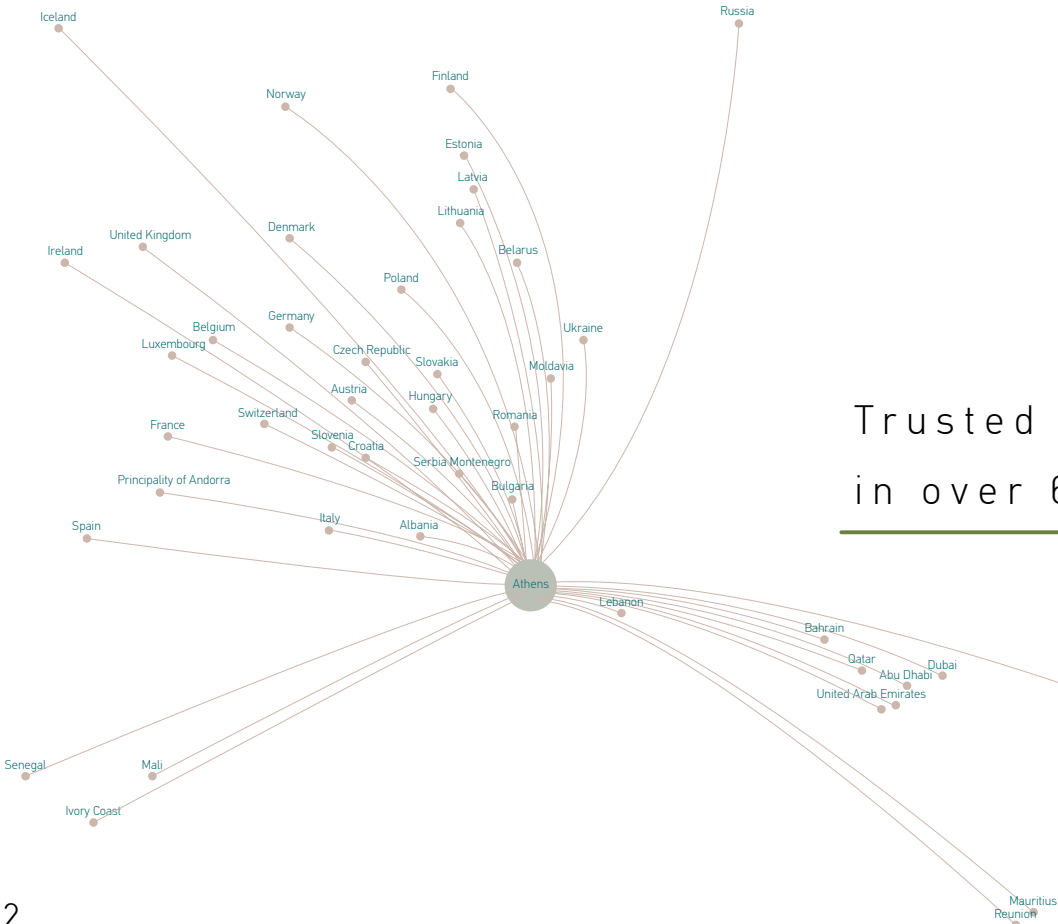

Trusted by professionals
in over 63 countries globally.

SUSTAINABILITY

Lighting the Future Responsibly.

We design lighting solutions that combine efficiency, durability and innovation - with minimal footprint and maximum purpose.
For us, green isn't just a color.
It's a mindset shaping everything we create.



Scan to learn how we go green.



TABLE OF CONTENTS

- 01. PORTABLE | p.012-035
- 02. CONCRETE | p.036-059
- 03. FLOOR & WALL | p.060-157
- 04. WALL | p.158-251
- 05. SPIKES | p.252-299
- 06. STEP | p.300-331
- 07. CEILING | p.332-347
- 08. INGROUND | p.348-371
- 09. WALL WASHER | p.372-385
- 10. IP65 SURFACE LIGHTING SYSTEM | p.386-395

WE MAKE IT EASY

Virtual Light - ZambelisLights App



4 simple steps to light up your place

- Download the Virtual Light App
Scan QR
- Find the ideal light
by browsing our categories
- View in your space
through your mobile camera
- Enjoy your new atmosphere!



E485 p.16



E489 p.20



E484 p.22



E370 p.24



E314 p.26



E290 p.29



E400 p.30



E402 p.32



E193 p.34



E478 p.40



E474 p.41



E475 p.44



E476 p.46



E253 p.48



E384 p.51



E480 p.53



E411 p.54



E192 p.56



E479 p.58



E406 p.65



E405 p.66



E445 p.68



E448 p.72



E339 p.74



E348 p.76



E523 p.80



E522 p.81



E463 p.82



E407 p.84



E408 p.87



E466 p.91



E423 p.92



E425 p.95



E424 p.96



E426 p.98



E467 p.102



E418 p.104



E518 p.106



E297 p.108



E446 p.110



E368 p.112



E335 p.116



E336 p.117



E443 p.119




E444 p.120



E204 p.122



E302 p.125



E277 p.126




E345 p.129



E354 p.130



E357 p.132



E358 p.134



E132 p.136



E325 p.138



E237 p.142



E249 p.142



E298 p.144



E352 p.146



E351 p.147



E356 p.148



E367 p.151



E355 p.151



E208 p.152



E337 p.154



E235-12D p.156



E427 p.160



E420 p.162



E421 p.164



E428 p.166



E492 p.169



E433 p.170



E240-W p.172



E440 p.176



E135 p.178



E159 p.179



E316 p.180



E413 p.182



E414 p.185



E415 p.186



E412 p.189



E430 p.190



E431 p.193



E287 p.194



E343 p.196



NEW

E434 p.199



E202 p.200



E201 p.200



E296 p.200



NEW

E437 p.202



NEW

E438 p.202



E341 p.205



E275 p.205



E342 p.206



E268 p.208



E271 p.208



E267 p.210



NEW

E464 p.212



NEW

E416 p.214



NEW

E417 p.214



NEW

E500 p.217



E149 p.218



E243 p.220



E195 p.222




E315 p.223



E197 p.224



E199 p.225



E274 p.226



E273 p.227



E278 p.228



E272 p.229



NEW

E436 p.231



NEW

E435 p.231



E318 p.232



E227 p.234



E261 p.236



E262 p.236



E146 p.237



E266 p.238



E124 p.240



E123 p.240



E122 p.240



E121 p.240



E151 p.242



E150 p.242



E307 p.245



E306 p.245



E186 p.246



E168 p.248



E216 p.248



E305 p.251



NEW

E457 p.256



NEW

E459 p.257



NEW

E494 p.261



NEW

E456 p.262



NEW

E465 p.264



E329 p.266



NEW

E449 p.269



NEW

E472 p.272



NEW

E470 p.274



NEW

E350 p.276



E349 p.276



E404 p.278



E286 p.280



E285 p.280



E284 p.283



E152 p.284



E153 p.285



E177-B p.286



E281 p.289



E283 p.290



E279 p.292



E280 p.294



E312 p.296



E310 p.298



E217 p.298



NEW

E442 p.302



NEW

E441 p.302



NEW

E450 p.304



NEW

E451 p.304



NEW

E455 p.307



NEW

E453 p.307



E347 p.308



E346 p.308



E320 p.310



E322 p.311



E321 p.312




E319 p.313



E301 p.314



E300 p.314



E324 p.316



E294 p.318



E242-W p.320



E241-G p.321



E241-W p.321



E247-G p.324



E246-W p.325



E229 p.326



E230 p.327



E184 p.328



E181 p.328



E187 p.330



E333 p.334



S131 p.338



S113 p.340



E340 p.340



E220 p.342



E309 p.342



E270 p.344



E327 p.346



E502 p.350



E504 p.352



E508 p.356



E180 p.358



E178 p.359



E365 p.360



E366 p.363



E461 p.364



E364 p.365



E363 p.366



E362 p.366



E361 p.368



E359 p.371



E189 p.371



E496 p.374



E495 p.376



E499 p.378



E382 p.380



E380 p.383



E377 p.384



E375 p.384



E385 p.388



E390 p.388



E392 p.388



E389 p.389



E393 p.389



E391 p.389



E386 p.390



E387 p.390



E388 p.390



E501 p.392



E397 p.394





SIL-385 p.394

Tap. Dim. Light Up.
Prepare warm ambience with portable lights.



01 . PORTABLE



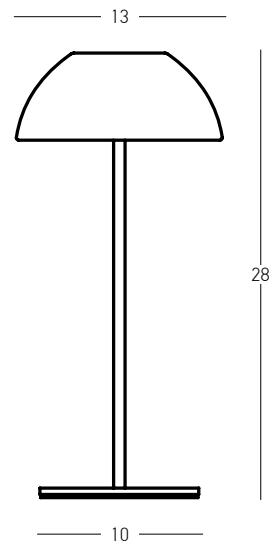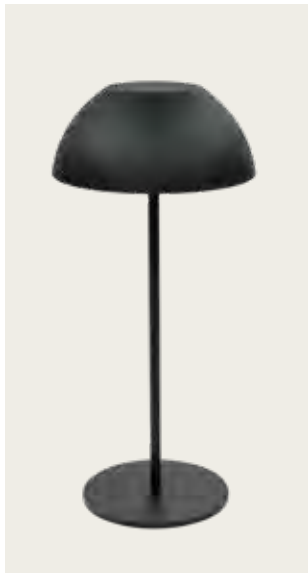

Power	2W
Input	5V DC
Battery	1200 MAH
Color Temperature	2700K
Lumen	104Lm
Cri	80
IP	44
Dimensions	Ø: 13cm H: 28cm
Shade	Ø: 13cm H: 5.5cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 5.5H 50% of Light - 10H 10% of Light - 135H
Charging Time	3.5H
Color	Sandy Black / Code E485
Color	Sand / Code E486
Color	Sandy Milk Tea / Code E487




White AC-DC Adaptor for Portable Light




Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099





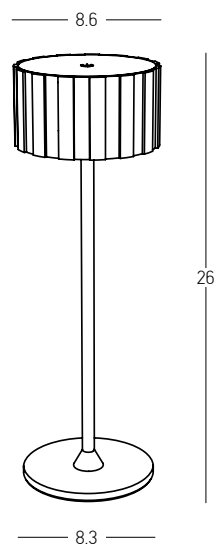

Power	2W
Input	5V DC
Battery	1800 MAH
Color Temperature	2700K, 4000K, 6500K
Lumen	124Lm
Cri	80
IP	44
Dimensions	Ø: 8.6cm H: 26cm
Shade	Ø: 8.6cm H: 4.7cm
Touch Dimming	☉
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off & Brightness Memory Function
Working Time	100% of Light - 6H 50% of Light - 11.5H 10% of Light - 60H
Charging Time	4H
Color	Sand / Code E488
Color	Sandy Milk Tea / Code E489
Color	Sandy Green / Code E490

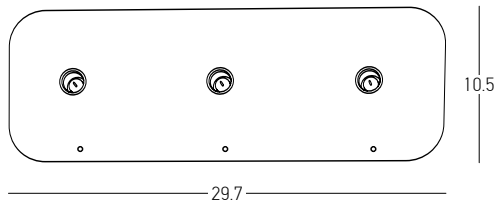


Input	220-240V, 50/60Hz
Output	5V, 2A
IP	20
Dimensions	L: 29.7cm W: 10.5cm H: 2cm
Material	Aluminium
Special Feature	Portable Charging Base for 3pcs 100cm Cable Included
Color	Black / Code 25280

White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099



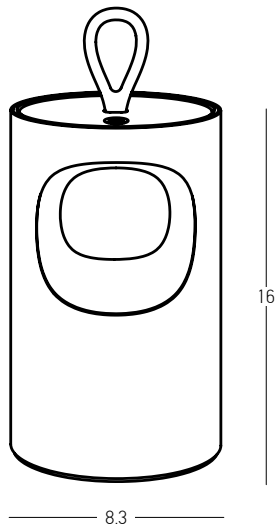

Power	2W
Input	5V DC
Battery	2000 MAH
Color Temperature	2700K
Lumen	103Lm
Cri	80
IP	44
Dimensions	L: 8.3cm W: 6cm H: 16cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 6H 50% of Light - 11H 10% of Light - 95H
Charging Time	3.5H
Color	Black Matt / Code E482
Color	White Matt / Code E483
Color	Brushed Gold / Code E484




White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099



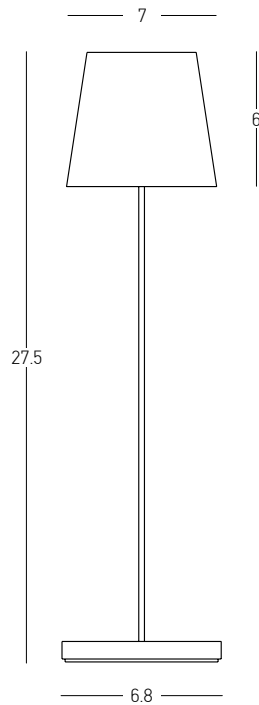


Power	1.5W
Input	5V DC
Battery	1900 MAH
Color Temperature	3000K
Lumen	181Lm
Cri	80
IP	54
Dimensions	Ø: 7cm H: 27.5cm
Shade	Ø: 7cm H: 6cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp Charging Base with USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 100H
Charging Time	4H
Color	Black / Code E369
Color	Brick / Code E370
Color	Sand / Code E371




White AC-DC Adaptor for Portable Light





Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099

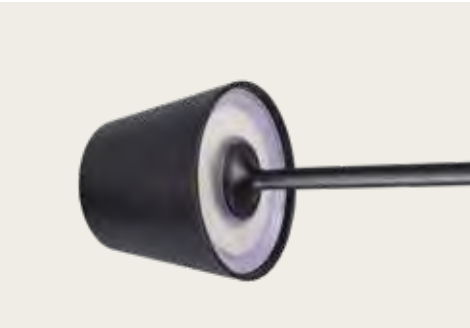

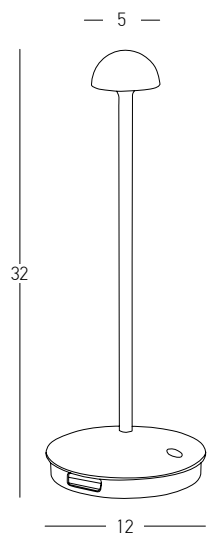

Power 2W
Input 3.7V DC
Battery 1800 MAH
Color Temperature 3000K
Lumen 124Lm
Cri 80
IP 54
Dimensions Ø: 12cm H: 32cm
Shade Ø: 5cm H: 2.6cm
Touch Dimming 
Material Metal - Aluminium - PC Frosted
Special Feature Portable Table Lamp
USB Cable & Adaptor Included
Power-Off Memory Function
Working Time 100% of Light - 7H
50% of Light - 14H
10% of Light - 70H
Charging Time 4.5H
Color Sandy Black / **Code E314**
Color Sandy White / **Code E313**

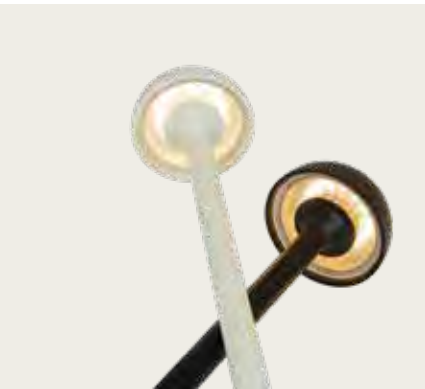

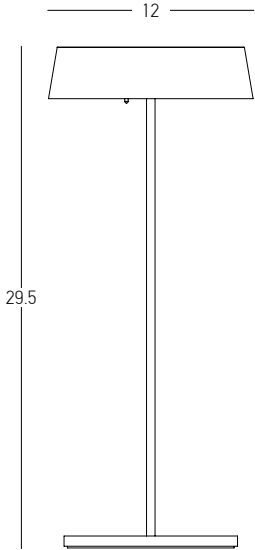


Power	2W
Input	3.7V DC
Battery	2200 MAH
Color Temperature	3000K
Lumen	210Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 29.5cm
Shade	Ø: 12cm H: 3.2cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 110H
Charging Time	5H
Color	Sandy Black / Code E289
Color	Sandy White / Code E290
Color	Gold Matt / Code E291



White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099

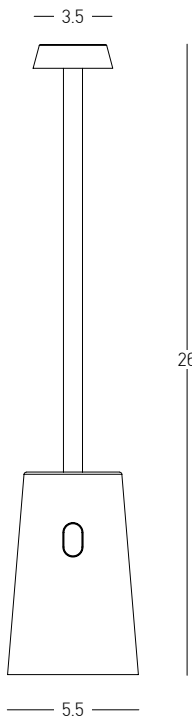

Power 2W
Input 3.7V DC
Battery 2000 MAH
Color Temperature 3000K
Lumen 168Lm
Cri 80
IP 44
Dimensions Ø: 5.5cm H: 26cm
Shade Ø: 3.5cm H: 1cm
Touch Dimming 
Material Metal - Aluminium - Glass
Special Feature Portable Table Lamp
Charging Base with USB Cable Included
Power-Off Memory Function
Working Time 100% of Light - 8H
50% of Light - 16H
10% of Light - 80H
Charging Time 4.5H
Color White / **Code E398**
Color Black / **Code E399**
Color Green / **Code E400**




White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz
Output 5V, 1A
Color White / **Code E099**





Power	1W
Input	5V DC
Battery	1200 MAH
Color Temperature	3000K
Lumen	80Lm
Cri	80
IP	44
Dimensions	Ø: 11.2cm H: 10cm
Shade	Ø: 11.2cm H: 2.4cm
Touch Dimming	○
Material	Plastic
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 6H 50% of Light - 12H 10% of Light - 70H
Charging Time	3.5H
Color	White / Code E401
Color	Black / Code E402



White AC-DC Adaptor for Portable Light





Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099





Power 2W
Input 3.7V DC
Battery 2200 MAH
Color Temperature 3000K
Lumen 260Lm
Cri 80
IP 54
Dimensions Ø: 11cm H: 38cm
Shade Ø: 11cm H: 10.5cm
Touch Dimming ○
Material Metal - Aluminium - PC Diffuser
Special Feature Portable Table Lamp
USB Cable & Adaptor Included
Power-Off Memory Function
Working Time 100% of Light - 10H
50% of Light - 20H
10% of Light - 100H
Charging Time 5.5H
Color Sandy White / **Code E193**
Color Sandy Black / **Code E194**

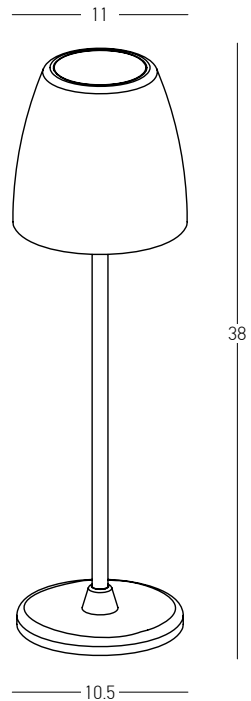

Concrete Glow - Natural Flow
Rugged elegance for unique outdoor space.




02. CONCRETE







Power 20W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 509Lm
Cri 90
IP 65
Dimensions Ø: 19.2cm H: 97cm
Base Ø: 19.2cm H: 0.3cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E478**

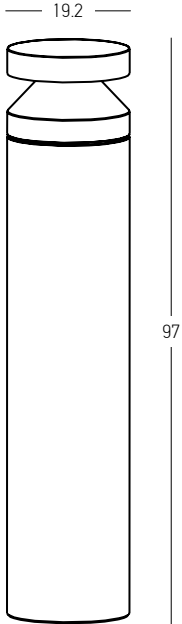


Power 20W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 509Lm
Cri 90
IP 65
Dimensions Ø: 19.2cm H: 52cm
Base Ø: 19.2cm H: 0.3cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E477**

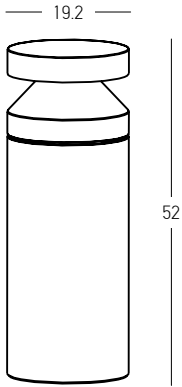

Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 414Lm
Cri 90
IP 65
Dimensions Ø: 19.2cm L: 21.5cm H: 24cm
Base W: 12cm H: 5cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E474**






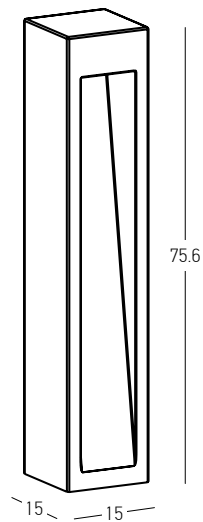


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 426Lm
Cri 90
IP 65
Dimensions L: 15cm W: 15cm H: 75.6cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E475**



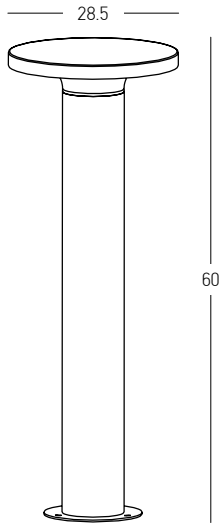


Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 755Lm
Cri 90
IP 65
Dimensions Ø: 28.5cm H: 60cm
Base Ø: 16.5cm H: 0.3cm
Shade Ø: 28.5cm H: 2.2cm
Material Concrete - Metal - PC Diffuser
Color Natural Concrete-Sandy Black / **Code E476**





Power 4W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 340Lm
Cri 80
IP 65
Dimensions L: 9.7cm W: 9.1cm H: 10.5cm
Beam Angle 36°
Dimmable Triac 
Material Concrete - Aluminium
Color Natural Concrete / **Code E253**




Power 2x 4W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 600Lm
Cri 80
IP 65
Dimensions L: 9.7cm W: 9.1cm H: 20cm
Beam Angle 36°
Dimmable Triac 
Material Concrete - Aluminium
Special Feature Up-Down Lighting
Color Natural Concrete / **Code E254**







Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 490Lm
Cri 80
IP 65
Dimensions L: 19cm W: 28cm H: 70.4cm
Base L: 10cm W: 28cm H: 0.5cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E383**

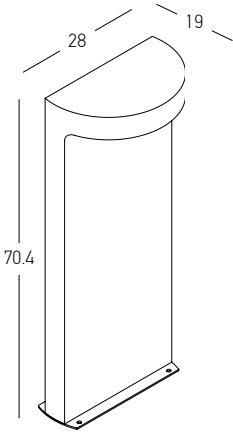

Power 2x 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 780Lm
Cri 80
IP 65
Dimensions Ø: 28cm H: 70.4cm
Base L: 10cm W: 28cm H: 0.5cm
Material Concrete - Metal - Glass
Color Natural Concrete / **Code E384**

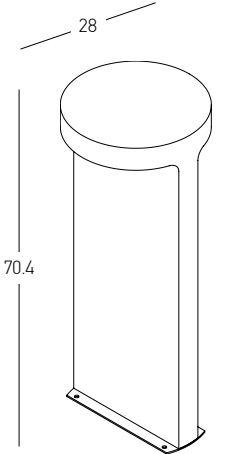




Bulb 1x GU10 LED
Power 9W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 10cm H: 14cm
Material Concrete - Metal
Color Natural Concrete / **Code E480**







Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 363Lm
Cri 90
IP 65
Dimensions Ø: 8.6cm H: 58.3cm
Base Ø: 12.5cm H: 0.5cm
Material Concrete - Metal - PC Diffuser
Color Natural Concrete-Black / **Code E410**

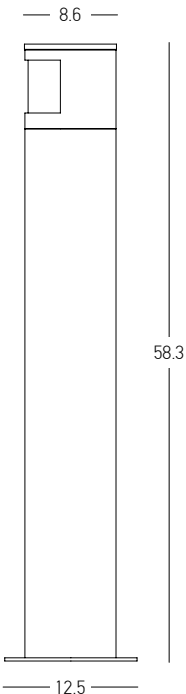


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 395Lm
Cri 90
IP 65
Dimensions Ø: 8.6cm H: 58.3cm
Base Ø: 12.5cm H: 0.5cm
Material Concrete - Metal - PC Diffuser
Color Natural Concrete-Black / **Code E411**

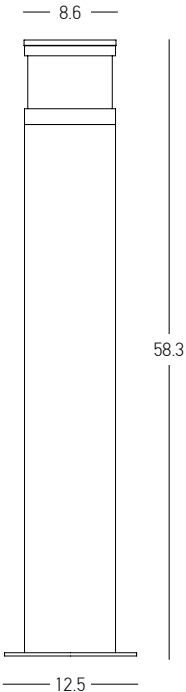




Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 490Lm
Cri 90
IP 54
Dimensions L: 15cm W: 16cm H: 30cm
Base L: 21cm W: 23cm
Material Concrete
Color Natural Concrete / **Code E191**

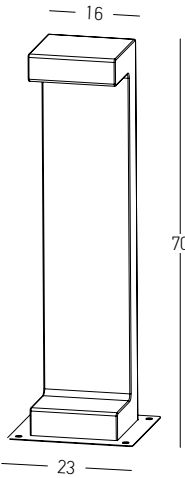


Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 490Lm
Cri 90
IP 54
Dimensions L: 15cm W: 16cm H: 70cm
Base L: 21cm W: 23cm
Material Concrete
Color Natural Concrete / **Code E192**




Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 490Lm
Cri 90
IP 54
Dimensions L: 10cm W: 28cm H: 35cm
Base L: 19cm W: 37cm
Material Concrete
Color Natural Concrete / **Code E190**



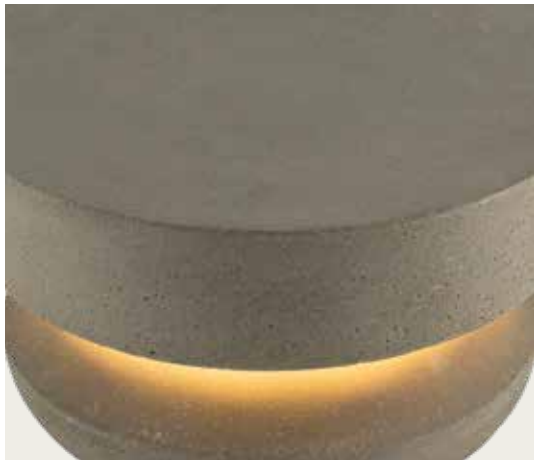

Power 7W
Input 24V
Color Temperature 3000K
Lumen 135Lm
Cri 90
IP 65
Dimensions Ø: 20cm H: 12cm
Material Concrete - Glass
Special Feature Spike & Base Included
Reccomended Driver LPV-35-24 (Not Included)
In Parallel Connection 1-4pcs
Color Natural Concrete / **Code E479**




Wall to Floor - One Style
Seamless design connection across surfaces.




03. FLOOR & WALL



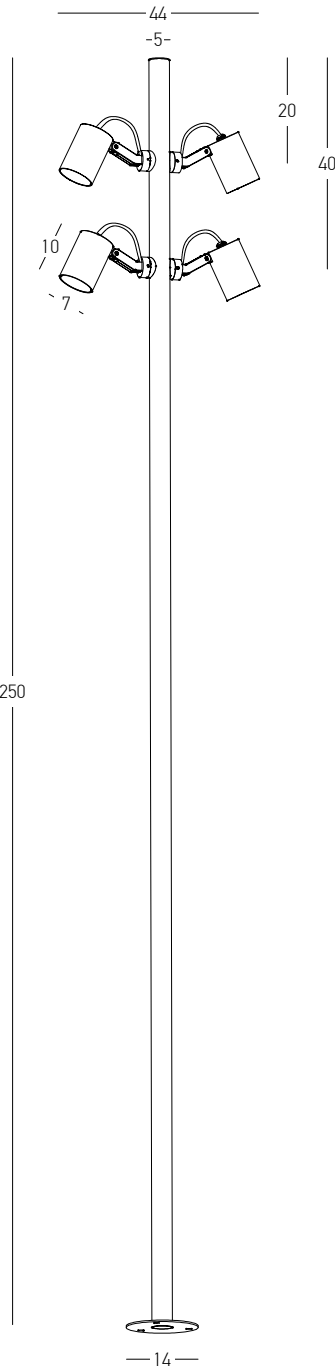


Power	35W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2148Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H: 10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / Code E406



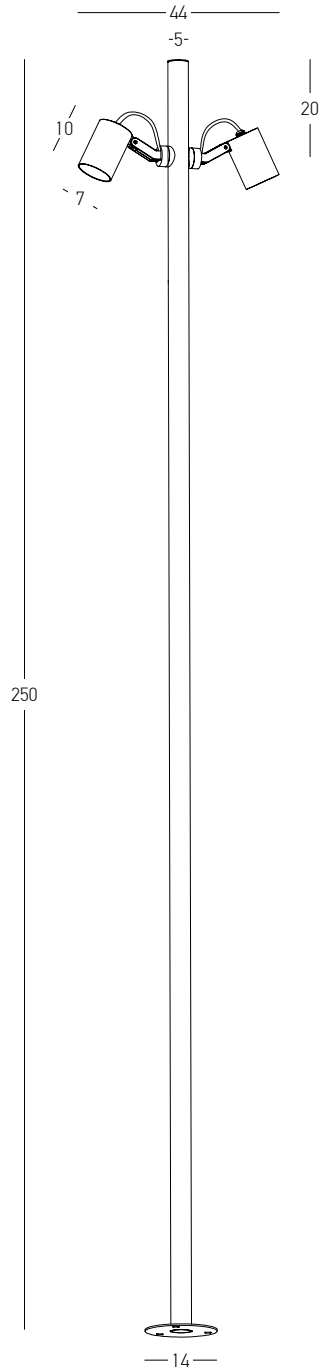

Power	17W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	1072Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H: 10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / Code E405





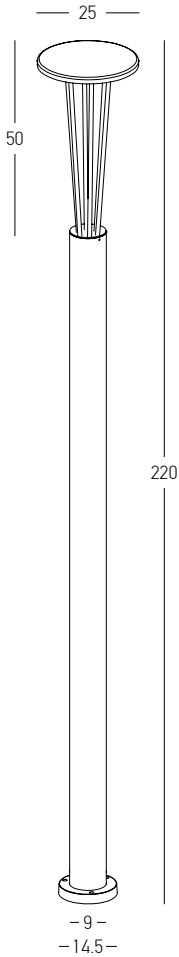

Power 15.5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1005Lm
Cri 85
IP 65
Dimensions Ø: 25cm H: 220cm
Base Ø: 14.5cm H: 2.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E445**





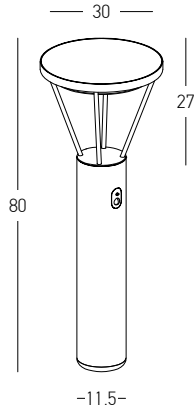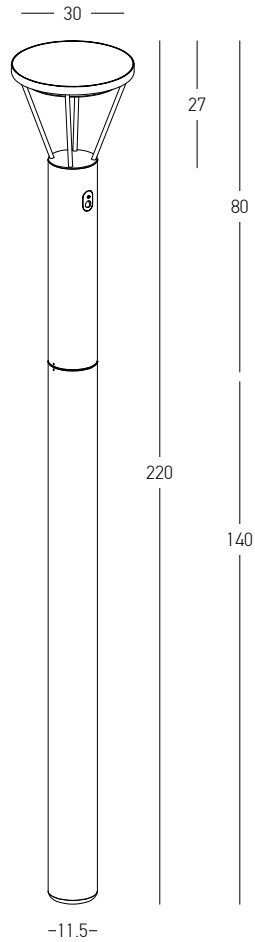


Power 5W
Input 3.7V DC
Battery 2x2200 MAH
Color Temperature 3000K
Lumen 378Lm
Cri 80
IP 54
Dimensions Ø: 30cm H: 80-220cm
Material Aluminium - PC Diffuser
Special Feature Solar Panel
3 Lighting Modes
Sense Distance 3-5m

Color Graphite / **Code E448**




LIGHTING MODES OVERVIEW

- Mode 1 • Dim + Motion Sensor**
LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Lamp switches off when ambient light >20 lux.
- Mode 2 • Constant Light**
Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.
- Mode 3 • Motion Only**
No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.

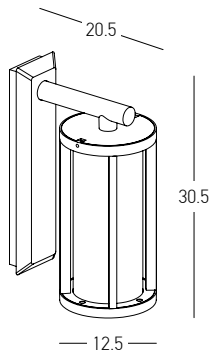


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 20.5cm W: 12.5cm H: 30.5cm
Base L: 3cm W: 7.5cm H: 28.5cm
Shade Ø: 12.5cm H: 24cm
Material Aluminium - Clear Diffuser
Color Sandy Black / **Code E338**

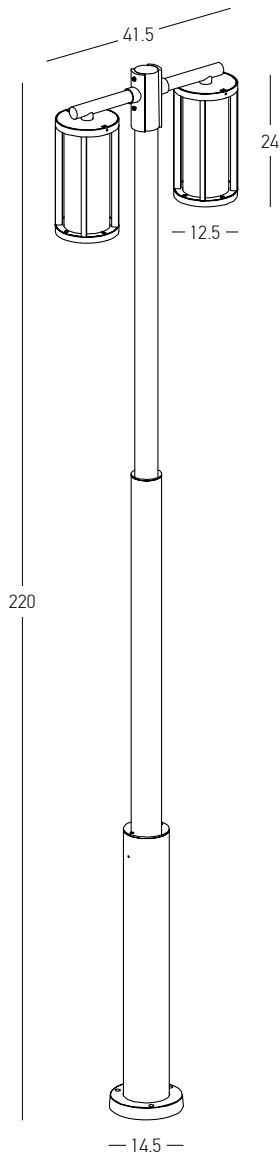

Bulb 2x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 12.5cm W: 41.5cm H: 220cm
Base Ø: 14.5cm H: 3cm
Shades Ø: 12.5cm H: 24cm
Material Aluminium - Clear Diffuser
Color Sandy Black / **Code E339**





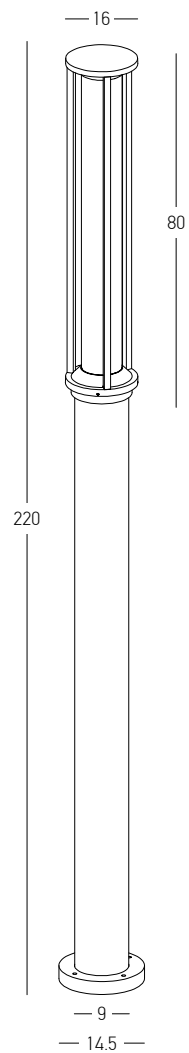


Power 17W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1488Lm
Cri 80
IP 65
Dimensions Ø: 16cm H: 220cm
Base Ø: 14.5cm H: 2.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E348**





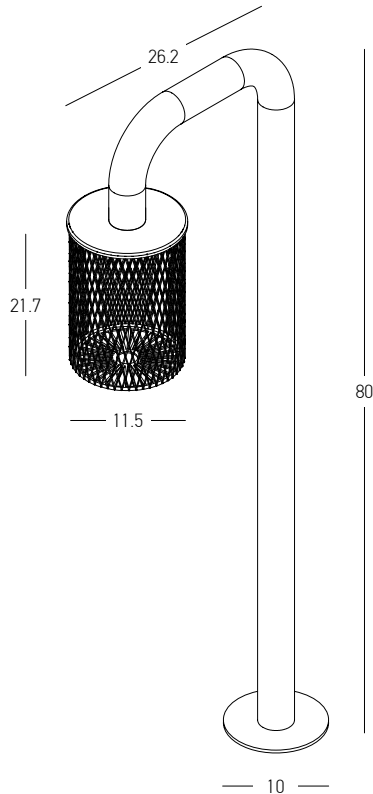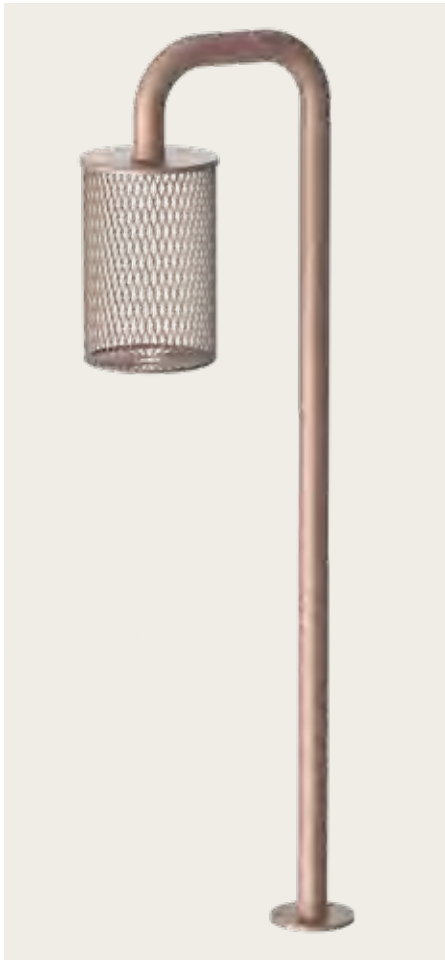


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 360Lm
Cri 80
IP 65
Dimensions Ø: 11.5cm L: 26.2cm H: 80cm
Base Ø: 10cm H: 0.5cm
Material Aluminium - Acrylic
Color Sandy Coffee / **Code E523**

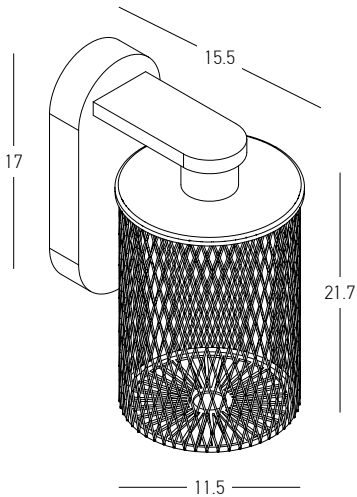


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 360Lm
Cri 80
IP 54
Dimensions Ø: 11.5cm L: 15.5cm H: 25cm
Base L:3cm W: 7cm H: 17cm
Material Aluminium - Acrylic
Color Sandy Coffee / **Code E522**



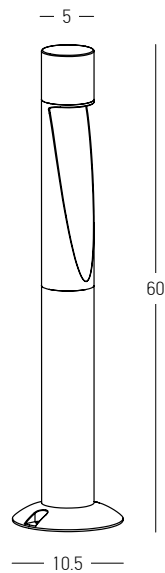

Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 187Lm
Cri 90
IP 65
Dimensions Ø: 5cm H: 60cm
Base Ø: 10.5cm
Material Aluminium - Glass
Color Sandy Black / **Code E463**



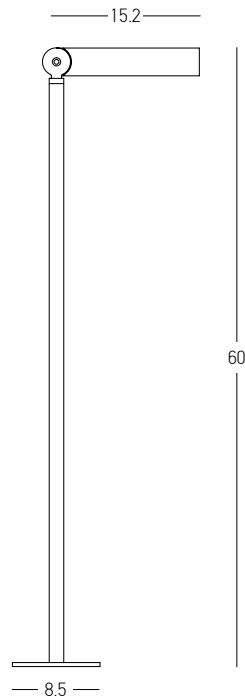


Driver
Power 35W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14.8cm W: 4cm H: 3cm
IP 67

LPV-35-24
Power 35W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14.8cm W: 4cm H: 3cm
IP 67


Power 8W
Input 24V, 50/60Hz
Color Temperature 3000K
Lumen 363Lm
CRI 90
IP 65
Dimensions L: 15.2cm W: 4cm H: 60cm
Base Ø: 8.5cm H: 0.5cm
Beam Angle 36°
Material Aluminium - Tempered Glass
Recommended Driver LPV-35-24 (Not Included)
Special Feature In Parallel Connection 1-4pcs
Tilt Up-Down
Connection Box Included
Color Sandy Black / **Code E407**



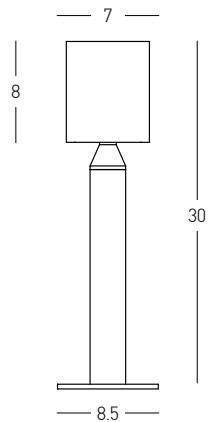



Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 7cm H: 30cm
Base	Ø: 8.5cm H: 0.5cm
Shade	Ø: 7cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Connection Box Included
Color	Sandy Black / Code E408



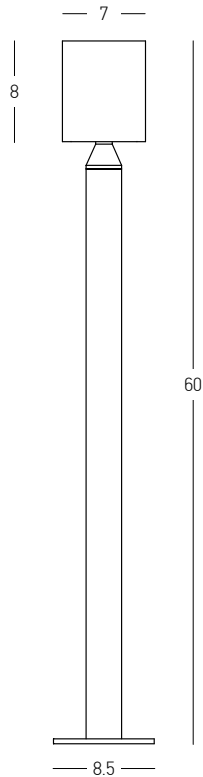

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 363Lm
Cri 90
IP 65
Dimensions Ø: 7cm H: 60cm
Base Ø: 8.5cm H: 0.5cm
Shade Ø: 7cm H: 8cm
Material Aluminium - Tempered Glass
Special Feature Connection Box Included
Color Sandy Black / **Code E409**



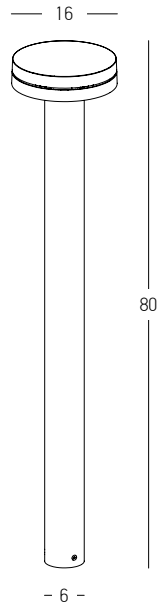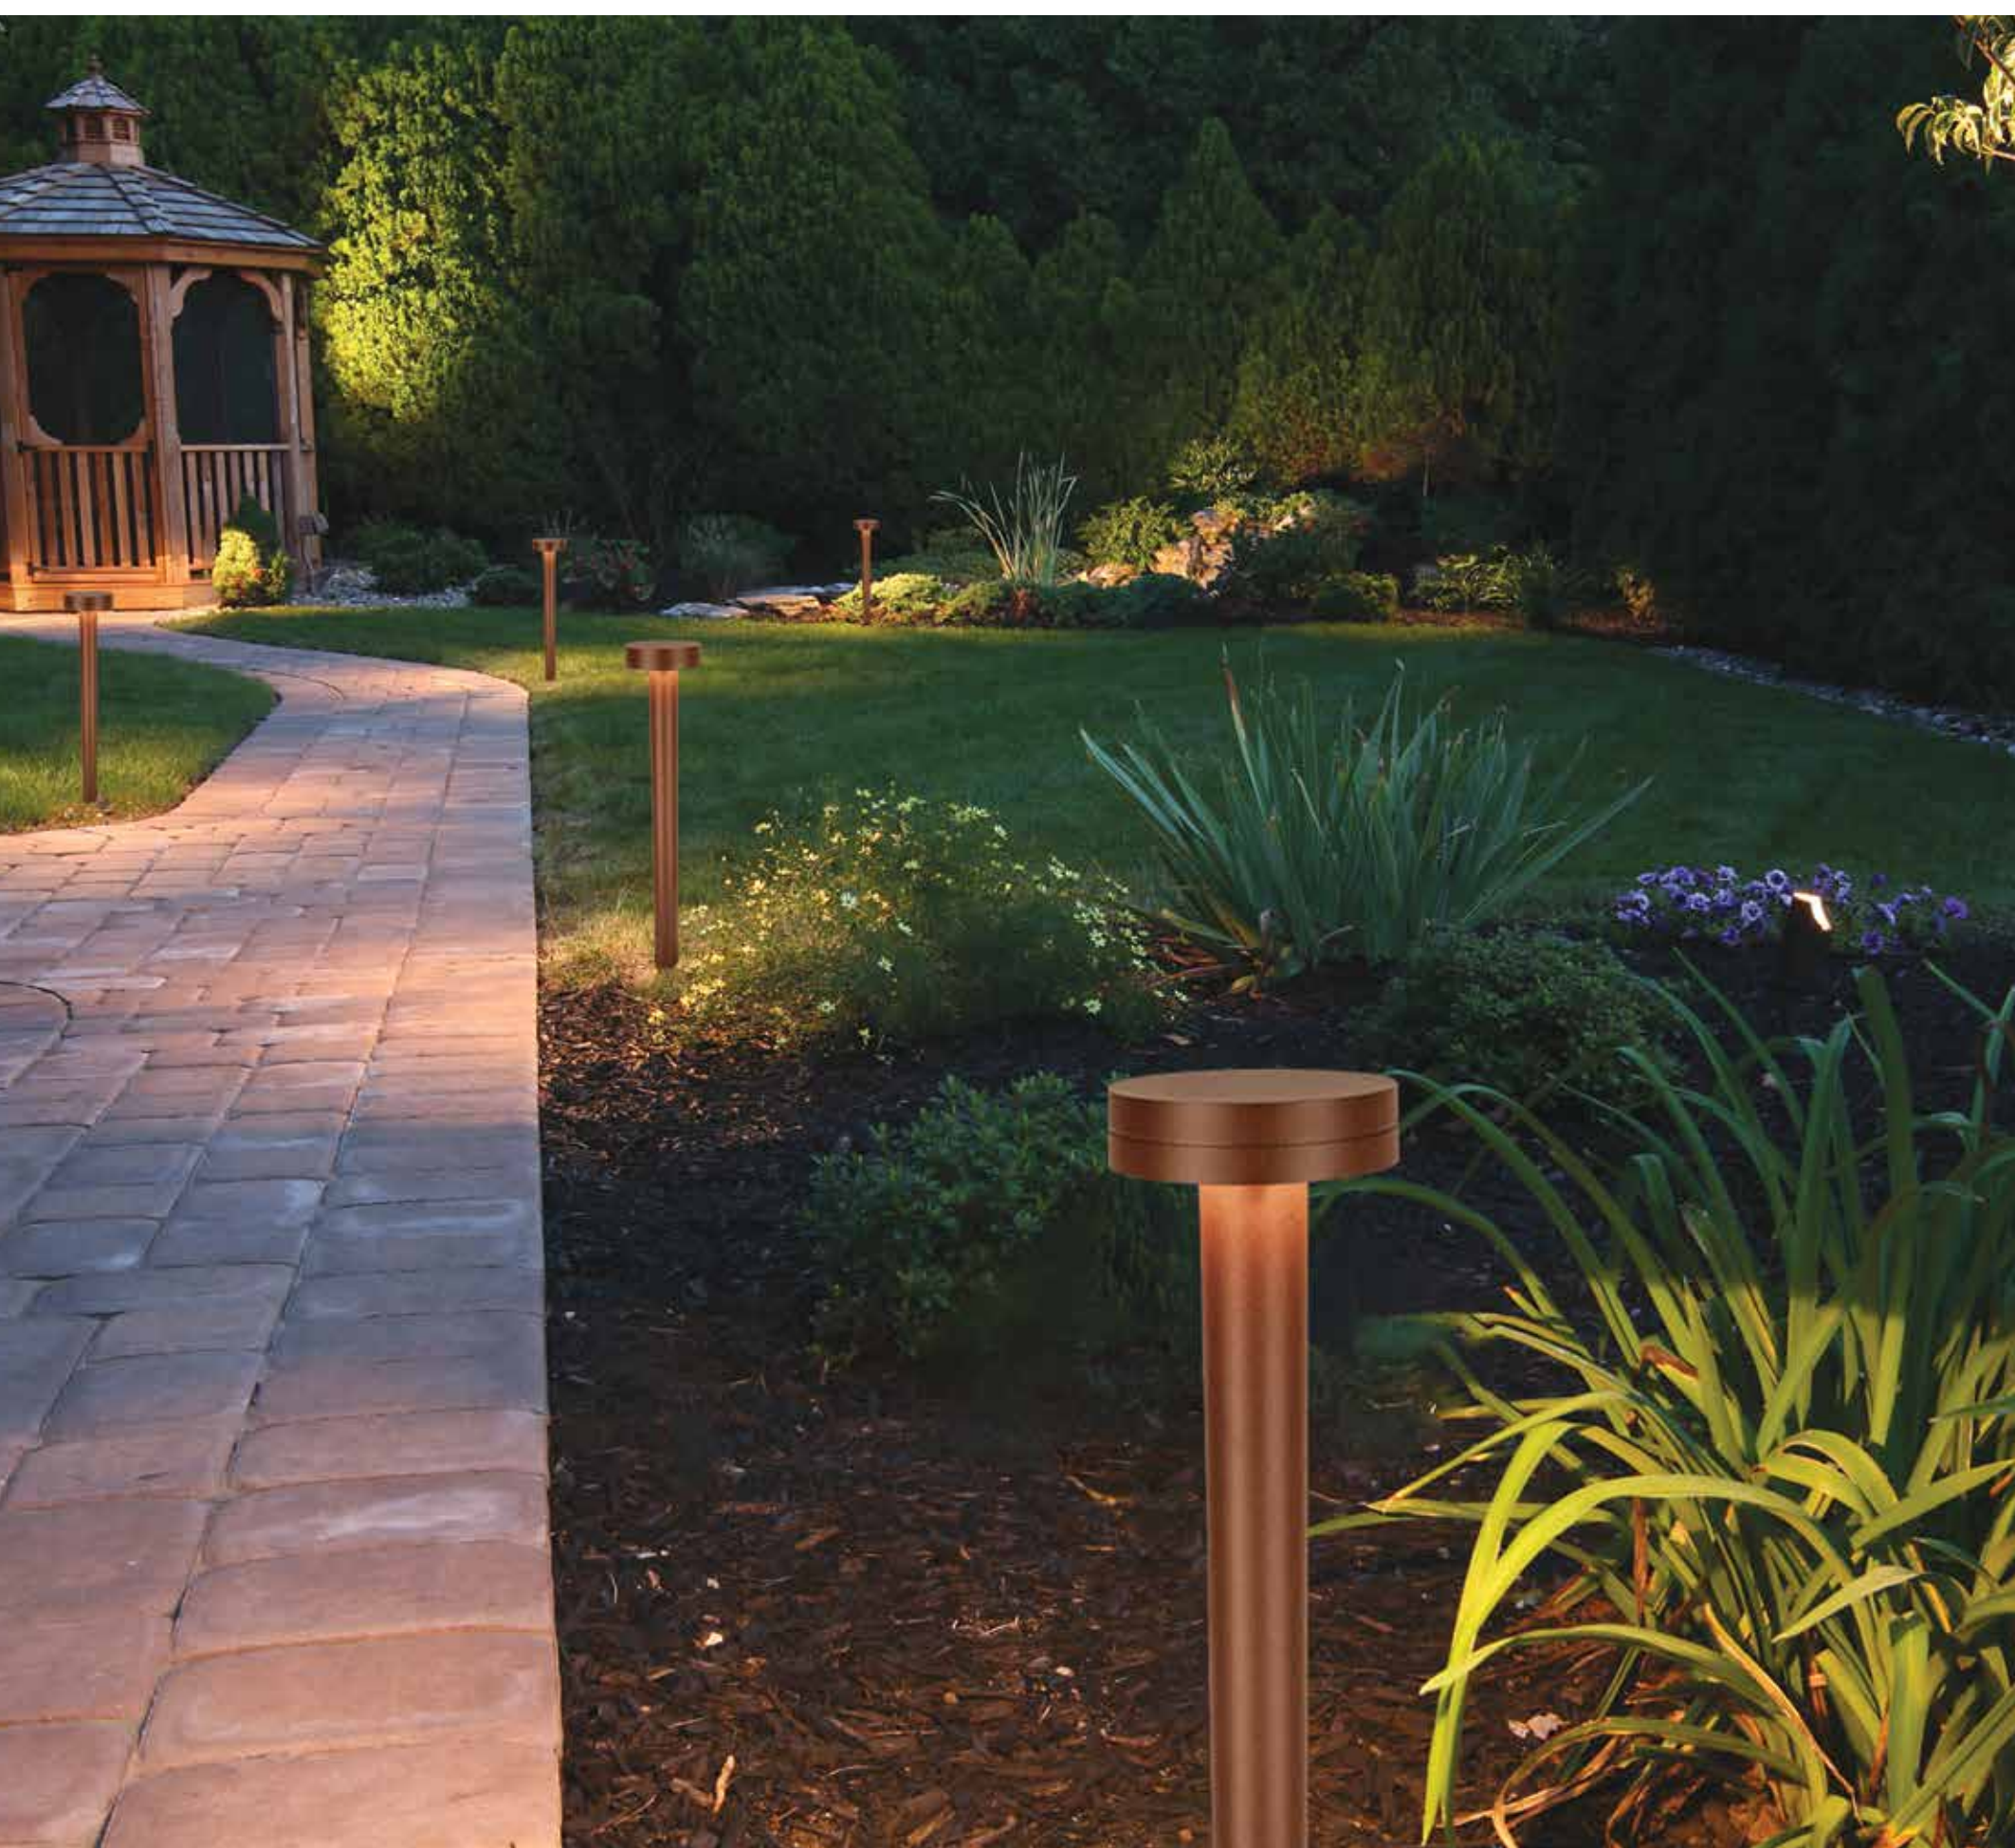


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2200K, 2700K, 3200K, 4000K
Lumen	566Lm, 610Lm, 658Lm, 712Lm
Cri	80
IP	65
Dimensions	Ø: 16cm H: 80cm
Material	Aluminium - PC Diffuser
Special Feature	CCT Switch
Color	Dark Brown / Code E466







Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 95
IP 65
Dimensions Ø: 6cm H: 60cm
Material Aluminium - PC Diffuser
Color Dark Coffee / **Code E423**



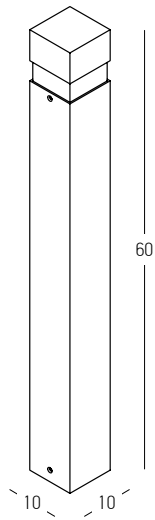


Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 438Lm
Cri 95
IP 65
Dimensions L: 10cm W: 10cm H: 60cm
Material Aluminium - PC Diffuser
Color Dark Coffee / **Code E425**



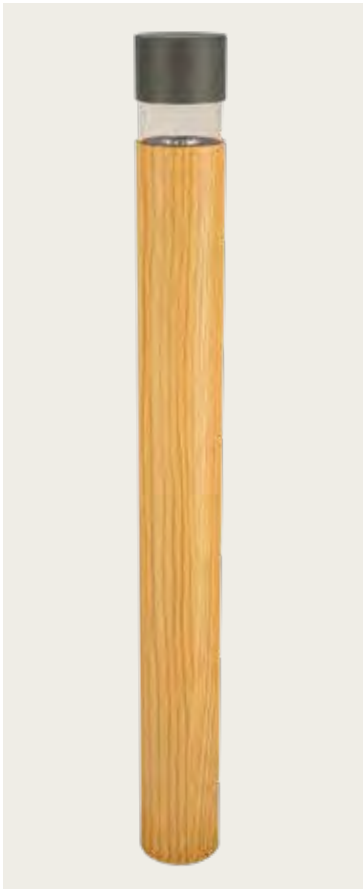

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 95
IP 65
Dimensions Ø: 6cm H: 60cm
Material Aluminium - PC Diffuser
Color Graphite-Wood / **Code E424**




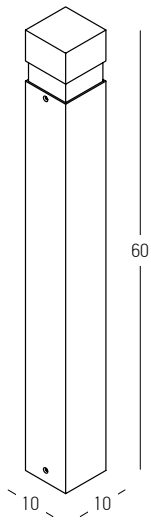

Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 438Lm
Cri 95
IP 65
Dimensions L: 10cm W: 10cm H: 60cm
Material Aluminium - PC Diffuser
Color Graphite-Wood / **Code E426**





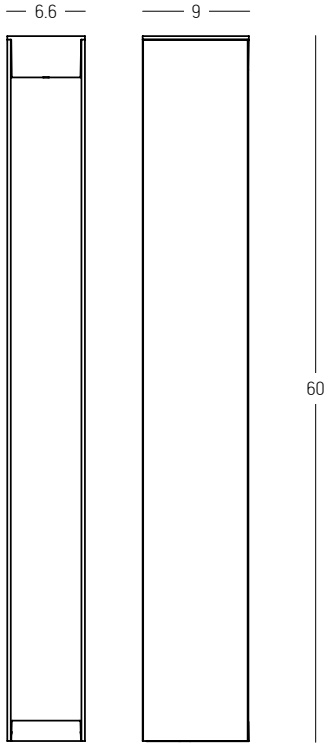

Power	12W
Input	220-240V, 50/60Hz
Color Temperature	2200K, 2700K, 3200K, 4000K
Lumen	320Lm, 341Lm, 358Lm, 375Lm
Cri	80
IP	65
Dimensions	L: 9cm W: 6.6cm H: 60cm
Material	Aluminium - PC Diffuser
Special Feature	CCT Switch
Color	Graphite / Code E467



IP 65




LED







CCT



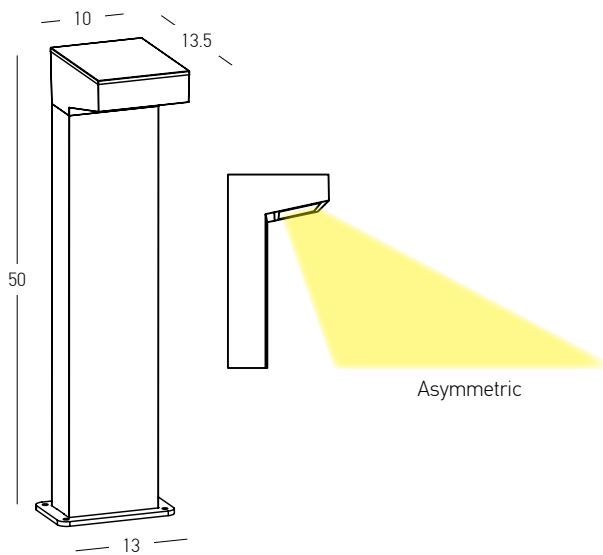


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 760Lm
Cri 85
IP 65
Dimensions L: 13.5cm W: 10cm H: 50cm
Base L: 8cm W: 13cm H: 0.5cm
Material Aluminium - Tempered Glass
Special Feature Asymmetric Beam Angle
Color Graphite / **Code E418**

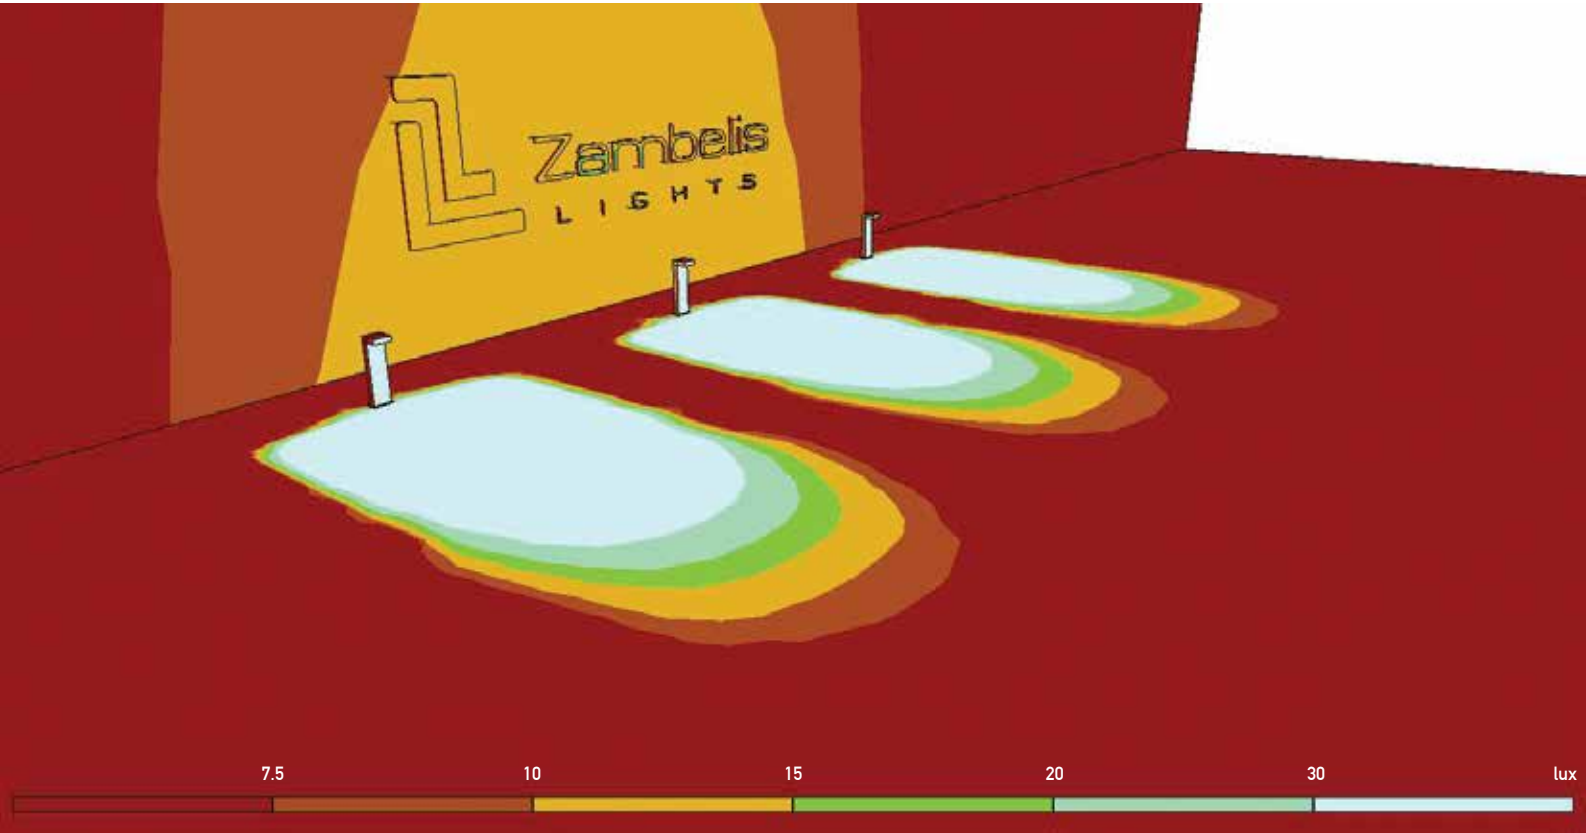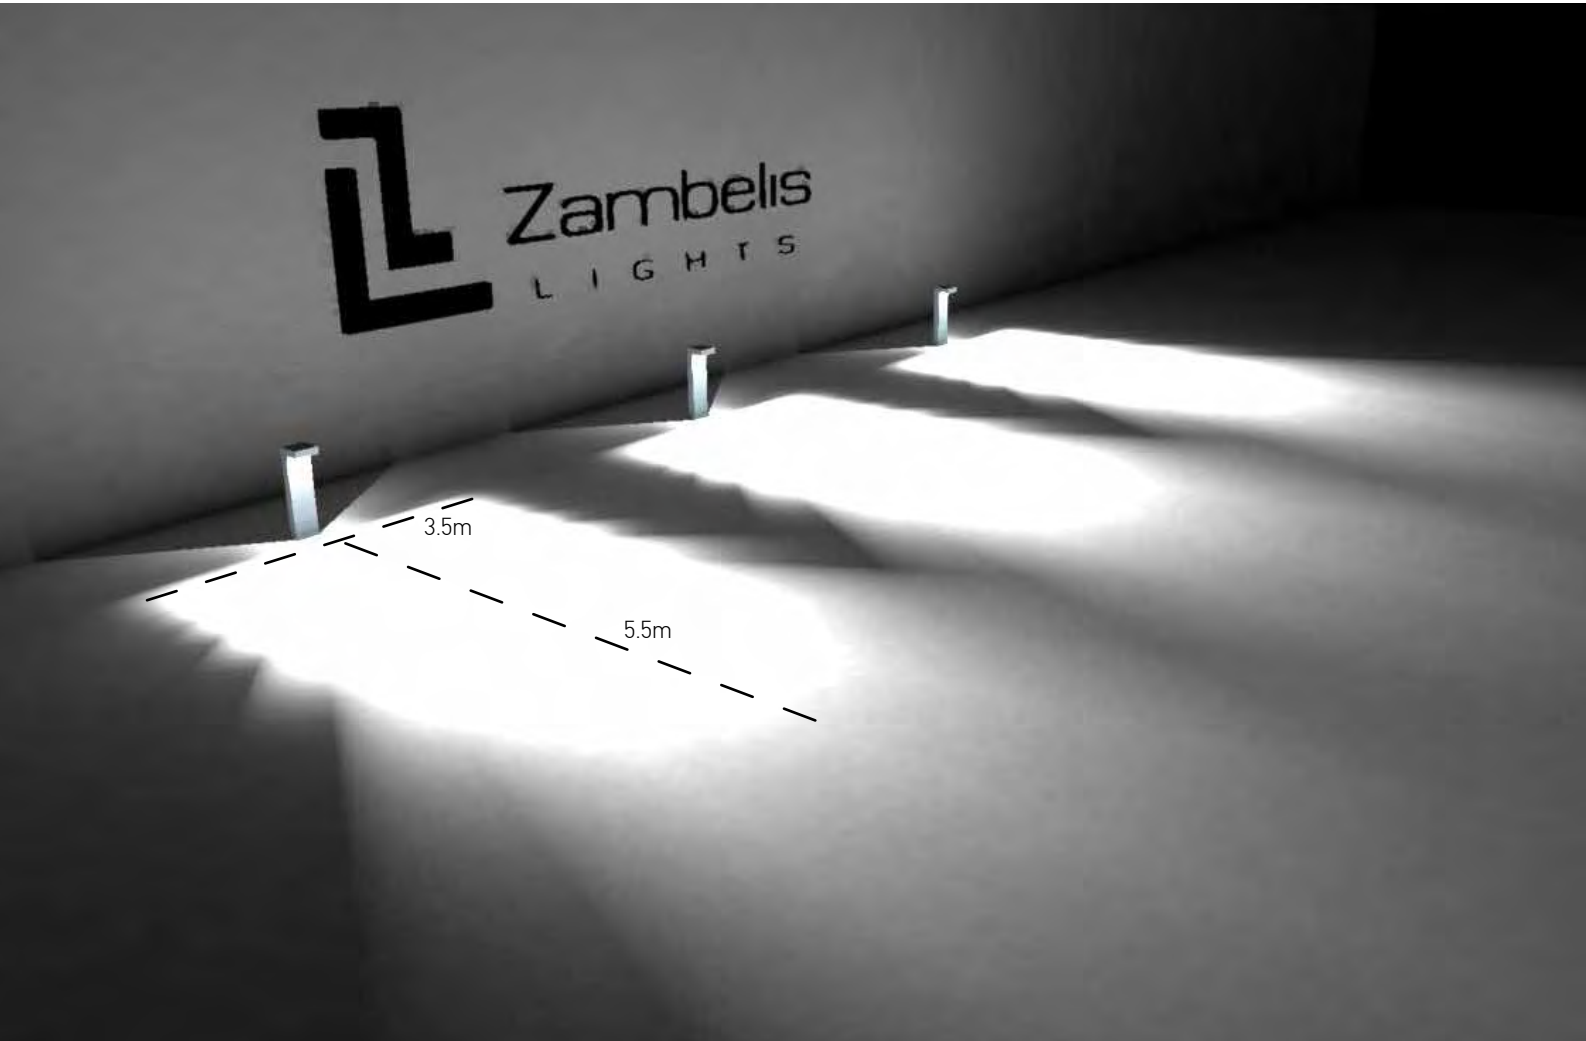


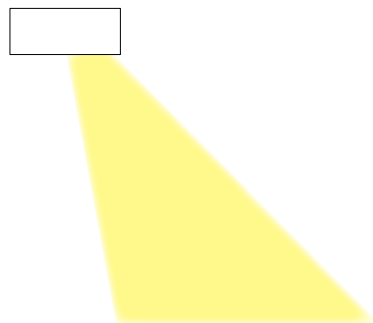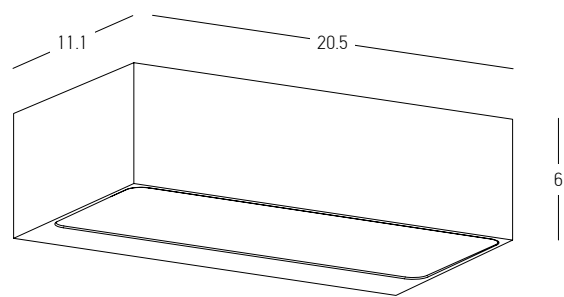

Asymmetric


Power	3x 4.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	968Lm
Cri	85
IP	54
Dimensions	L: 11.1cm W: 20.5cm H: 6cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / Code E518

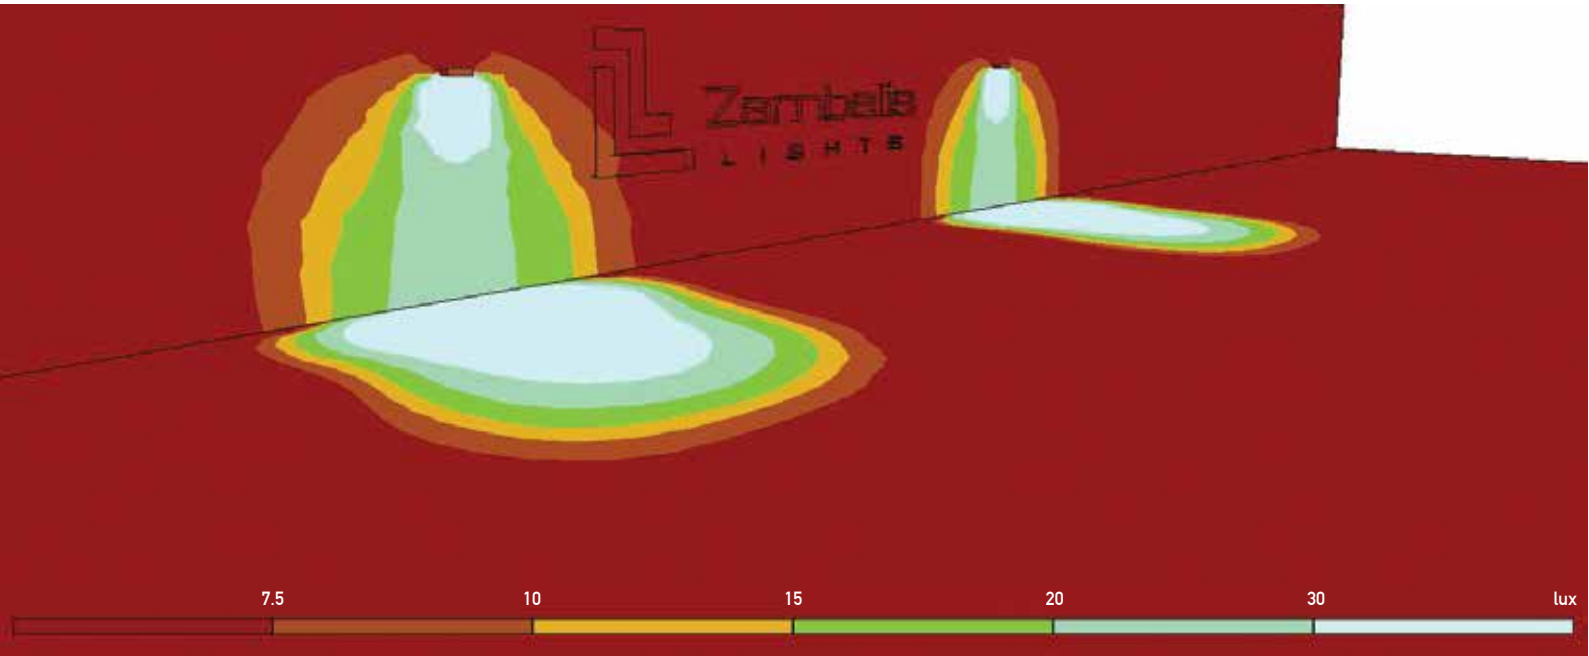

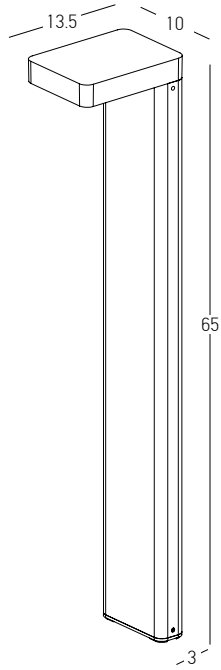


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 710Lm
Cri 80
IP 54
Dimensions L: 13.5cm W: 10cm H: 65cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Graphite / **Code E297**






Power 6.5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 316Lm
Cri 80
IP 65
Dimensions L: 4.3m W: 16cm H: 17.2cm
Material Aluminium - Glass
Color Graphite / **Code E446**

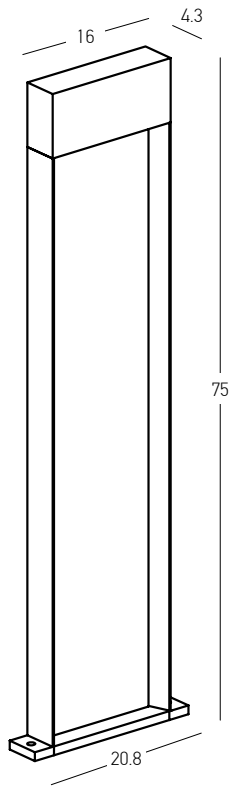


Power 6.5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 316Lm
Cri 80
IP 65
Dimensions L: 4.3m W: 16cm H: 75cm
Base L: 4.3m W: 20.8cm H: 1cm
Material Aluminium - Glass
Color Graphite / **Code E447**






Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 638Lm
Cri 80
IP 65
Dimensions L: 4.7cm W: 16.4cm H: 20cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E353**

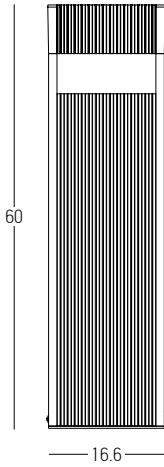


Power 30W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 986Lm
Cri 80
IP 65
Dimensions L: 8m W: 16.6cm H: 60cm
Material Aluminium - Tempered Glass
Special Feature Double Sided Lighting
Color Graphite / **Code E368**






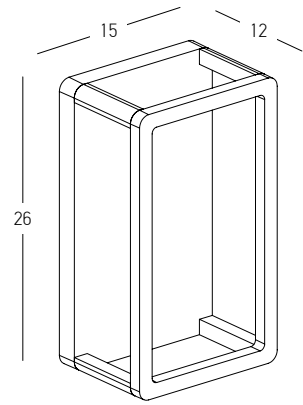

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 481Lm
Cri 80
IP 65
Dimensions L: 12cm W: 15cm H: 26cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E336**

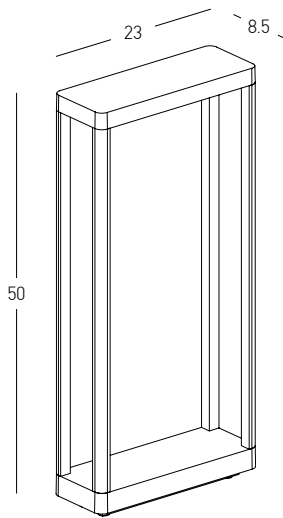


Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 587Lm
Cri 80
IP 65
Dimensions L: 8.5cm W: 23cm H: 50cm
Material Aluminium - Clear Glass
Color Graphite / **Code E335**




Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 587Lm
Cri 80
IP 65
Dimensions L: 8.5cm W: 23cm H: 20cm
Material Aluminium - Clear Glass
Color Graphite / **Code E334**



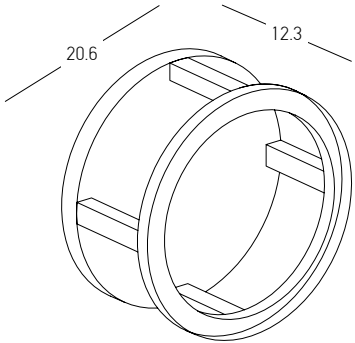


Power 9.2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 368Lm
Cri 85
IP 65
Dimensions Ø: 20.6cm L: 12.3cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E443**




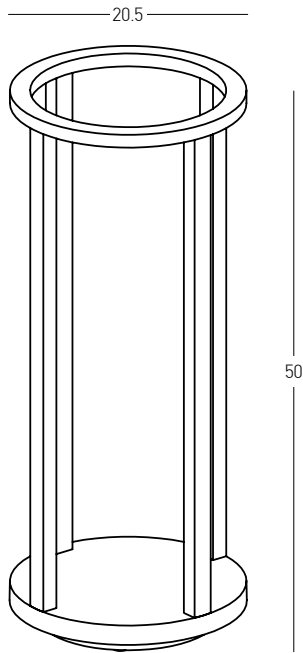


Power 9.2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 450Lm
Cri 85
IP 65
Dimensions Ø: 20.5cm H: 50cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E444**






Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 704Lm
Cri 80
IP 54
Dimensions L: 18cm W: 18cm H: 23cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E203**

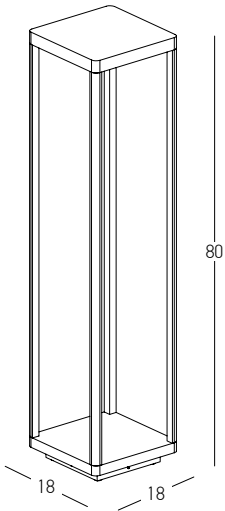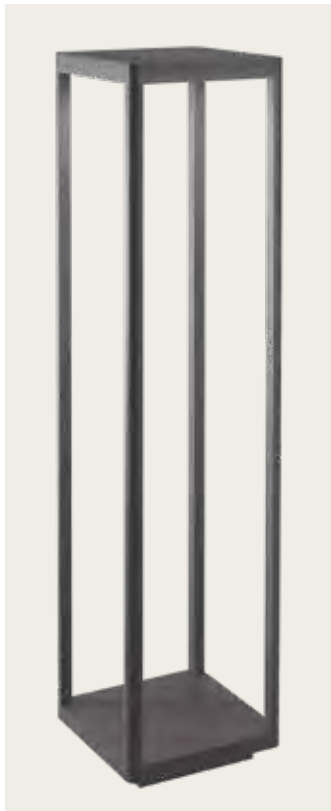

Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 704Lm
Cri 80
IP 54
Dimensions L: 18cm W: 18cm H: 80cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E204**



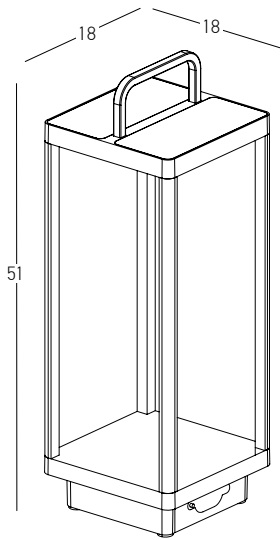


Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	390Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 51
Switch	1 Switch On/Off
Material	Aluminium - Tempered Glass
Special Feature	Solar Panel Portable Lamp USB Cable Included
Color	Graphite / Code E302




LIGHTING MODES OVERVIEW

- Charging Instructions:**
Before first use, charge the lamp under direct sunlight for 3 full days or use the included USB cable with a 1A adaptor for 4-5 hours. (USB cable included in the package.)
- Lighting Modes:**
Mode 1: First press • 100% brightness
Mode 2: Second press • 50% brightness
Mode 3: Third press • Light OFF

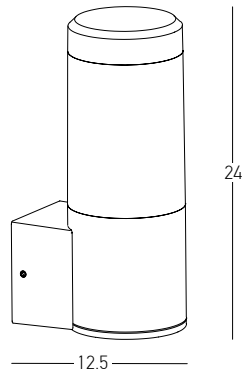


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 990Lm
Cri 80
IP 54
Dimensions L: 12.5cm W: 9cm H: 24cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E276**

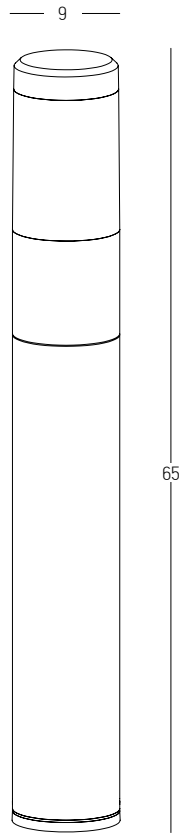


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 993Lm
Cri 80
IP 54
Dimensions Ø: 9cm H: 65cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E277**






Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 919Lm
Cri 80
IP 65
Dimensions Ø: 12cm L: 15.5cm H: 21.3cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E344**

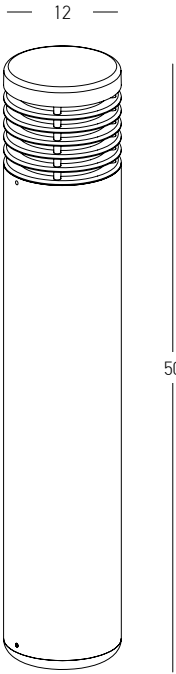

Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 923Lm
Cri 80
IP 65
Dimensions Ø: 12cm H: 50cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E345**



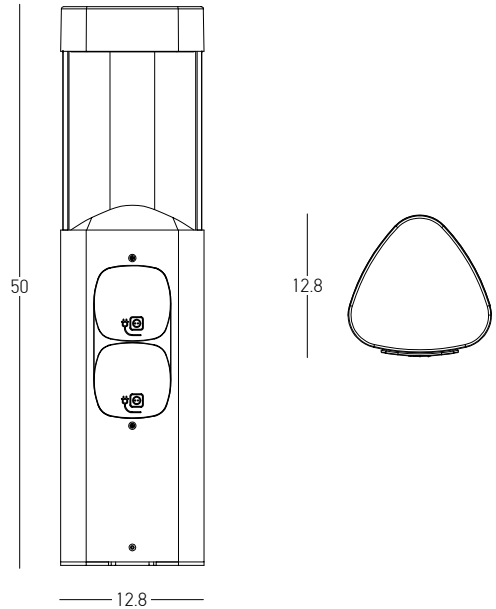


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	639Lm
Cri	80
IP	54
Dimensions	L: 12.8cm W: 12.8cm H: 50cm
Material	Aluminium - PC Diffuser
Special Feature	2 European Sockets 220-240V
Color	Graphite / Code E354





*Power sockets operate only when the light is switched on.



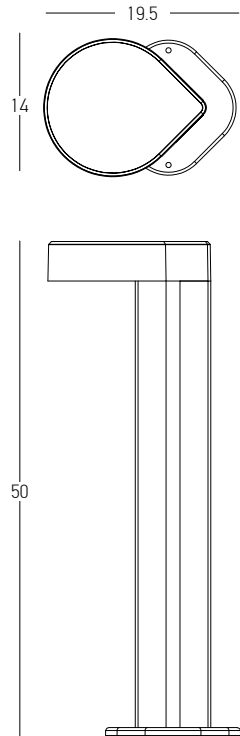



Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1035Lm
Cri 80
IP 65
Dimensions L: 19.5cm W: 14cm H: 50cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Color Graphite / **Code E357**



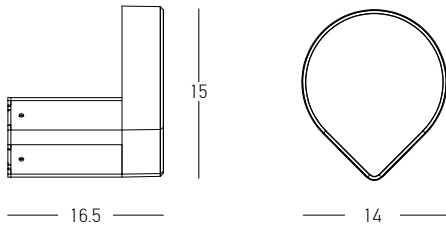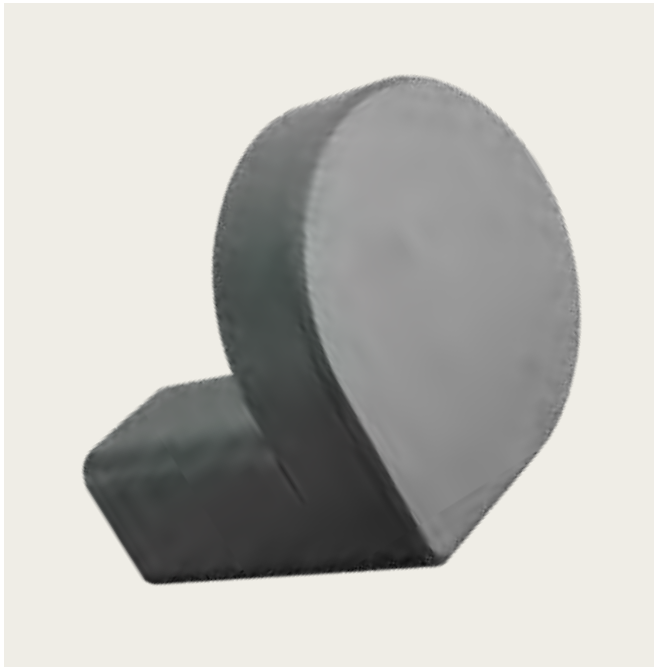


Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1035Lm
Cri 80
IP 65
Dimensions L: 16.5cm W: 14cm H: 15cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Color Graphite / **Code E358**

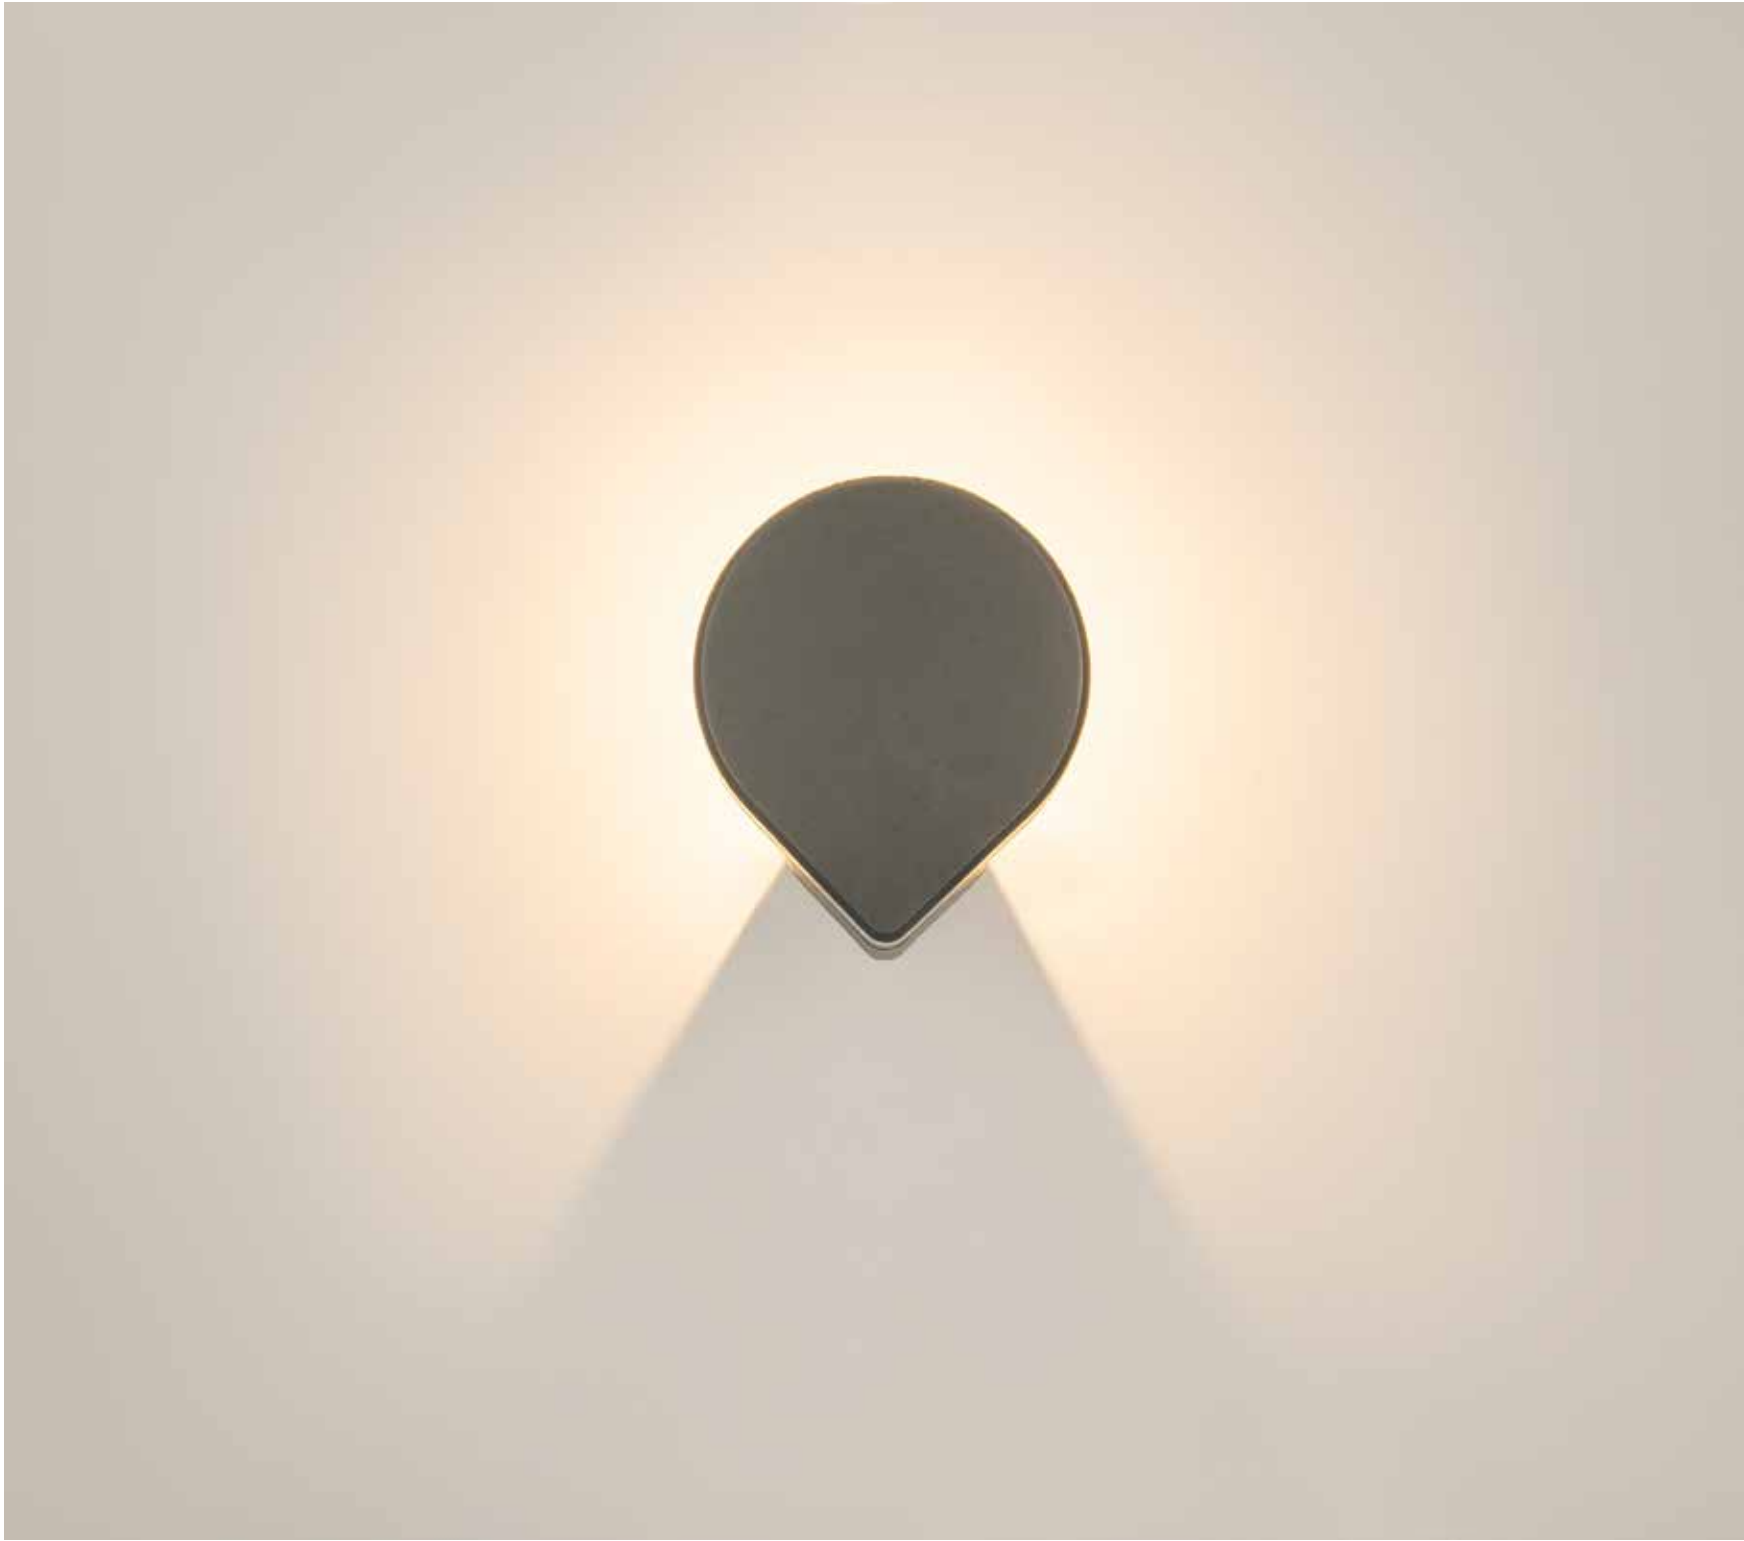




Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 867Lm
Cri 80
IP 54
Dimensions Ø: 11cm H: 25cm
Material Aluminium
Color Graphite / **Code E133**

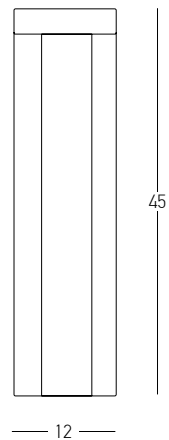

Power 3x 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1117Lm
Cri 80
IP 54
Dimensions Ø: 12cm H: 45cm
Material Aluminium
Color Graphite / **Code E132**




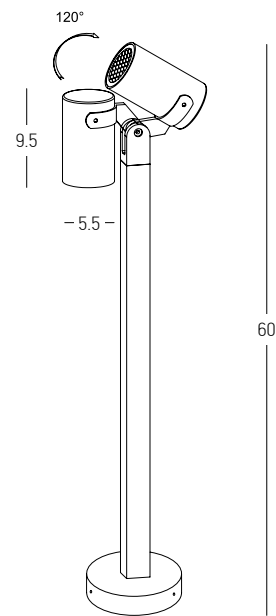


Bulb 1x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 11.5cm W: 5.5cm H: 60cm
Base Ø: 11.5cm H: 3cm
Spot Dimensions Ø: 5.5cm L: 9.5cm
Material Aluminium - Tempered Glass
Special Feature Tilt Up-Down
Honeycomb Included
Color Graphite / **Code E325**








Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 920Lm
Cri 80
IP 54
Dimensions Ø: 15cm L: 5.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E237**

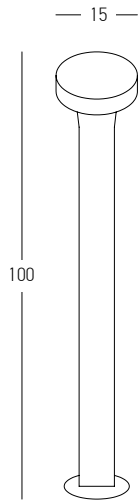




Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 792Lm
Cri 80
IP 65
Dimensions Ø: 15cm H: 100cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E249**






Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1180Lm
Cri 90
IP 54
Dimensions Ø: 9cm H: 65cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Graphite / **Code E298**



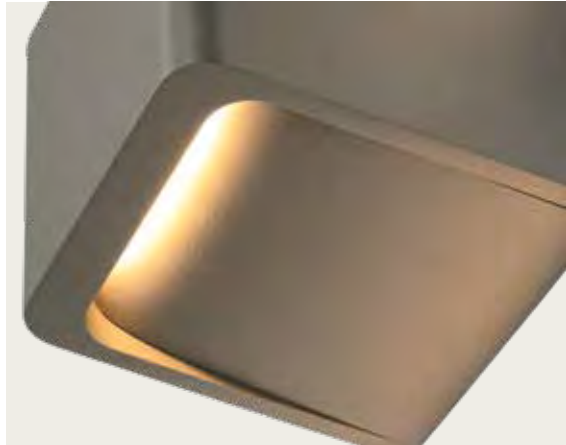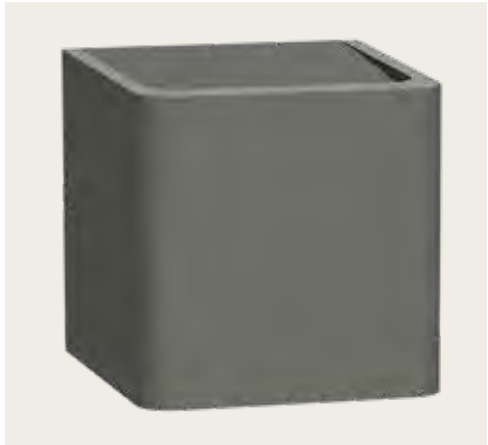


Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 767Lm
Cri 80
IP 65
Dimensions L: 10cm W: 9cm H: 9cm
Material Aluminium
Special Feature Up-Down Lighting
Color Graphite / **Code E352**

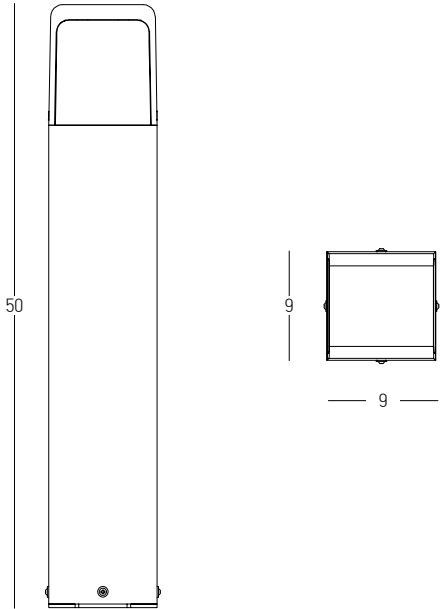


Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 767Lm
Cri 80
IP 65
Dimensions L: 9cm W: 9cm H: 50cm
Material Aluminium
Special Feature Double Sided Lighting
Color Graphite / **Code E351**



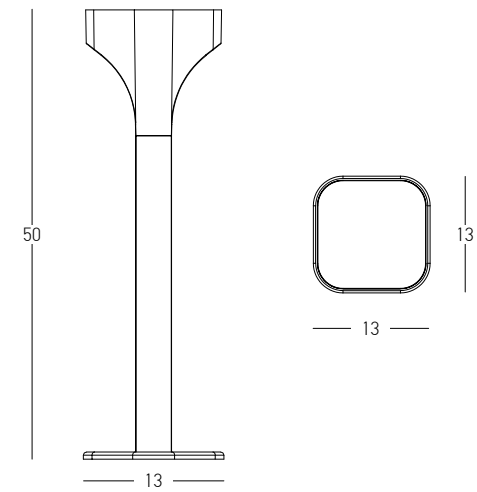


Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 993Lm
Cri 80
IP 65
Dimensions L: 13cm W: 13cm H: 50cm
Base L: 13cm W: 13cm H: 0.5cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Special Feature Double Sided Lighting
Color Graphite / **Code E356**



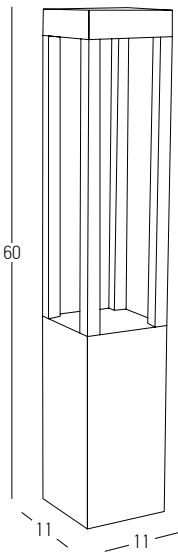


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 658Lm
Cri 80
IP 67
Dimensions L: 11cm W: 11cm H: 60cm
Beam Angle 120°
Material Aluminium - Clear Glass
Color Graphite / **Code E367**

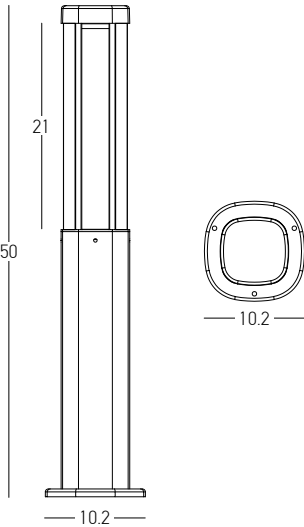


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 533Lm
Cri 80
IP 54
Dimensions L: 10.2cm W: 10.2cm H: 50cm
Base Ø: 10.2cm H: 1cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Color Graphite / **Code E355**



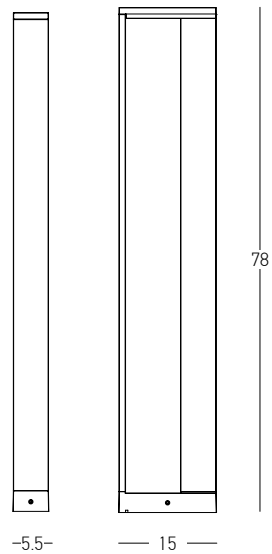


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 653Lm
Cri 80
IP 54
Dimensions L: 15cm W: 5.5cm H: 78cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E208**



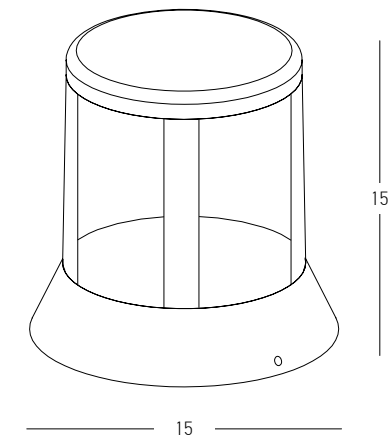

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 557Lm
Cri 80
IP 65
Dimensions Ø: 15cm H: 15cm
Material Aluminium - Clear Diffuser
Color Graphite / **Code E337**




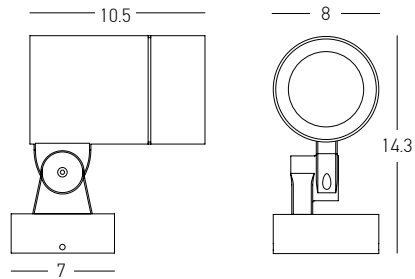

Bulb 1x GU10
Power 11W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 8cm L: 14.3cm
Base Ø: 7cm
Material Aluminium - Tempered Glass
Special Feature Tilt Up-Down
Color Graphite / **Code E236**



Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1243Lm
Cri 80
IP 65
Dimensions Ø: 8cm L: 16.2cm
Base Ø: 7cm
Beam Angle 32°
Material Aluminium - Tempered Glass
Special Feature Tilt Up-Down
Color Graphite / **Code E235**

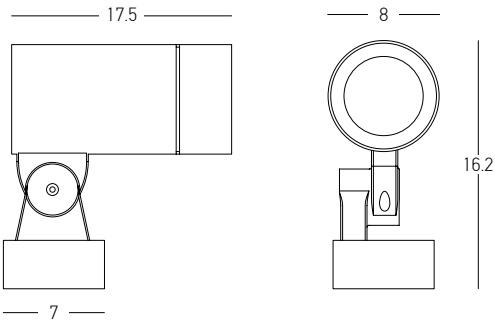


Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1243Lm
Cri 80
IP 65
Dimensions Ø: 8cm L: 16.2cm
Base Ø: 7cm
Beam Angle 12°
Material Aluminium - Tempered Glass
Special Feature Tilt Up-Down
Color Graphite / **Code E235-12D**



Light That Defines Walls
Captivating outdoor wallscapes with style.




04 . WALL

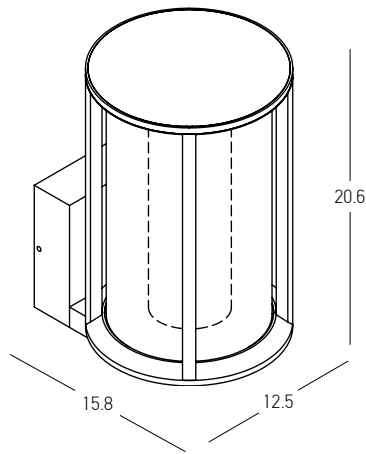


Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 789Lm
Cri 90
IP 54
Dimensions L: 15.8cm W: 12.5cm H:20.6cm
Base L: 3.5cm W: 7.5cm H:9cm
Material Aluminium - Glass - Acrylic
Color Beige-Brown (Taupe) / **Code E427**



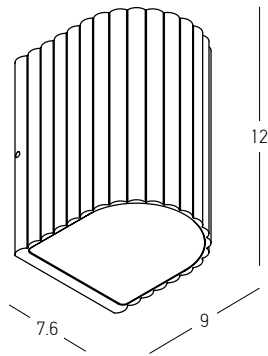


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 191Lm
Cri 85
IP 54
Dimensions L: 9cm W: 7.6cm H: 12cm
Material Aluminium - Glass
Color Grey Beige / **Code E419**

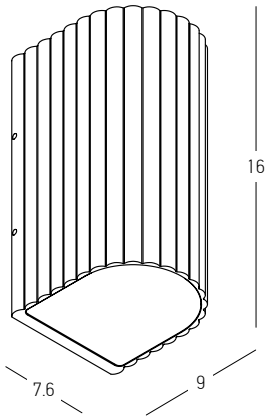


Power 2x 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 405Lm
Cri 85
IP 54
Dimensions L: 9cm W: 7.6cm H: 16cm
Material Aluminium - Glass
Special Feature Up-Down Lighting
Color Grey Beige / **Code E420**



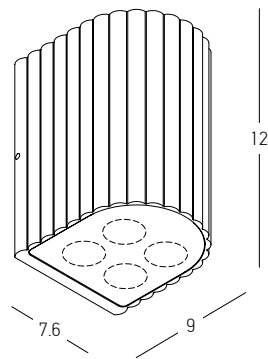


Power 4x 1W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 280Lm
Cri 85
IP 54
Dimensions L: 9cm W: 7.6cm H: 12cm
Beam Angle 10°
Material Aluminium - Glass
Color Graphite / **Code E421**

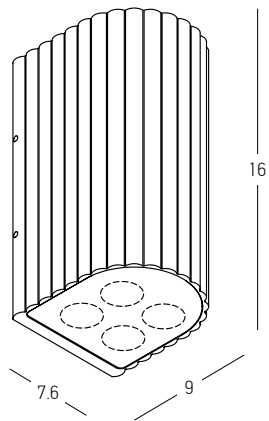

Power 8x 1W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 560Lm
Cri 85
IP 54
Dimensions L: 9cm W: 7.6cm H: 16cm
Beam Angle 10°
Material Aluminium - Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E422**



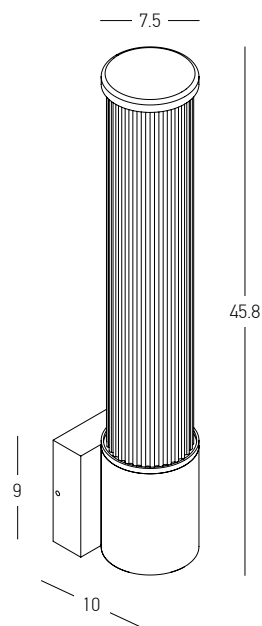

Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 832Lm
Cri 90
IP 54
Dimensions Ø: 7.5cm L: 10cm H: 45.8cm
Base L: 3cm W: 9cm H: 9cm
Material Aluminium - Glass - Acrylic
Color Graphite / **Code E428**






WHITE



GREEN




CHAMPAGNE

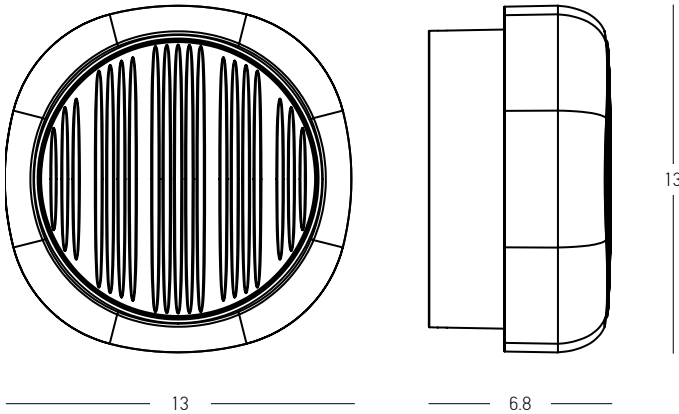

Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	885Lm
Cri	90
IP	65
Dimensions	L: 6.8cm W: 13cm H: 13cm
Beam Angle	120°
Dimmable Triac	☉
Material	Aluminium - Acrylic - Glass
Color	White-Sandy Black Base / Code E491
Color	Champagne-Sandy Black Base / Code E492
Color	Green-Sandy Black Base / Code E493




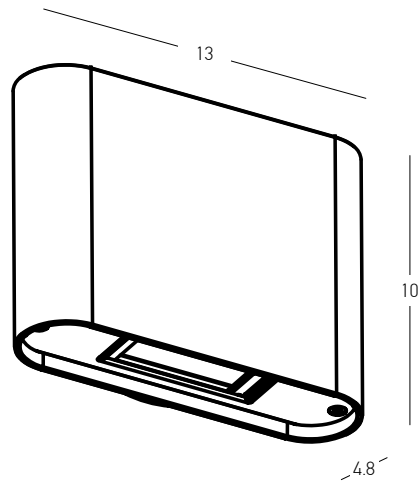


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K, 4000K
Lumen 508Lm, 542Lm
Cri 80
IP 65
Dimensions L: 4.8cm W: 13cm H: 10cm
Base Ø: 8.8cm L: 1cm
Material Aluminium - Tempered Glass
Special Feature CCT Switch
Adjustable Dual Light Side Cover
Up-Down Lighting

Color Sandy Black / **Code E433**






Power 2x 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 65
Dimensions L: 3.1cm W: 11cm H: 9cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E238**
Color Sandy White / **Code E238-W**




Power 2x 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 960Lm
Cri 80
IP 65
Dimensions L: 3.1cm W: 17.5cm H: 9cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E239**
Color Sandy White / **Code E239-W**

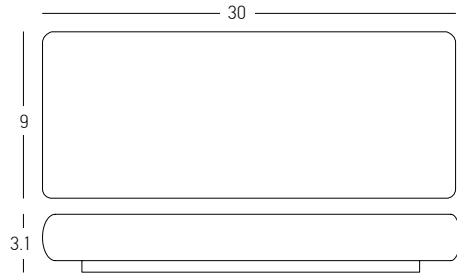


Power 2x 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1600Lm
Cri 80
IP 65
Dimensions L: 3.1cm W: 30cm H: 9cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E240**
Color Sandy White / **Code E240-W**





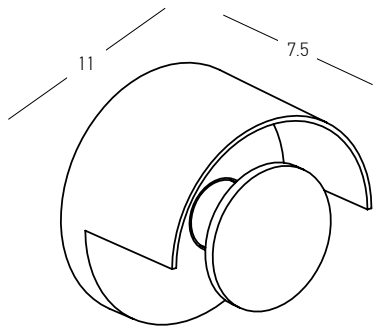



Bulb 1x G9
Power 12W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 11cm L: 7.5cm
Material Aluminium - Clear PC Diffuser
Color Sandy White / **Code E440**

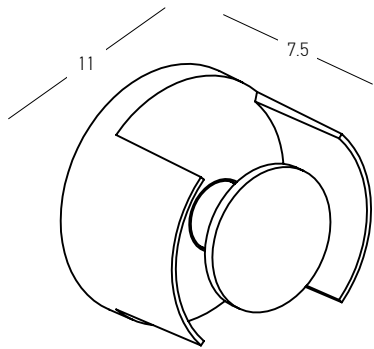

Bulb 1x G9
Power 12W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 11cm L: 7.5cm
Material Aluminium - Clear PC Diffuser
Color Sandy White / **Code E439**



OUTDOOR LIGHTING | WALL



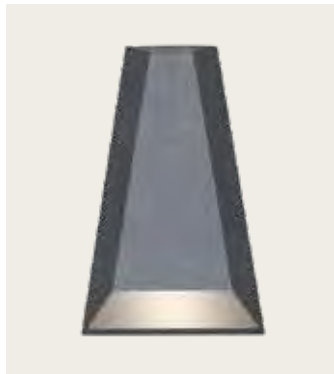




Power 2x 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 54
Dimensions L: 6.5cm W: 11cm H: 17.5cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E135**
Color Sandy White / **Code E156**




Power 2x 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 54
Dimensions L: 8.2cm W: 8cm H: 8cm
Material Aluminium - Tempered Glass
Special Feature Movable
Up-Down Lighting

Color Graphite / **Code E109**
Color Sandy White / **Code E159**

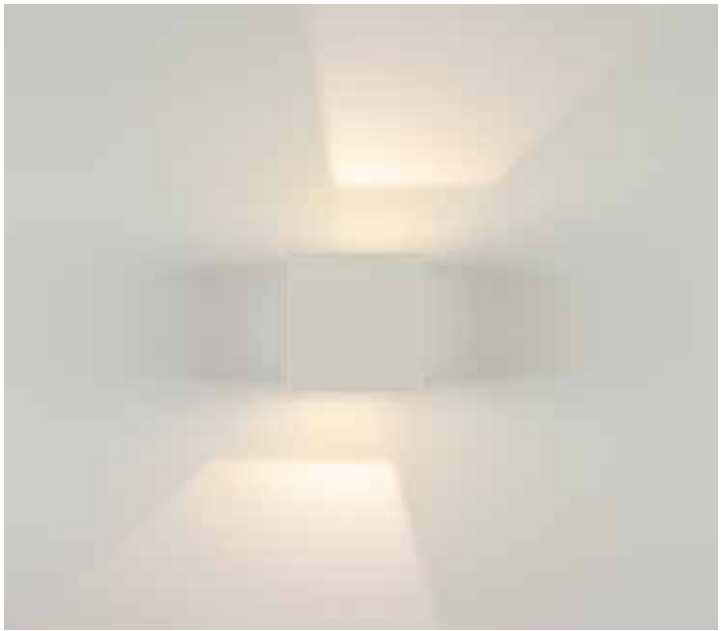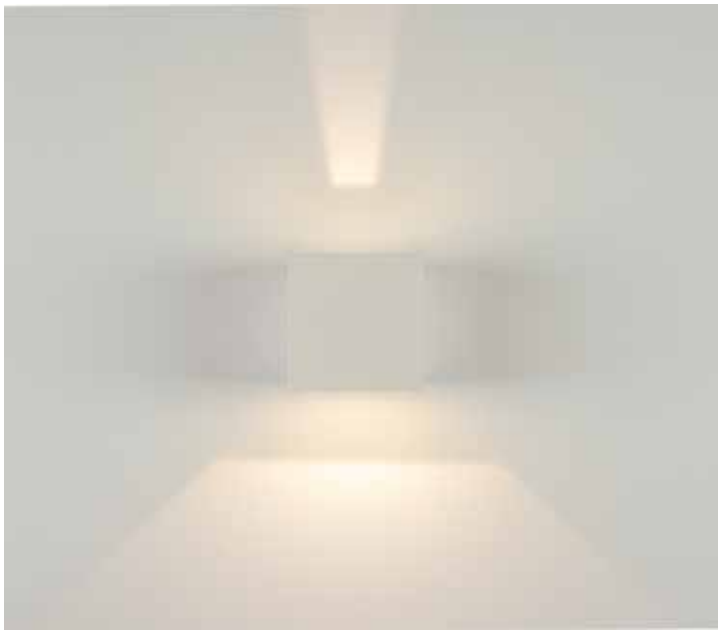

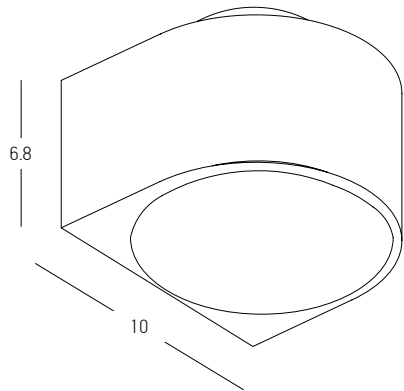
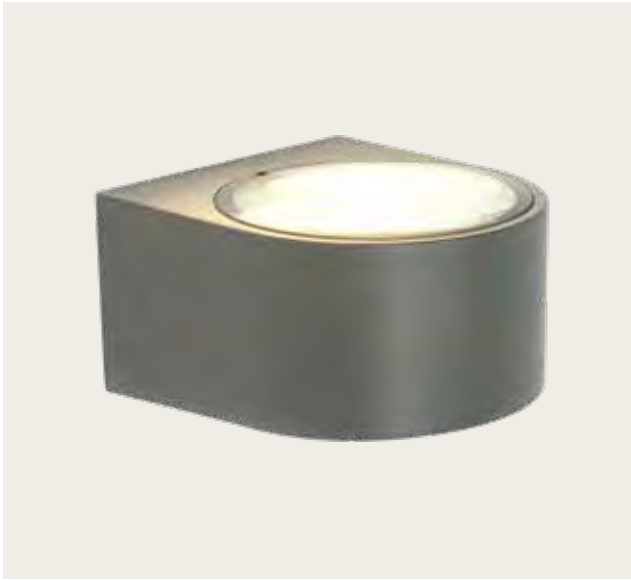


Power 2x 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 929Lm
Cri 90
IP 54
Dimensions L: 11cm W: 10cm H: 6.8cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E317**

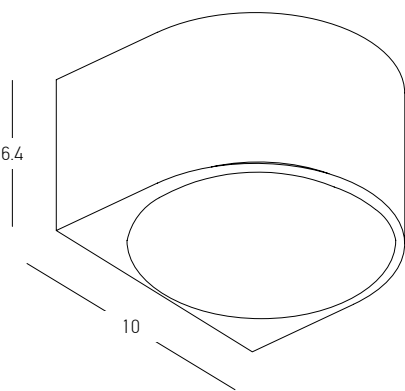


Power 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 544Lm
Cri 90
IP 54
Dimensions L: 11cm W: 10cm H: 6.4cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E316**



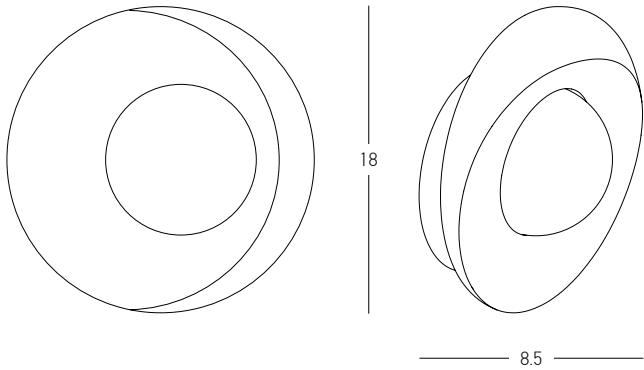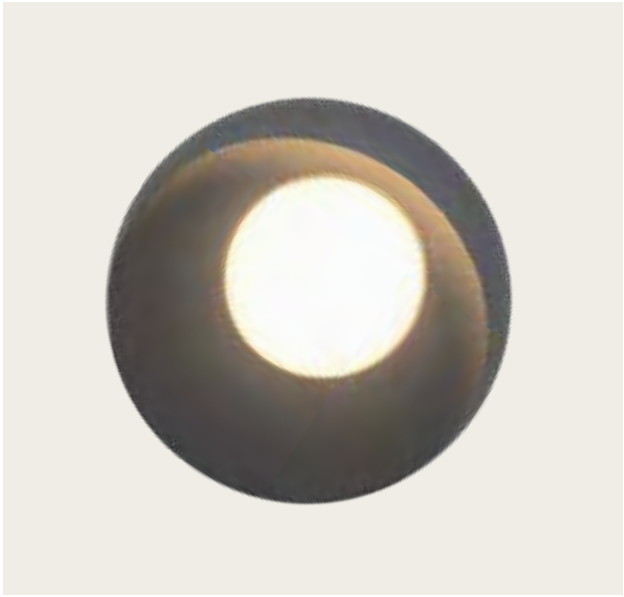



Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 490Lm
Cri 80
IP 54
Dimensions Ø: 18cm L: 8.5cm
Base Ø: 12cm L: 5.5cm
Material Aluminium - PC Diffuser
Special Feature Diffuser Ø: 8.5cm
Color Graphite / **Code E413**



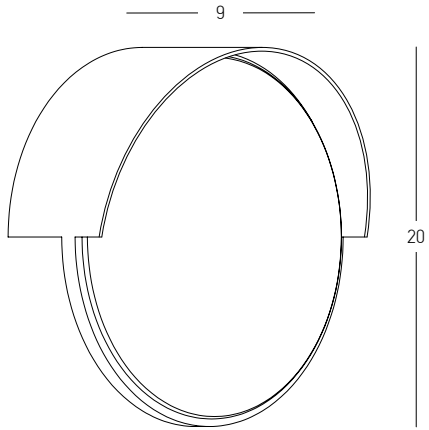


Power	10W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	875Lm
Cri	85
IP	54
Dimensions	Ø: 20cm L: 9cm
Material	Aluminium - PC Diffuser
Color	Graphite / Code E414



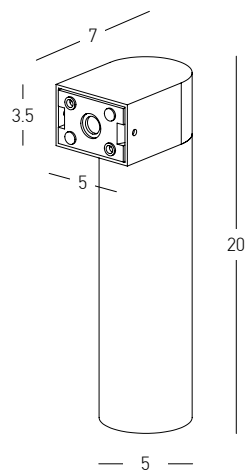


Power 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 300Lm
Cri 90
IP 65
Dimensions Ø: 5cm L: 7cm H: 20cm
Base L: 7cm W: 5cm H: 3.5cm
Beam Angle 34°
Material Aluminium - Glass
Color Graphite / **Code E415**



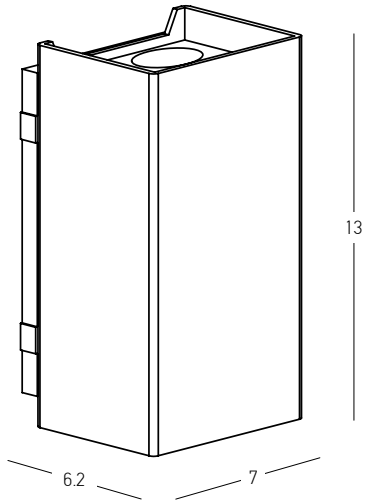

Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	350Lm
Cri	90
IP	65
Dimensions	L: 6.2cm W: 7cm H: 13cm
Base	L: 1.7cm W: 7cm H: 11cm
Beam Angle	6.5°
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Graphite / Code E412






Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 617Lm
Cri 80
IP 54
Dimensions L: 12.5cm W: 4cm H: 55cm
Base 2x W: 4cm H: 7cm
Material Aluminium - Acrylic
Special Feature 350° Rotatable
Profile 7.2x2.5cm


Color Graphite / **Code E429**
Color Dark Brown / **Code E430**






Power	36W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2000Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 4cm H: 134cm
Base	2x W: 4cm H: 7cm
Material	Aluminium - Acrylic
Special Feature	350° Rotatable Profile 7.2x2.5cm
Color	Graphite / Code E431
Color	Dark Brown / Code E432



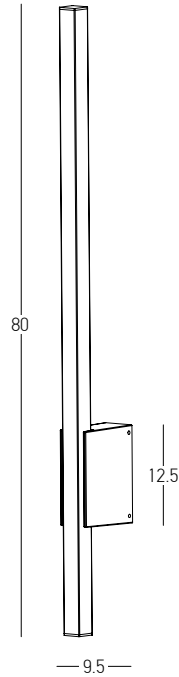


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1187Lm
Cri 80
IP 65
Dimensions L: 9.5cm W: 4.5cm H: 80cm
Base L: 9cm W: 4.5cm H: 12.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E287**



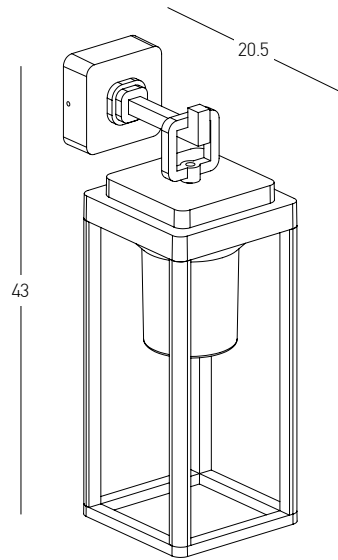


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 20.5cm W: 14.5cm H: 43cm
Base L: 3.3cm W: 9cm H: 9cm
Material Aluminium - Clear Diffuser
Color Dark Brown / **Code E343**




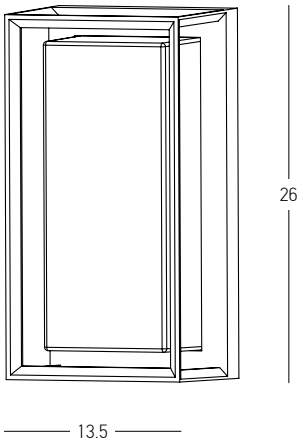


Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 12cm W: 13.5cm H: 26cm
Base	L: 2.5cm W: 9.3cm H: 22cm
Material	Aluminium - PC Diffuser
Color	Graphite-Smoked Diffuser / Code E434






Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 810Lm
Cri 80
IP 65
Dimensions L: 9cm W: 9.5cm H: 26.5cm
Material Aluminium - PC Diffuser
Color Sandy Black / **Code E202**


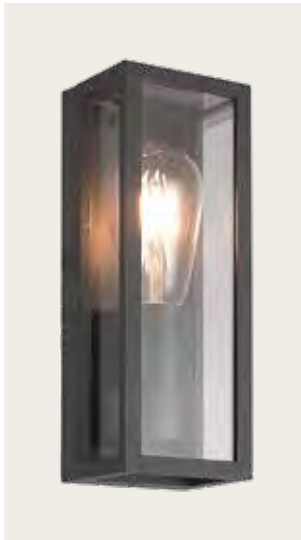


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 9cm W: 9.5cm H: 26.5cm
Material Aluminium - Clear Diffuser
Color Sandy Black / **Code E201**


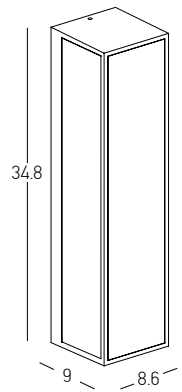


Bulb 2x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9cm W: 8.6cm H: 34.8cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E296**



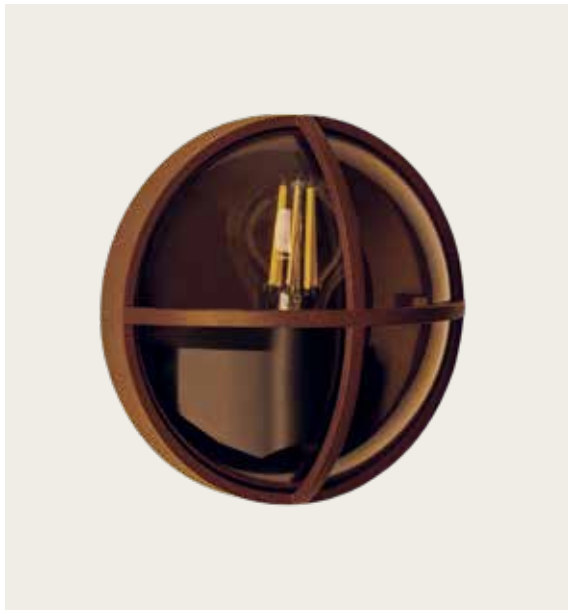


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 17.7cm L: 9.8cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E437**

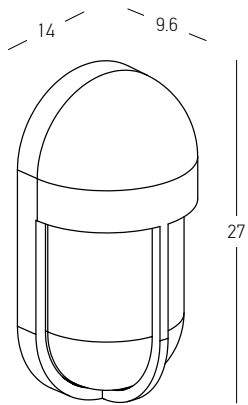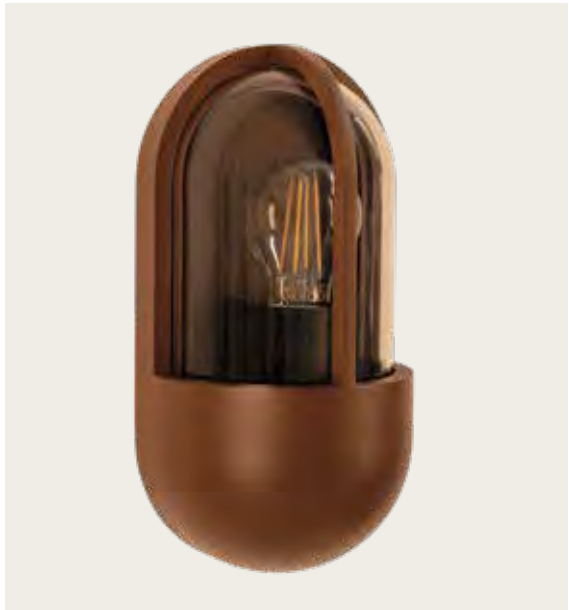


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 9.6cm W: 14cm H: 27cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E438**



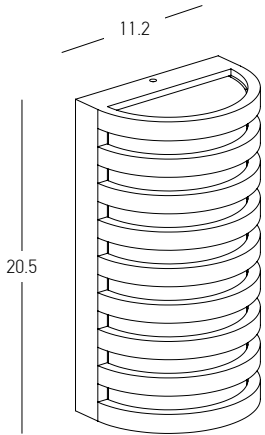


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 929Lm
Cri 80
IP 65
Dimensions L: 8cm W: 11.2cm H: 20.5cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E341**

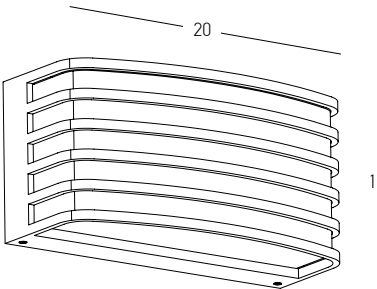



Bulb 1x E27
Power 20W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9cm W: 20cm H: 10cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E275**




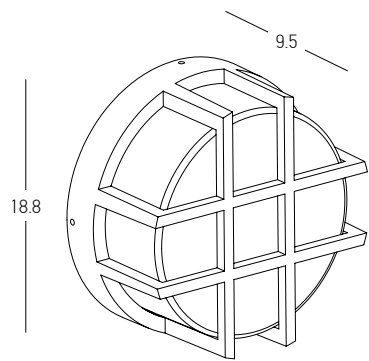


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 880Lm
Cri 80
IP 65
Dimensions Ø: 18.8cm L: 9.5cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E342**

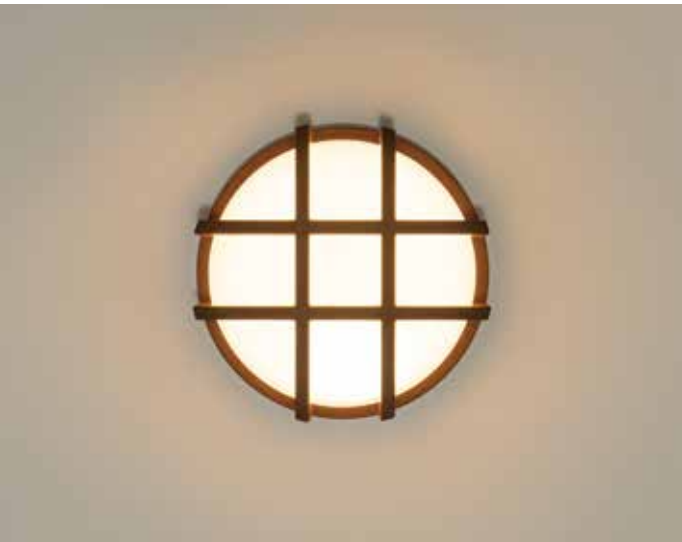



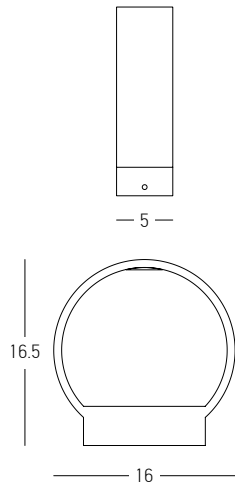


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 530Lm
Cri 80
IP 65
Dimensions L: 16.5cm W: 16cm H: 5cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Dark Brown / **Code E268**

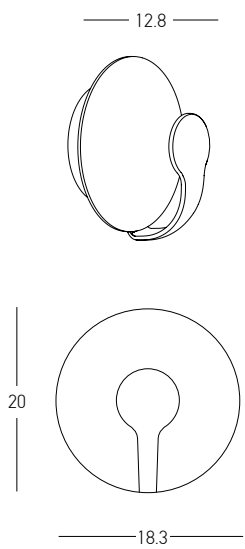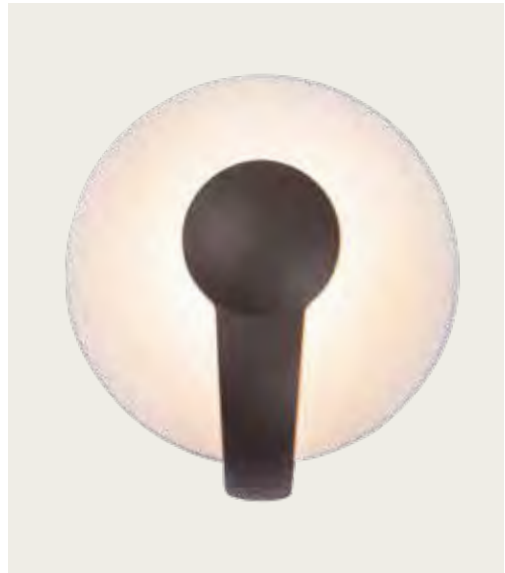


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 880Lm
Cri 80
IP 65
Dimensions L: 12.8cm W: 18.3cm H: 20cm
Material Aluminium
Color Dark Brown - Sandy White / **Code E271**

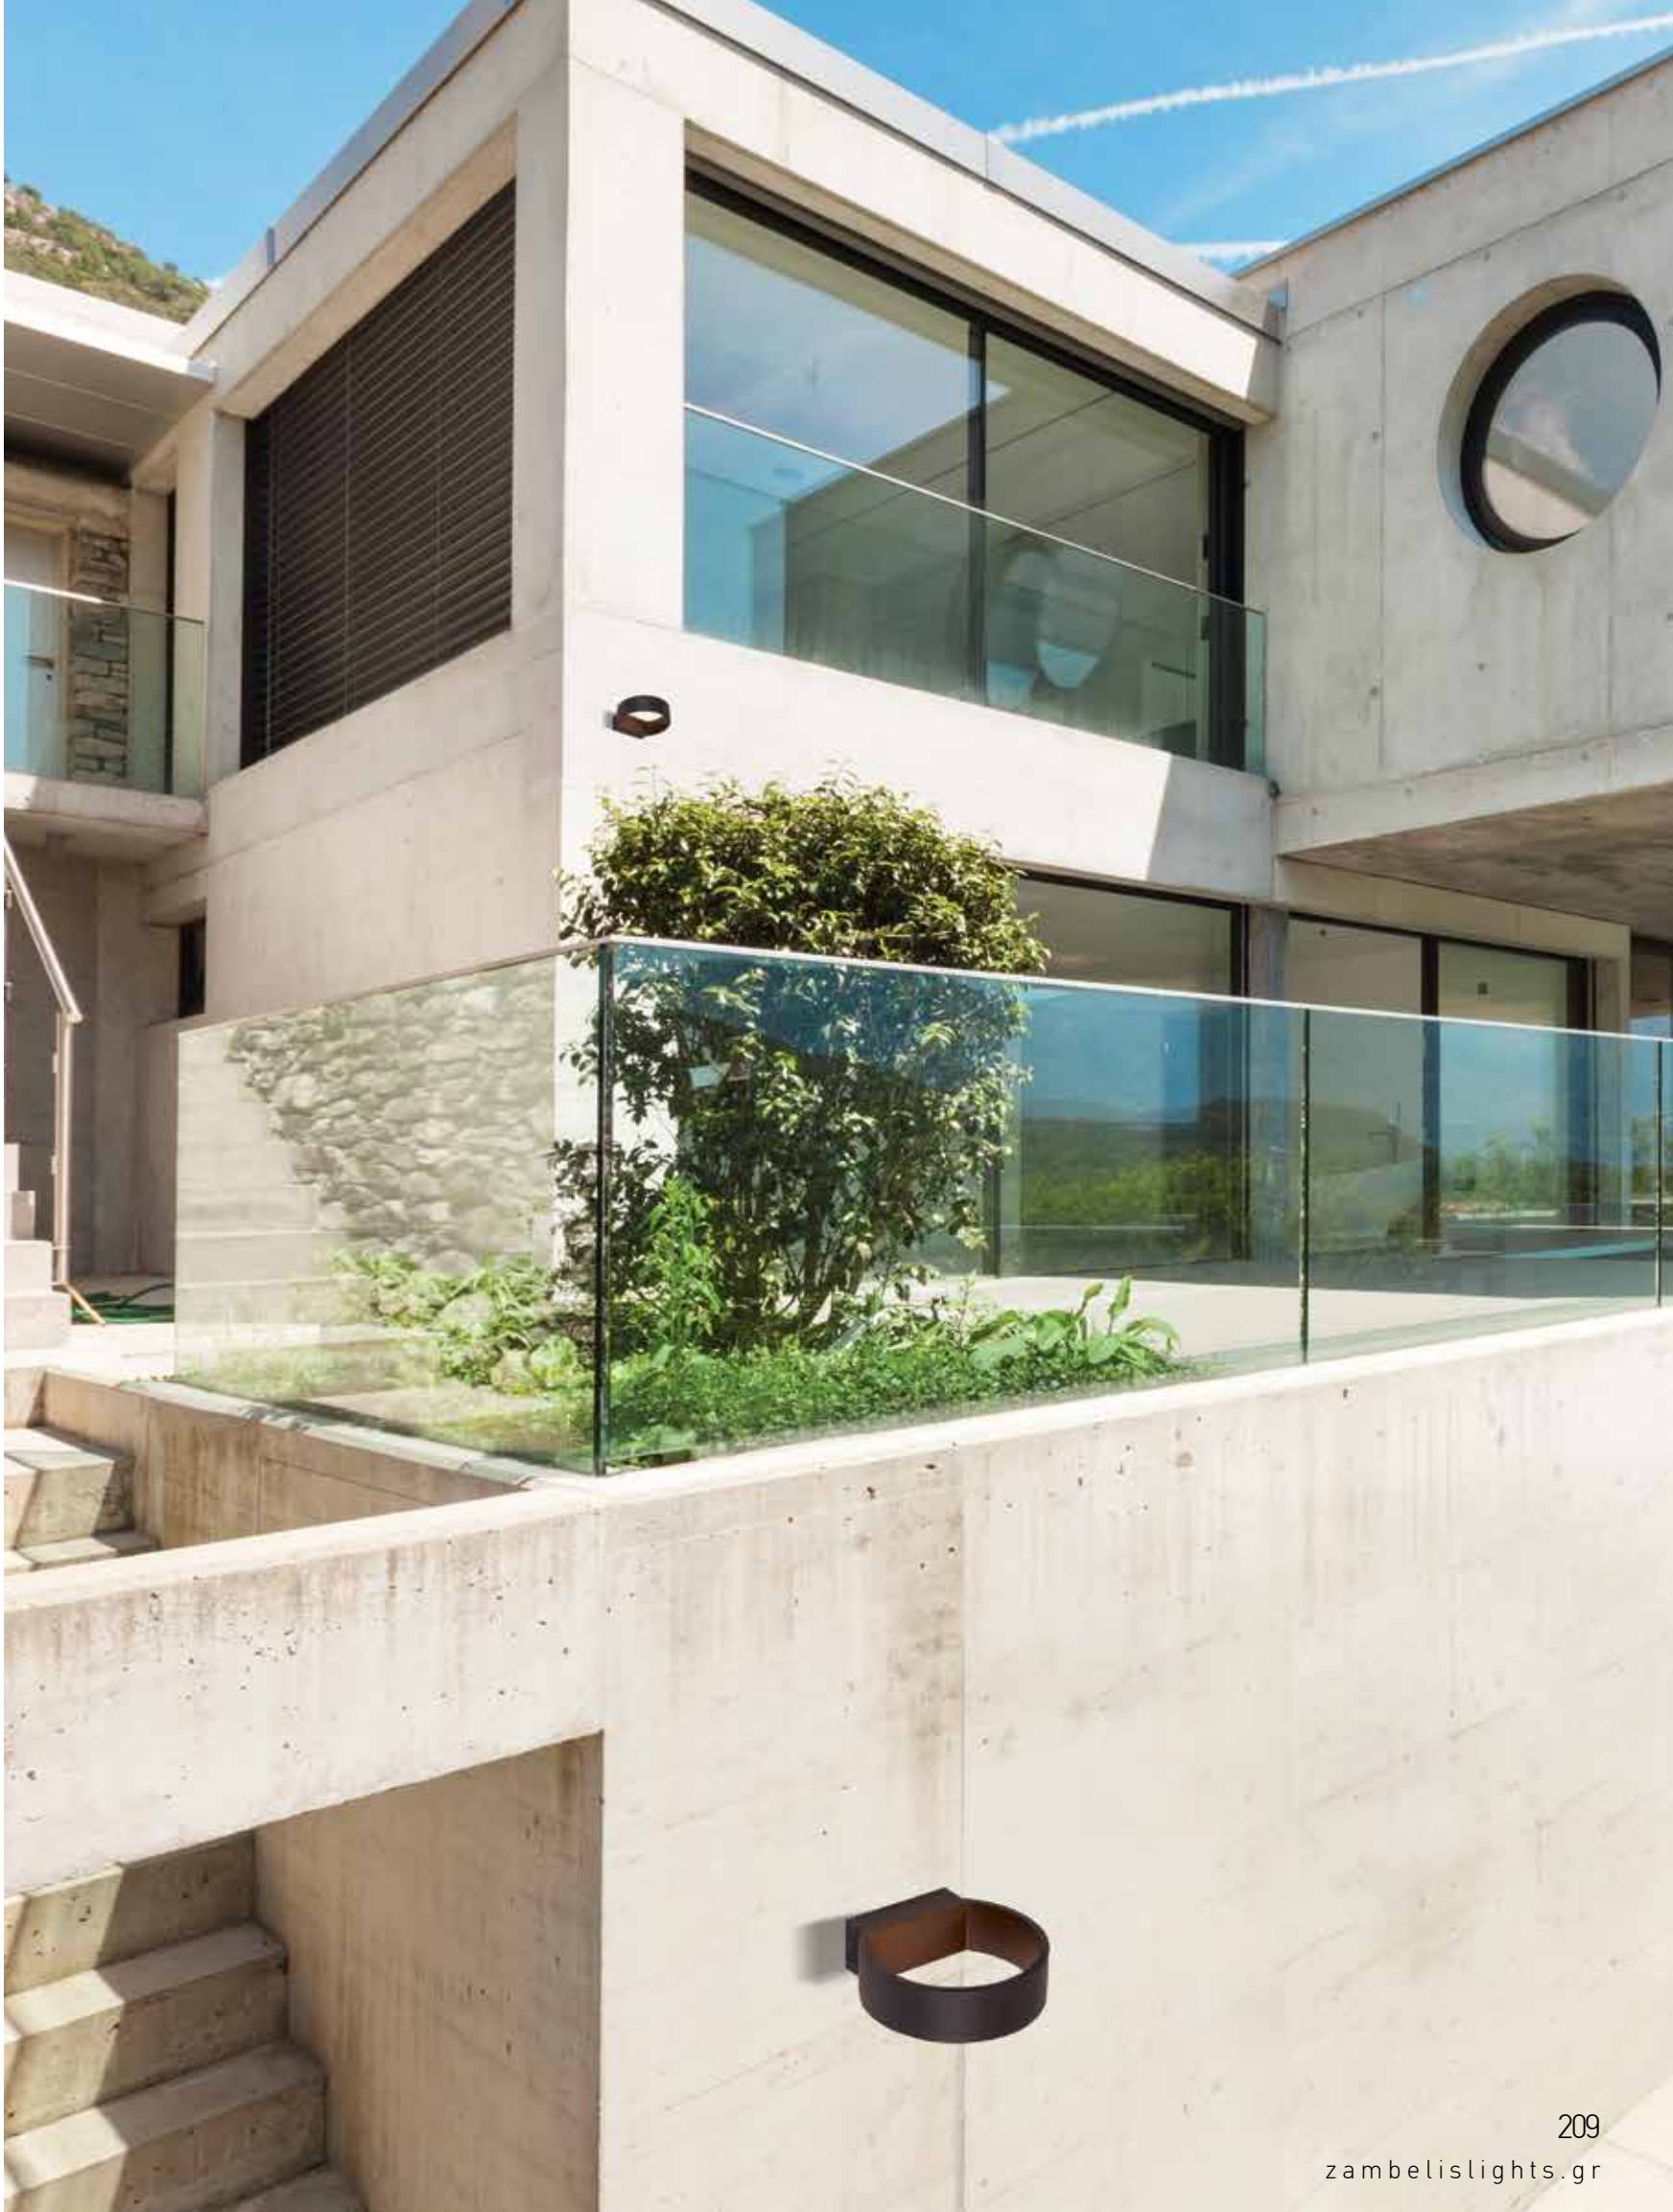

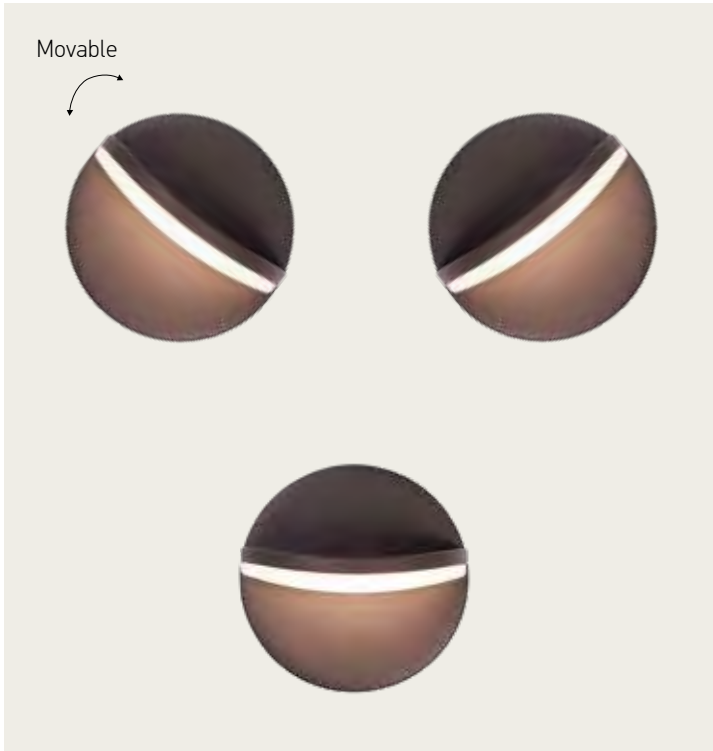



Power 16W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1106Lm
Cri 80
IP 65
Dimensions Ø: 18.3cm L: 13cm
Material Aluminium - Opal PC Diffuser
Special Feature Movable Light
Color Dark Brown / **Code E267**




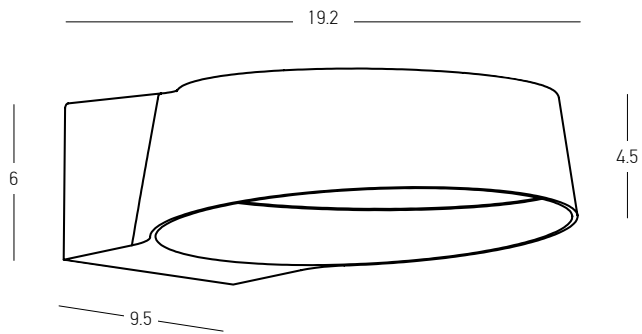


Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1100Lm
Cri 80
IP 54
Dimensions L: 19.2cm W: 16.2cm H: 6cm
Beam Angle 120°
Material Aluminium - Clear Glass
Color Graphite / **Code E464**



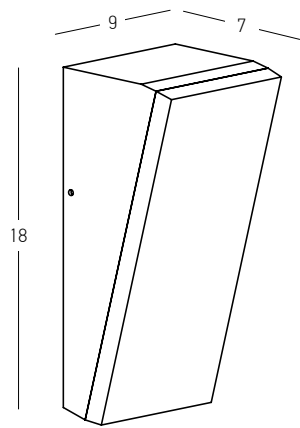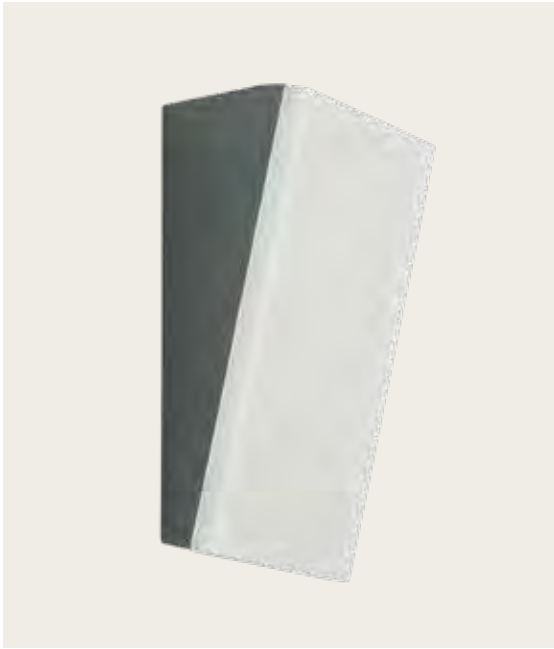


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1115Lm
Cri 80
IP 65
Dimensions L: 7cm W: 9cm H: 18cm
Material Aluminium - Opal PC Diffuser
Color Graphite / **Code E416**

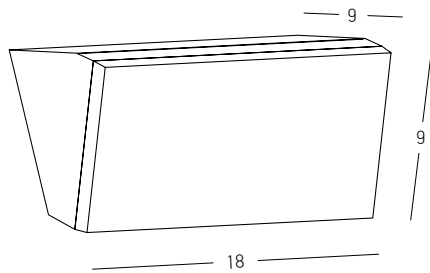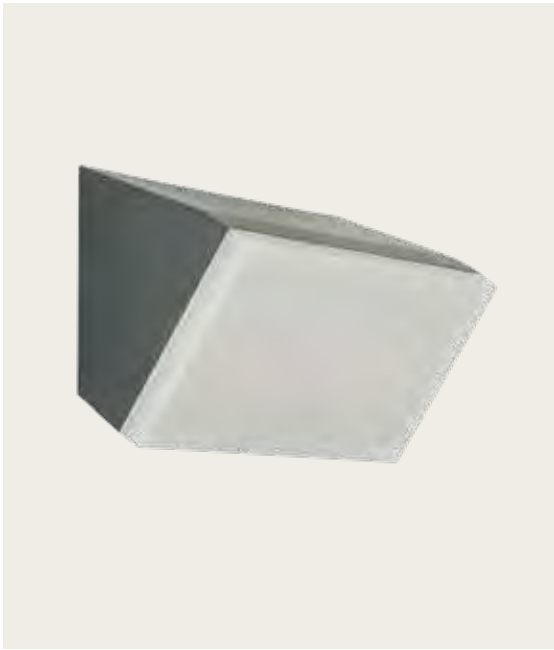


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1115Lm
Cri 80
IP 65
Dimensions L: 9cm W: 18cm H: 9cm
Material Aluminium - Opal PC Diffuser
Color Graphite / **Code E417**



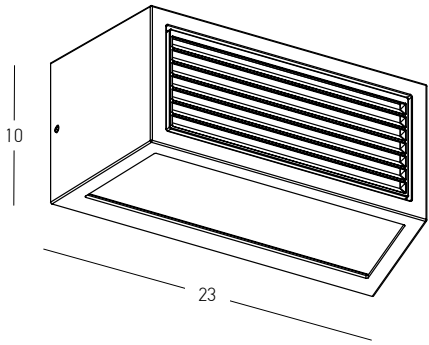


Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.5cm W: 23cm H: 10cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting
Color	Graphite / Code E500




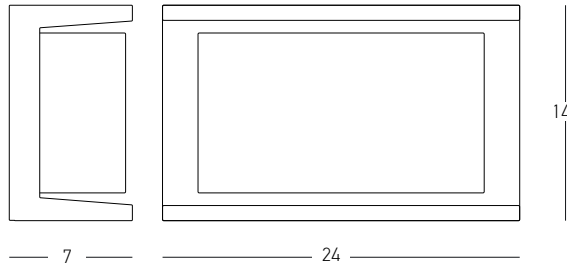

Bulb 1x E27
Power 18W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 7cm W: 24cm H: 14cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E149**

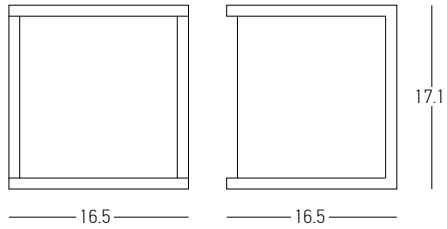


Bulb 1x E27
Power 18W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 16.5cm W: 16.5cm H: 17.1cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E127**

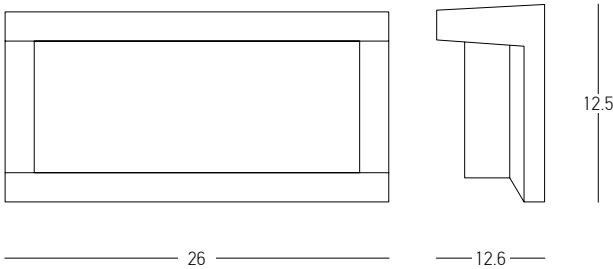



Bulb 1x E27
Power 18W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 12.6cm W: 26cm H: 12.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E128**



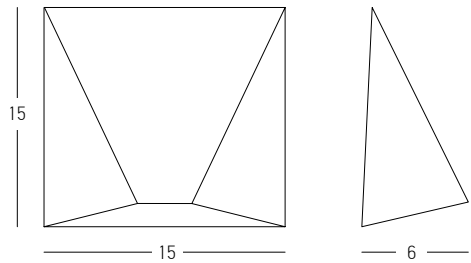


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 54
Dimensions L: 6cm W: 15cm H: 15cm
Material Aluminium - Glass
Color Graphite / **Code E243**



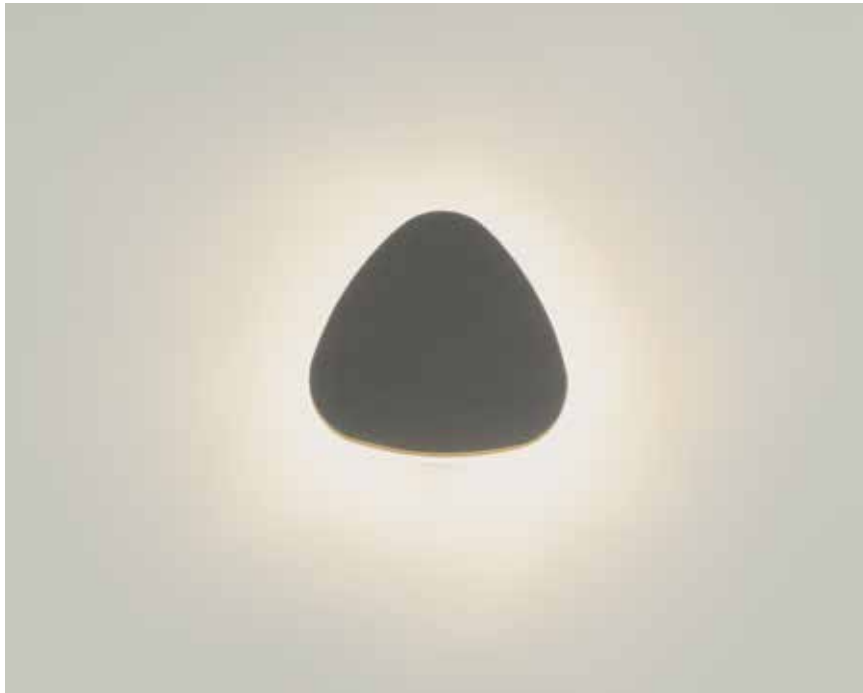


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 810Lm
Cri 80
IP 65
Dimensions L: 7.2cm W: 16cm H: 15.5cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E195**

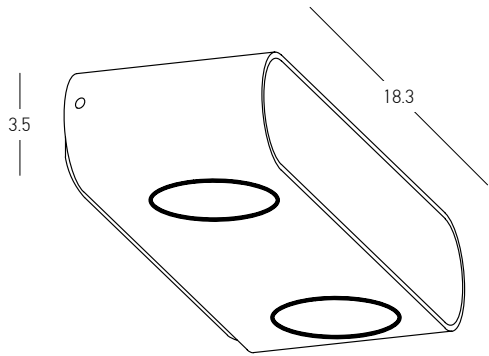


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 775Lm
Cri 90
IP 54
Dimensions L: 6.5cm W: 18.3cm H: 3.5cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E315**








Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 336Lm
Cri 80
IP 65
Dimensions L: 6cm W: 11cm H: 11cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E197**

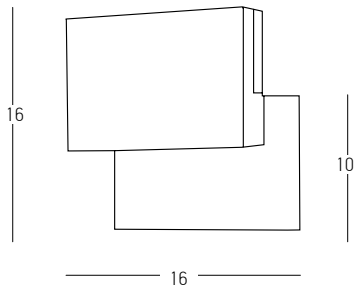


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 810Lm
Cri 80
IP 65
Dimensions L: 7.8cm W: 16cm H: 10-16cm
Material Aluminium - PC Diffuser
Special Feature Movable
Color Graphite / **Code E199**

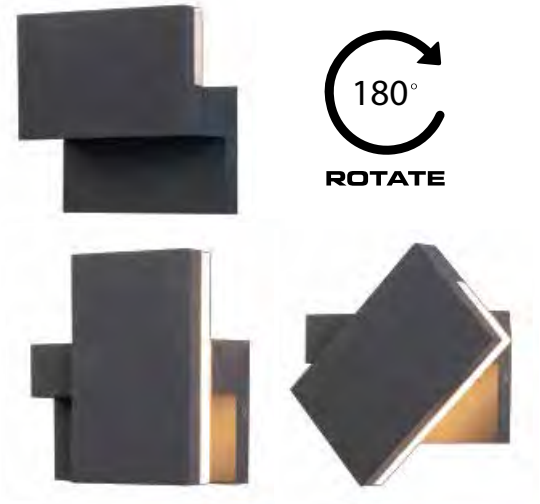

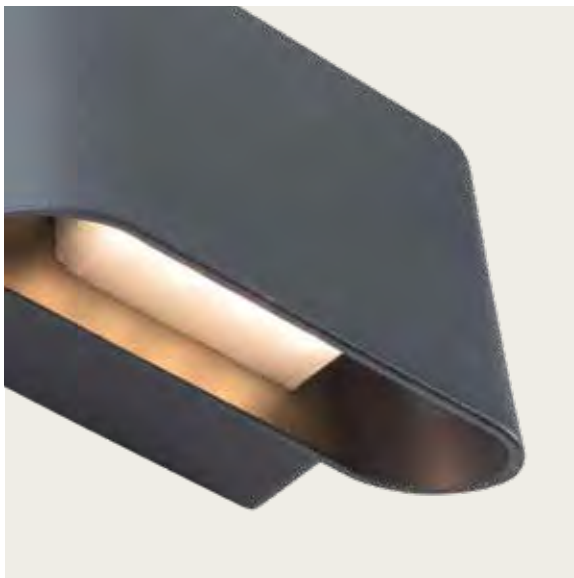


Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 900Lm
Cri 80
IP 54
Dimensions L: 10cm W: 16cm H: 7.7cm
Material Aluminium - PC Diffuser
Special Feature Up-Down Lighting
Color Graphite / **Code E274**

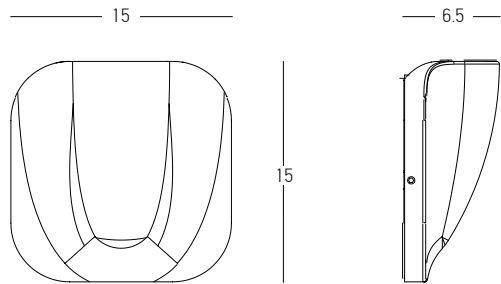


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 572Lm
Cri 80
IP 54
Dimensions L: 6.5cm W: 15cm H: 15cm
Beam Angle 45°
Material Aluminium - Tempered Glass
Color Graphite / **Code E273**



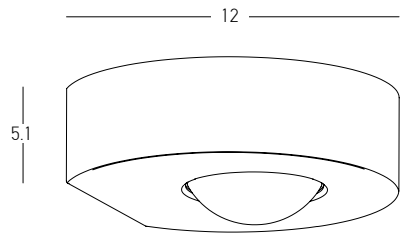


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 752Lm
Cri 80
IP 54
Dimensions L: 12cm W: 13cm H: 5.1cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Color Graphite / **Code E278**

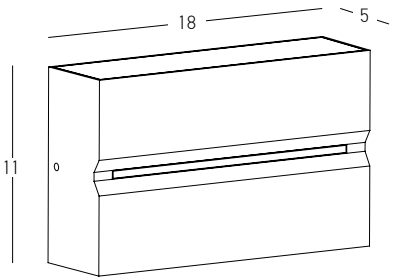


Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 796Lm
Cri 80
IP 54
Dimensions L: 5cm W: 18cm H: 11cm
Beam Angle 30°
Material Aluminium - Tempered Glass - PC Diffuser
Special Feature Up - Down - Front Lighting
12x SMD LED
Color Graphite / **Code E272**



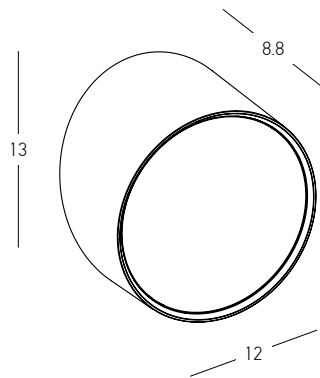


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 518Lm
Cri 80
IP 65
Dimensions Ø: 12cm L: 8.8cm H: 13cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Sandy Black / **Code E436**

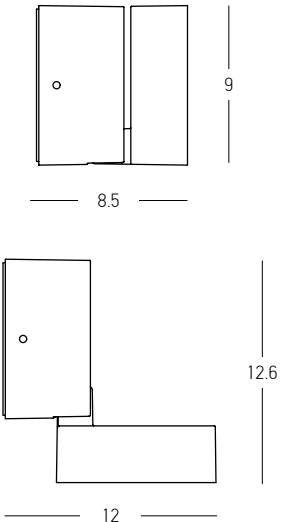




Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 672Lm
Cri 80
IP 65
Dimensions Closed Ø: 9cm L: 8.5cm
Dimensions Open L: 12cm W: 9cm H: 12.6cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Special Feature 90° Movable Head
Color Sandy Black / **Code E435**



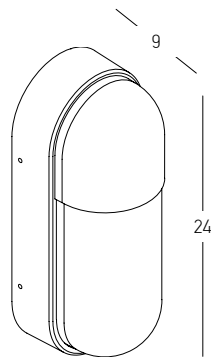


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 498Lm
Cri 80
IP 54
Dimensions L: 9cm W: 9.5cm H: 24cm
Material Aluminium - PC Diffuser
Color Black / **Code E318**



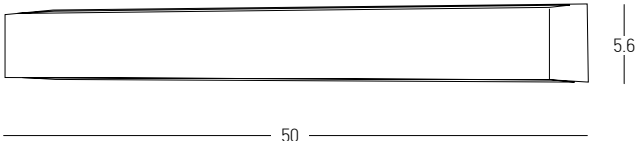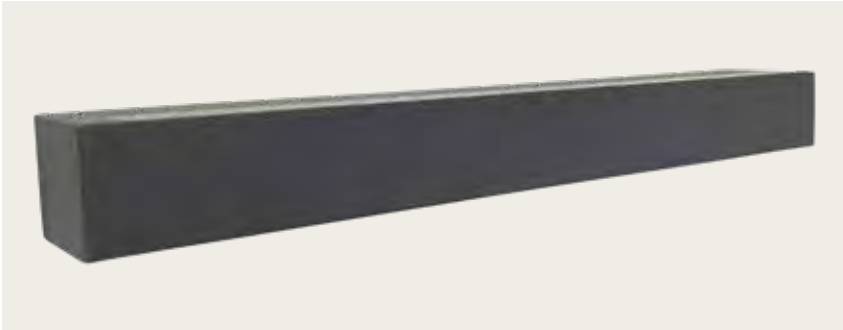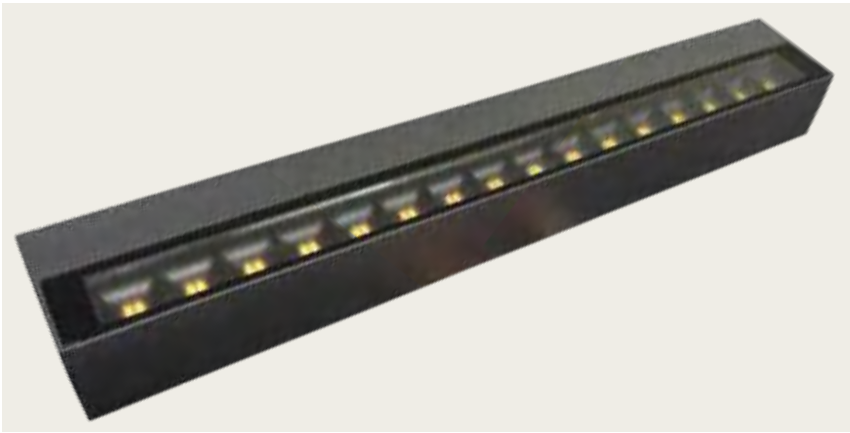


Power 30W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 2263Lm
Cri 80
IP 65
Dimensions L: 7.8cm W: 50cm H: 5.6cm
Material Aluminium - PC Diffuser
Special Feature Up-Down Lighting
Clear Microprismatic Diffuser
Color Graphite / **Code E227**




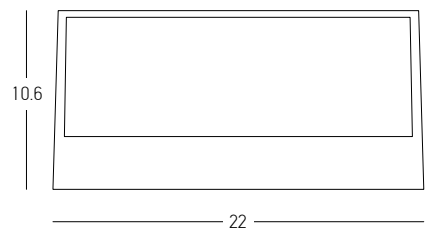


Power 2x 13.5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1359Lm
Cri 80
IP 65
Dimensions L: 10.6cm W: 22cm H: 9cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Dark Grey / **Code E261**
Dark Brown / **Code E262**

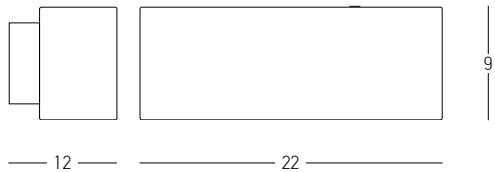


Bulb 1x E27
Power 18W MAX
Input 220-240V, 50/60Hz
IP 44
Dimensions L: 12cm W: 22cm H: 9cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E146**

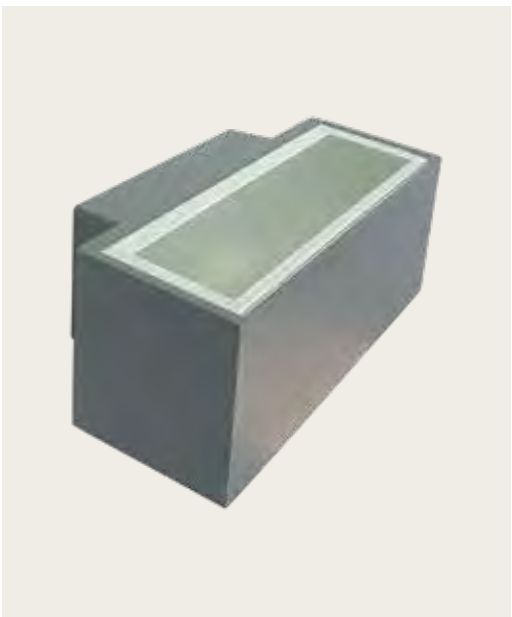




Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 640Lm
Cri 80
IP 65
Dimensions L: 9.6cm W: 30cm H: 12cm
Material Aluminium - Opal PC Diffuser
Special Feature Up-Down Lighting
Color Dark Grey / **Code E265**
Color Dark Brown / **Code E266**







Bulb 2x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 15cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E124**



Bulb 1x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 9cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E123**




Bulb 2x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 15cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Graphite / **Code E122**




Bulb 1x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 9cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E121**






Bulb 2x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 15cm
Material Aluminium - Tempered Glass
Special Feature Up-Down Lighting
Color Sandy White / **Code E151**




Bulb 1x GU10
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.5cm H: 9cm
Material Aluminium - Tempered Glass
Color Sandy White / **Code E150**






Bulb 2x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.8cm H: 15cm
Material ABS - Acrylic
Special Feature Up-Down Lighting
Color Sandy Black / **Code E307**




Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 9.2cm W: 6.8cm H: 7.5cm
Material ABS - Acrylic
Color Sandy Black / **Code E306**






Bulb 2x GU10
Power 9W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm
Material ABS - PC Diffuser
Special Feature Up-Down Lighting
Color White / **Code E186**





Bulb 1x GU10
Power 9W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 7.6cm L: 9.9cm H: 14.8cm
Material ABS - PC Diffuser
Color White / **Code E185**






Power 11W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 653Lm
Cri 80
IP 54
Dimensions L: 7.5cm W: 22cm H: 3.2cm
Material Aluminium - Tempered Glass
Color Sandy White / **Code E168**

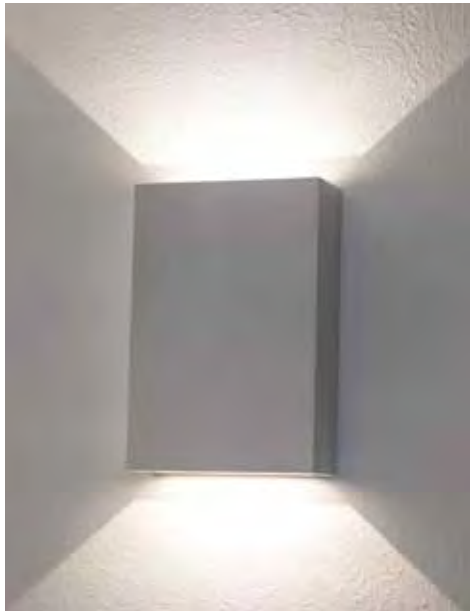

Power 2x 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 320Lm
Cri 80
IP 65
Dimensions L: 3cm W: 8.3cm H: 12.3cm
Material ABS - PC Diffuser
Special Feature Up-Down Lighting
Color White / **Code E216**






Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	65
Dimensions	Ø: 16.5cm L: 5.8cm
Material	ABS - PC Diffuser
Color	Sandy Black / Code E305
Color	Sandy White / Code E304



Precision Light. Grounded Installation
Spike lights for targeted garden illumination.

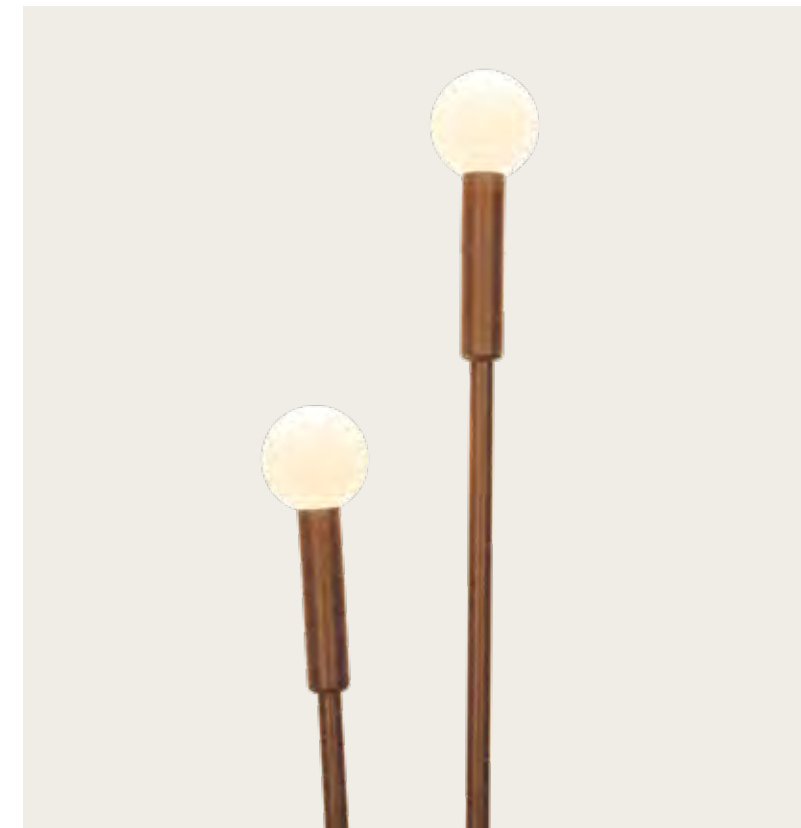


05. SPIKES





Power 1.5W
Input 24V
Color Temperature 3000K
Lumen 90Lm
Cri 80
IP 65
Dimensions Ø: 1.8cm H: 60cm
Material Aluminium - Frosted Acrylic
Special Feature 200cm Cable Available
Spike Included
Waterproof Connector Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-11 pcs
Color Brown / **Code E457**



Power 1.5W
Input 24V
Color Temperature 3000K
Lumen 90Lm
Cri 80
IP 65
Dimensions Ø: 4.5cm H: 65cm
Material Aluminium - Frosted Acrylic
Special Feature 200cm Cable Available
Spike Included
Waterproof Connector Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-11 pcs
Color Brown / **Code E459**




Power 1.5W
Input 24V
Color Temperature 3000K
Lumen 90Lm
Cri 80
IP 65
Dimensions Ø: 1.8cm H: 99cm
Material Aluminium - Frosted Acrylic
Special Feature 200cm Cable Available
Spike Included
Waterproof Connector Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-11 pcs
Color Brown / **Code E458**



Power 1.5W
Input 24V
Color Temperature 3000K
Lumen 90Lm
Cri 80
IP 65
Dimensions Ø: 4.5cm H: 90cm
Material Aluminium - Frosted Acrylic
Special Feature 200cm Cable Available
Spike Included
Waterproof Connector Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-11 pcs
Color Brown / **Code E460**






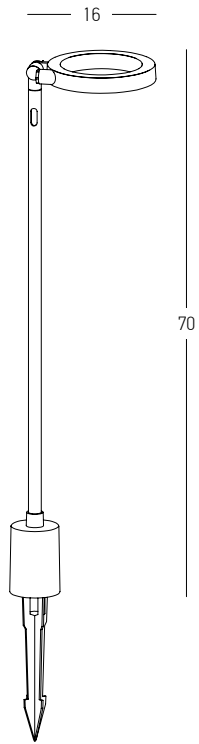

Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	245Lm
Cri	80
IP	65
Dimensions	L: 16cm W: 12cm H: 70cm
Ring	Ø: 12cm H: 1.5cm
Material	Aluminium - PC Diffuser
Special Feature	50cm Cable Available Driver Included Spike Included Tilt Up-Down Waterproof Connector Included
Color	Brown / Code E494






Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 595Lm
Cri 80
IP 65
Dimensions Ø: 11cm H: 90cm
Material Aluminium - PC Diffuser
Special Feature 100cm Cable Available
Driver Included
Spike Included
Movable Head
Waterproof Connector Included

Color Green / **Code E456**



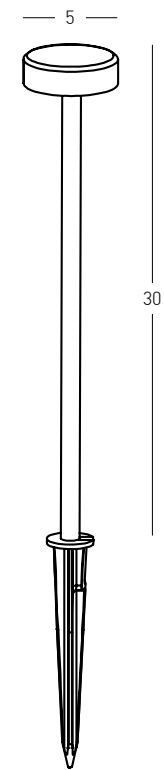



Power 1.5W
Input 24V
Color Temperature 3000K
Lumen 80Lm
Cri 80
IP 65
Dimensions Ø: 5cm H: 30cm
Material Stainless Steel - PC Diffuser
Special Feature 50cm Cable Available
Spike Included
Waterproof Connector Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-10 pcs
Color Brown / **Code E465**





Power 0.5W
Input 24V
Color Temperature 2700K
Lumen 50Lm
Cri 80
IP 65
Dimensions Ø: 1cm H: 80cm
Material Stainless Steel - PC Diffuser
Special Feature 100cm Cable Available
Spike Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-17 pcs

Color Dark Brown / **Code E330**
Color Dark Green / **Code E331**

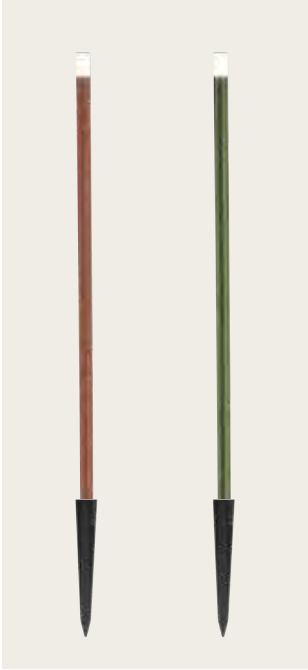


Power 0.5W
Input 24V
Color Temperature 2700K
Lumen 50Lm
Cri 80
IP 65
Dimensions Ø: 1cm H: 30cm
Material Stainless Steel - PC Diffuser
Special Feature 100cm Cable Available
Spike Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-17 pcs

Color Dark Brown / **Code E328**
Color Dark Green / **Code E329**



Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67

Waterproof Connection Box 1in / 1out , 16A , 450V
IP 67
Color Black / **Code Z0800-BA**

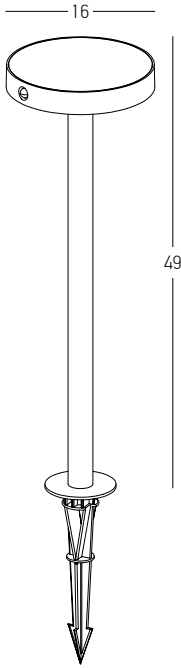


Power	2W
Input	3.7V
Battery	2200 MAH
Color Temperature	3000K
Lumen	85Lm
Cri	80
IP	54
Dimensions	Ø: 16cm H: 49cm
Material	Aluminium - PC Diffuser
Special Feature	Solar Panel 3 Lighting Modes Sense Distance 3 - 5m Base & Spike Included
Color	Graphite / Code E449



LIGHTING MODES OVERVIEW


- Mode 1 • Dim + Motion Sensor**
LED operates at 10% brightness when ambient light <20 lux. Upon Motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Turns off when ambient light >20 lux.
- Mode 2 • Constant Light**
Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.
- Mode 3 • Motion Only**
No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.



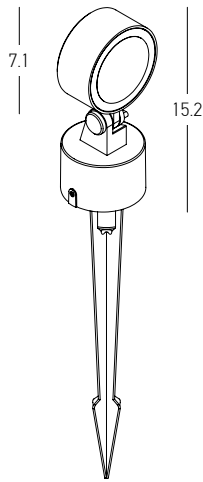

Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 779Lm
Cri 90
IP 65
Dimensions Ø: 7.1cm H: 15.2cm
Base Ø: 6.3cm H: 4cm
Beam Angle 36°
Material Aluminium - Glass
Special Feature 30cm Cable Available
Movable Spot
Aluminium Spike Included
Driver Included


Color Green / **Code E472**

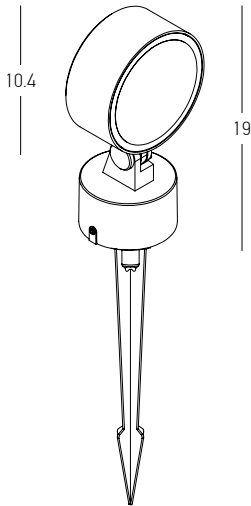

Power 25W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1860Lm
Cri 90
IP 65
Dimensions Ø: 10.4cm H: 19cm
Base Ø: 7.5cm H: 4cm
Beam Angle 24°
Material Aluminium - Glass
Special Feature 30cm Cable Available
Movable Spot
Aluminium Spike Included
Driver Included

Color Green / **Code E473**




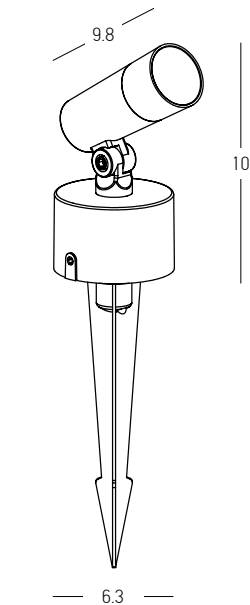

Power 10W
Input 24V
Color Temperature 3000K
Lumen 534Lm
Cri 90
IP 65
Dimensions Ø: 6.2cm H: 10cm
Spot Dimensions Ø: 3.5cm L: 9.8cm
Base Ø: 6.3cm H: 4cm
Beam Angle 24°
Material Aluminium - Glass
Special Feature 30cm Cable Available
Movable Spot
Aluminium Spike Included
Recommended Driver LPH-18-24 (Not Included)
Color Graphite / **Code E468**



Lens for 10W Spot / Beam Angle 15° / **Code E469**

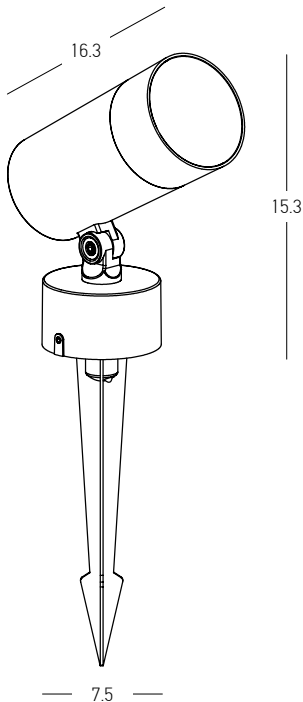

Power 28W
Input 24V
Color Temperature 3000K
Lumen 1615Lm
Cri 90
IP 65
Dimensions Ø: 7.6cm H: 15.3cm
Spot Dimensions Ø: 7.8cm L: 16.3cm
Base Ø: 7.5cm H: 4cm
Beam Angle 24°
Material Aluminium - Glass
Special Feature 30cm Cable Available
Movable Spot
Aluminium Spike Included
Recommended Driver LPV-35-24 (Not Included)
Color Graphite / **Code E470**



Lens for 28W Spot / Beam Angle 15° / **Code E471**




Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67




Driver
Power 35W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14.8cm W: 4cm H: 3cm
IP 67



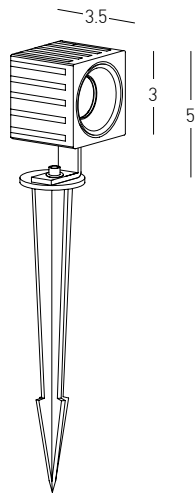

Power 3W
Input 24V
Color Temperature 3000K
Lumen 228Lm
Cri 90
IP 65
Dimensions L: 3cm W: 3.5cm H: 5cm
Beam Angle 36°
Material Aluminium - Tempered Glass
Special Feature Movable Spot
Spike Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Color Graphite / **Code E350**

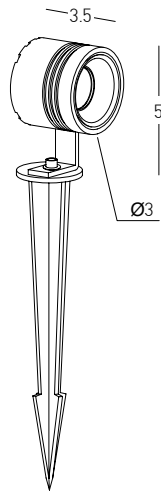

Power 3W
Input 24V
Color Temperature 3000K
Lumen 228Lm
Cri 90
IP 65
Dimensions Ø: 3cm W: 3.5cm H: 5cm
Beam Angle 36°
Material Aluminium - Tempered Glass
Special Feature Movable Spot
Spike Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Color Graphite / **Code E349**




Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67




Waterproof Connection Box 1in / 1out , 16A , 450V
IP 67
Color Black / **Code Z0800-BA**



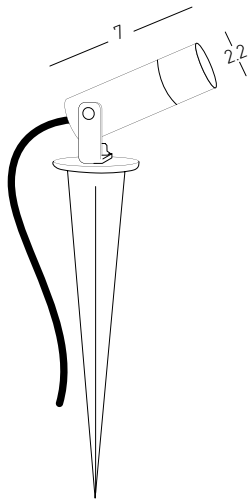

Power 2.3W
Input 3.2V, 700mA
Color Temperature 2700K
Lumen 130Lm
Cri 80
IP 54
Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
Beam Angle 40°
Material Brush
Special Feature 60cm Cable Available
Movable Spot
Spike Included
Recommended Driver V350-1050 (Not Included)
In Series Connection 1-9 pcs
Color Natural Brush / **Code E403**

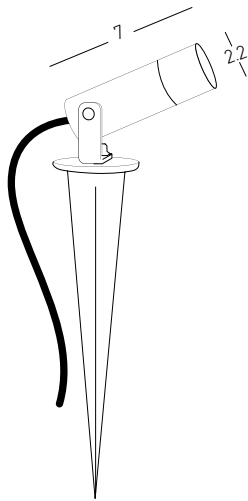


Power 2.3W
Input 3.2V, 700mA
Color Temperature 3000K
Lumen 130Lm
Cri 80
IP 54
Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
Beam Angle 40°
Material Brush
Special Feature 60cm Cable Available
Movable Spot
Spike Included
Recommended Driver V350-1050 (Not Included)
In Series Connection 1-9 pcs
Color Natural Brush / **Code E404**




Driver
Power 34W
Input 220-240V, 50/60Hz
Output 2 - 32V
Dimensions L: 15cm W: 4cm H: 3cm
IP 20





Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 740Lm
Cri 80
IP 65
Dimensions L: 7cm W: 7cm H: 12.5-25cm
Base Ø: 6cm H: 0.5cm
Beam Angle 40°
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Movable Spot
Spike & Base Included
Waterproof Connector Included


Color Graphite / **Code E286**

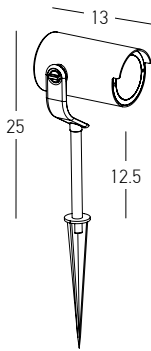

Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 740Lm
Cri 80
IP 65
Dimensions Ø: 7.5cm L: 13cm H: 12.5-25cm
Base Ø: 6cm H: 0.5cm
Beam Angle 40°
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Movable Spot
Spike & Base Included
Waterproof Connector Included

Color Graphite / **Code E285**




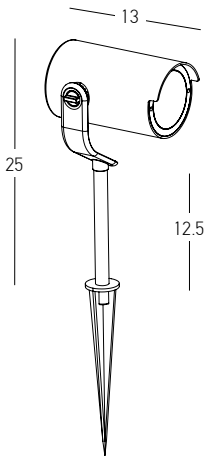

Bulb 1x GU10
Power 20W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 7.5cm L: 13cm H: 25cm
Base Ø: 6cm H: 0.5cm
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Movable Spot
Spike & Base Included
Waterproof Connector Included


Color Brown / **Code E284**



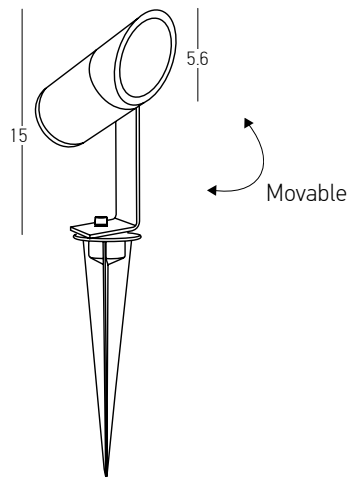

Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 516Lm
Cri 80
IP 65
Dimensions Ø: 5.6cm H: 15cm
Beam Angle 36°
Material Aluminium - Tempered Glass
Special Feature Movable Spot
Spike Included


Color Graphite / **Code E152**

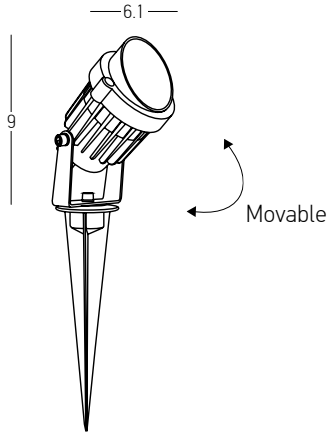

Power 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 380Lm
Cri 80
IP 65
Dimensions Ø: 6.1 cm H: 9cm
Beam Angle 36°
Material Aluminium - Tempered Glass
Special Feature Movable Spot
Spike Included


Color Graphite / **Code E153**



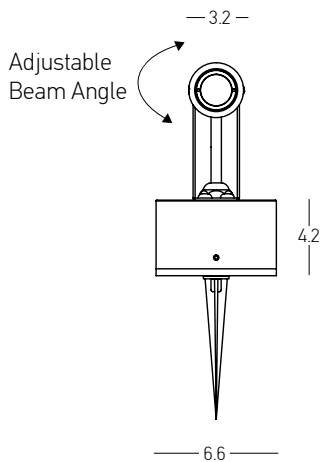

Power 2.1W
Input 220-240V, 50/60Hz
Color Temperature 2700K
Lumen 168Lm
Cri 80
IP 54
Dimensions L: 8cm H: 8.5cm
Base Ø: 6.6cm H: 4.2cm
Beam Angle 10°-60°
Material Aluminium - Stainless Steel
Special Feature 60cm Cable Available
Stick Ø: 3.2cm H: 8cm
Spike Included

Color Sandy Black / **Code E177-B**



Power 2.1W
Input 3V, 700mA
Color Temperature 2700K
Lumen 168Lm
Cri 80
IP 54
Dimensions L: 8cm H: 8.5cm
Beam Angle 10-60°
Material Aluminium - Stainless Steel
Special Feature 60cm Cable Available
Stick Ø: 3.2cm H: 8cm
Spike Included

Recommended Driver V350-1050 (Not Included)
In Series Connection 1-10 pcs

Color Sandy Black / **Code E177-A**




Driver

Power 34W
Input 220-240V, 50/60Hz
Output 2 - 32V
Dimensions L: 15cm W: 4cm H: 3cm
IP 20

V350-1050


Power 34W
Input 220-240V, 50/60Hz
Output 2 - 32V
Dimensions L: 15cm W: 4cm H: 3cm
IP 20



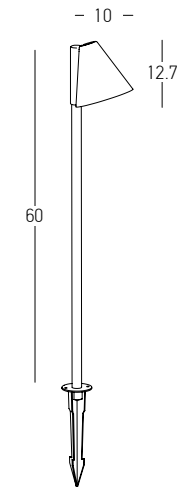

Bulb 1x GU10
Power 20W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 10cm W: 10cm H: 60cm
Material Aluminium - Tempered Glass
Special Feature 50cm Cable Available
Spike Included
Recommended Base E282-SP / Not Included

Color Graphite / **Code E281**

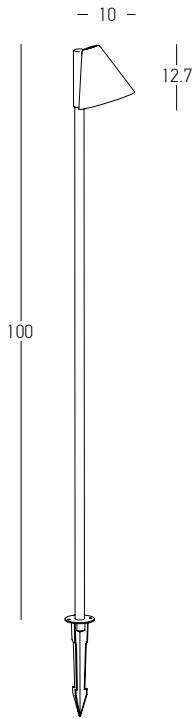


Bulb 1x GU10
Power 20W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 10cm W: 10cm H: 100cm
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Spike Included
Recommended Base E282-SP / Not Included

Color Graphite / **Code E282**




Base for E281 - E282
Dimensions Ø: 9.5cm H: 2cm
Material Aluminium
Color Graphite / **Code E282-SP**

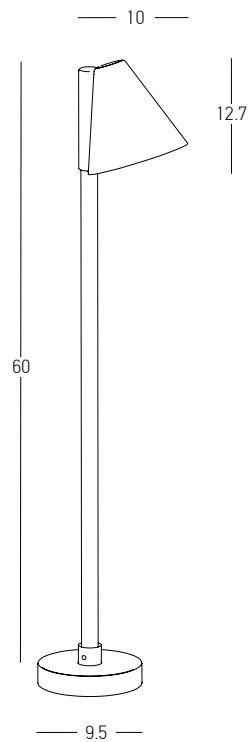


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 522Lm
Cri 80
IP 65
Dimensions L: 10cm W: 10cm H: 60cm
Base Ø: 9.5cm H: 2cm
Beam Angle 40°
Material Aluminium - Tempered Glass
Special Feature 50cm Cable Available
Spike & Base Included
Color Graphite / **Code E283**



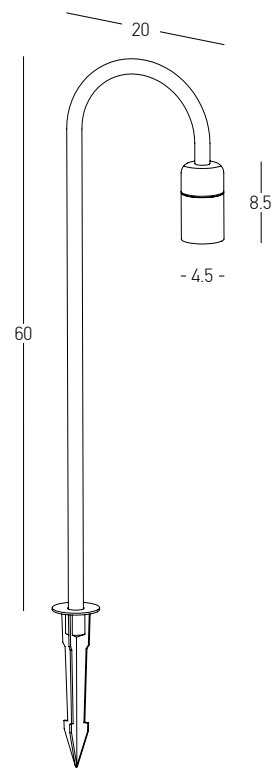

Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 500Lm
Cri 80
IP 65
Dimensions L: 20cm W: 4.5cm H: 60cm
Beam Angle 40°
Material Aluminium - Tempered Glass
Special Feature 40cm Cable Available
Spike Included
Color Dark Brown / **Code E279**







Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1550Lm
Cri 80
IP 65
Dimensions L: 2.5cm W: 2.5cm H: 100cm
Base Ø: 9.5cm H: 2cm
Material Aluminium - Opal PC Diffuser
Special Feature 40cm Cable Available
Spike & Base Included
Profile 2.5 x 2.5cm

Color Dark Brown / **Code E280**






Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 6cm L: 11cm H: 6.2cm
Material ABS - PC Diffuser
Special Feature 30cm Cable Available
Movable Spot
Without Spike
Color Black / **Code E311**

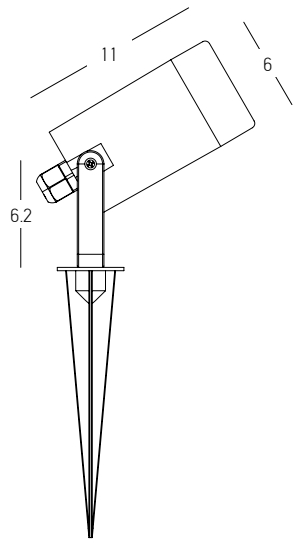


Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 6cm L: 11cm H: 6.2cm
Material ABS - PC Diffuser
Special Feature 30cm Cable Available
Movable Spot
Spike Included
Color Black / **Code E312**



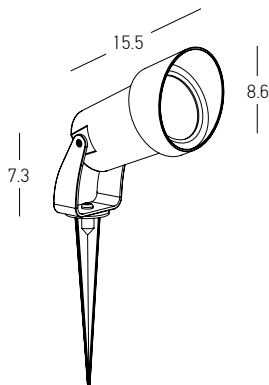

Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm
Material ABS - Tempered Glass
Special Feature 30cm Cable Available
Movable Spot
Spike Included

Color Black / **Code E310**



Bulb 1x GU10 LED
Power 5W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions Ø: 6cm H: 16cm
Material ABS - PC Diffuser
Special Feature 30cm Cable Available
Movable Spot
Spike Included


Color Black / **Code E217**




Step by Step Safety and Visibility
Guiding your path with confidence.



06 . STEP




Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 80
IP 65
Dimensions L: 3.9cm W: 16cm H: 8cm
Material Aluminium - Glass
Color Brown / **Code E442**





Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 80
IP 65
Dimensions L: 3.9cm W: 8cm H: 16cm
Material Aluminium - Glass
Color Brown / **Code E441**






Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 185Lm
Cri 80
IP 65
Dimensions L: 2.6cm W: 14cm H: 14cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E450**
Color Sandy White / **Code E451**
Color Brown / **Code E452**



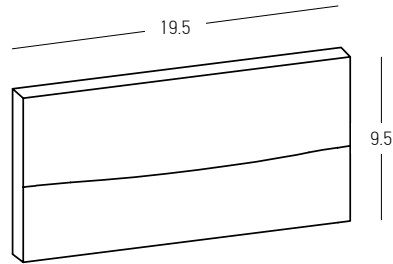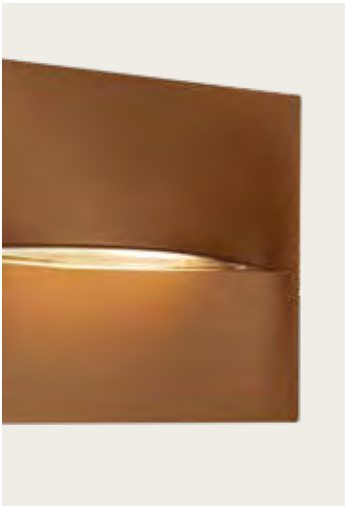


Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	285Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 19.5cm H: 9.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / Code E453
Color	Sandy White / Code E454
Color	Brown / Code E455



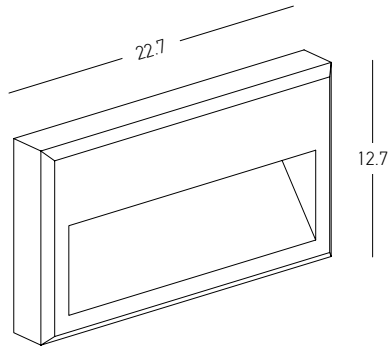


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 420Lm
Cri 80
IP 65
Dimensions L: 3.5cm W: 22.7cm H: 12.7cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E347**

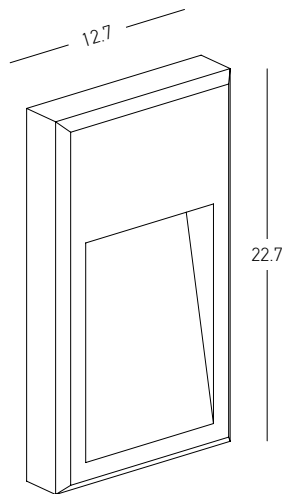


Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 420Lm
Cri 80
IP 65
Dimensions L: 3.5cm W: 12.7cm H: 22.7cm
Material Aluminium - Tempered Glass
Color Graphite / **Code E346**



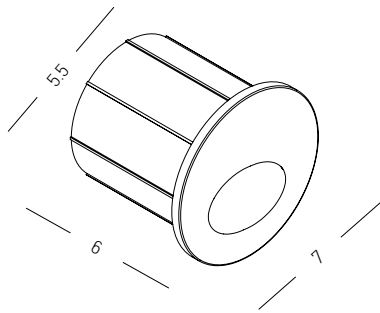


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 133Lm
Cri 90
IP 65
Dimensions Ø: 7cm L: 6.5cm
Material Aluminium - Tempered Glass
Depth Required 6cm
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
Color Sandy White / **Code E320**


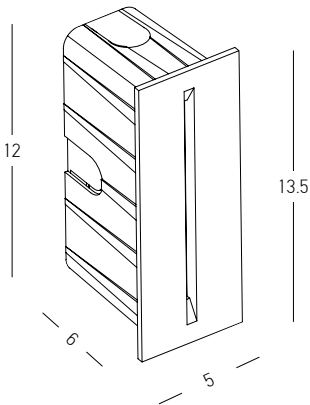


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 92Lm
Cri 90
IP 65
Dimensions L: 6.5cm W: 5cm H: 13.5cm
Material Aluminium - Tempered Glass
Depth Required 6cm
Recessed Mounting Box L: 6cm W: 4.3cm H: 12.6cm (Included)
Color Sandy White / **Code E322**



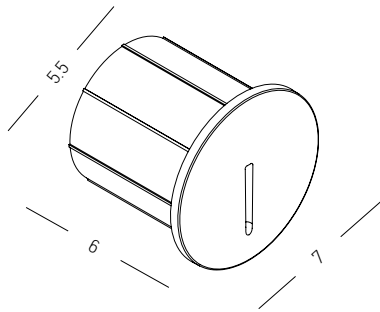


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 92Lm
Cri 90
IP 65
Dimensions Ø: 7cm L: 6.5cm
Material Aluminium - Tempered Glass
Depth Required 6cm
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
Color Sandy White / **Code E321**

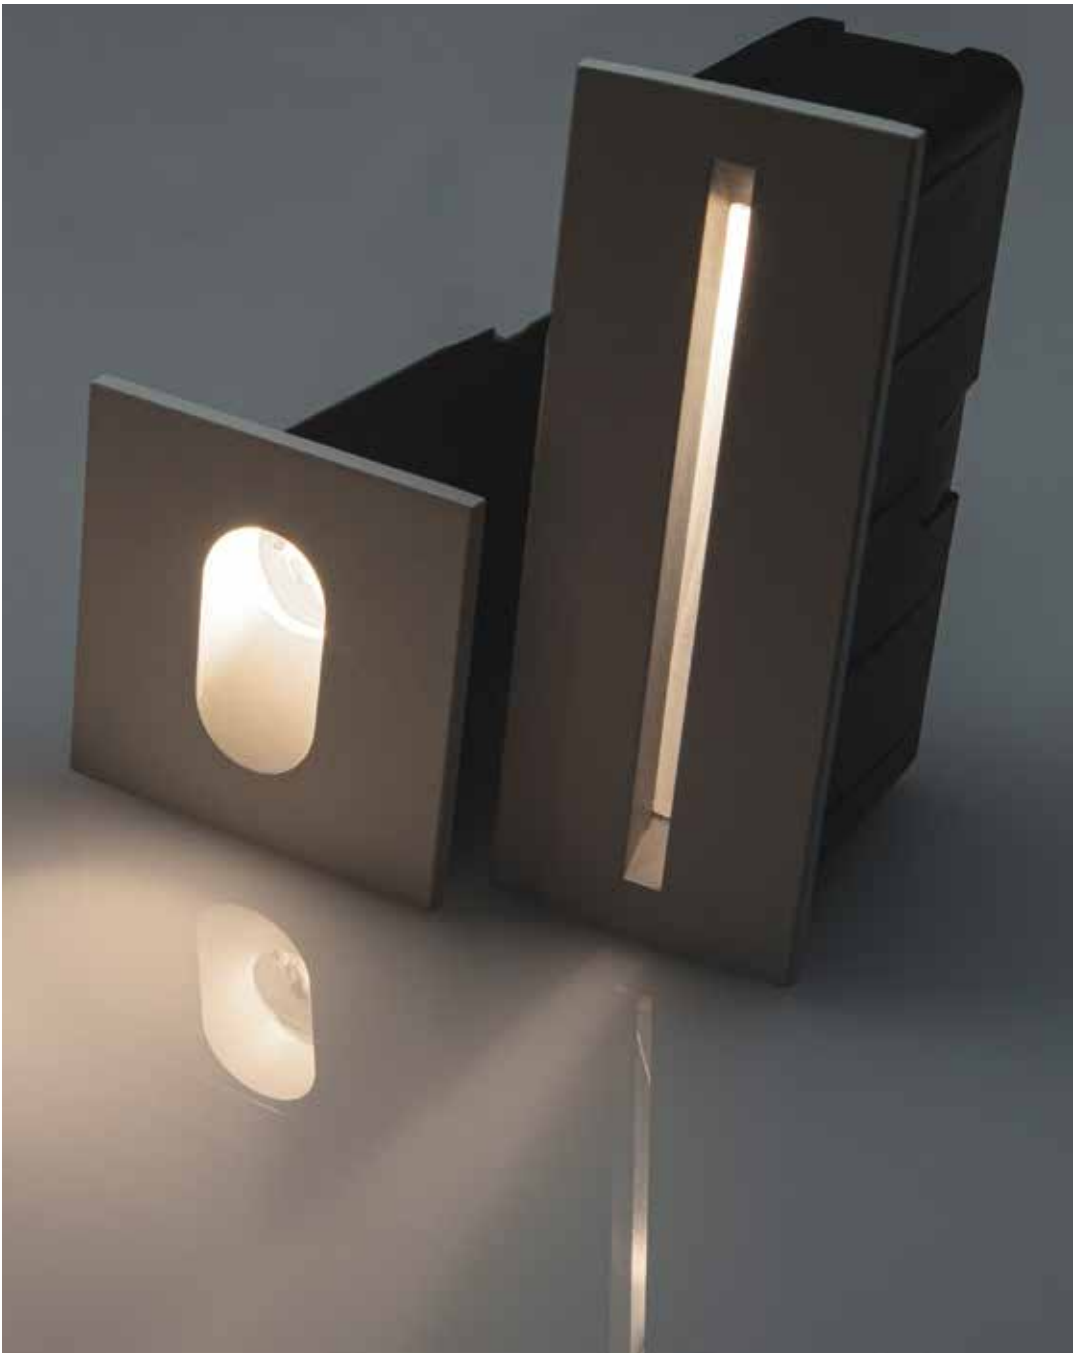


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 133Lm
Cri 90
IP 65
Dimensions L: 7.5cm W: 7cm H: 7cm
Material Aluminium - Tempered Glass
Depth Required 7cm
Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)
Color Sandy White / **Code E319**



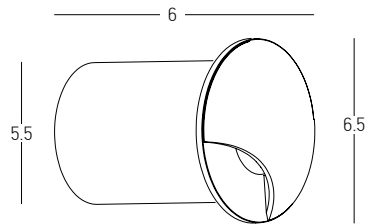


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 230Lm
Cri 90
IP 65
Dimensions Ø: 6.5cm L: 6cm
Material Aluminium - PC Diffuser
Depth Required 6cm
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
Color Sandy Black / **Code E300**

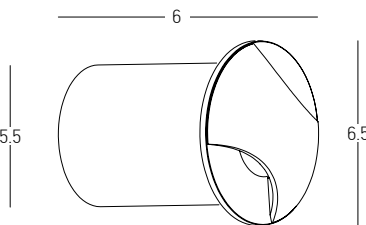


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 290Lm
Cri 90
IP 65
Dimensions Ø: 6.5cm L: 6cm
Material Aluminium - PC Diffuser
Depth Required 6cm
Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
Color Sandy Black / **Code E301**



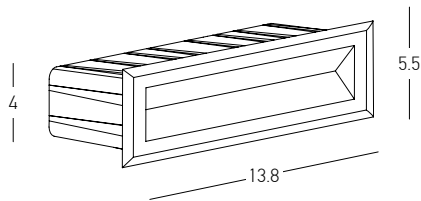


Power 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 302Lm
Cri 80
IP 65
Dimensions L: 6.5cm W: 13.8cm H: 5.5cm
Material Aluminium - Tempered Glass
Depth Required 6cm
Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)
Color Graphite / **Code E324**



Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 195Lm
Cri 80
IP 65
Dimensions L: 6.5cm W: 8.5cm H: 5.5cm
Material Aluminium - Tempered Glass
Depth Required 6cm
Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)




Color Graphite / **Code E323**






Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 190Lm
Cri 80
IP 65
Dimensions Ø: 10.5cm L: 3.7cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E294**



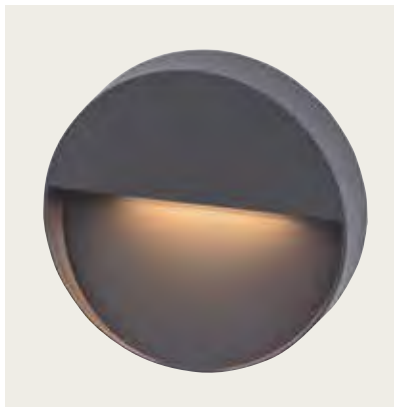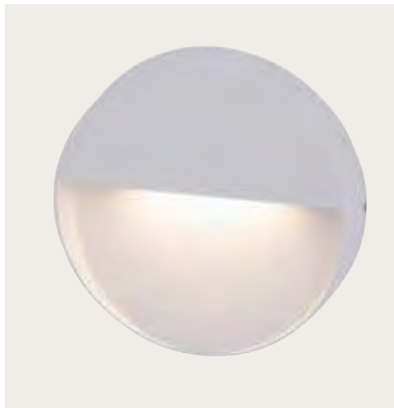


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 65
Dimensions Ø: 15cm L: 3.7cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E242-G**
Color Sandy White / **Code E242-W**





Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 65
Dimensions L: 3.7cm W: 15cm H: 15cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E241-G**
Color Sandy White / **Code E241-W**






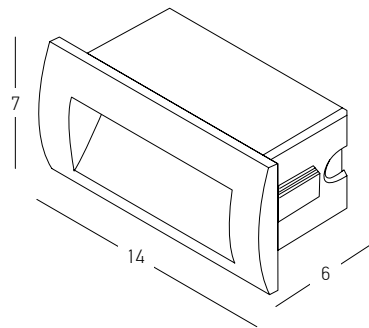


Power 4W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 188Lm
Cri 80
IP 65
Dimensions L: 6cm W: 14cm H: 7cm
Depth Required 6cm
Material Aluminium - PC Diffuser
Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)
Color Graphite / **Code E247-G**
Color Sandy White / **Code E247-W**

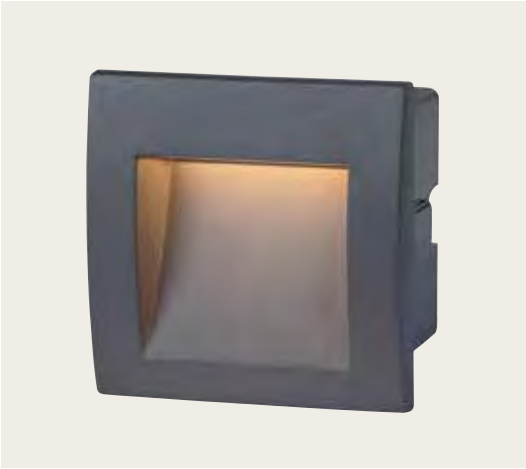


Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 65Lm
Cri 80
IP 65
Dimensions L: 6cm W: 9cm H: 9cm
Depth Required 6cm
Material Aluminium - PC Diffuser
Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)
Color Graphite / **Code E246-G**
Color Sandy White / **Code E246-W**



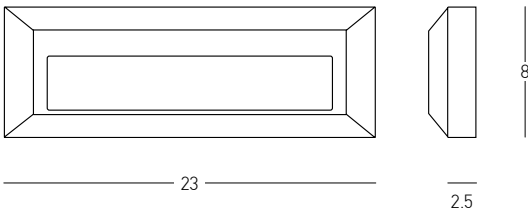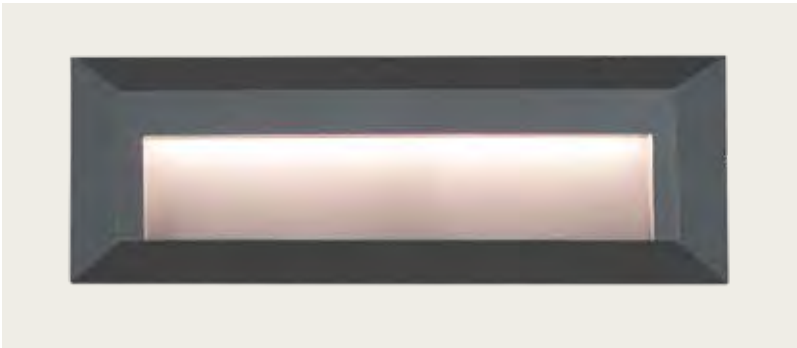


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 132Lm
Cri 80
IP 65
Dimensions L: 2.5cm W: 23cm H: 8cm
Material ABS
Color Graphite / **Code E229**




Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 69Lm
Cri 80
IP 65
Dimensions L: 2.5cm W: 12.5cm H: 12.5cm
Material ABS
Color Graphite / **Code E230**






Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 92Lm
Cri 80
IP 54
Dimensions Ø: 13.5cm L: 3.2cm
Material ABS
Color Graphite / **Code E183**
Color White / **Code E184**



Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 88Lm
Cri 80
IP 54
Dimensions L: 3.3cm W: 10cm H: 6cm
Material ABS
Color Graphite / **Code E181**
Color White / **Code E182**







Power	1.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	90Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 9cm H: 12cm
Material	ABS - PC Diffuser
Color	White / Code E187



IP-Rated Ceiling Lighting
All-weather performance.




07. CEILING

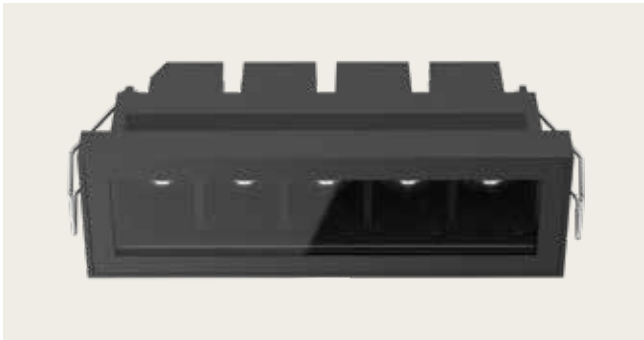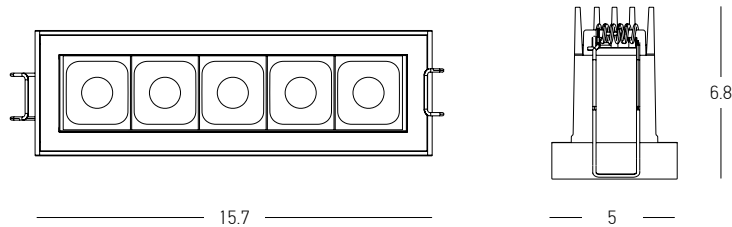


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	757Lm
Cri	90
IP	65
Dimensions	L: 15.7cm W: 5cm H: 6.8cm
Cutting Hole	14.2 x 3.5cm
Beam Angle	40°
Non Dimmable	☒
Material	Stainless Steel - Aluminium - Tempered Glass
Depth Required	JTL: 6cm
Driver	Included
Color	Sandy Black / Code E332
Color	Sandy White / Code E333








Power 12W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 561Lm
Cri 90
IP 54
Dimensions Ø: 8cm H: 5.5cm
Beam Angle 120°
Material Aluminium
Color Sandy Black / **Code S131**
Color Sandy White / **Code S132**




Power 12W
Input 220-240V, 50/60Hz
Color Temperature 4000K
Lumen 593Lm
Cri 90
IP 54
Dimensions Ø: 8cm H: 5.5cm
Beam Angle 120°
Material Aluminium
Color Sandy Black / **Code S131-4K**
Color Sandy White / **Code S132-4K**




Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 454Lm
Cri 80
IP 54
Dimensions Ø: 6.5cm H: 4.5cm
Beam Angle 120°
Material Aluminium
Color Sandy Black / **Code S133**
Color Sandy White / **Code S134**



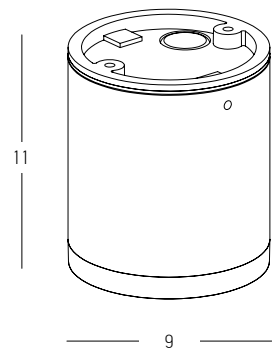


Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 597Lm
Cri 80
IP 65
Dimensions Ø: 9cm H: 11cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Graphite / **Code E340**




Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 500Lm
Cri 90
IP 54
Dimensions Ø: 6.3cm H: 7.5cm
Beam Angle 20°
Material Aluminium - Glass
Special Feature Driver Included
Color Sandy Black / **Code S112**
Color Sandy White / **Code S113**






Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 6cm H: 10.5cm
Material Aluminium - Glass Diffuser
Color Sandy Black / **Code E219**
Color Sandy White / **Code E220**

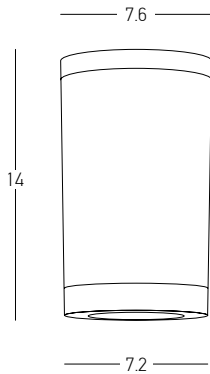


Bulb 1x GU10 LED
Power 7W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions Ø: 7.2-7.6cm H: 14cm
Material ABS - Acrylic
Color White Matt / **Code E308**
Color Black Matt / **Code E309**



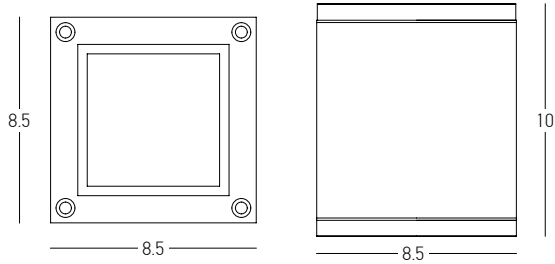


Bulb 1x GU10
Power 35W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 8.5cm W: 8.5cm H: 10cm
Material Aluminium - Glass
Color Graphite / **Code E269**
Color Sandy White / **Code E270**




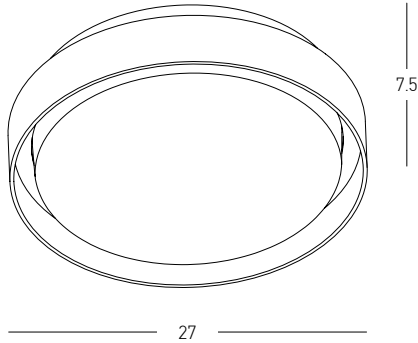

Power 20W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 2041Lm
Cri 80
IP 65
Dimensions Ø: 27cm H: 7.5cm
Material Aluminium - PC Diffuser
Special Feature Driver Included
Color Sandy White / **Code E326**
Color Graphite / **Code E327**

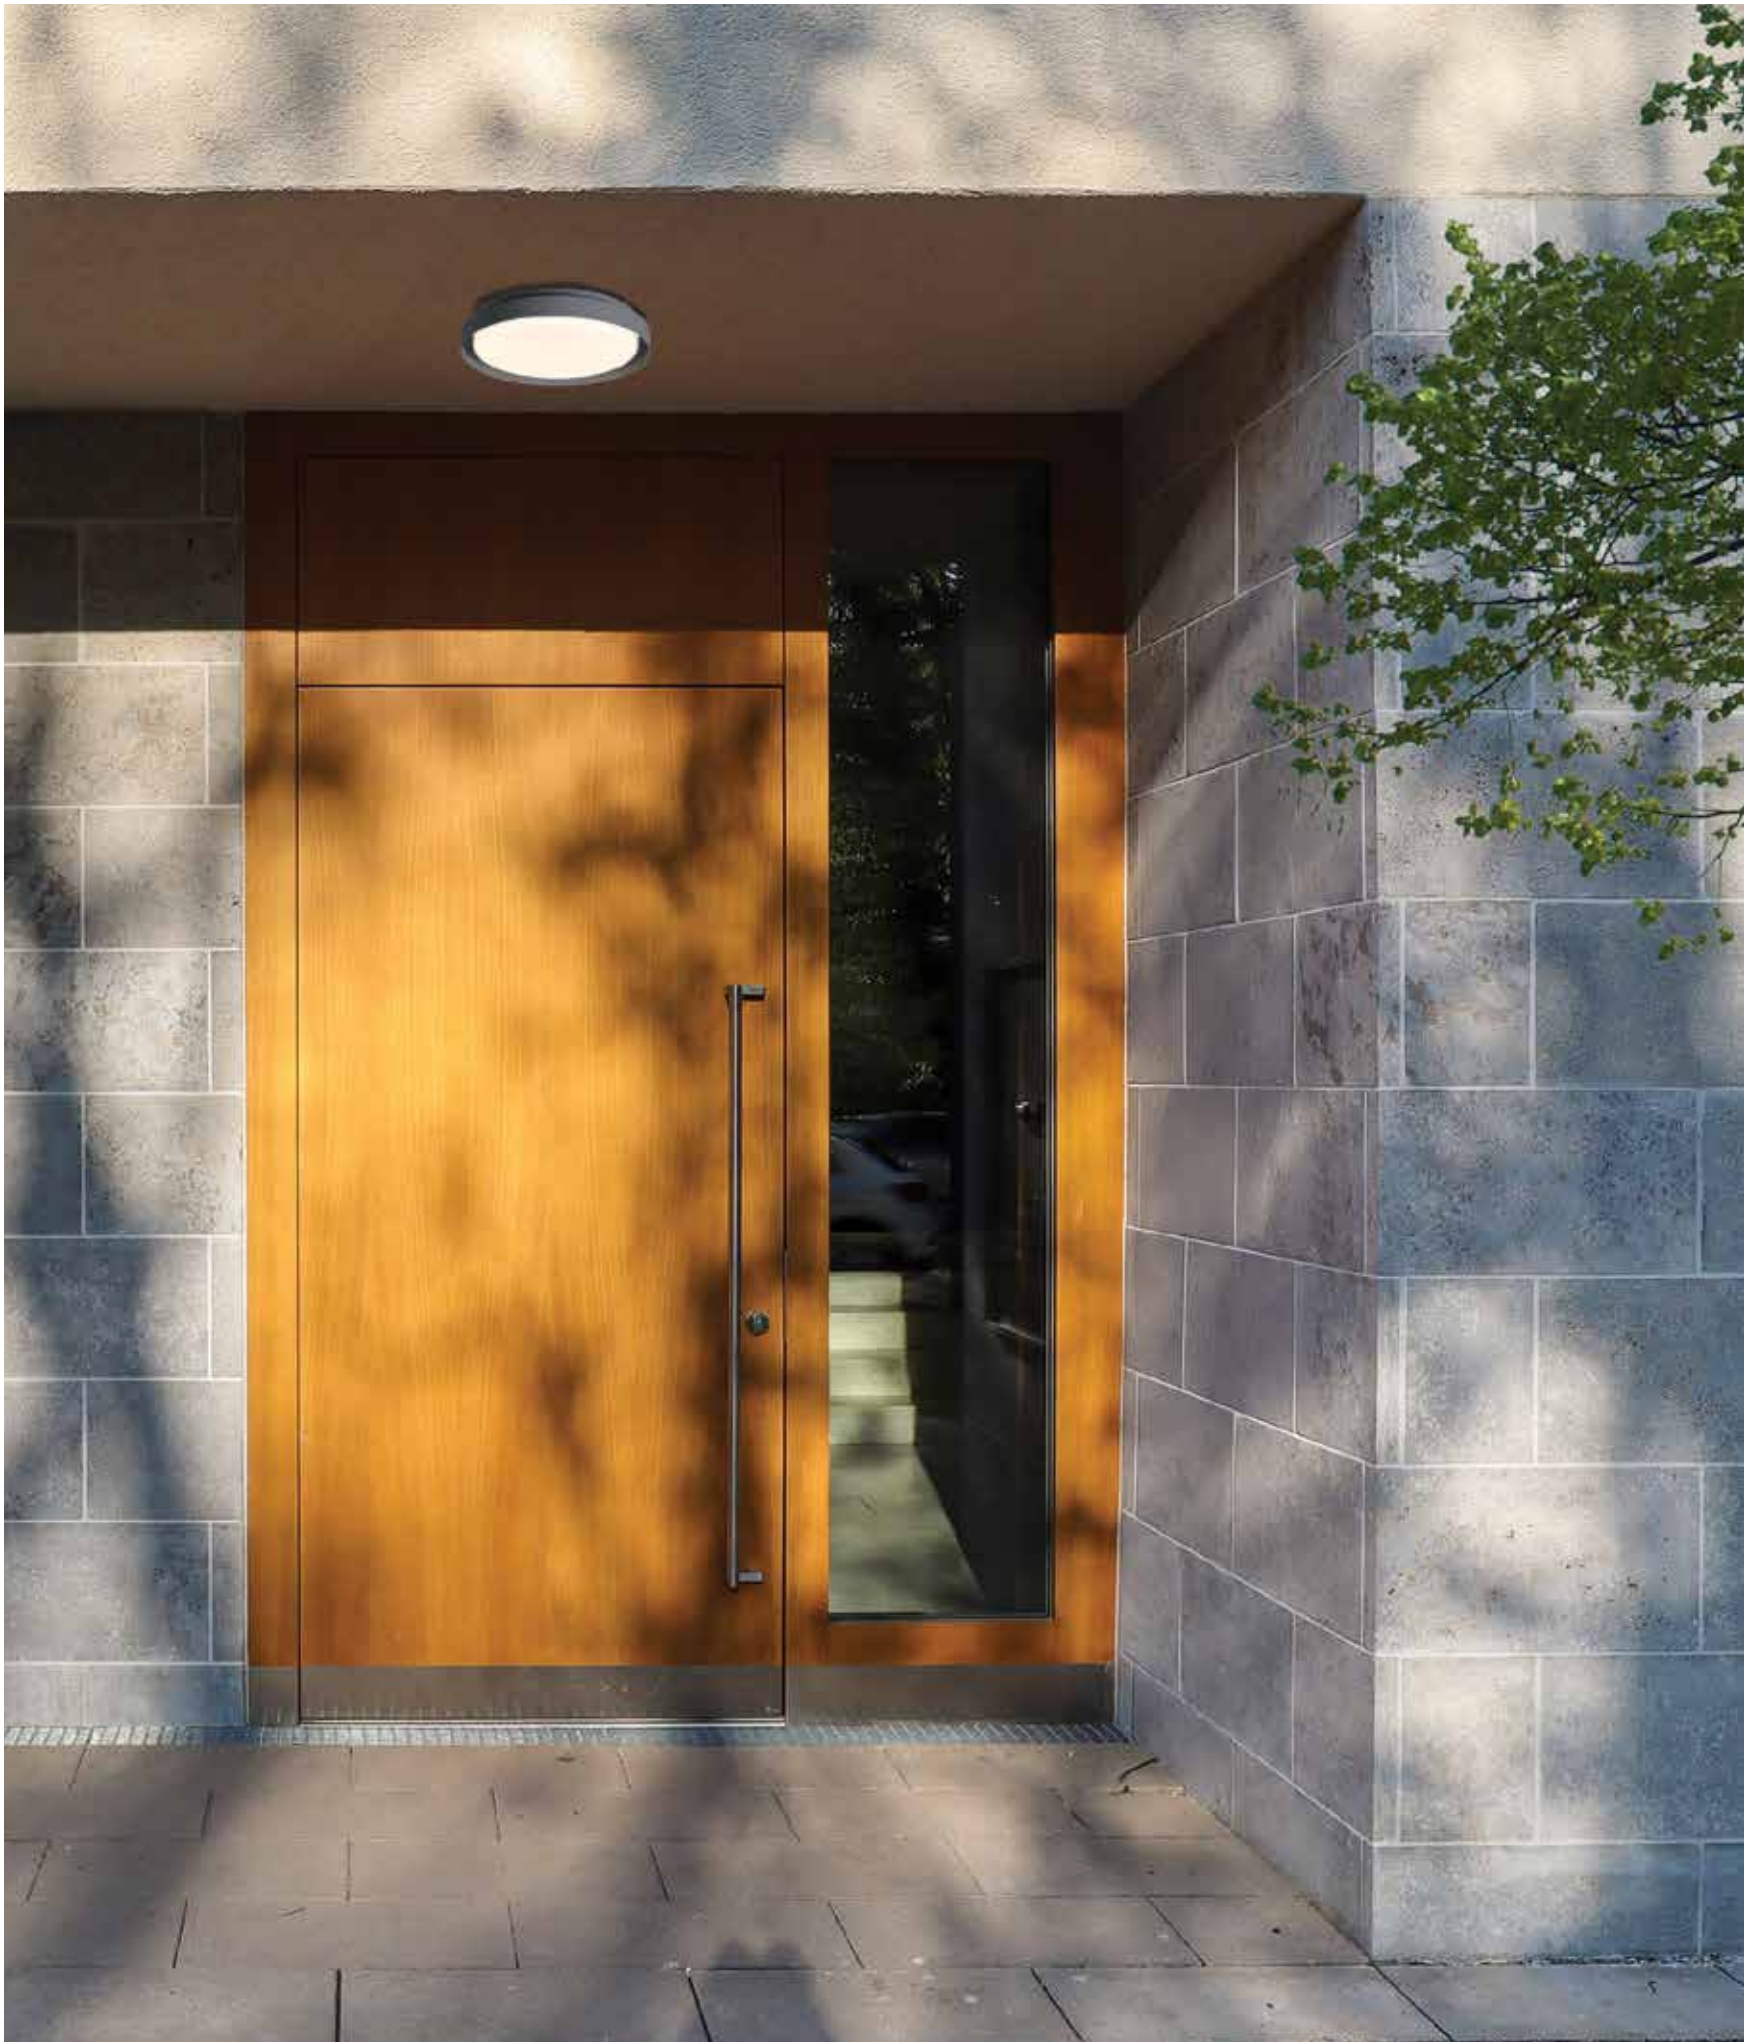


Discreet Integration
Inground lights with focused beam control.

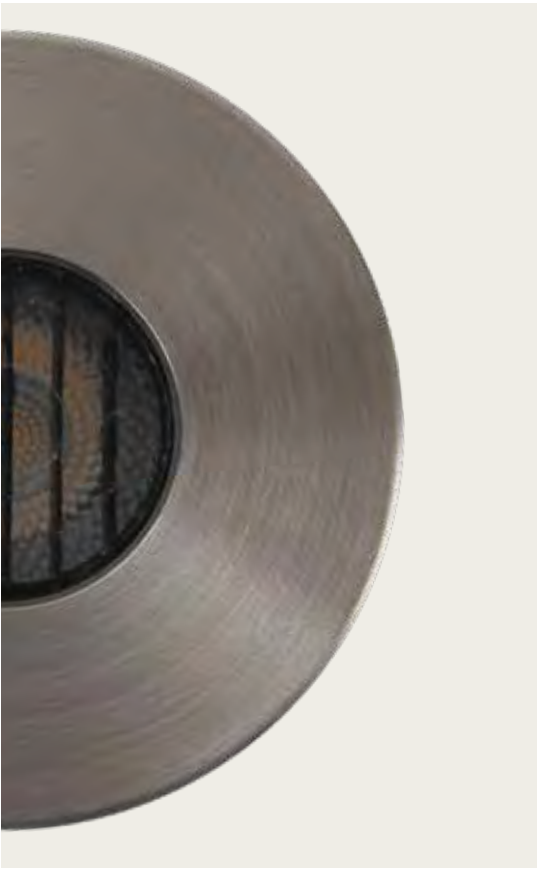

08. INGROUND



Power 1W
Input 24V
Color Temperature 3000K
Lumen 57Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 3.5cm H: 5.2cm
Beam Angle 15°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 11: 7cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-17 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E502**

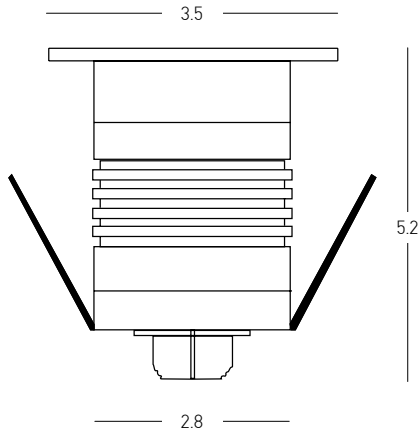

Power 1W
Input 24V
Color Temperature 2700K
Lumen 51Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 3.5cm H: 5.2cm
Beam Angle 15°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 11: 7cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-17 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E503**




Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67






Power 3W
Input 24V
Color Temperature 3000K
Lumen 230Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 4.5cm H: 5.6cm
Beam Angle 24°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 7.5cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E504**

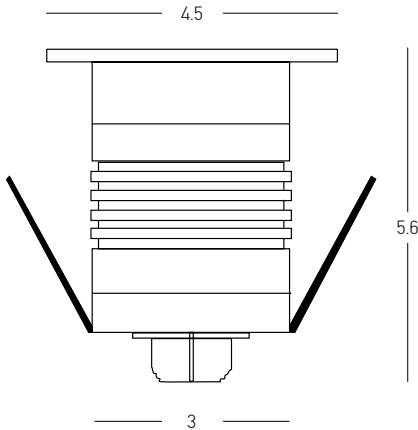

Power 3W
Input 24V
Color Temperature 3000K
Lumen 230Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 4.5cm H: 5.6cm
Beam Angle 10°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 7.5cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E506**

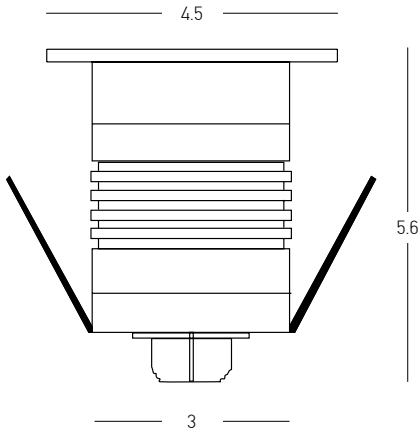

Power 3W
Input 24V
Color Temperature 2700K
Lumen 218Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 4.5cm H: 5.6cm
Beam Angle 24°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 7.5cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E505**



Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67



Power 3W
Input 24V
Color Temperature 2700K
Lumen 218Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 4.5cm H: 5.6cm
Beam Angle 10°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 7.5cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Included
Color Stainless Steel / **Code E507**




Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67






Power	5W
Input	24V
Color Temperature	3000K
Lumen	345Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.6cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included)
	In Parallel Connection 1-3 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / Code E510

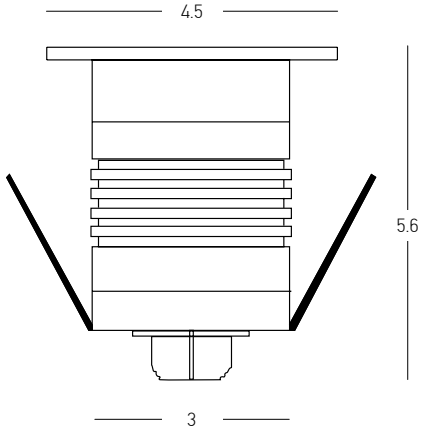


Power	5W
Input	24V
Color Temperature	2700K
Lumen	324Lm
Cri	80
IP	65
IK	08
Dimensions	Ø: 4.5cm H: 5.2cm
Beam Angle	24°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11: 7.5cm
Recessed Mounting Box	Aluminium (Included)
Recommended Driver	LPH-18-24 (Not Included)
	In Parallel Connection 1-3 pcs
Special Feature	Honeycomb Included
Color	Stainless Steel / Code E511



Driver	LPH-18-24
Power	18W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14cm W: 3cm H: 2.2cm
IP	67

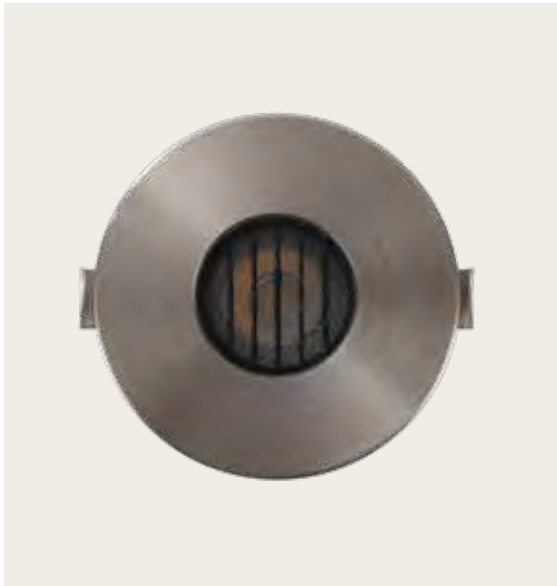

Power 3W
Input 24V
Color Temperature 3000K
Lumen 230Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 6.5cm H: 7.5cm
Beam Angle 10x60°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 11: 8cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Striated Included
Color Stainless Steel / **Code E508**

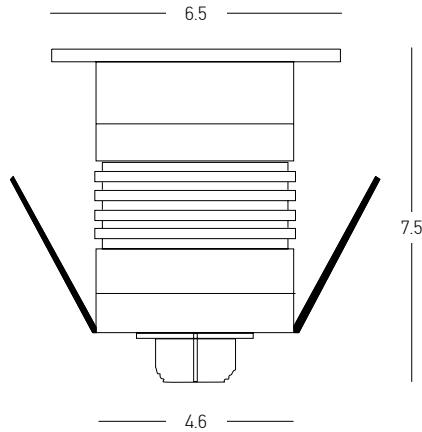


Power 3W
Input 24V
Color Temperature 2700K
Lumen 218Lm
Cri 80
IP 65
IK 08
Dimensions Ø: 6.5cm H: 7.5cm
Beam Angle 10x60°
Material Aluminium - Stainless Steel - Tempered Glass
Depth Required 11: 8cm
Recessed Mounting Box Aluminium (Included)
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Special Feature Honeycomb Striated Included
Color Stainless Steel / **Code E509**




Driver
Power 18W
Input 220-240V, 50/60Hz
Output 24V
Dimensions L: 14cm W: 3cm H: 2.2cm
IP 67

LPH-18-24






Power 3W
Input 24V
Color Temperature 3000K
Lumen 150Lm
Cri 80
IP 65
IK 10
Dimensions Ø: 4.8cm H: 10cm
Material Aluminium - Stainless Steel - PC Diffuser
Depth Required 111: 13cm
Recessed Mounting Box Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Color Aluminium / **Code E180**






Power 3W
Input 24V
Color Temperature 3000K
Lumen 95Lm
Cri 80
IP 65
IK 10
Dimensions Ø: 4.8cm H: 10cm
Material Aluminium - Stainless Steel - PC Diffuser
Depth Required 111: 13cm
Recessed Mounting Box Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Color Aluminium / **Code E179**





Power 3W
Input 24V
Color Temperature 3000K
Lumen 232Lm
Cri 80
IP 65
IK 8
Dimensions Ø: 4.5cm H: 9.3cm
Material Aluminium - Stainless Steel - PC Diffuser
Depth Required 111: 12cm
Recessed Mounting Box Included
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-5 pcs
Color Aluminium / **Code E178**



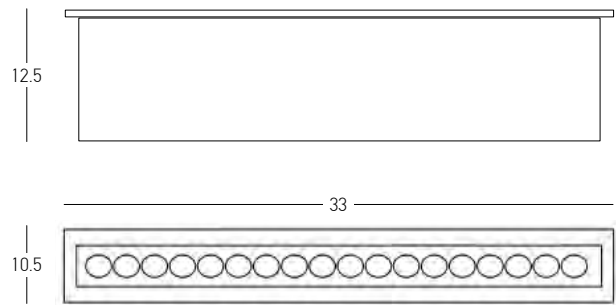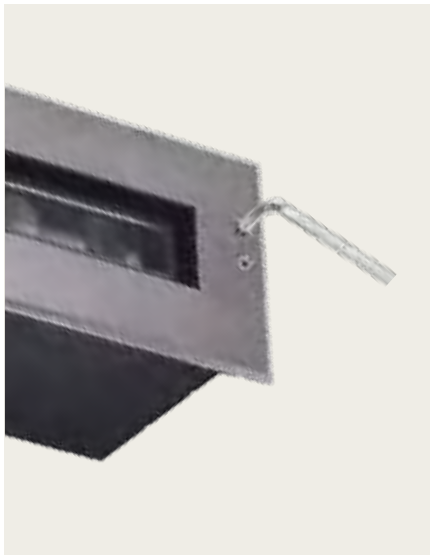



Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 33cm W: 10.5cm H: 12.5cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	111: 14.5cm
Recessed Mounting Box	Included
Special Feature	Light Angle can be adjusted externally through screw on the frame. 50cm Cable Available Driver Included
Color	Stainless Steel / Code E365



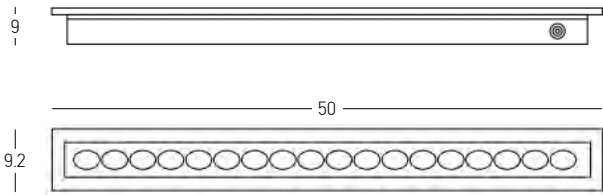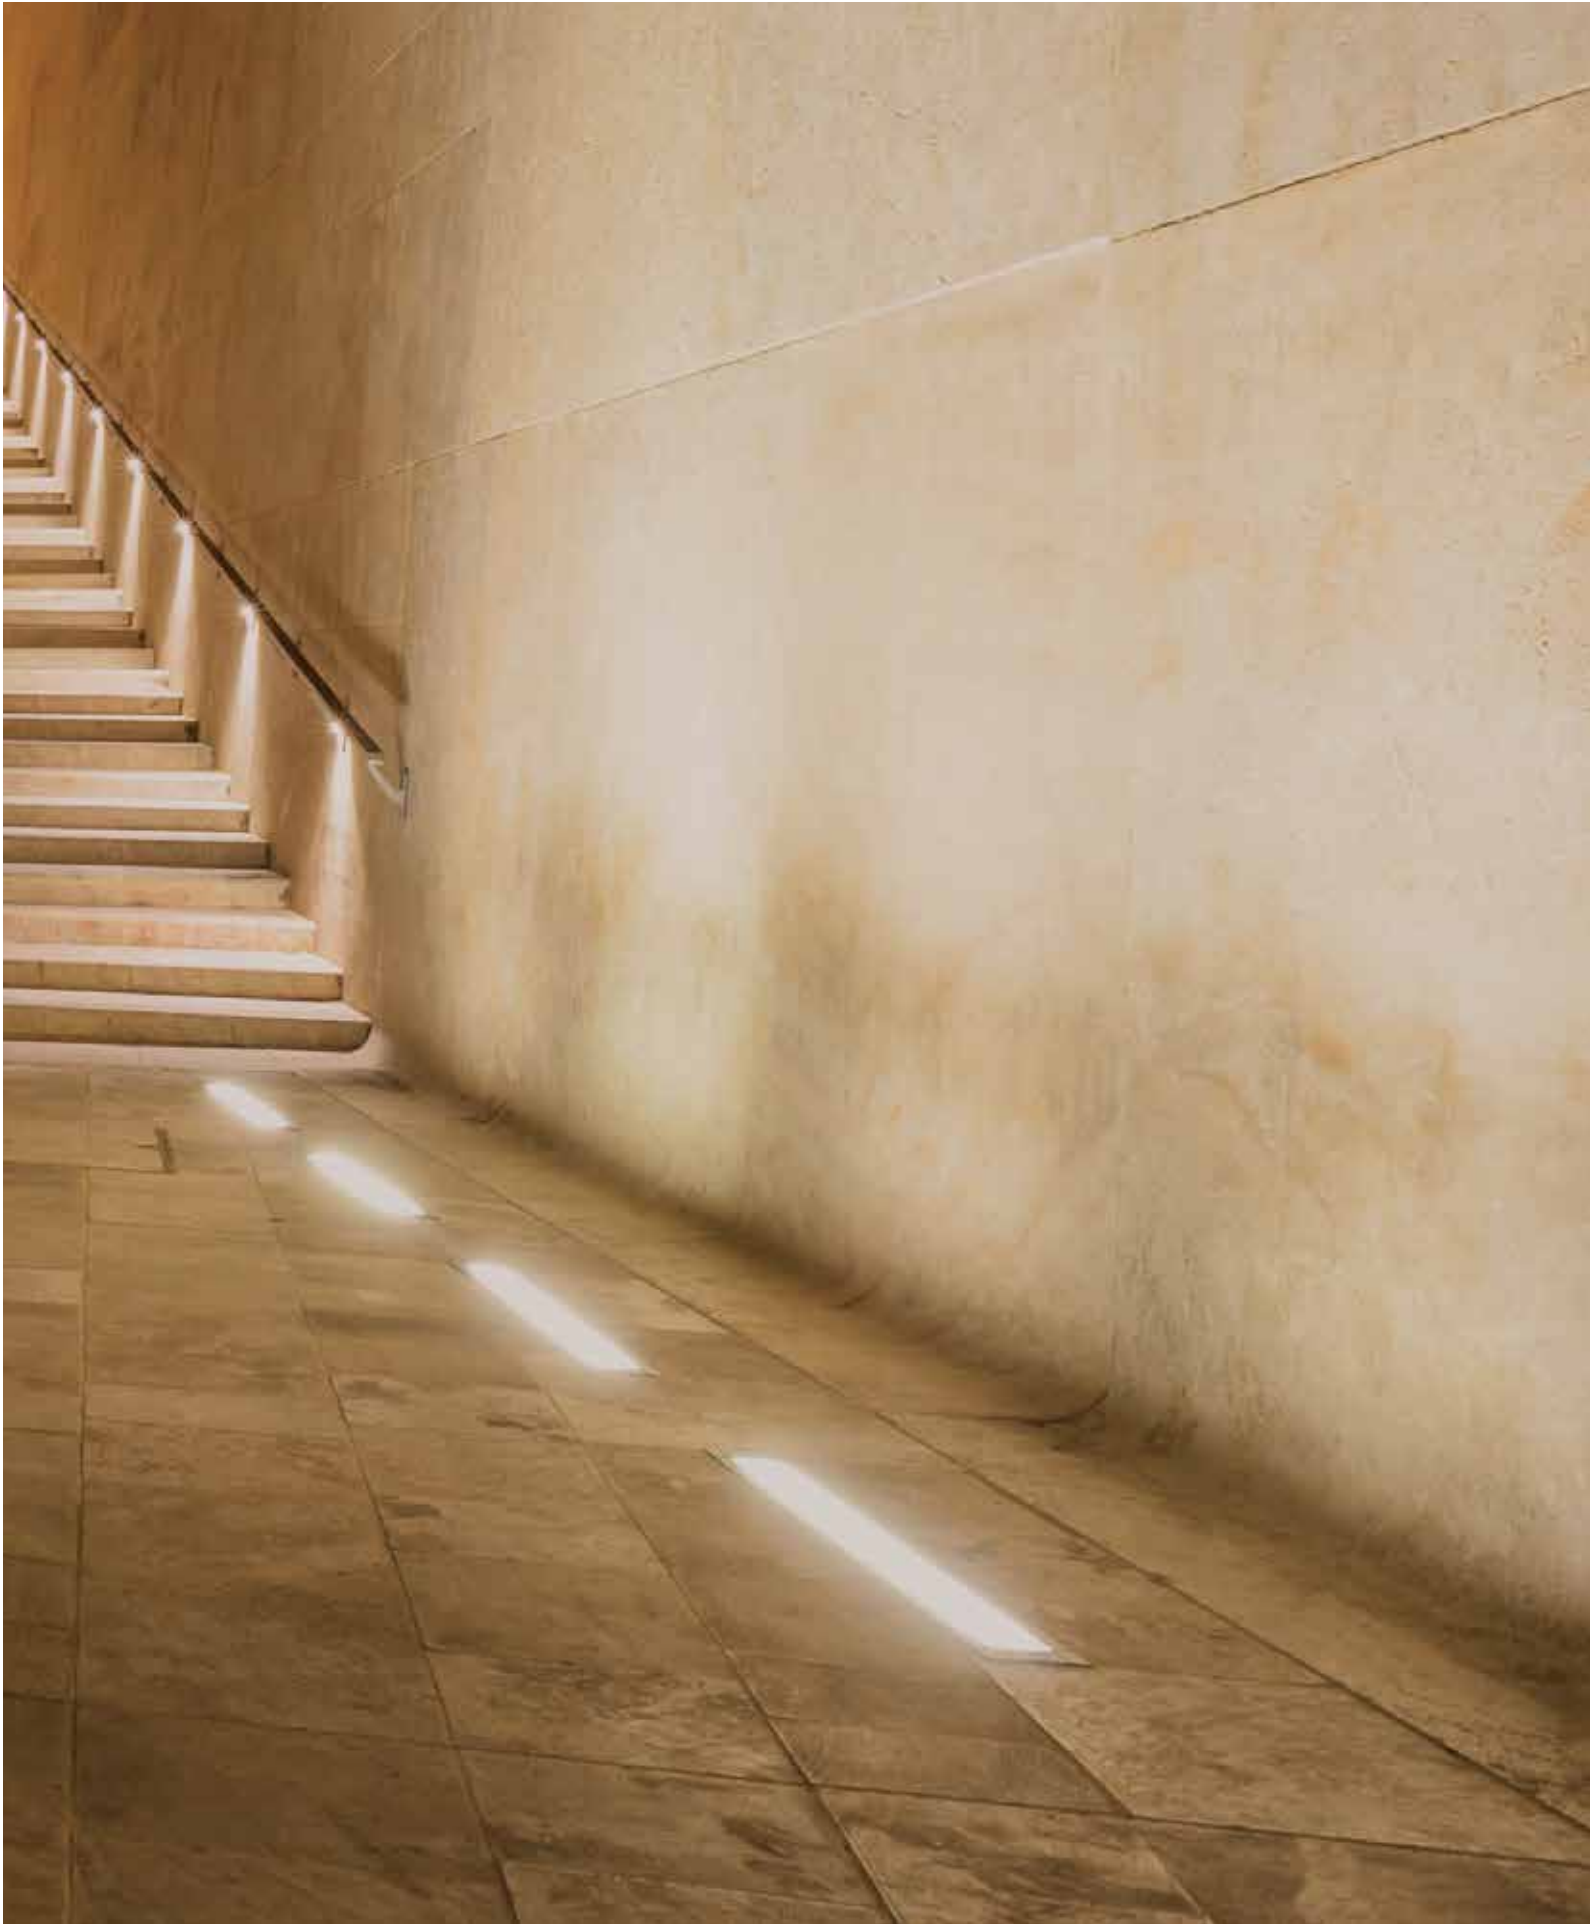



Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 50cm W: 9.2cm H: 9cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11 cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available Driver Included
Color	Stainless Steel / Code E366



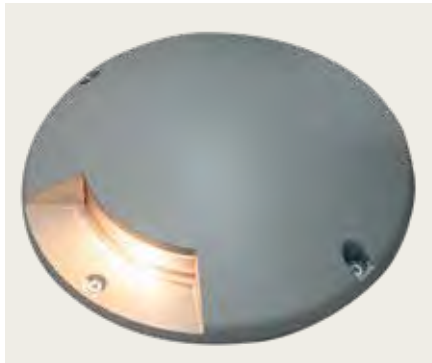


Power 3W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 130Lm
Cri 80
IP 67
IK 10
Dimensions Ø: 21cm H: 5.4cm
Material Aluminium - Clear PC Diffuser
Special Feature Surface Ground
Driver Included

Color Grey / **Code E461**

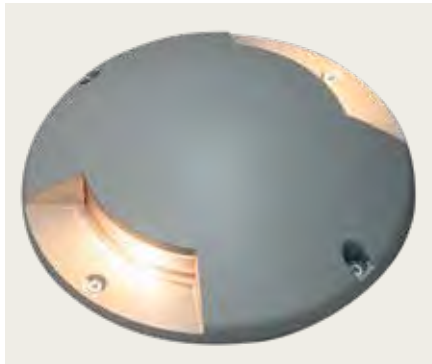

Power 5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 228Lm
Cri 80
IP 67
IK 10
Dimensions Ø: 21cm H: 5.4cm
Material Aluminium - Clear PC Diffuser
Special Feature Surface Ground
Driver Included


Color Grey / **Code E462**



Power 0.2W
Input 24V
Color Temperature 3000K
Lumen 23Lm
Cri 80
IP 68
IK 10
Dimensions Ø: 1.5cm H: 3.5cm
Beam Angle 45°
Material Stainless Steel - Tempered Glass
Depth Required 11: 5cm
Special Feature 50cm Cable Available
Recommended Driver LPH-18-24 (Not Included)
In Parallel Connection 1-10 pcs


Color Stainless Steel / **Code E364**



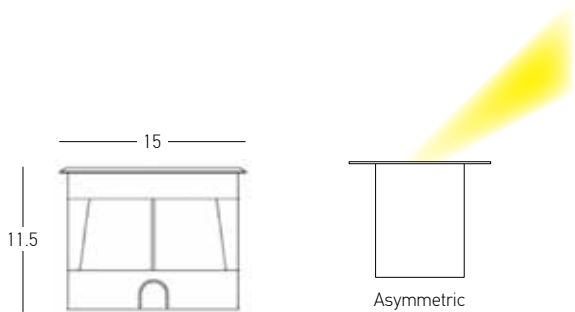

Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 560Lm
Cri 80
IP 66
IK 8
Dimensions Ø: 15cm H: 11.5cm
Beam Angle 45°
Material Aluminium - Stainless Steel - Glass
Depth Required 11.5cm
Recessed Mounting Box Included
Special Feature Asymmetric
50cm Cable Available
Driver Included


Color Stainless Steel / **Code E363**

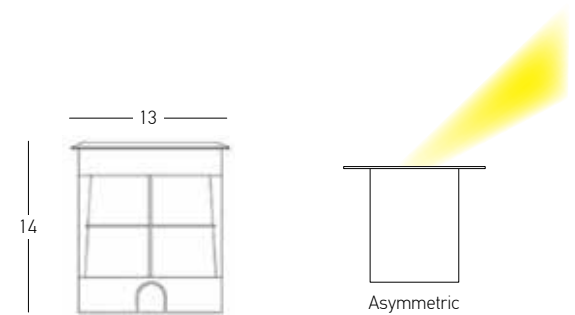

Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 560Lm
Cri 80
IP 66
IK 8
Dimensions Ø: 13cm H: 14cm
Beam Angle 45°
Material Aluminium - Stainless Steel - Glass
Depth Required 11.5cm
Recessed Mounting Box Included
Special Feature Asymmetric
50cm Cable Available
Driver Included

Color Stainless Steel / **Code E362**



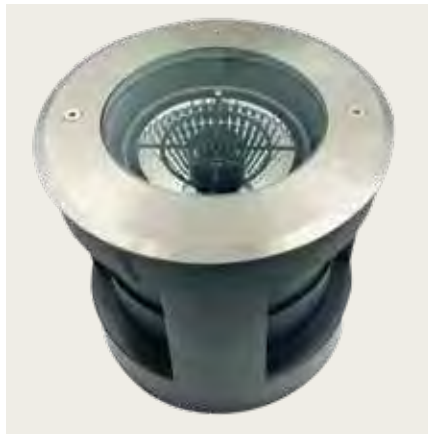

Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1200Lm
Cri 80
IP 66
IK 8
Dimensions Ø: 18cm H: 16cm
Beam Angle 45°
Material Aluminium - Stainless Steel - Glass
Depth Required 11 : 17cm
Recessed Mounting Box Included
Special Feature Light Angle can be adjusted externally through screw on the frame.
50cm Cable Available
Driver Included


Color Stainless Steel / **Code E361**



Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 560Lm
Cri 80
IP 66
IK 8
Dimensions Ø: 13cm H: 14cm
Beam Angle 45°
Material Aluminium - Stainless Steel - Glass
Depth Required 11 : 15cm
Recessed Mounting Box Included
Special Feature Internal Adjustable Light Angle
50cm Cable Available
Driver Included


Color Stainless Steel / **Code E360**





Bulb 1x GU10 LED
Power 10W MAX
Input 220-240V, 50/60Hz
IP 65
IK 8
Dimensions Ø: 10cm H: 10cm
Material Stainless Steel - Tempered Glass
Depth Required 11cm
Recessed Mounting Box Included
Special Feature 50cm Cable Available
GU10 Lampholder Included

Color Stainless Steel / **Code E359**



Power 6W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 618Lm
Cri 80
IP 67
IK 8
Dimensions Ø: 10cm H: 9.5cm
Beam Angle 36°
Material Stainless Steel - Tempered Glass
Depth Required 12cm
Recessed Mounting Box Included
Special Feature Driver Included



Color Stainless Steel / **Code E189**



Power. Precision. Presence.
Wall washers for uniform illumination and
architectural impact.




09. WALL WASHER

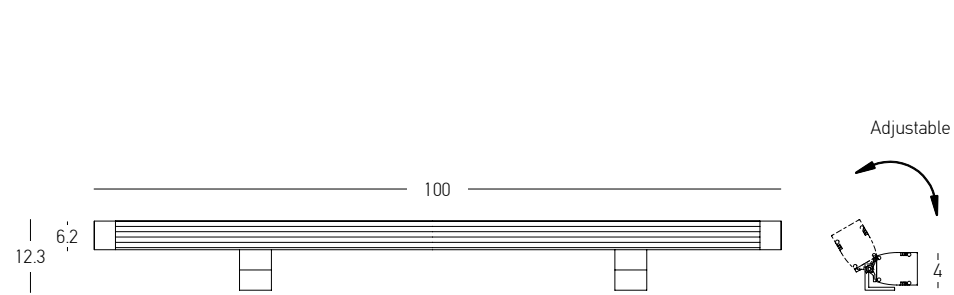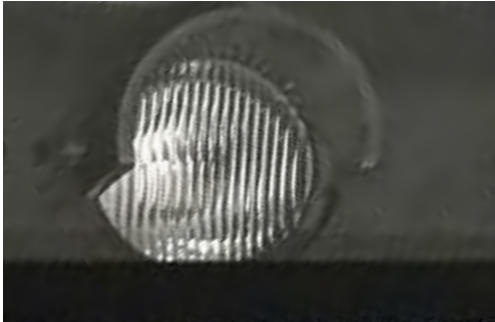

Power 36W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 2200Lm
Cri 80
IP 65
Dimensions L: 100cm W: 4cm H: 12.3cm
Beam Angle 60° x 10°
Material Aluminium - Glass
Special Feature Half Circular Anti-Glare
Driver Included
Connect 8pcs MAX


Color Graphite / **Code E496**

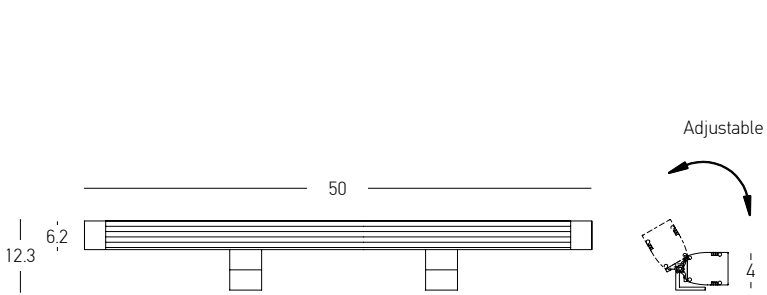

Power 18W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1160Lm
Cri 80
IP 65
Dimensions L: 50cm W: 4cm H: 12.3cm
Beam Angle 60° x 10°
Material Aluminium - Glass
Special Feature Half Circular Anti-Glare
Driver Included
Connect 8pcs MAX

Color Graphite / **Code E497**



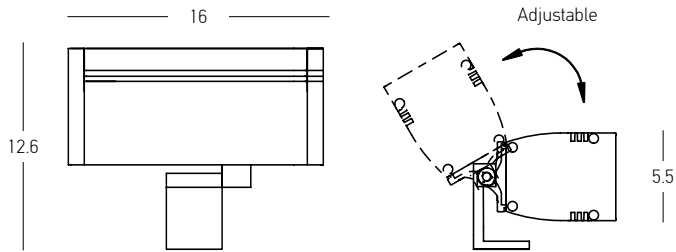



Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 420Lm
Cri 80
IP 65
Dimensions L: 16cm W: 5.5cm H: 12.6cm
Beam Angle 15°
Material Aluminium - Glass
Special Feature Honeycomb Included
Driver Included
120° Adjustable Angle
Connect 8pcs MAX

Color Graphite / **Code E495**



Connectors Male & Female for E495, E496 & E497
Cable 25cm
Input 220-240V
IP 66
Color Black / **Code CNCTR 6**



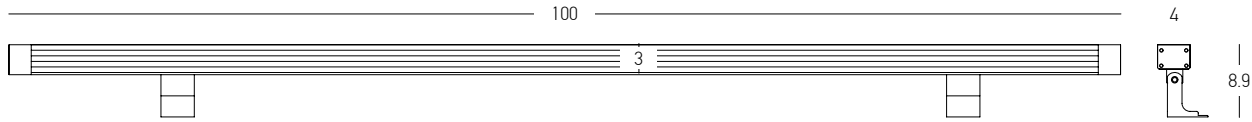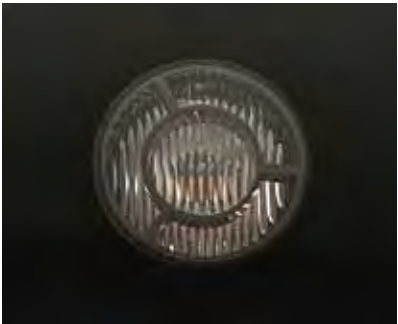


Power 36W
Input 24V
Color Temperature 2700K
Lumen 1530Lm
Cri 80
IP 65
Dimensions L: 100cm W: 4cm H: 8.9cm
Beam Angle 60° x 10°
Material Aluminium - Glass
Special Feature Anti-Glare

Driver Not Included
Connect 5pcs MAX
Color Dark Brown / **Code E498**



- Dimming Options
- 1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU (Page 396-397)
 - 2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
 - 3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
 - 4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)



Power 18W
Input 24V
Color Temperature 2700K
Lumen 775Lm
Cri 80
IP 65
Dimensions L: 50cm W: 4cm H: 8.9cm
Beam Angle 60° x 10°
Material Aluminium - Glass
Special Feature Anti-Glare

Driver Not Included
Connect 5pcs MAX
Color Dark Brown / **Code E499**




Connectors Male & Female for E498 & E499

Cable 25cm
Input 24V
IP 66
Color Black / **Code CNCTR 7**



WALL WASHER TUNABLE WHITE

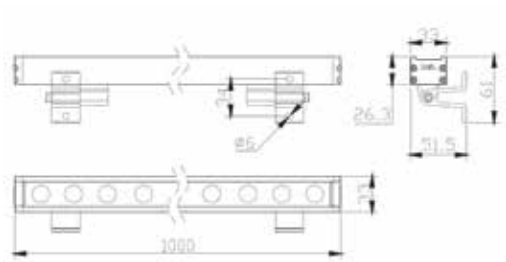

Power	24W
Input	24V
Color Temperature	2700K-6500K
Lumen	1580-1770Lm
Cri	80
IP	66
Dimensions	L: 100cm W: 3.3cm H: 2.6cm
Beam Angle	60° x 10°
Material	Aluminium
Special Feature	Honeycomb Included Driver Not Included Connect 6pcs MAX
Color	Grey / Code E382


- Dimming Options
- 1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
 - 2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)




Connectors Male & Female for E382	
Cable	25cm
Input	24V
IP	66
Color	Black / Code CNCTR 3



Power	288W @ 24V
Input	220-240V, 50/60Hz
Dimensions	W: 2.9cm H: 2.2cm L: 18.6cm
Bluetooth Dimming	OT Wi DIM 5CH CA , RGB, RGBW and RGBTW
Material	Plastic
Special Feature	IP 20
Color	White / Code 6937186115232



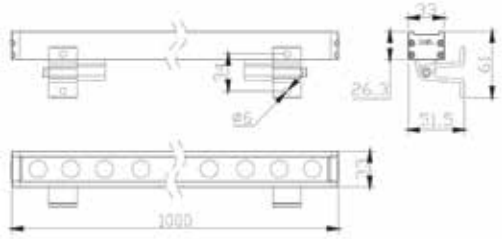


Code	Kelvin	Watt	Lumen
E380	RGB	12W	MAX 280
E381	RGBW 4000	12W	MAX 480

Power 12W
Input 24V
Cri 80
IP 66
Dimensions L: 100cm W: 3.3cm H: 2.6cm
Beam Angle 60° x 10°
Material Aluminium
Special Feature Honeycomb Included
Driver Not Included
Connect 6pcs MAX

Color Grey



Dimming Options
1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)

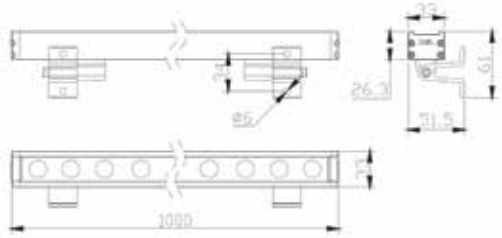

Code	Kelvin	Watt	Lumen
E378	RGB	24W	MAX 560
E379	RGBW 4000	24W	MAX 960

Power 24W
Input 24V
Cri 80
IP 66
Dimensions L: 100cm W: 3.3cm H: 2.6cm
Beam Angle 60° x 10°
Material Aluminium
Special Feature Honeycomb Included
Driver Not Included
Connect 6pcs MAX

Color Grey




Dimming Options
1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)



Connectors Male & Female for E381 & E379
Cable 25cm
Input 24V
IP 66
Color Black / **Code CNCTR 2**



Connectors Male & Female for E380 & E378
Cable 25cm
Input 24V
IP 66
Color Black / **Code CNCTR 4**

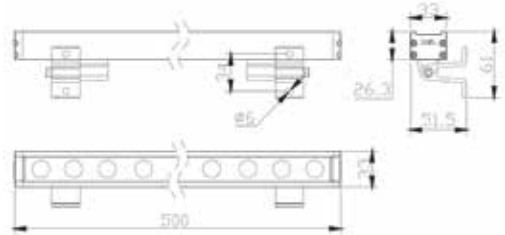

Code	Kelvin	Watt	Lumen
E376	3000	12W	MAX 850
E377	4000	12W	MAX 870




Power 12W
Input 24V
Cri 80
IP 66
Dimensions L: 50cm W: 3.3cm H: 2.6cm
Beam Angle 60° x 10°
Material Aluminium
Special Feature Honeycomb Included
Driver Not Included
Connect 12pcs MAX

Color Grey



- Dimming Options
1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
 2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
 3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
 4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

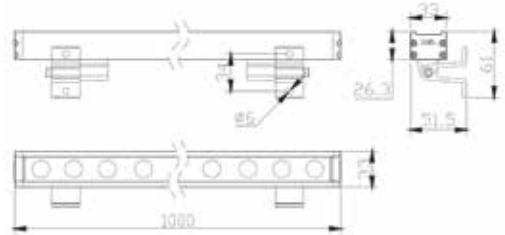

Code	Kelvin	Watt	Lumen
E374	3000	24W	MAX 1700
E375	4000	24W	MAX 1720



Power 24W
Input 24V
Cri 80
IP 66
Dimensions L: 100cm W: 3.3cm H: 2.6cm
Beam Angle 60° x 10°
Material Aluminium
Special Feature Honeycomb Included
Driver Not Included
Connect 6pcs MAX

Color Grey



- Dimming Options
1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
 2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
 3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
 4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)



Connectors Male & Female for E376, E377, E374 & E375

Cable 25cm
Input 24V
IP 66
Color Black / Code CNCTR 1



Track The Light, Magnify The Possibilities.
IP-protected outdoor lighting for modern
spaces.




10. IP65 SURFACE LIGHTING SYSTEM




IP65 SURFACE OUTDOOR TRACK

Dimensions L: 300cm W: 2.6cm H: 2.5cm
Material Aluminium
Color Sandy Black / **Code E385**




HORIZONTAL MECHANICAL CORNER

Dimensions L: 7cm W: 7cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E390**




VERTICAL MECHANICAL CORNER

Dimensions L: 7cm W: 3cm H: 7cm
Material Aluminium
Color Sandy Black / **Code E392**




STRAIGHT MECHANICAL CONNECTOR

Dimensions L: 10cm W: 3cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E389**




T MECHANICAL CONNECTOR

Dimensions L: 10cm W: 6.5cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E393**



END CAP


Dimensions L: 6.2cm W: 3cm H: 2.6cm
Material Aluminium
Color Sandy Black / **Code E391**





IP65 WATERPROOF RUBBER






Power 10W
Input 48V
Color Temperature 3200K
Lumen 700Lm
Cri 90
IP 65
Beam Angle 100°
Dimmable DALI ☐
Dimensions L: 100cm W: 2cm H: 1.4cm
Material Silicone Rubber
Special Feature 1m Can Load 144W MAX
Color White / **Code E386**


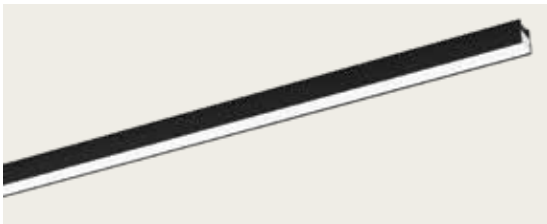


Power 20W
Input 48V
Color Temperature 3200K
Lumen 1400Lm
Cri 90
IP 65
Beam Angle 100°
Dimmable DALI ☐
Dimensions L: 200cm W: 2cm H: 1.4cm
Material Silicone Rubber
Special Feature 2m Can Load 288W MAX
Color White / **Code E387**

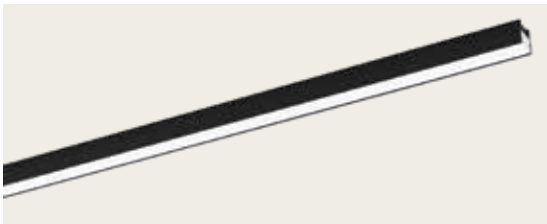


Power 30W
Input 48V
Color Temperature 3200K
Lumen 2100Lm
Cri 90
IP 65
Beam Angle 100°
Dimmable DALI ☐
Dimensions L: 300cm W: 2cm H: 1.4cm
Material Silicone Rubber
Special Feature 3m Can Load 432W MAX
Color White / **Code E388**

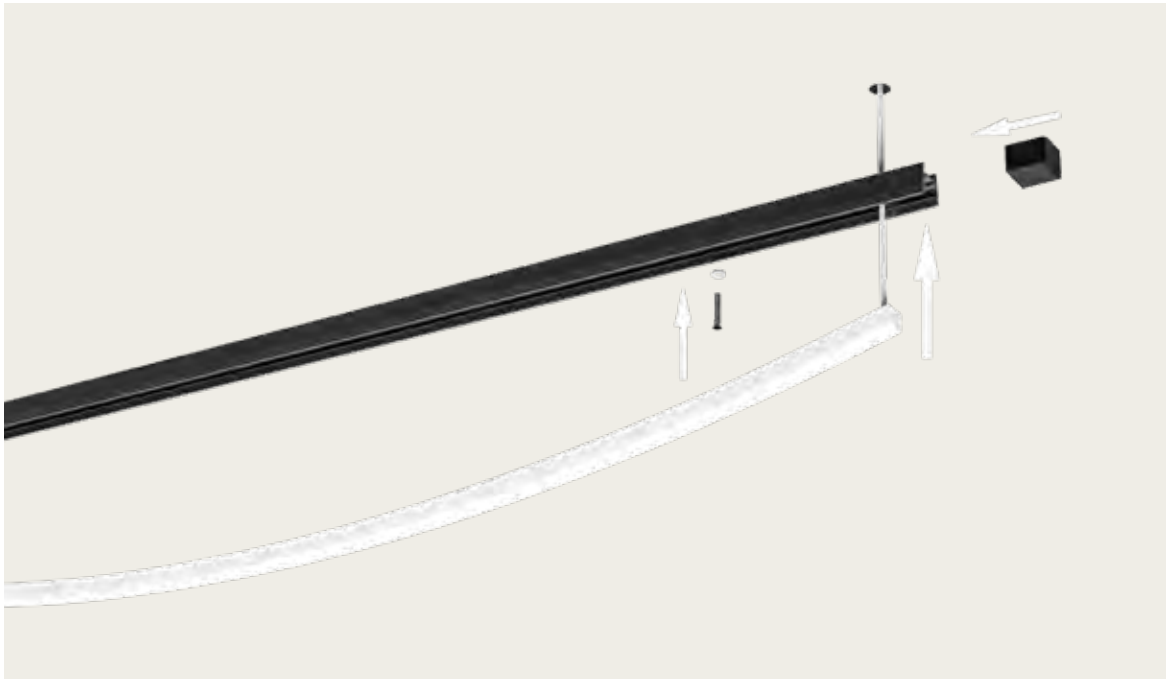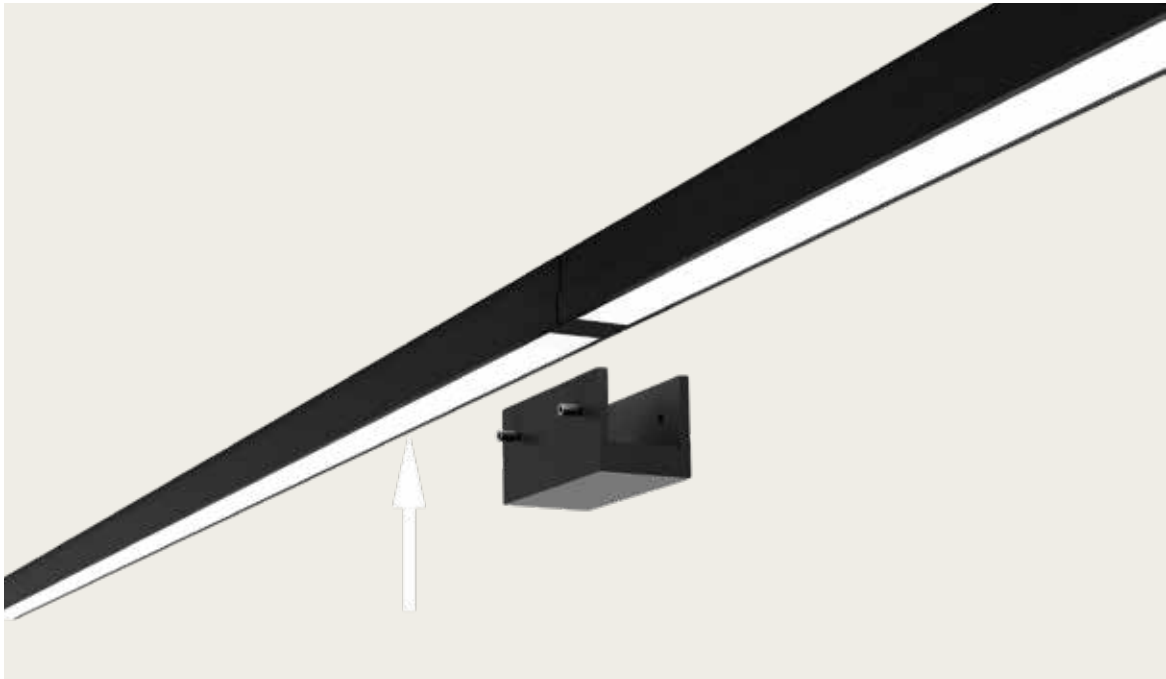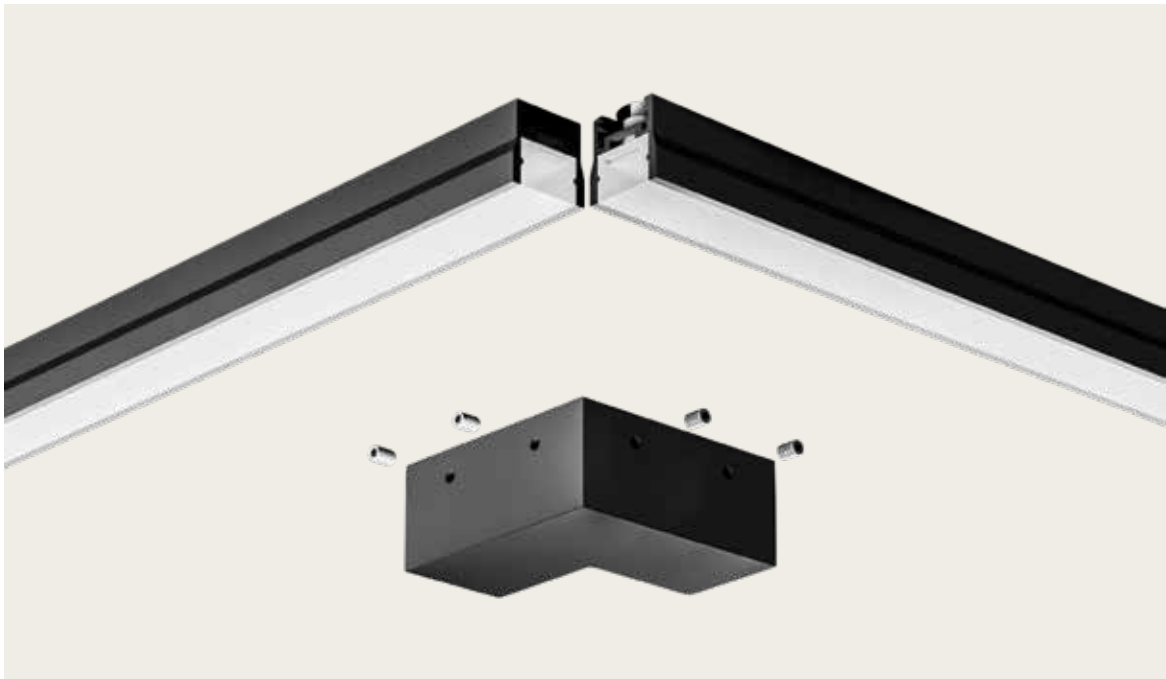

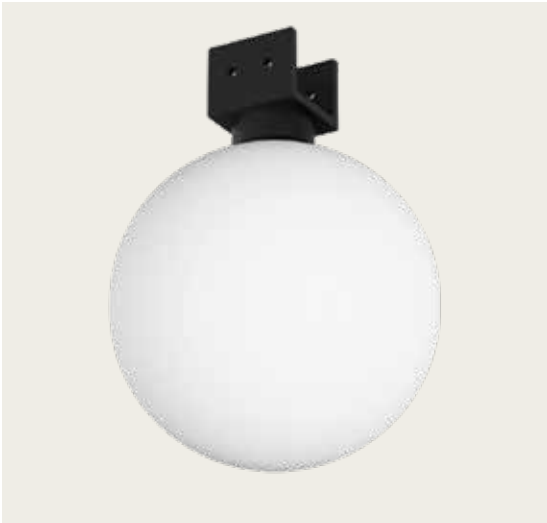


Power 9W
Input 48V
Color Temperature 3200K
Lumen 438Lm
Cri 80
IP 65
Dimmable DALI ☐
Dimensions Ø: 12cm H: 16cm
Material Aluminium - Opal Diffuser
Special Feature Does Not Operate Independently, Must Be Mounted On E386, E387 & E388
Color Opal-Sandy Black Adaptor / **Code E501**

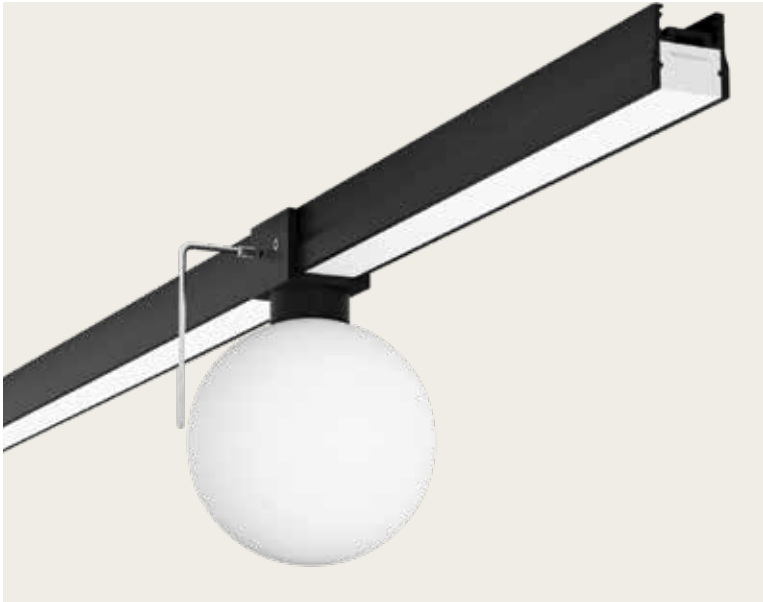

SURFACE MOUNT BOX FOR 48V IP65 LIGHTING SYSTEM





Dimensions L: 39cm W: 14cm H: 5.5cm
Material Metal
Special Feature Driver Not Included
Color Black / **E397**

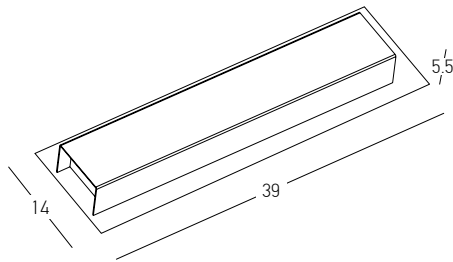

Power 160W
Input 220-240V, 50/60Hz
Output 48V
IP 67
Dimensions L: 33.5 W: 3cm H: 2.1cm
Dimmable DALI ☐
Material Metal
Special Feature Fits Into E397
Code XSV160W48



Power 240W
Input 220-240V, 50/60Hz
Output 48V
IP 67
Dimensions L: 38.5 W: 3cm H: 2.1cm
Dimmable DALI ☐
Material Metal
Special Feature External Application
Code XSV240W48

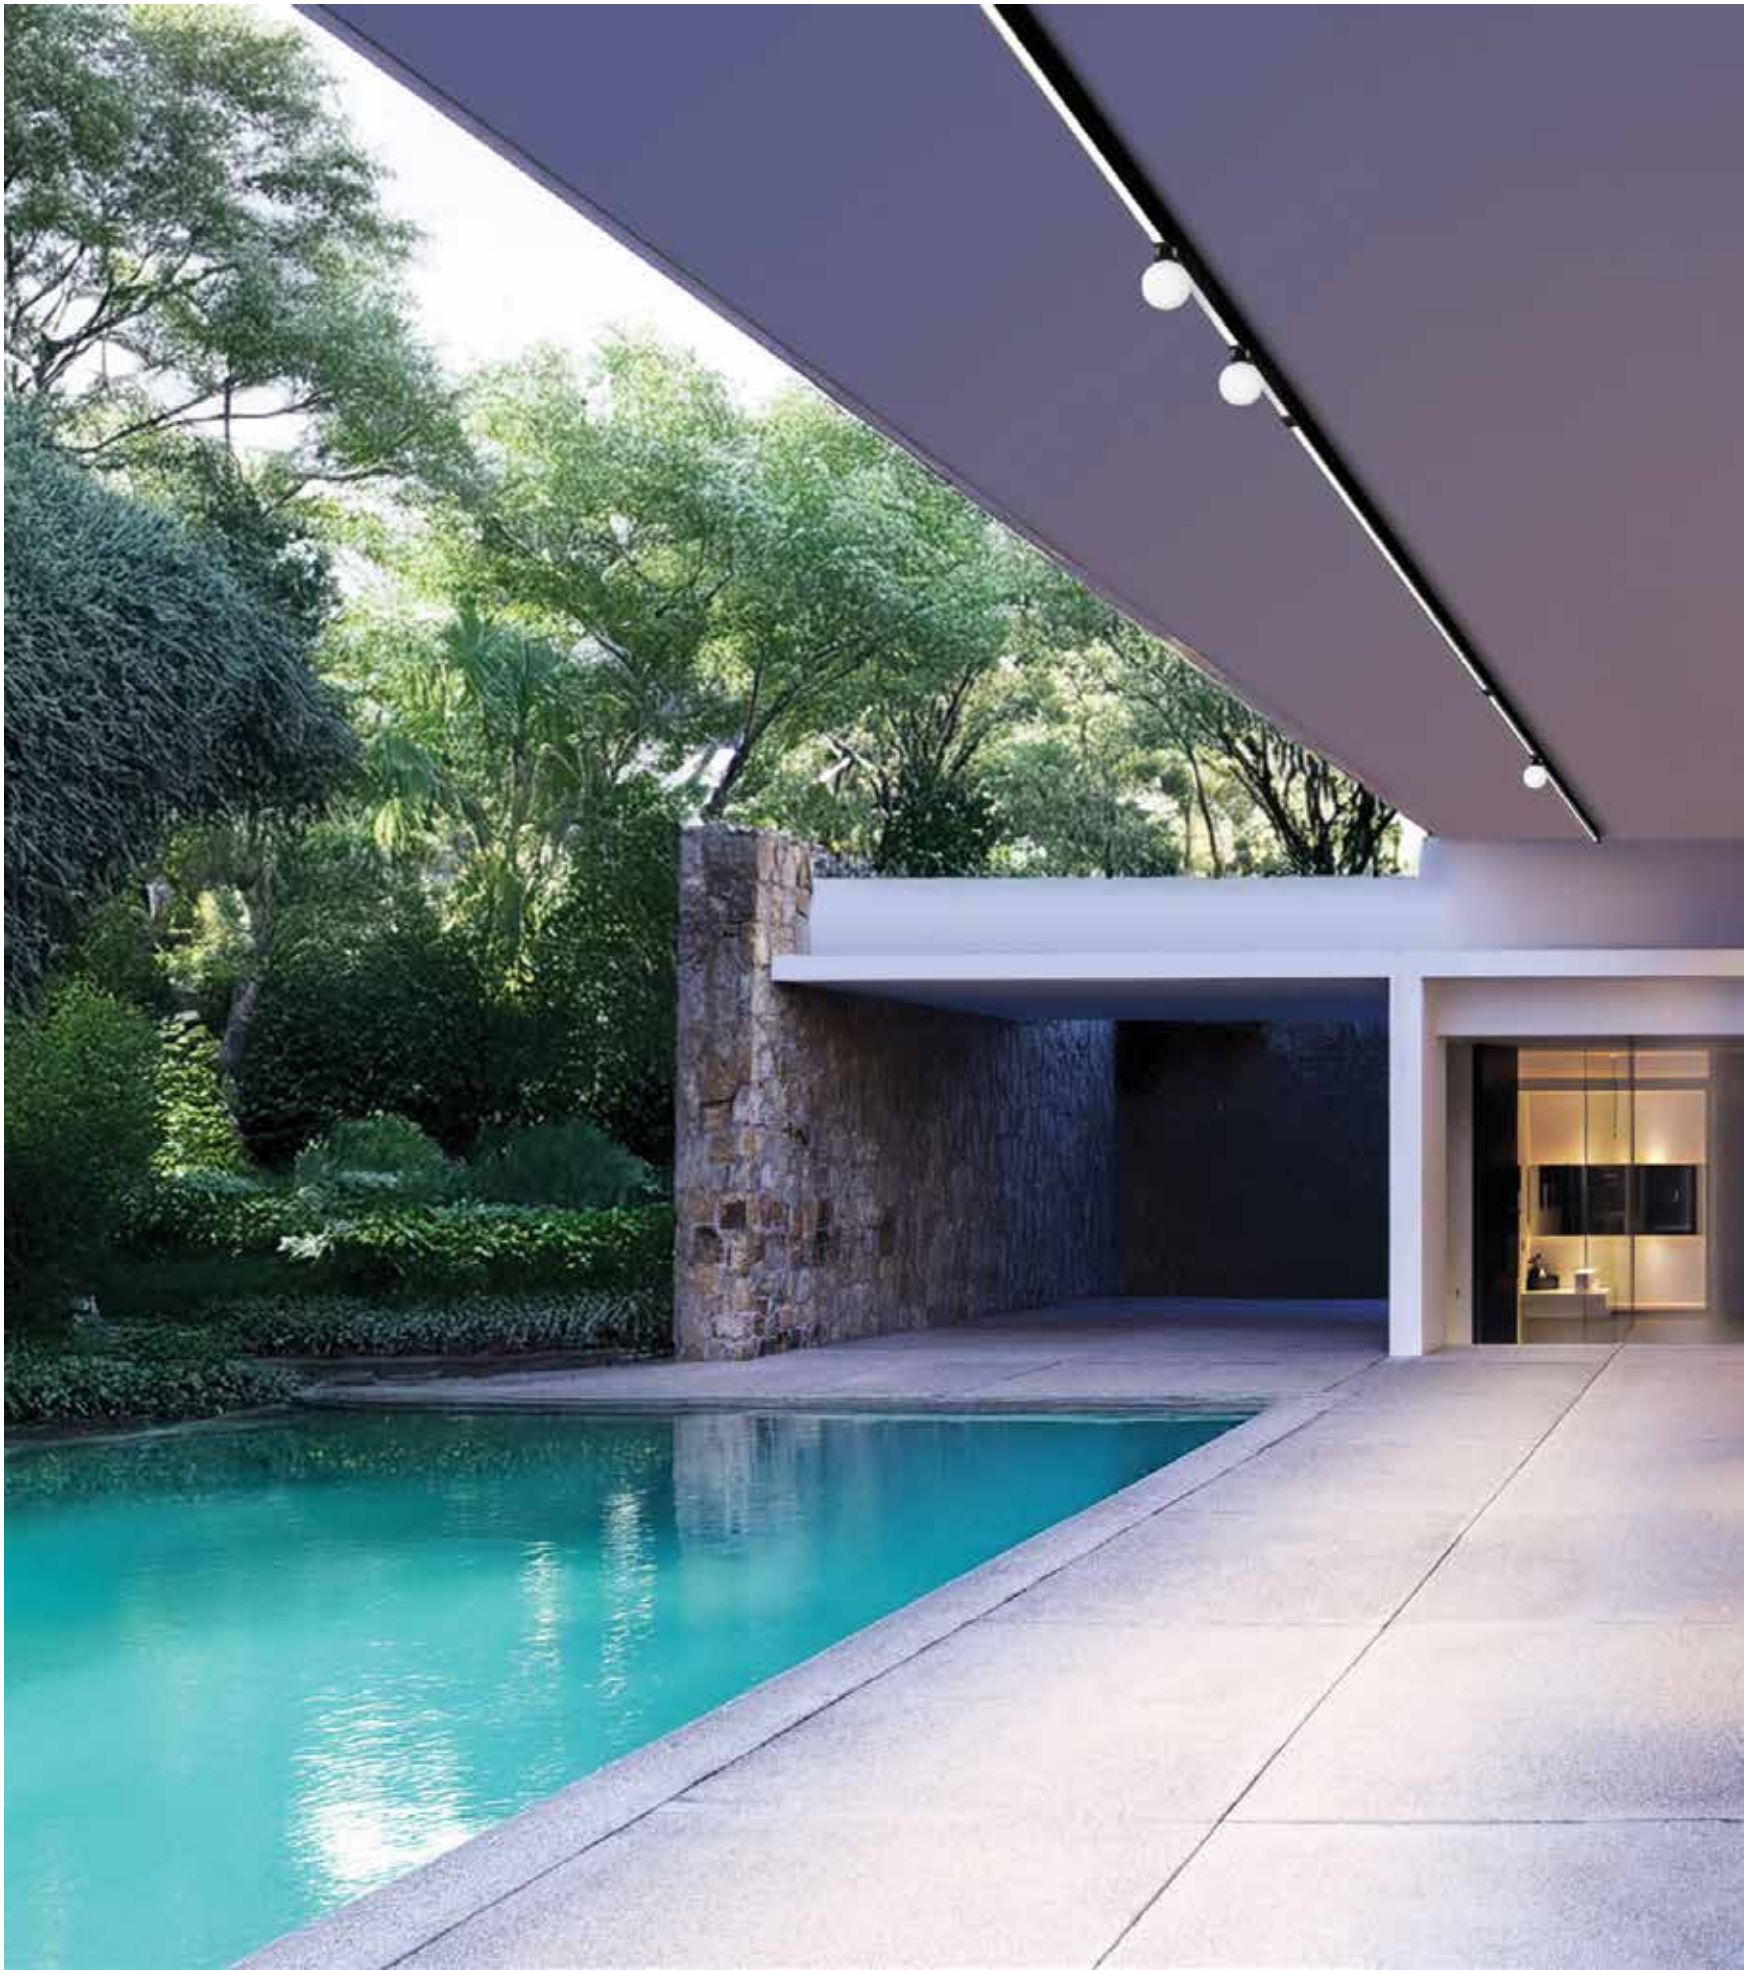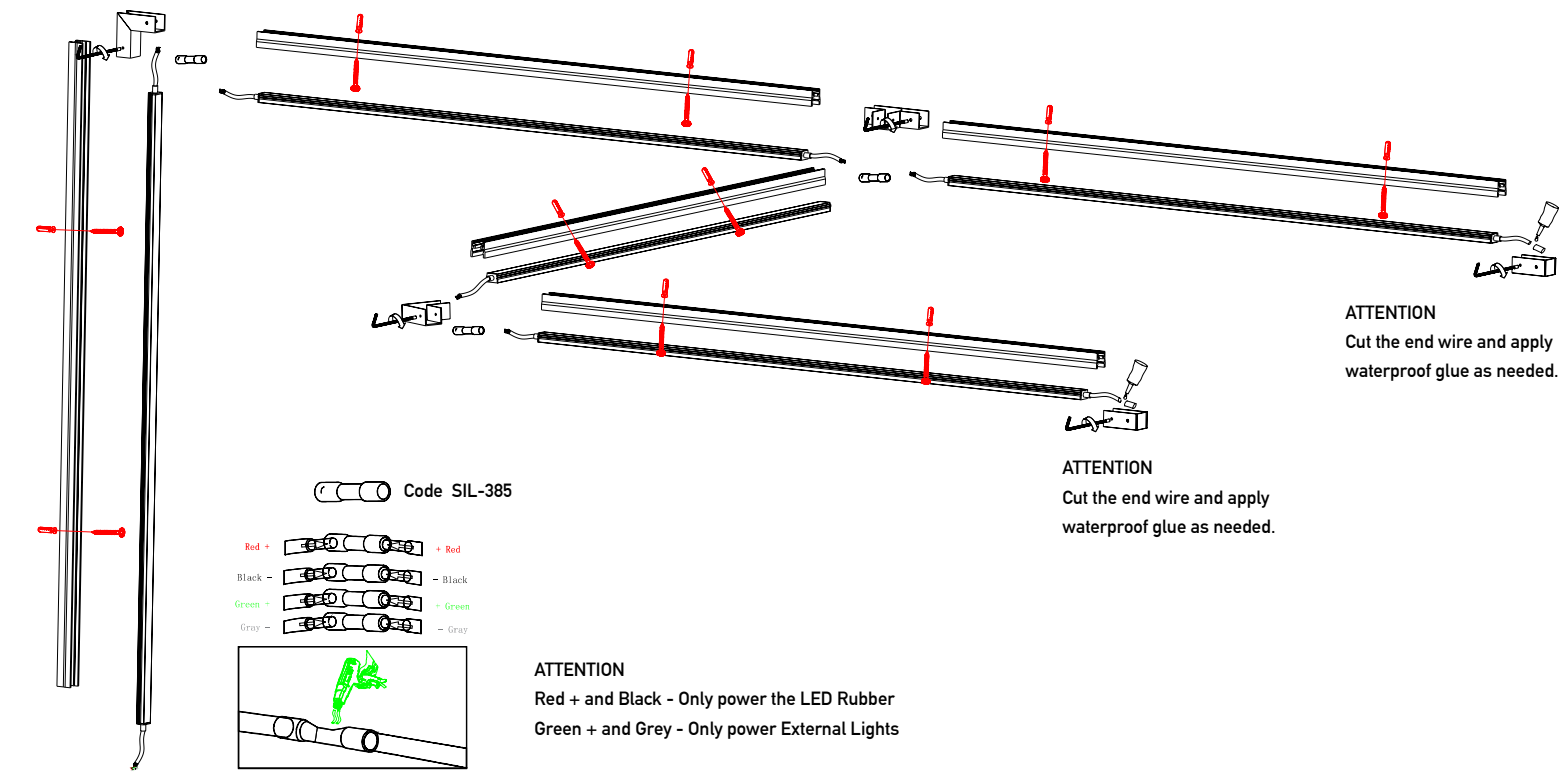

Power 30W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 4.1cm H: 2.7cm L: 14.5cm
Non Dimmable ☒ On-Off
ELEMENT 30/220-240/24 G2
Material Plastic
Special Feature IP 20
Color White / **Code 4052899605503**



Power 60W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 4.1cm H: 3.1cm L: 20.1cm
Non Dimmable ☒ On-Off
ELEMENT 60/220-240/24 G2
Material Plastic
Special Feature IP 20
Color White / **Code 4052899605527**



Power 180W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 4cm H: 3.1cm L: 30cm
Non Dimmable ☒ On-Off
ELEMENT 180/220-240/24 G2
Material Plastic
Special Feature IP 20
Color White / **Code 4052899605565**



Power 30W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 6.7cm H: 3cm L: 10.3cm
DALI Dimming ○ Push Button - DALI2
1 CHANNEL
Material Plastic
Special Feature IP 20
Color White / **Code 4062172329767**



Power 50W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming ○ Push Button - DALI2
1 CHANNEL
Material Plastic
Special Feature IP 20
Color White / **Code 4062172274340**



Power 80W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming ○ Push Button - DALI2
1 CHANNEL
Material Plastic
Special Feature IP 20
Color White / **Code 4062172274364**



Power 200W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 6.3cm H: 3.6cm L: 20cm
Non Dimmable ☒ On-Off
Material Metal
Special Feature IP 67
Color White / **Code XLG-200**



Power 80W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
DALI Dimming ○ Push Button - DALI2
4 CHANNEL
Material Plastic
Special Feature IP 20
Color White / **Code 4062172274302**



Power 100W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 5cm H: 3cm L: 23cm
Dimmable Triac , 1-10 ○
Material Metal
Special Feature IP 20
Color Metal / **Code Z89100VND**




Power 288W @ 24V
Input 220-240V, 50/60Hz
Dimensions W: 2.9cm H: 2.2cm L: 18.6cm
Bluetooth Dimming ○
OT Wi DIM 5 CHANNEL CA
RGB, RGBW and RGBTW
Material Plastic
Special Feature IP 20
Color White / **Code 6937186115232**

 CV dimmers with Bluetooth



Power 150W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 5cm H: 3.1cm L: 26.2cm
DALI Dimming ○ Push Button - DALI2
1 CHANNEL
Material Metal
Special Feature IP 67
Color White / **Code AC-MS-150**

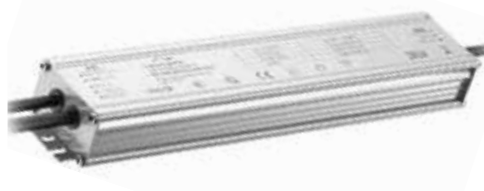

Input 220-240V, 50/60Hz
Dimensions W: 5cm H: 8cm L: 8cm
DALI Dimming ○
DALI MCU Tunable White Switch
Material Plastic
Special Feature IP 20
Color White / **Code 4052899465916**



Power 200W
Input 220-240V, 50/60Hz
Output 24V
Dimensions W: 5cm H: 3cm L: 28.7cm
Dimmable Triac , 1-10 ○
Material Metal
Special Feature IP 20
Color Metal / **Code Z89200VND**



Power 288W @ 24V
Input 220-240V, 50/60Hz
Dimensions W: 4.2cm H: 2cm L: 17.2cm
DMX Dimming ○
OT DMX DIM 5 CHANNEL
RGB, RGBW and RGBTW
Material Plastic
Special Feature IP 20
Color White / **Code 6977078993838**



E099	16	E238-W	172	E309	342	E367	151	E430	190	E489	20	4062172274340	397
E109	179	E239	172	E310	298	E368	112	E431	193	E490	20	4062172274364	396
E121	240	E239-W	172	E311	296	E369	24	E432	193	E491	169	4062172329767	396
E122	240	E240	172	E312	296	E370	24	E433	170	E492	169	6937186115232	397
E123	240	E240-W	172	E313	26	E371	24	E434	199	E493	169	6977078993838	397
E124	240	E241-G	321	E314	26	E374	384	E435	231	E494	261		
E127	218	E241-W	321	E315	223	E375	384	E436	231	E495	376		
E128	218	E242-G	320	E316	180	E376	384	E437	202	E496	374		
E132	136	E242-W	320	E317	180	E377	384	E438	202	E497	375		
E133	136	E243	220	E318	232	E378	383	E439	176	E498	378		
E135	178	E246-G	325	E319	313	E379	383	E440	176	E499	378		
E146	237	E246-W	325	E320	310	E380	383	E441	302	E500	217		
E149	218	E247-G	324	E321	312	E381	383	E442	302	E501	392		
E150	242	E247-W	324	E322	311	E382	380	E443	119	E502	350		
E151	242	E249	142	E323	316	E383	51	E444	120	E503	350		
E152	284	E253	48	E324	316	E384	51	E445	68	E504	352		
E153	285	E254	48	E325	138	E385	388	E446	110	E505	352		
E156	178	E261	236	E326	346	E386	390	E447	110	E506	353		
E159	179	E262	236	E327	346	E387	390	E448	72	E507	353		
E168	248	E265	238	E328	266	E388	390	E449	269	E508	356		
E177-A	286	E266	238	E329	266	E389	389	E450	304	E509	356		
E177-B	286	E267	210	E330	266	E390	388	E451	304	E510	355		
E178	359	E268	208	E331	266	E391	389	E452	304	E511	355		
E179	358	E269	344	E332	334	E392	388	E453	307	E518	106		
E180	358	E270	344	E333	334	E393	389	E454	307	E522	81		
E181	328	E271	208	E334	117	E397	394	E455	307	E523	80		
E182	328	E272	229	E335	116	E398	30	E456	262	S112	340		
E183	328	E273	227	E336	117	E399	30	E457	256	S113	340		
E184	328	E274	226	E337	154	E400	30	E458	256	S131	338		
E185	246	E275	205	E338	74	E401	32	E459	257	S131-4K	338		
E186	246	E276	126	E339	74	E402	32	E460	257	S132	338		
E187	330	E277	126	E340	340	E403	278	E461	364	S132-4K	338		
E189	371	E278	228	E341	205	E404	278	E462	364	S133	339		
E190	56	E279	292	E342	206	E405	66	E463	82	S134	339		
E191	56	E280	294	E343	196	E406	65	E464	212	AC-MS-150	397		
E192	56	E281	289	E344	129	E407	84	E465	264	SIL-385	394		
E193	34	E282	289	E345	129	E408	87	E466	91	CNCTR 1	384		
E194	34	E282-SP	289	E346	308	E409	88	E467	102	CNCTR 2	383		
E195	222	E283	290	E347	308	E410	54	E468	274	CNCTR 3	380		
E197	224	E284	283	E348	76	E411	54	E469	274	CNCTR 4	383		
E199	225	E285	280	E349	276	E412	189	E470	274	CNCTR 6	376		
E201	200	E286	280	E350	276	E413	182	E471	274	CNCTR 7	378		
E202	200	E287	194	E351	147	E414	185	E472	272	LPH-18-24	267		
E203	122	E289	29	E352	146	E415	186	E473	272	LPV-35-24	84		
E204	122	E290	29	E353	112	E416	214	E474	41	V350-1050	278		
E208	152	E291	29	E354	130	E417	214	E475	44	XLG-200	397		
E216	248	E294	318	E355	151	E418	104	E476	46	XSV160W48	394		
E217	298	E296	200	E356	148	E419	162	E477	41	XSV240W48	394		
E219	342	E297	108	E357	132	E420	162	E478	40	Z0800-BA	267		
E220	342	E298	144	E358	134	E421	164	E479	58	Z89100VND	397		
E227	234	E300	314	E359	371	E422	164	E480	53	Z89200VND	397		
E229	326	E301	314	E360	368	E423	92	E482	22	25280	20		
E230	327	E302	125	E361	368	E424	96	E483	22	4052899465916	397		
E235	156	E304	251	E362	366	E425	95	E484	22	4052899605503	396		
E235-12D	156	E305	251	E363	366	E426	98	E485	16	4052899605527	396		
E236	156	E306	245	E364	365	E427	160	E486	16	4052899605565	396		
E237	142	E307	245	E365	360	E428	166	E487	16	4062172166010	380		
E238	172	E308	342	E366	363	E429	190	E488	20	4062172274302	397		

ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri

Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

info@zambelislights.gr | zambelislights.gr

