


belux



oto

work & mood

belux



Joel Hoff and Philipp von Lintel, design studio OTO.berlin

oto

More than light: atmosphere

Extraordinary materials – exceptional atmosphere. With its distinctive silicone diffuser, oto creates a new kind of ambient light. Soft and opaque, just like its finish, yet as sophisticated and luminous as the setting demands. Commercial or residential? Hospitality or work? The design by Joel Hoff and Philipp von Lintel is a universal answer to the question of perfect lighting.

belux

oto



red dot winner 2025
lighting design



OTO.berlin

oto - making of

belux

oto

The oto family

A light that feels at home everywhere. It gives architects and designers maximum creative freedom – thanks to its minimalist design, wide range of variants and intelligent functionality. Whether a striking standalone piece or part of a refined overall concept: the oto family excels in every setting.




oto 10
Floor light
Ø450

oto 43 / oto 46
Desk-mounted light
Ø450

oto 34
Pendant light
Ø450

work



oto 20
Wall /
ceiling light
Ø300

oto 24
Wall /
ceiling light
Ø450

oto 30
Pendant light
Ø300

oto 32
Pendant light + LFO
Ø300

oto 01
Reading light
Ø300

oto 10H
Floor light
Ø450

oto 34H
Pendant light
Ø450

mood

belux oto




work

Light that works


Workspace? Wellness space. With a combination of three different lighting levels – for direct, indirect and ambient light – oto creates remarkably atmospheric office experiences. Beyond the functional aspects, such as precise illumination of the work area and even light distribution across the desk, it's all about soft skills with this pleasant, mood enhancing ambient lighting. Which is why oto is the ideal team member also in lounges, conference rooms, cafeterias, stairwells, corridors and more.

belux oto


work

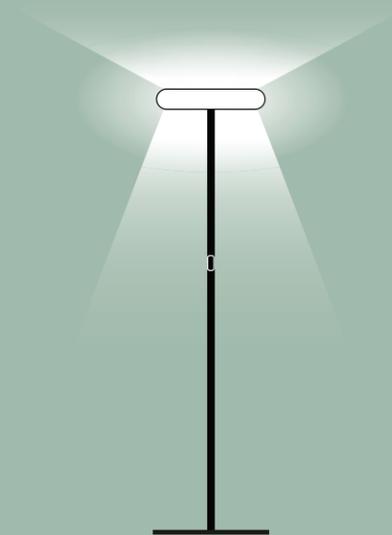

oto 10
Floor light
Ø450

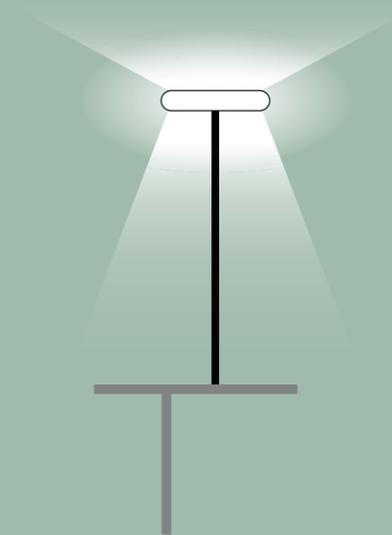

oto 43 / oto 46
Desk-mounted light
Ø450

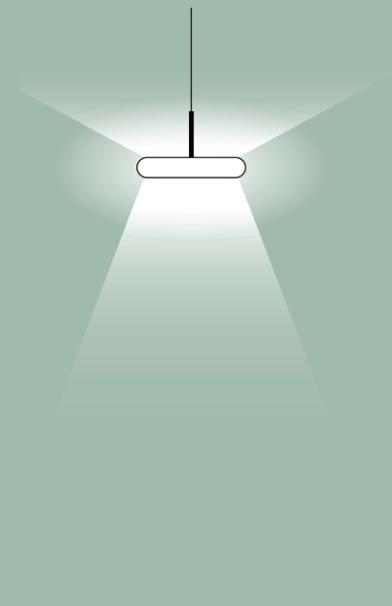

oto 34
Pendant light
Ø450

Light volume and emotion

Direct light: a precise optical system ensures even illumination of the workspace.

Indirect light: powerful indirect illumination creates a sense of space that is pleasant while optimising even light distribution across the desk. **Emotion and ambience:** the striking geometry of the high-quality silicone diffuser brings pleasant, atmospheric light to any environment.

Silicone diffuser
for pleasant,
atmospheric
room light
- UV resistant,
easy to clean,
sustainable

LED
for ambient
lighting

LED
protection plate


LED plate
for powerful indirect lighting

LED
for direct lighting

Reflector foil

light-diffusing plate

End plate
with prism structure
for optimal glare control

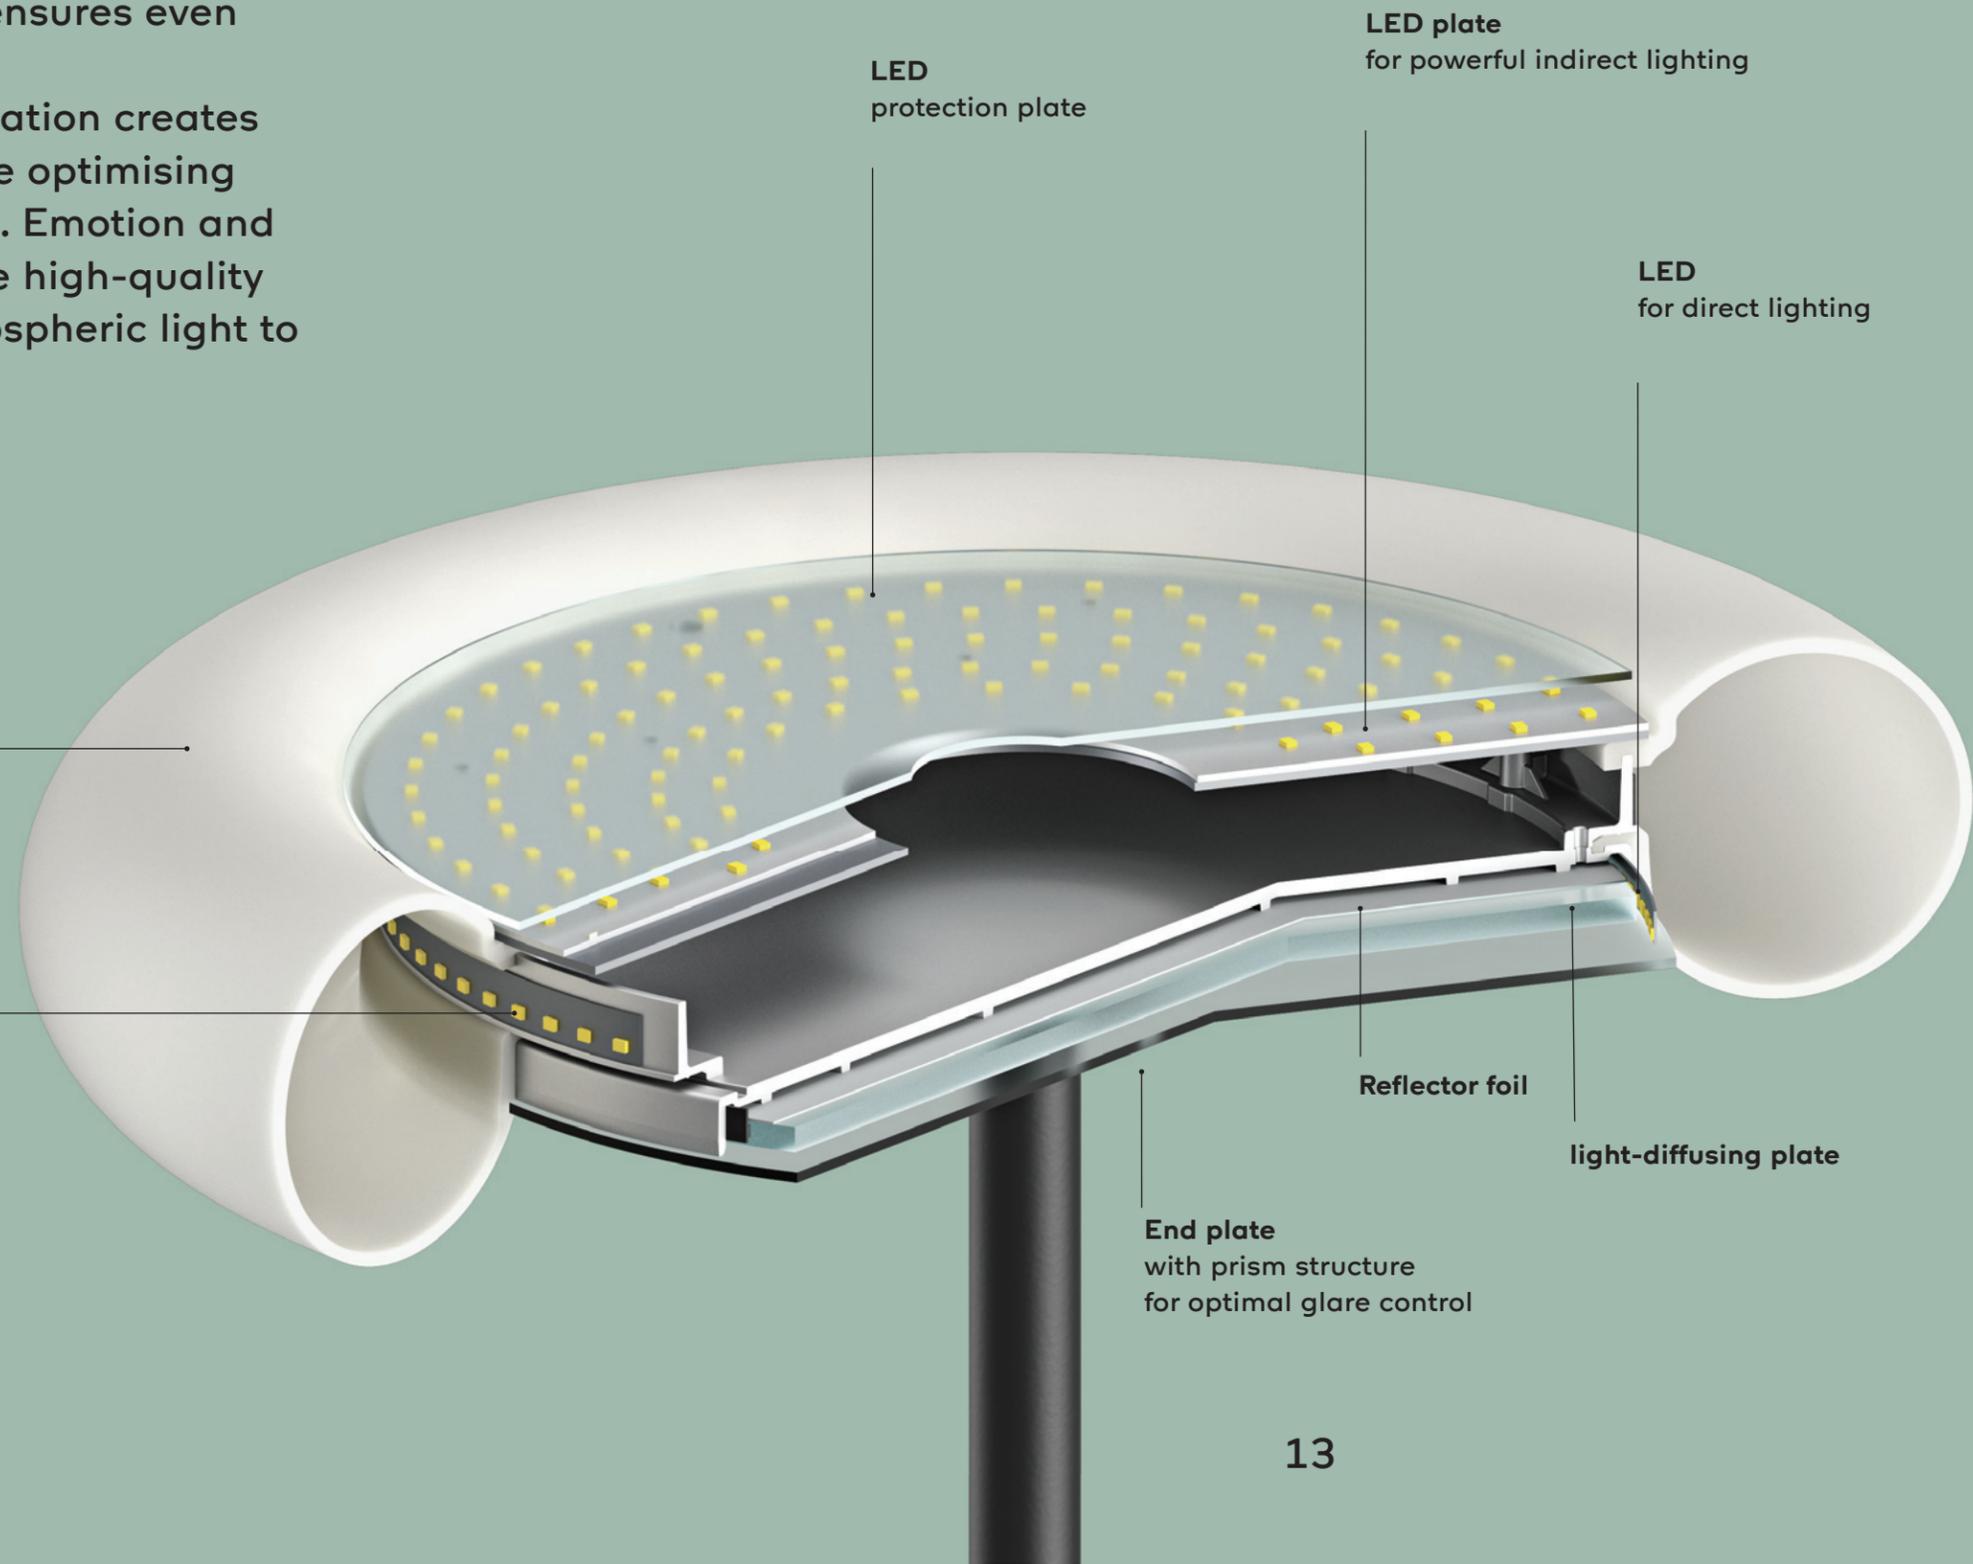

belux

work



belux oto



Light source
LED, 73W,
11050lm
CRI>90
3000K, 4000K



Light distribution
27% direct,
73% indirect



Lighting design
Optical system with
light guiding and
anti-glare panels



Lighting control
Touch Dim (DS), DALI
(DD), Multisens (MS)
& Wireless Dim (WD),
swarm technology
on request



Colours
Black and white
Chrome*

* for USM desk-mounted light

work

Button for direct and indirect light




Multisens
(MS button)



Touch Dim
(TD button)


oto floor light



oto floor light Ø450mm, cross base
Materials: silicone, steel, aluminium, PMMA, black mains cable ~ 3m
Country plug: Schuko plug CEE 7/7 (type E+F)


oto desk-mounted light USM Ø450mm
Materials: silicone, steel, aluminium, PMMA, black mains cable ~ 3m
Mounting: USM
Country plug: Schuko plug CEE 7/7 (type E+F)

oto USM desk-mounted light



oto desk-mounted light universal-d Ø450mm
Materials: silicone, steel, aluminium, PMMA, black mains cable ~ 3m
Mounting: universal-d
Country plug: Schuko plug CEE 7/7 (type E+F)

oto desk-mounted light universal-d



Installation instructions
 oto 10 / 43 / 46



		CRI	CCT	Power	Lumen@4000K
①	LED	CRI > 90	3000/4000K	73W	11050lm

Colour	Light source	Main code	9030 3000K	9040 4000K	TD Stem-mounted dimmer	MS Multisens, self-regulating	Order number
WE	①	OT010-15	●	●	●	●	OT010-15-9030-TD OT010-15-9030-MS OT010-15-9040-TD OT010-15-9040-MS
SW	①	OT010-18	●	●	●	●	OT010-18-9030-TD OT010-18-9030-MS OT010-18-9040-TD OT010-18-9040-MS
CR	①	OT043-12	●	●	●	●	OT043-12-9030-TD OT043-12-9030-MS OT043-12-9040-TD OT043-12-9040-MS
WE	①	OT046-15	●	●	●	●	OT046-15-9030-TD OT046-15-9030-MS OT046-15-9040-TD OT046-15-9040-MS
SW	①	OT046-18	●	●	●	●	OT046-18-9030-TD OT046-18-9030-MS OT046-18-9040-TD OT046-18-9040-MS

INFORMATION

General: light distribution: 27% direct/73% indirect UGR<15, LED converter integrated in the luminaire head

Touch Dim (TD): direct (incl. ambient light) and indirect light can be controlled and dimmed separately.

Multisens (MS): daylight and motion sensor for automatic operation (individual adjustment of parameters on request); direct (incl. ambient light) and indirect light are controlled simultaneously.


WE: white, matt, structured
SW: black, matt, structured
CR: chrome

① IP 20


Desk-mounted lights:

USM: attached/adapted directly to the USM Haller table leg.


Universal-d: drilled 25 mm in the table top. Solutions for other furniture manufacturers and types can be requested (drawings required).




oto 10/43/46
 151lm/W@4000K



oto pendant light



B-160 ceiling connection



Installation instructions oto 34



		oto pendant light Ø450mm							Order number
		Materials: silicone, steel, aluminium, PMMA, black mains cable - 2m							
Colour	Light source	Main code	9030 3000K	9040 4000K	DD Dimmable w/ DALI, customer supplied	MS Multisens, self-regulating	WD Wireless Dim (Casambi)		
WE	①	OT034-14	●	●	●	●	●	OT034-14-9030-DD OT034-14-9030-MS OT034-14-9030-WD OT034-14-9040-DD OT034-14-9040-MS OT034-14-9040-WD	
SW	①	OT034-17	●	●	●	●	●	OT034-17-9030-DD OT034-17-9030-MS OT034-17-9030-WD OT034-17-9040-DD OT034-17-9040-MS OT034-17-9040-WD	

INFORMATION

General: light distribution: 27% direct/73% indirect UGR<15, LED converter integrated in the luminaire head

Dimmable w/ DALI(DD): 5-core supply cable, two addresses, one for direct/ambient light and one for indirect light.

Multisens (MS): daylight and motion sensor for automatic operation (individual adjustment of parameters on request); direct (incl. ambient light) and indirect light are controlled simultaneously.


Wireless Dim (WD): control via Casambi app or via wireless "Casambi Xpress Switch". Included in the scope of delivery: belux B-160 ceiling connection.

WE: white, matt, structured
SW: black, matt, structured

Ⓜ IP 20

		CRI	CCT	Power	Lumen@4000K
①	LED	CRI > 90	3000/4000K	73W	11050lm

oto 34
151lm/W@4000K



belux oto



belux oto



mood



oto 20
Wall / ceiling light
Ø300



oto 24
Wall / ceiling light
Ø450



oto 30
Pendant light
Ø300



oto 32
Pendant light + LFO
Ø300



oto 01
Reading light
Ø300



oto 10H
Floor light
Ø450



oto 34H
Pendant light
Ø450

belux oto

mood



Highlights around me

Same, same but different. For oto in private or hospitality settings: the same atmospheric light, but subtler. The same high-quality design, but even more welcoming. And because stylish colours, materials and finishes matter even more here, the Mood edition offers a wider range of colours, gloss finishes and matching textile cables – as well as new versions and sizes.

Direct light is avoided, and the velvety, soft silicone ring reveals its qualities, even in the children's room. Flexible, durable and gracefully rounded, it may become warm, but never hot. Thoughtfully designed: a compact floor light with integrated reading light and asymmetrical light distribution.



Reading
light

Silicone body
for mild atmospheric
lighting
– UV-resistant, easy to
clean, sustainable

belux oto



Light distribution
Ambient,
reading light



Lighting control
dimmable



Colours

black, matt, structured
white, matt, structured
deep blue, gloss finish*
cement grey, gloss finish*
sand beige, gloss finish*

* only available for Ø300mm

mood



The colours of the textile cable, cover and ceiling connection
are matched to the available surfaces.

belux oto

mood



belux oto

mood

oto wall/ceiling light



oto wall/ceiling light Ø300mm
Materials: silicone, aluminium, PMMA

oto wall/ceiling light Ø450mm
Materials: silicone, aluminium, PMMA

oto wall/ceiling light



Installation instructions
oto 20 / 24



		CRI	CCT	Power	Lumen@3000K
①	LED	CRI > 90	2700/3000K	16W	1935lm
②	LED	CRI > 90	2700/3000K	37W	4360lm

Colour	Light source	Main code	9027 2700K		9030 3000K		DD Dimmable w/ DALI customer supplied	WD Wireless Dim (Casambi)	Order number
WE	①	OT020-14	●	●	●	●			OT020-14-9027-DD OT020-14-9027-WD OT020-14-9030-DD OT020-14-9030-WD
			●	●	●	●			
SW	①	OT020-17	●	●	●	●			
			●	●	●	●			
WE	②	OT024-14	●	●	●	●			OT024-14-9027-DD OT024-14-9027-WD OT024-14-9030-DD OT024-14-9030-WD
			●	●	●	●			
SW	②	OT024-17	●	●	●	●			
			●	●	●	●			

INFORMATION

General: light distribution
52% direct / 48% indirect,
LED converter integrated in
the luminaire head

DALI Dim (DD):
5-core connection, P, N, E
connection possible for
on/off operation


Wireless Dim (WD): control
via Casambi app or via
wireless "Casambi Xpress
Switch"

WE: white, matt, structured
SW: black, matt, structured

⊕ IP 20

oto 20
121lm/W@3000K


oto 24
118lm/W@3000K



belux oto


mood

oto pendant light




oto pendant light Ø300mm
Materials: silicone, aluminium, textile-covered mains cable ~3m

oto pendant light LFO lens



oto pendant light Ø300mm with LFO lens
Materials: silicone, aluminium, textile-covered mains cable ~3m

B-160 ceiling connection



Installation instructions
oto 30 / 32



		CRI	CCT	Power	Lumen@2700K
①	LED	CRI > 90	2700/3000K	16W	1970lm
②	LED	CRI > 90	2700/3000K	20W	2140lm

Colour	Light source	Main code	9027 2700K	9030 3000K	DD Dimmable w/ DALI, customer supplied	OO On/off, cable integrated	WD Wireless Dim (Casambi)	Order number
WE	①	OT030-14	●	●	●	●	●	OT030-14-...-DD OT030-14-...-OO OT030-14-...-TD
SW	①	OT030-17	●	●	●	●	●	OT030-17-...-DD OT030-17-...-OO OT030-17-...-TD
TB	①	OT030-20	●	●	●	●	●	OT030-20-...-DD OT030-20-...-OO OT030-20-...-TD
SB	①	OT030-22	●	●	●	●	●	OT030-22-...-DD OT030-22-...-OO OT030-22-...-TD
ZG	①	OT030-24	●	●	●	●	●	OT030-24-...-DD OT030-24-...-OO OT030-24-...-TD
WE	②	OT032-14	●	●	●	●	●	OT032-14-...-DD OT032-14-...-OO OT032-14-...-TD
SW	②	OT032-17	●	●	●	●	●	OT032-17-...-DD OT032-17-...-OO OT032-17-...-TD
TB	②	OT032-20	●	●	●	●	●	OT032-20-...-DD OT032-20-...-OO OT032-20-...-TD
SB	②	OT032-22	●	●	●	●	●	OT032-22-...-DD OT032-22-...-OO OT032-22-...-TD
ZG	②	OT032-24	●	●	●	●	●	OT032-24-...-DD OT032-24-...-OO OT032-24-...-TD

INFORMATION

General:

included in delivery: belux B-160 ceiling connection, cover supplied in the matching colour. Further ceiling connection options are available on request as additional installation material.


oto30/32 DALI: 5-core textile cable, colour to match the surface finish

oto30/32 OO+WD: 3-core textile cable; colour to match the surface finish


oto32 DD+WD:

ambient light and spotlight can be controlled and dimmed separately.
SW: black, matt, structured
WE: white, matt, structured
TB: deep blue, gloss
SB: sand beige, gloss
ZG: cement grey, gloss
⊕ IP 20

oto 30
123lm/W@2700K




oto 32
107lm/W@2700K



belux oto


mood

oto reading light




oto reading light Ø300mm, round base
Materials: silicone, steel, aluminium, PMMA, textile-covered mains cable ~3m
Country plug: Schuko plug CEE 7/7 (type E+F)

oto floor light



oto floor light Ø450mm, round base
Materials: silicone, steel, aluminium, PMMA, textile-covered mains cable ~3m
Country plug: Schuko plug CEE 7/7 (type E+F)

oto pendant light



oto pendant light Ø450mm
Materials: silicone, aluminium, PMMA, textile-covered mains cable ~2m

Installation instructions

oto 01 oto 10H / 34H



		CRI	CCT	Power	Lumen@2700K
①	LED	CRI > 90	2700/3000K	16W + 4W	1970lm + 240lm
②	LED	CRI > 90	2700K	67W	8080lm

Colour	Light source	Main code	9027 2700K	9030 3000K	DD Dimmable w/ DALI, customer supplied	TD stem-mounted dimmer	WD Wireless Dim (Casambi)	Order number
WE	①	<u>OT001-15</u>	●	●		●		OT001-15-9027-TD OT001-15-9030-TD
SW	①	<u>OT001-18</u>	●	●		●		OT001-18-9027-TD OT001-18-9030-TD
TB	①	<u>OT001-22</u>	●	●		●		OT001-22-9027-TD OT001-22-9030-TD
SB	①	<u>OT001-25</u>	●	●		●		OT001-25-9027-TD OT001-25-9030-TD
ZG	①	<u>OT001-28</u>	●	●		●		OT001-28-9027-TD OT001-28-9030-TD
WE	②	<u>OT010H-15</u>	●			●		OT010H-15-9027-TD
SW	②	<u>OT010H-18</u>	●			●		OT010H-18-9027-TD
WE	②	<u>OT034H-14</u>	●		●		●	OT034H-15-9027-DD OT034H-15-9027-WD
SW	②	<u>OT034H-17</u>	●		●		●	OT034H-18-9027-DD OT034H-18-9027-WD

INFORMATION

General: the colours of the textile cables match the available finishes. Exception: oto 10H white is supplied with a black textile cable.

Reading light: button integrated in the light head: ambient and reading light can be controlled individually. The reading light can be adjusted using the swivel-mounted light head.

Floor light: button integrated in the stem. Ambient and indirect


light can be controlled and dimmed separately.

Pendant light: dimmable w/ DALI(DD): 5-core supply cable, two addresses, one for ambient light and one for indirect light.


WE: white, matt, structured
SW: black, matt, structured
TB: deep blue, gloss finish
SB: sand beige, gloss finish
ZG: cement grey, gloss finish

Ⓜ IP 20

oto 01
111lm/W@2700K



oto 10H / oto 34H
121lm/W@2700K



belux oto

mood



belux oto




The colours of the textile cables match the available finishes.

mood



belux oto

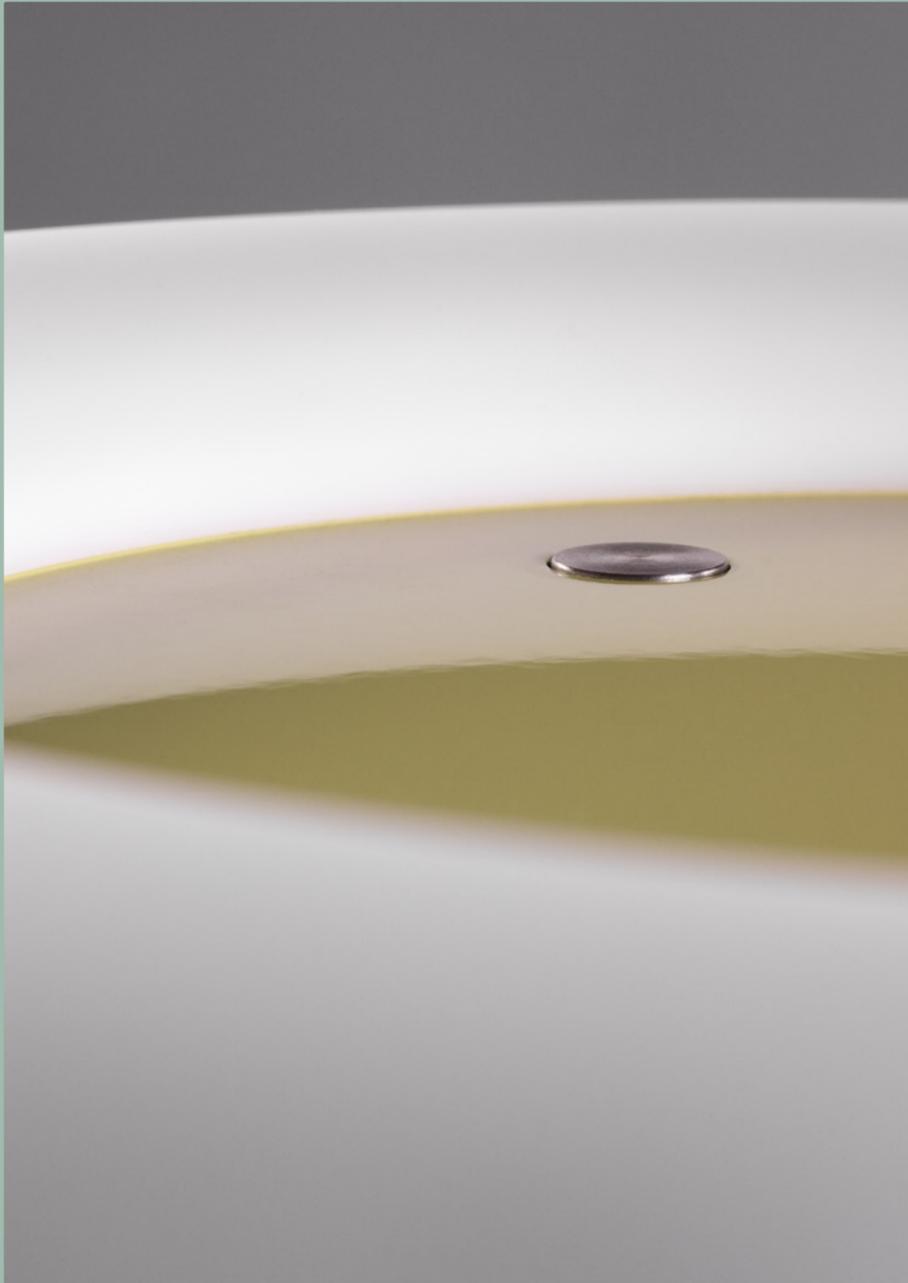

Button integrated in the light head:
ambient and reading light can be controlled individually.

mood



The reading light can be adjusted
using the swivel-mounted light head.

belux HQ

Neufeldweg 6
5103 Möriken
Switzerland
T +41 61 316 74 01
belux@belux.com

Belgium

belgium@belux.com

Denmark

denmark@belux.com

Finland

finland@belux.com

France

france@belux.com

Germany

germany@belux.com

Greece

greece@belux.com

Ireland

ireland@belux.com

Italy

italy@belux.com

Luxembourg

luxembourg@belux.com

Norway

norway@belux.com

Portugal

portugal@belux.com

Spain

spain@belux.com

Sweden

sweden@belux.com

The Netherlands

netherlands@belux.com

UK

uk@belux.com

Photos:

Jonas Holthaus, Studio Viro

Henning Moser,
MOSER Fotografie & Postproduktion

Paul Sonntag

BL59999983
© belux AG 08/2025





belux.com/oto

belux

Product world

Classic



Cloud



Diogenes



Disk



Hello



belux

Light is essential. Not just for our eyes. It creates atmosphere. It shapes the setting. It influences our mood. And it transforms our view of the world. This is why, for us, it's about much more than just light or darkness. We design lighting that inspires - uncompromising in quality, with sophisticated design and intelligent functionality. Whether for your home, the office or a commercial space; whether you need a single solution or a complete concept:

**Belux stands for lights that evoke emotions.
Turning light into an experience.**


Inline



Kido



Koi

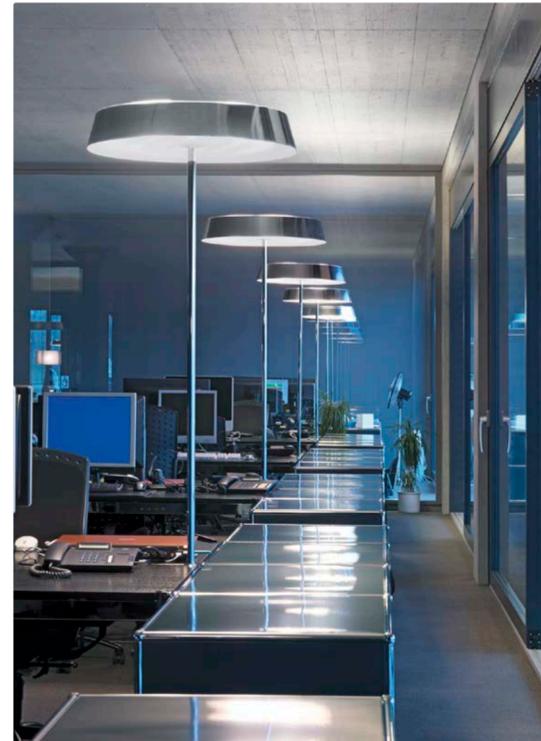

Koi-S



Koi-Q



Belux AG
Neufeldweg 6
5103 Möriken
Switzerland
T +41 61 316 74 01
belux@belux.com

www.belux.com


Lifto



Mama Cloud



Meter By Meter

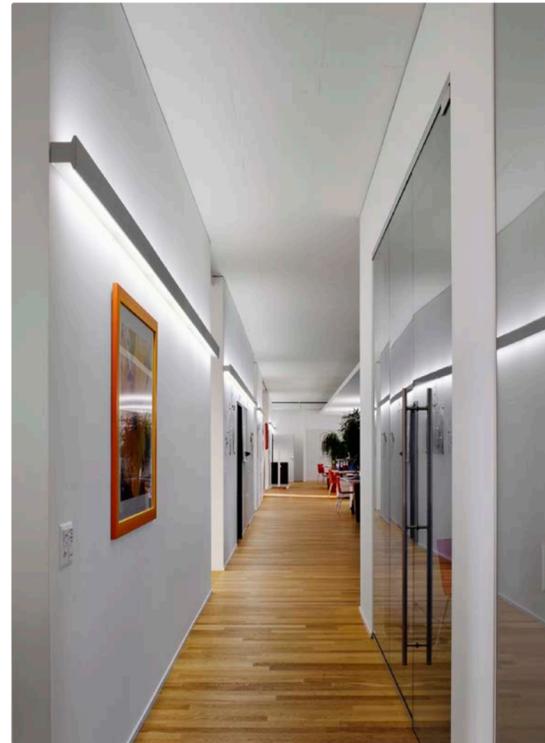

One By One




Oto Mood



Oto Work



Tubo

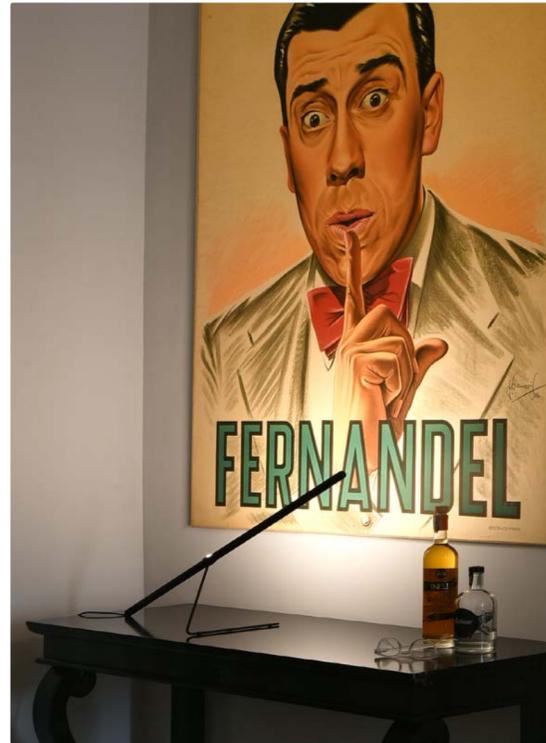

Twilight



Twilight360



U-Turn



Updown



Ypsilon

